




50–30 kya · s=0.01
True TMRCA · all 100 selected simulations · selected site: 500 kb
100 neutral curves
100 selected curves
Selected points: p < 0.05
Selection active
Cumulative cutoff
1-kyr interval
Pairwise coalescence fraction
Pairwise fraction in 1-kyr bin
Time before present (kya)
Time before present (kya)
0.0
0.2
0.4
0.6
0.8
0.1
0.3
0.5
0
10
20
30
40
50
Bold points use each simulation’s own p value against the same 100 neutrals.
Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


50–30 kya · s=0.01
Posterior median · all 100 selected simulations · selected site: 500 kb
100 neutral curves
100 selected curves
Selected points: p < 0.05
Selection active
Cumulative cutoff
1-kyr interval
Pairwise coalescence fraction
Pairwise fraction in 1-kyr bin
Time before present (kya)
Time before present (kya)
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0
10
20
30
40
50
Bold points use each simulation’s own p value against the same 100 neutrals.
Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


50–30 kya · s=0.01
Posterior-weighted mass · all 100 selected simulations · selected site: 500 kb
100 neutral curves
100 selected curves
Selected points: p < 0.05
Selection active
Cumulative cutoff
1-kyr interval
Pairwise coalescence fraction
Pairwise fraction in 1-kyr bin
Time before present (kya)
Time before present (kya)
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.000
0.005
0.010
0.015
0.020
0.025
0.030
0
10
20
30
40
50
Bold points use each simulation’s own p value against the same 100 neutrals.
Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


10 kya–present · s=0.01


True TMRCA · all 100 selected simulations · selected site: 500 kb

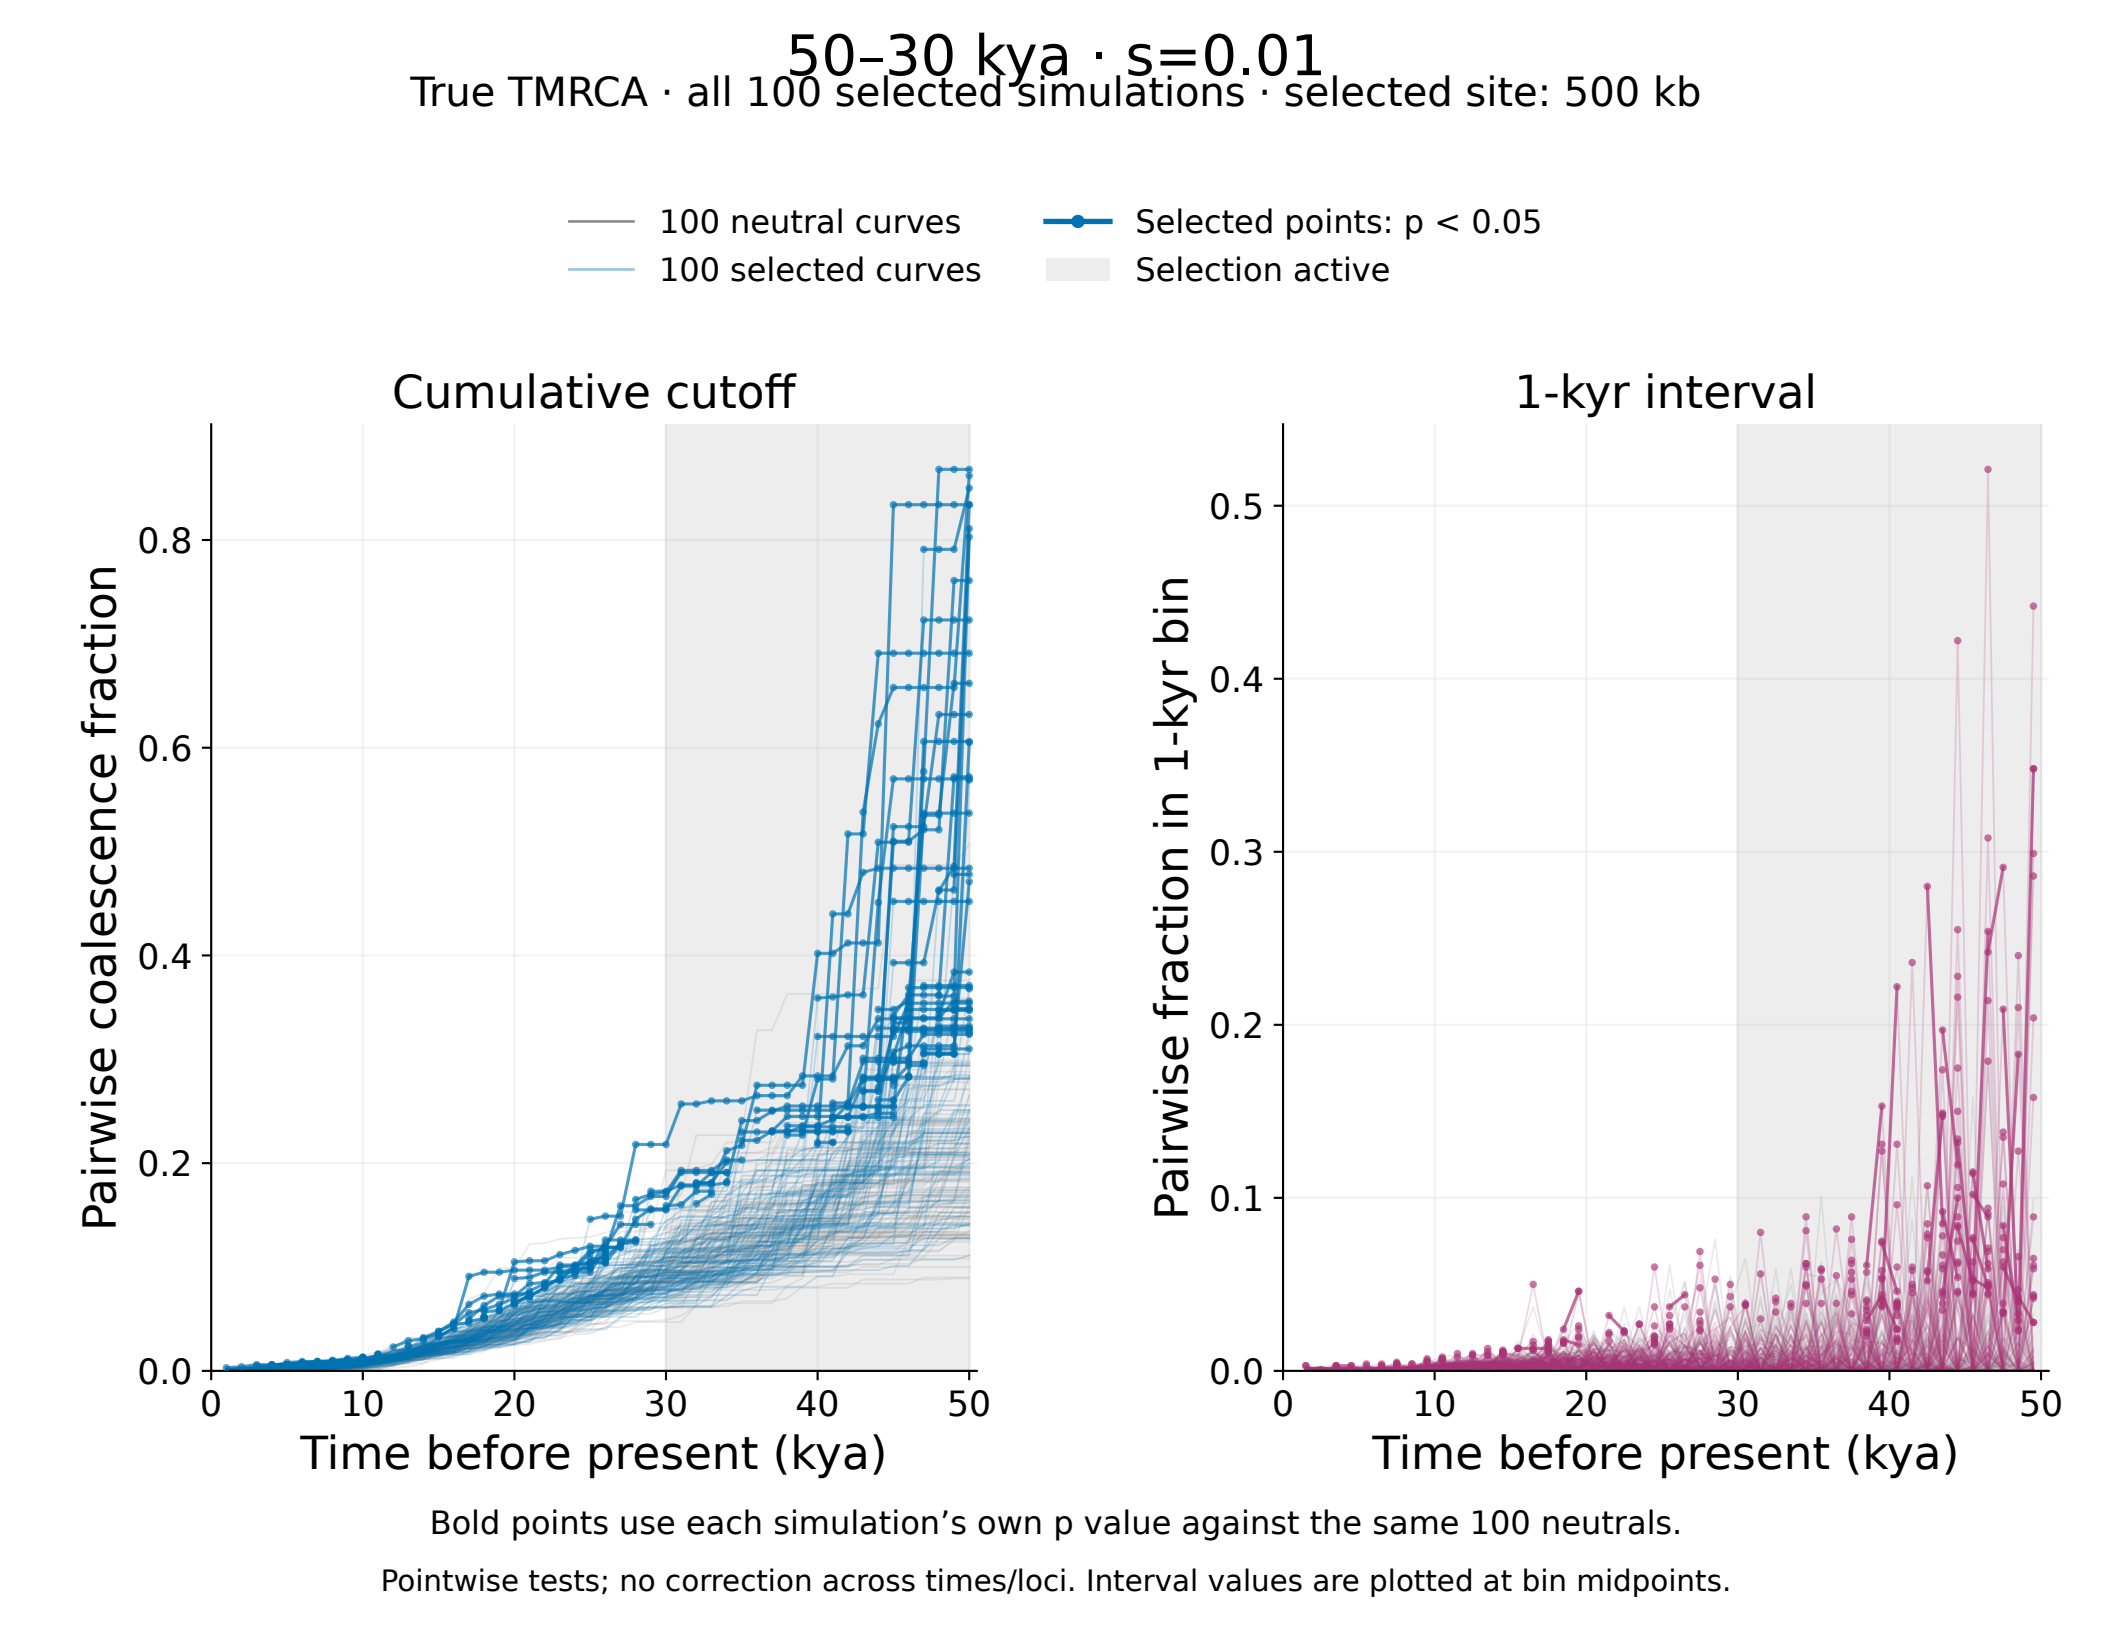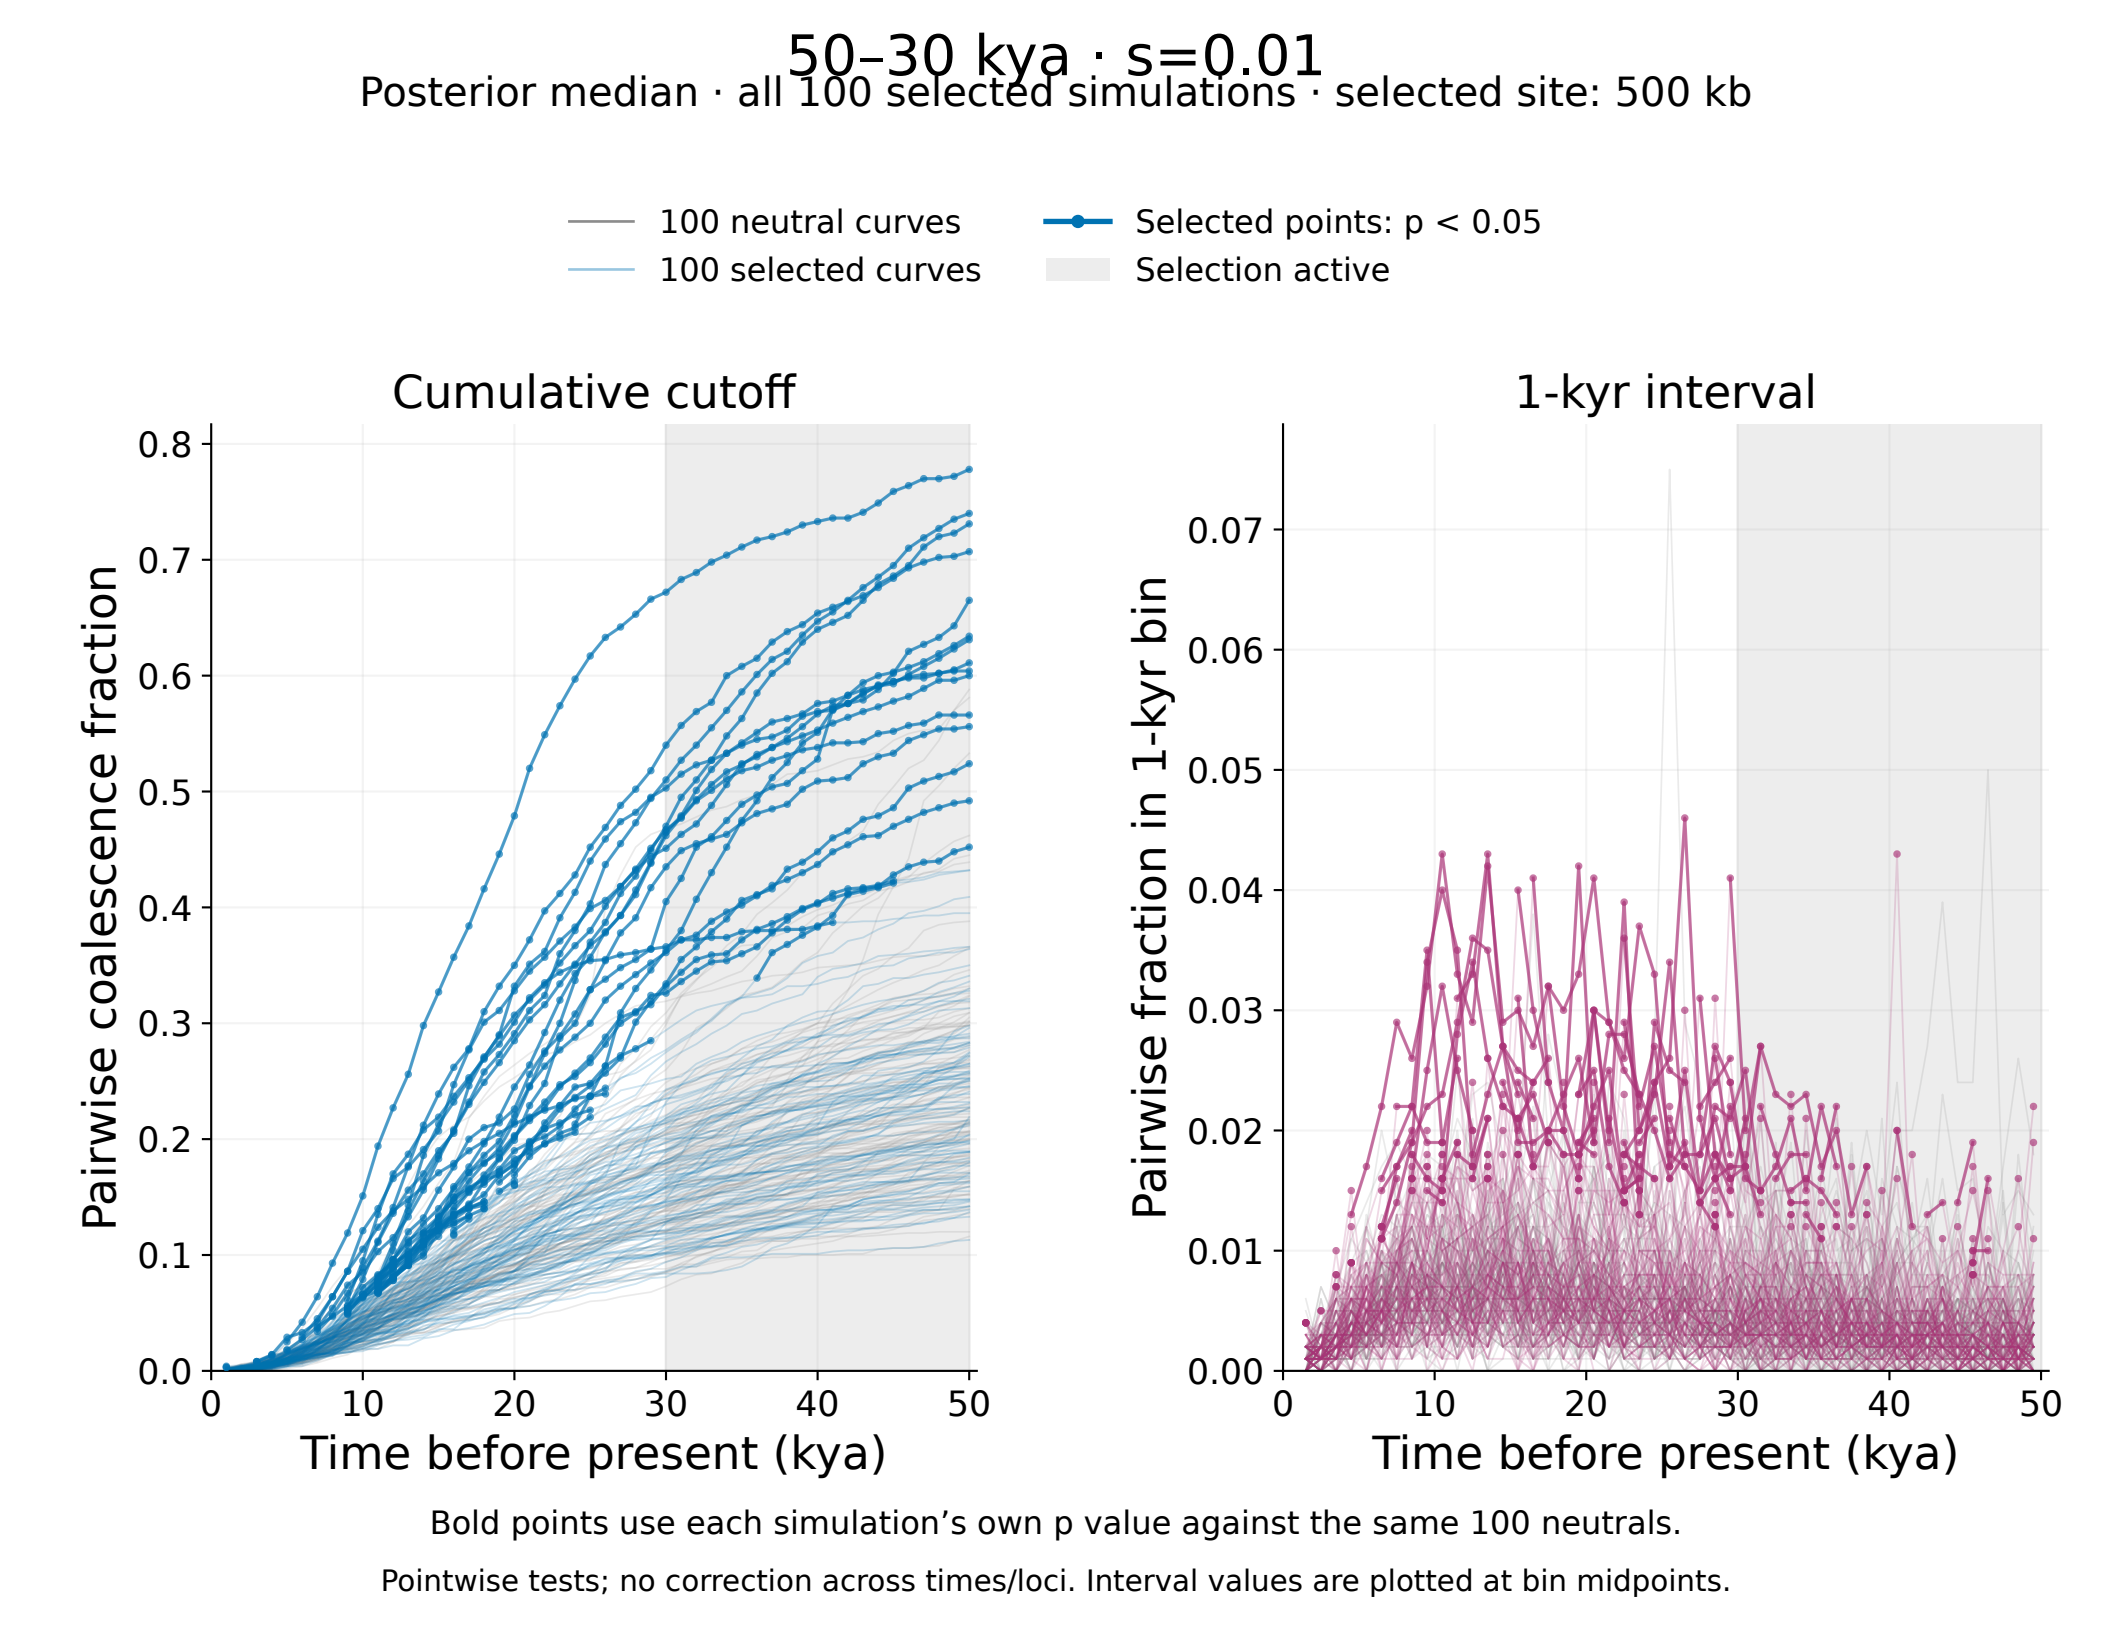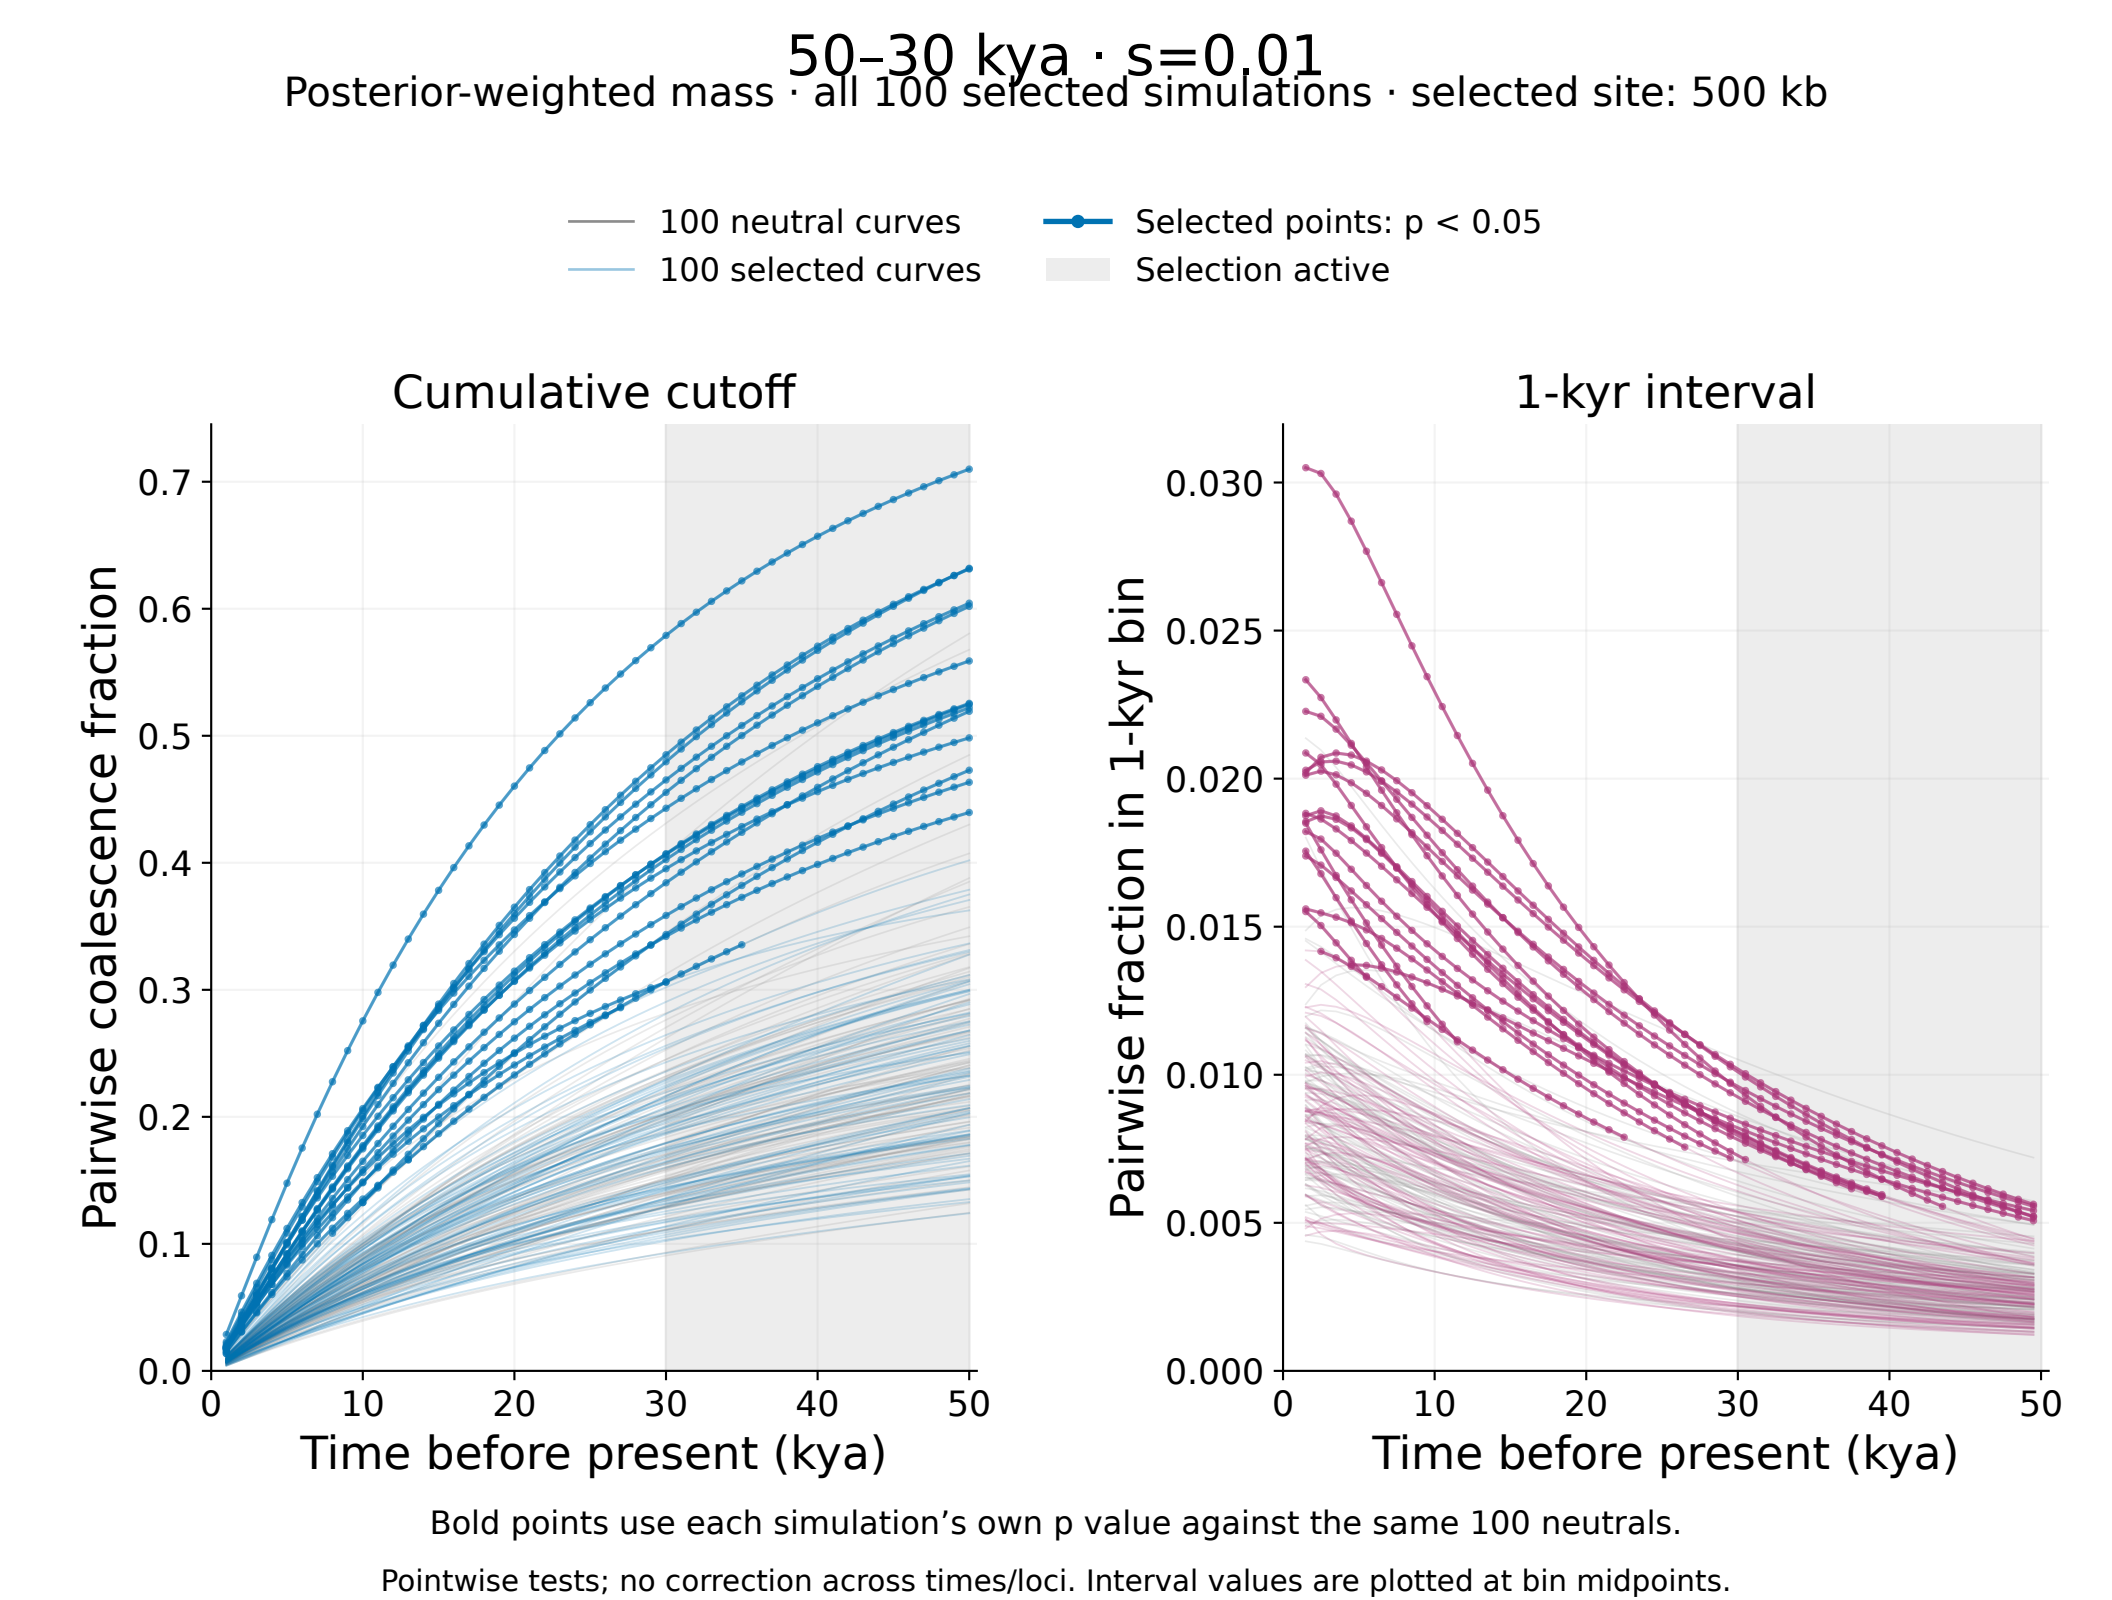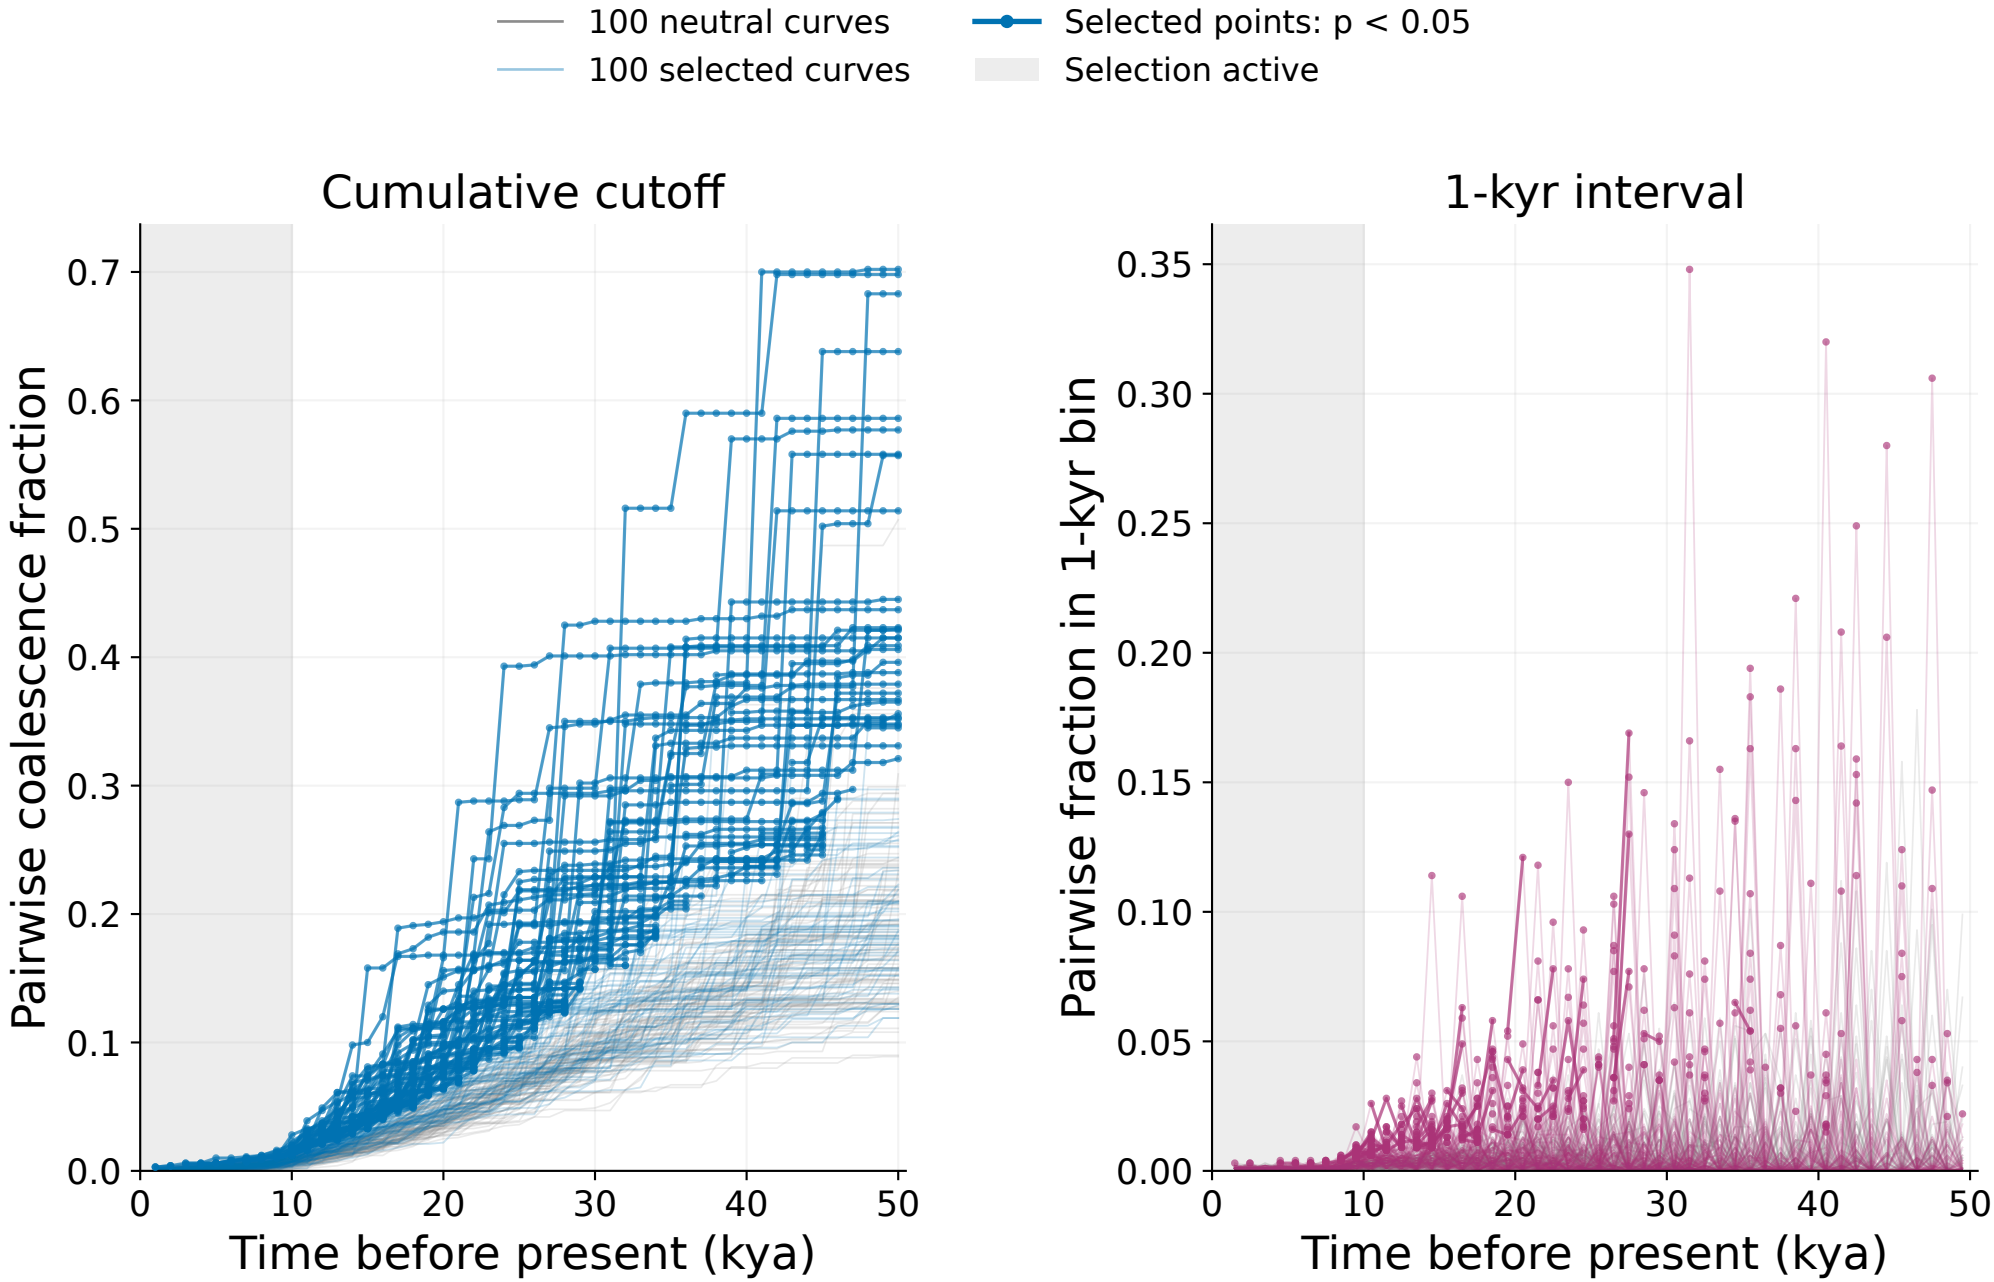

Bold points use each simulation's own p value against the same 100 neutrals.


Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

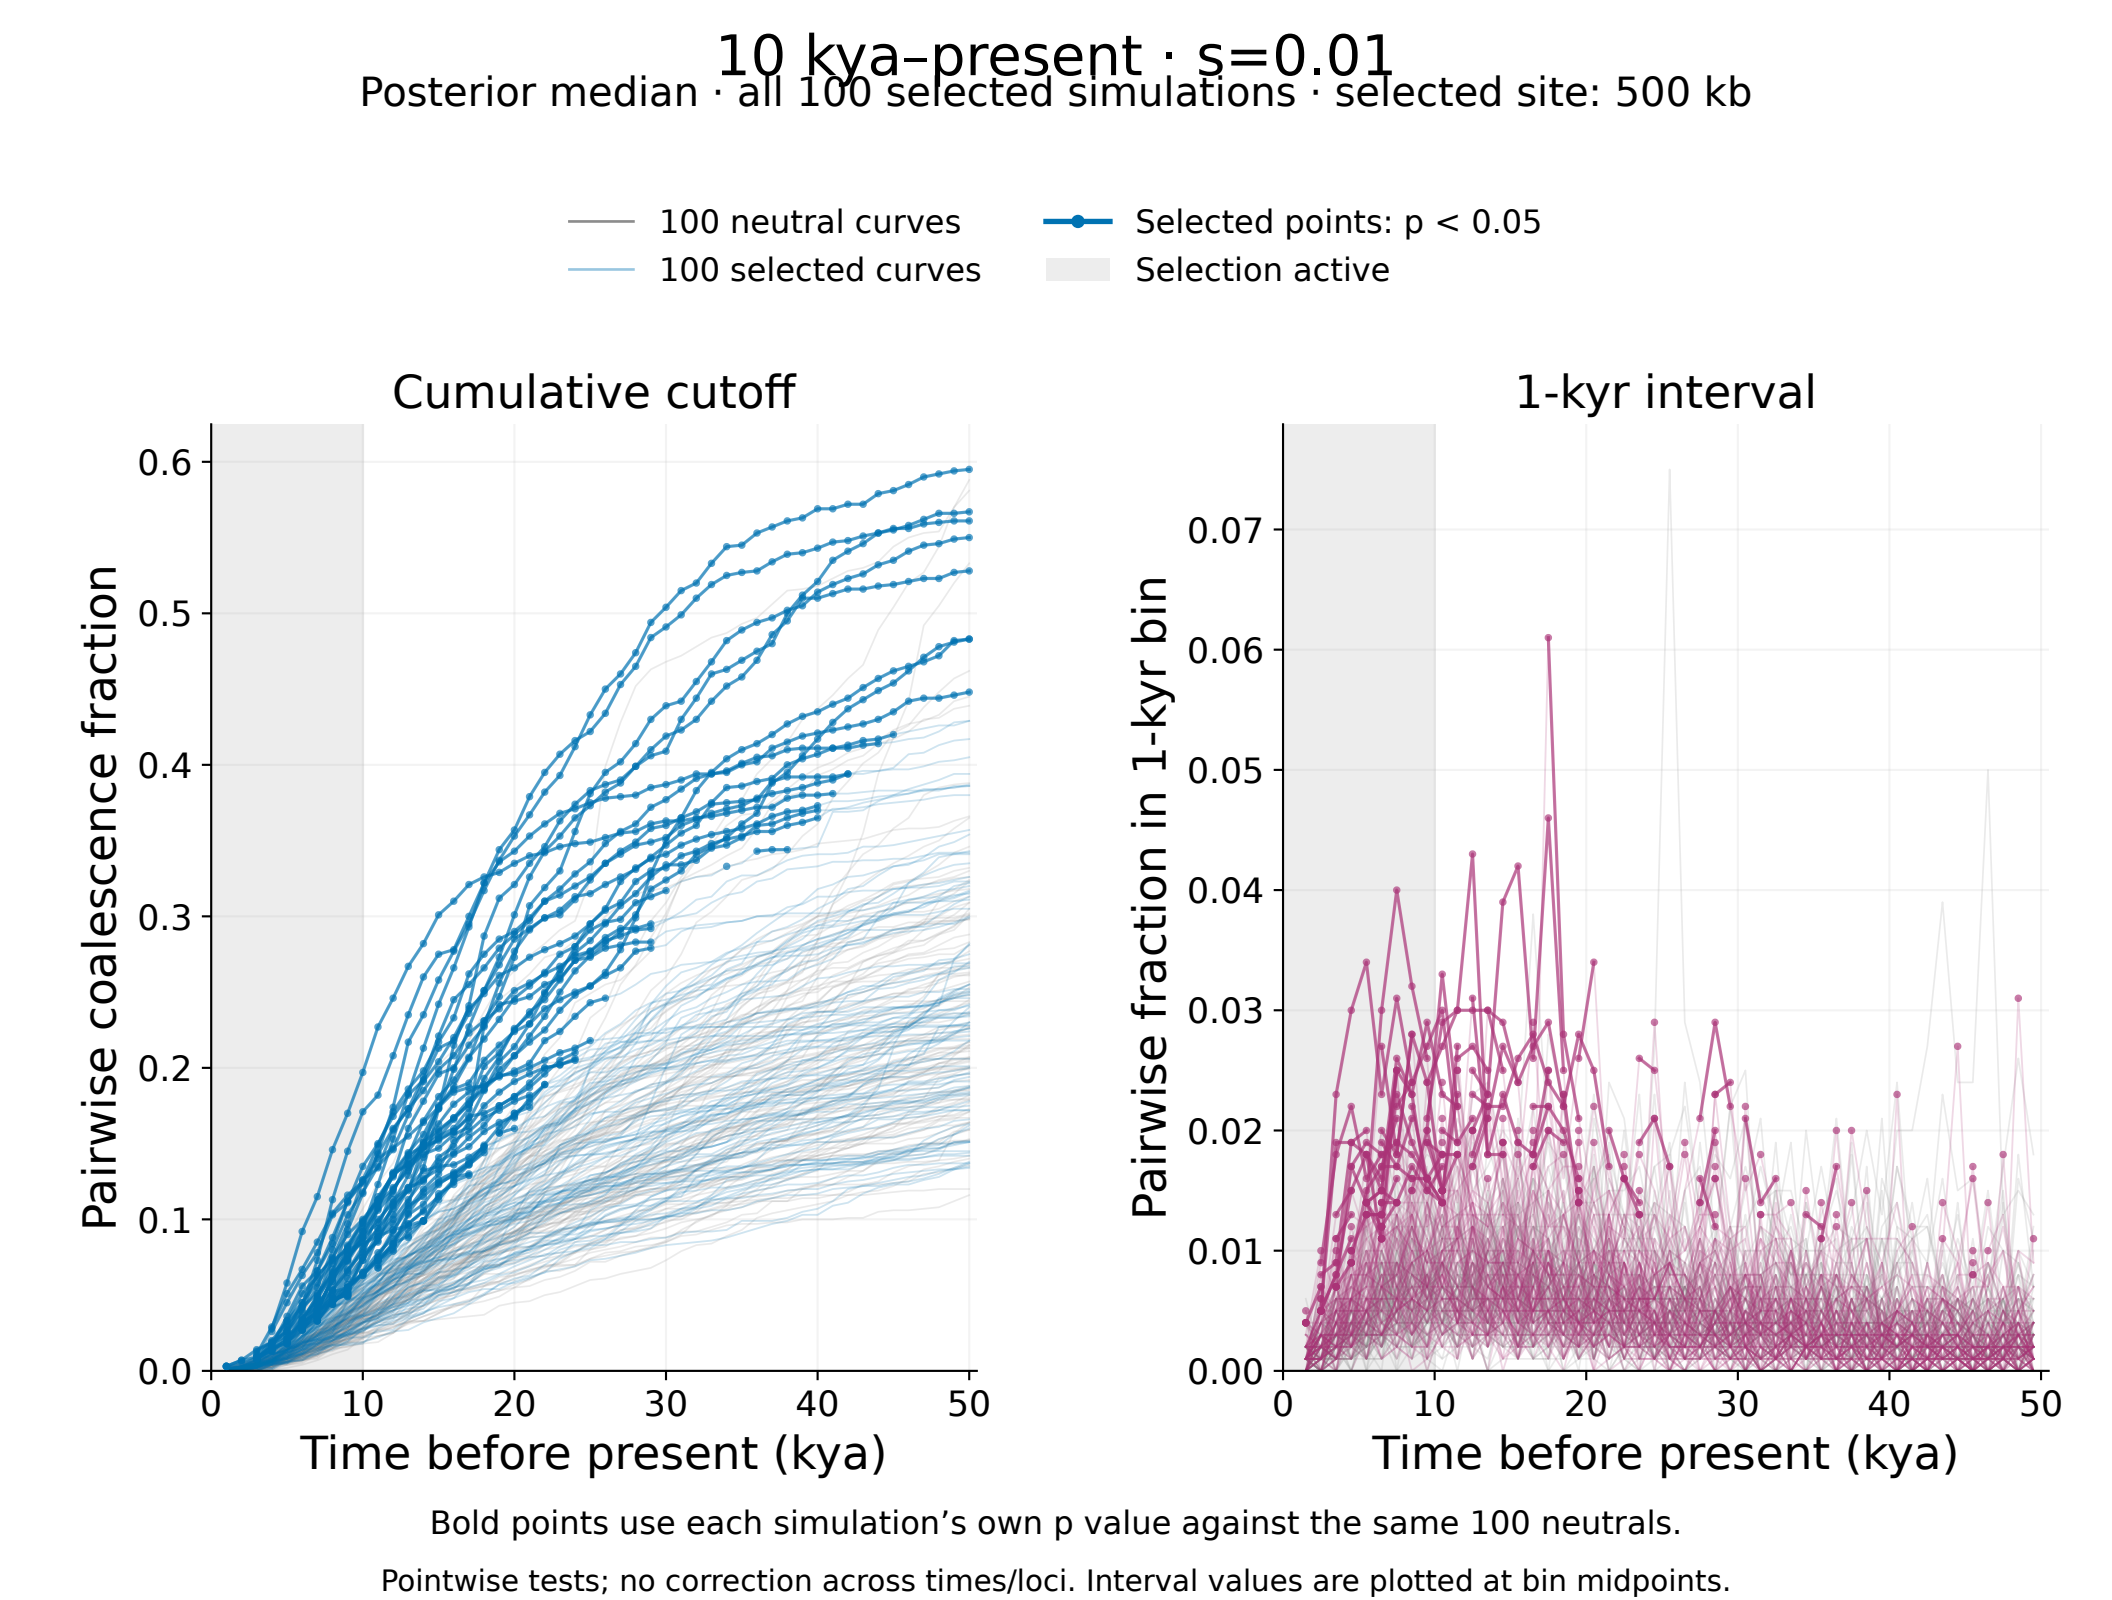
10 kya–present · s=0.01
Posterior median · all 100 selected simulations · selected site: 500 kb
100 neutral curves
100 selected curves
Selected points: p < 0.05
Selection active
Cumulative cutoff
1-kyr interval
Pairwise coalescence fraction
Pairwise fraction in 1-kyr bin
Time before present (kya)
Time before present (kya)
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0
10
20
30
40
50
Bold points use each simulation’s own p value against the same 100 neutrals.
Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

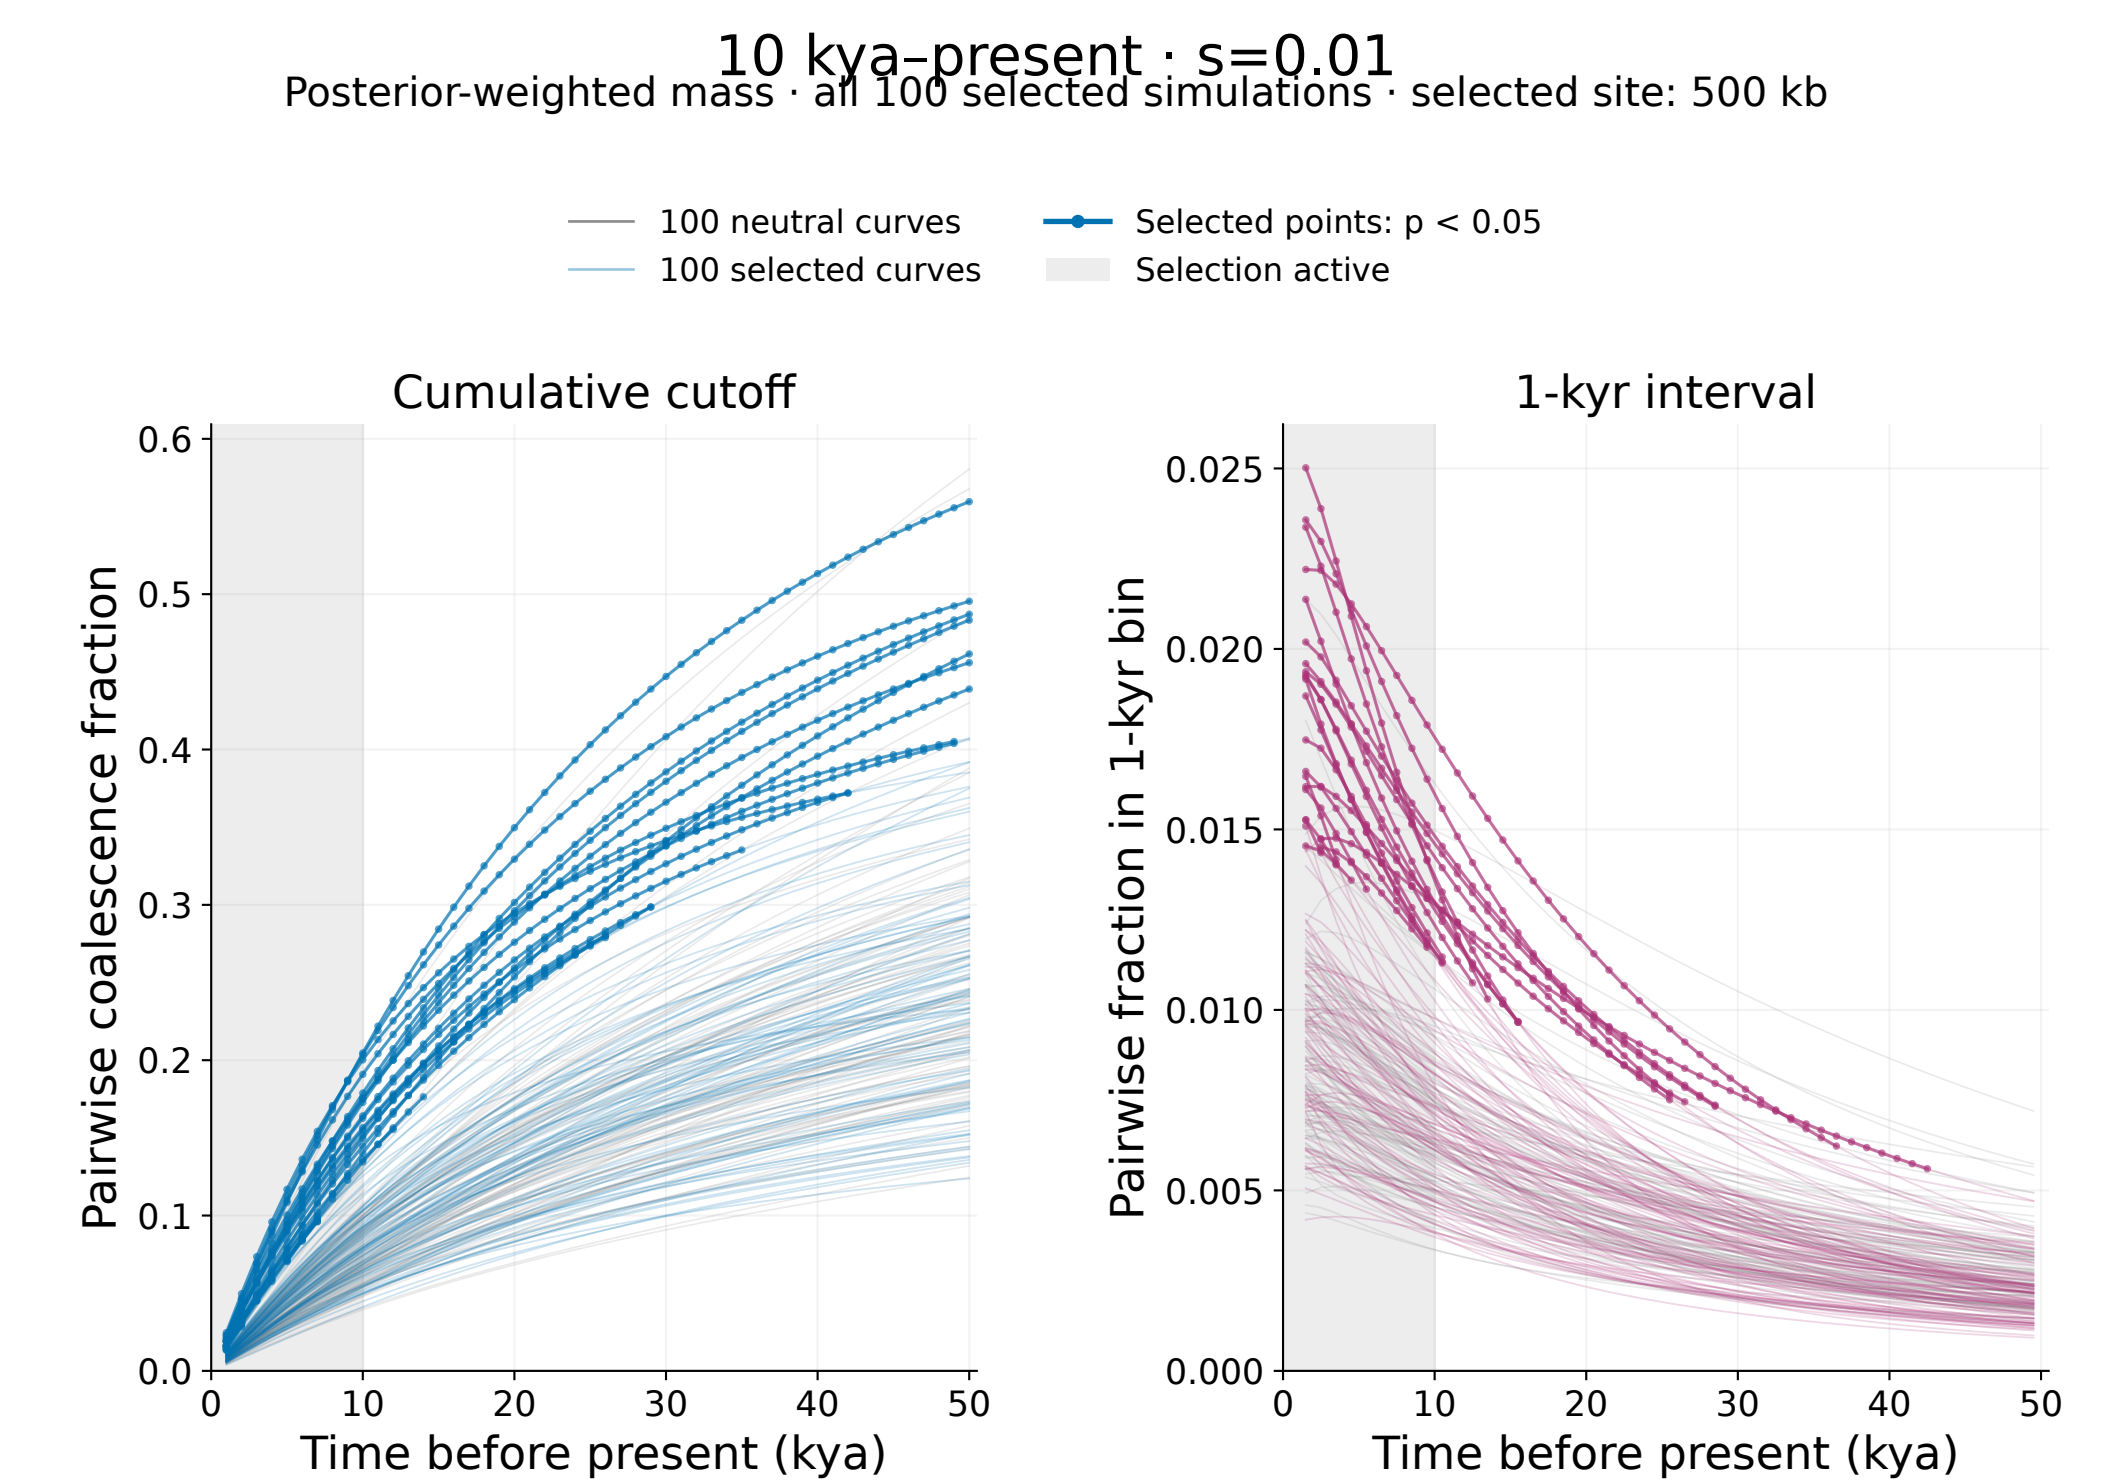


Bold points use each simulation's own p value against the same 100 neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

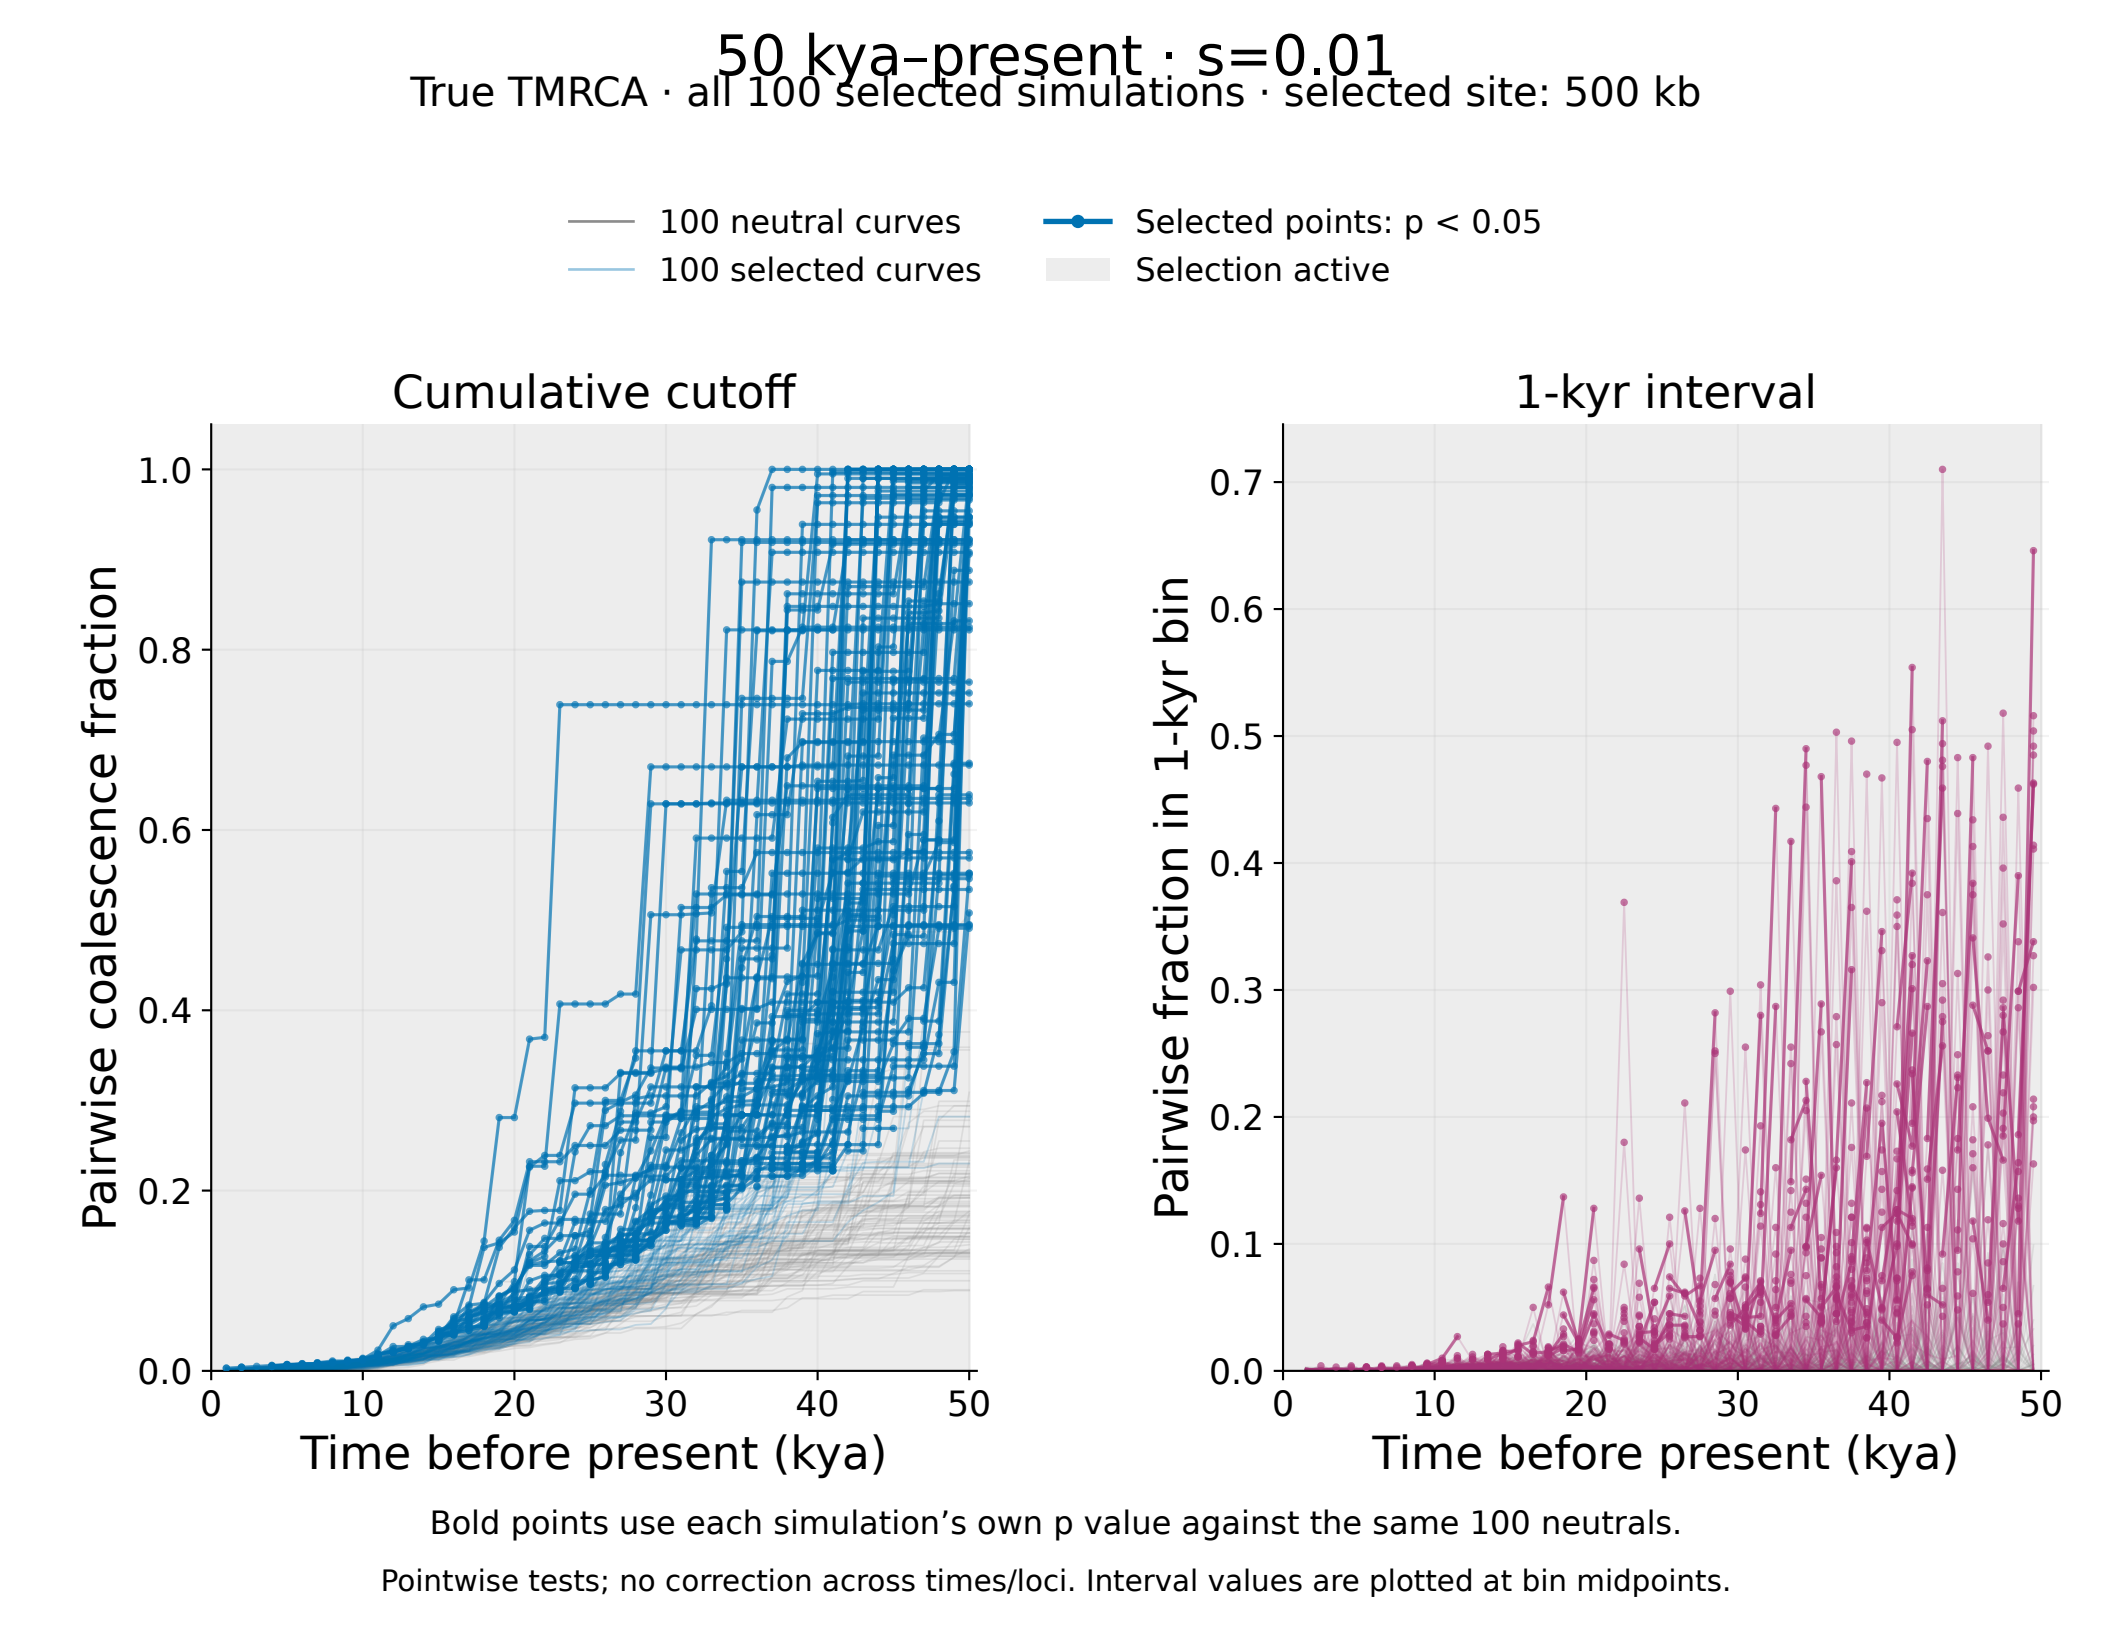
50 kya–present · s=0.01
True TMRCA · all 100 selected simulations · selected site: 500 kb
100 neutral curves
100 selected curves
Selected points: p < 0.05
Selection active
Cumulative cutoff
1-kyr interval
Pairwise coalescence fraction
Pairwise fraction in 1-kyr bin
Time before present (kya)
Time before present (kya)
0.0
0.2
0.4
0.6
0.8
1.0
0.1
0.3
0.5
0.7
0
10
20
30
40
50
Bold points use each simulation’s own p value against the same 100 neutrals.
Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


50 kya–present · s=0.01


Posterior median · all 100 selected simulations · selected site: 500 kb

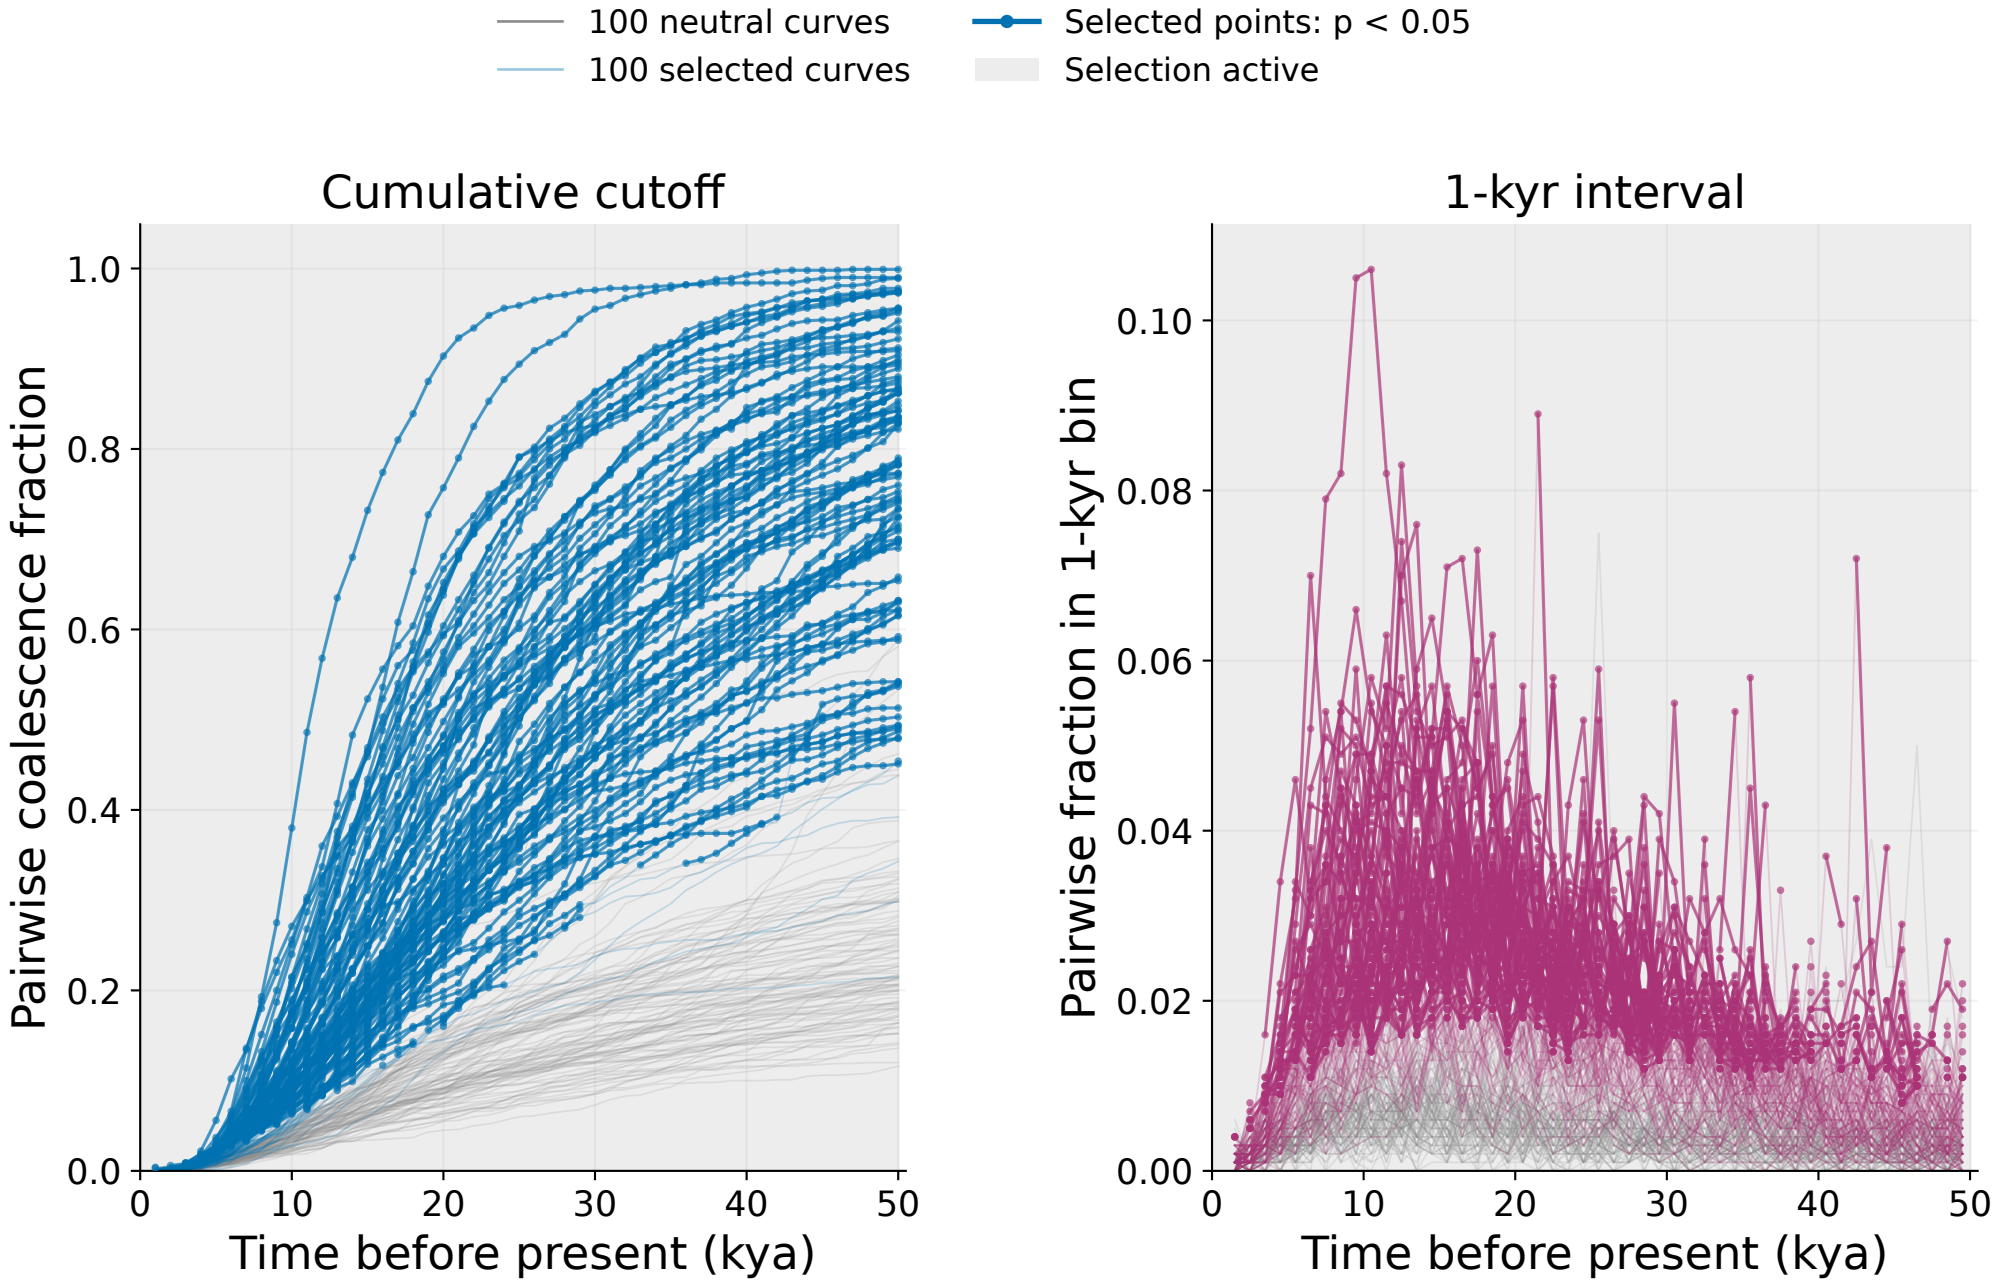

Bold points use each simulation’s own p value against the same 100 neutrals.


Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

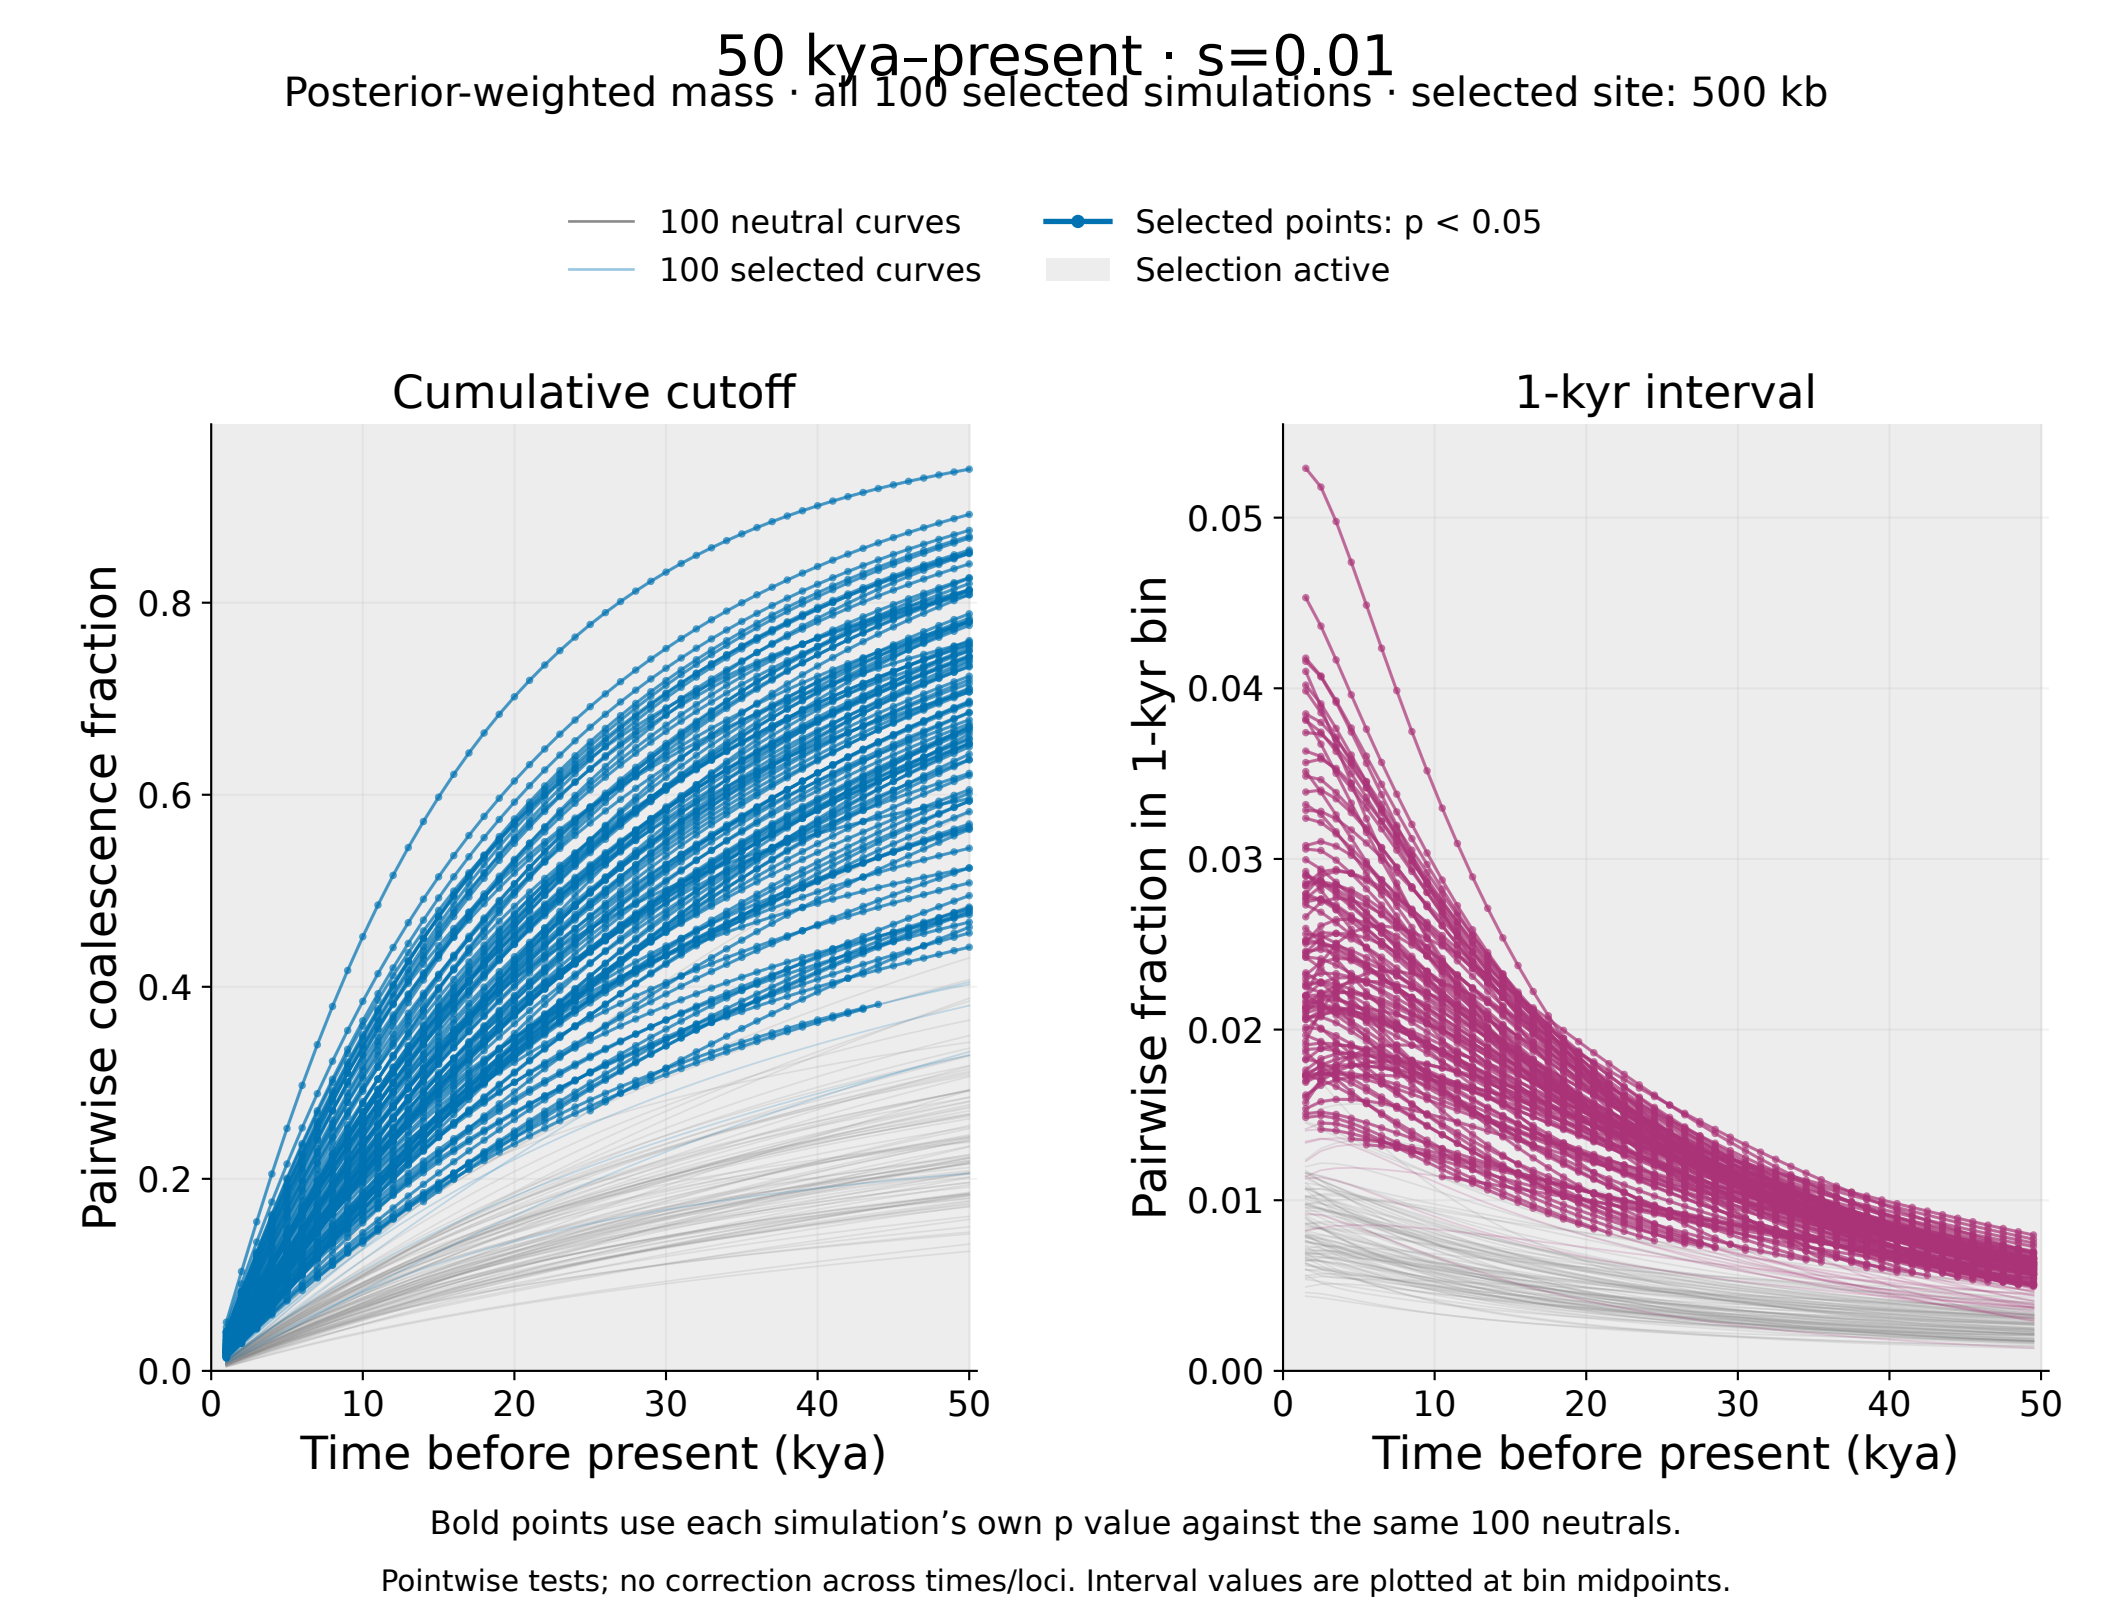
50 kya–present · s=0.01
Posterior-weighted mass · all 100 selected simulations · selected site: 500 kb
100 neutral curves
100 selected curves
Selected points: p < 0.05
Selection active
Cumulative cutoff
1-kyr interval
Pairwise coalescence fraction
Pairwise fraction in 1-kyr bin
Time before present (kya)
Time before present (kya)
0.0
0.2
0.4
0.6
0.8
0.00
0.01
0.02
0.03
0.04
0.05
0
10
20
30
40
50
Bold points use each simulation’s own p value against the same 100 neutrals.
Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

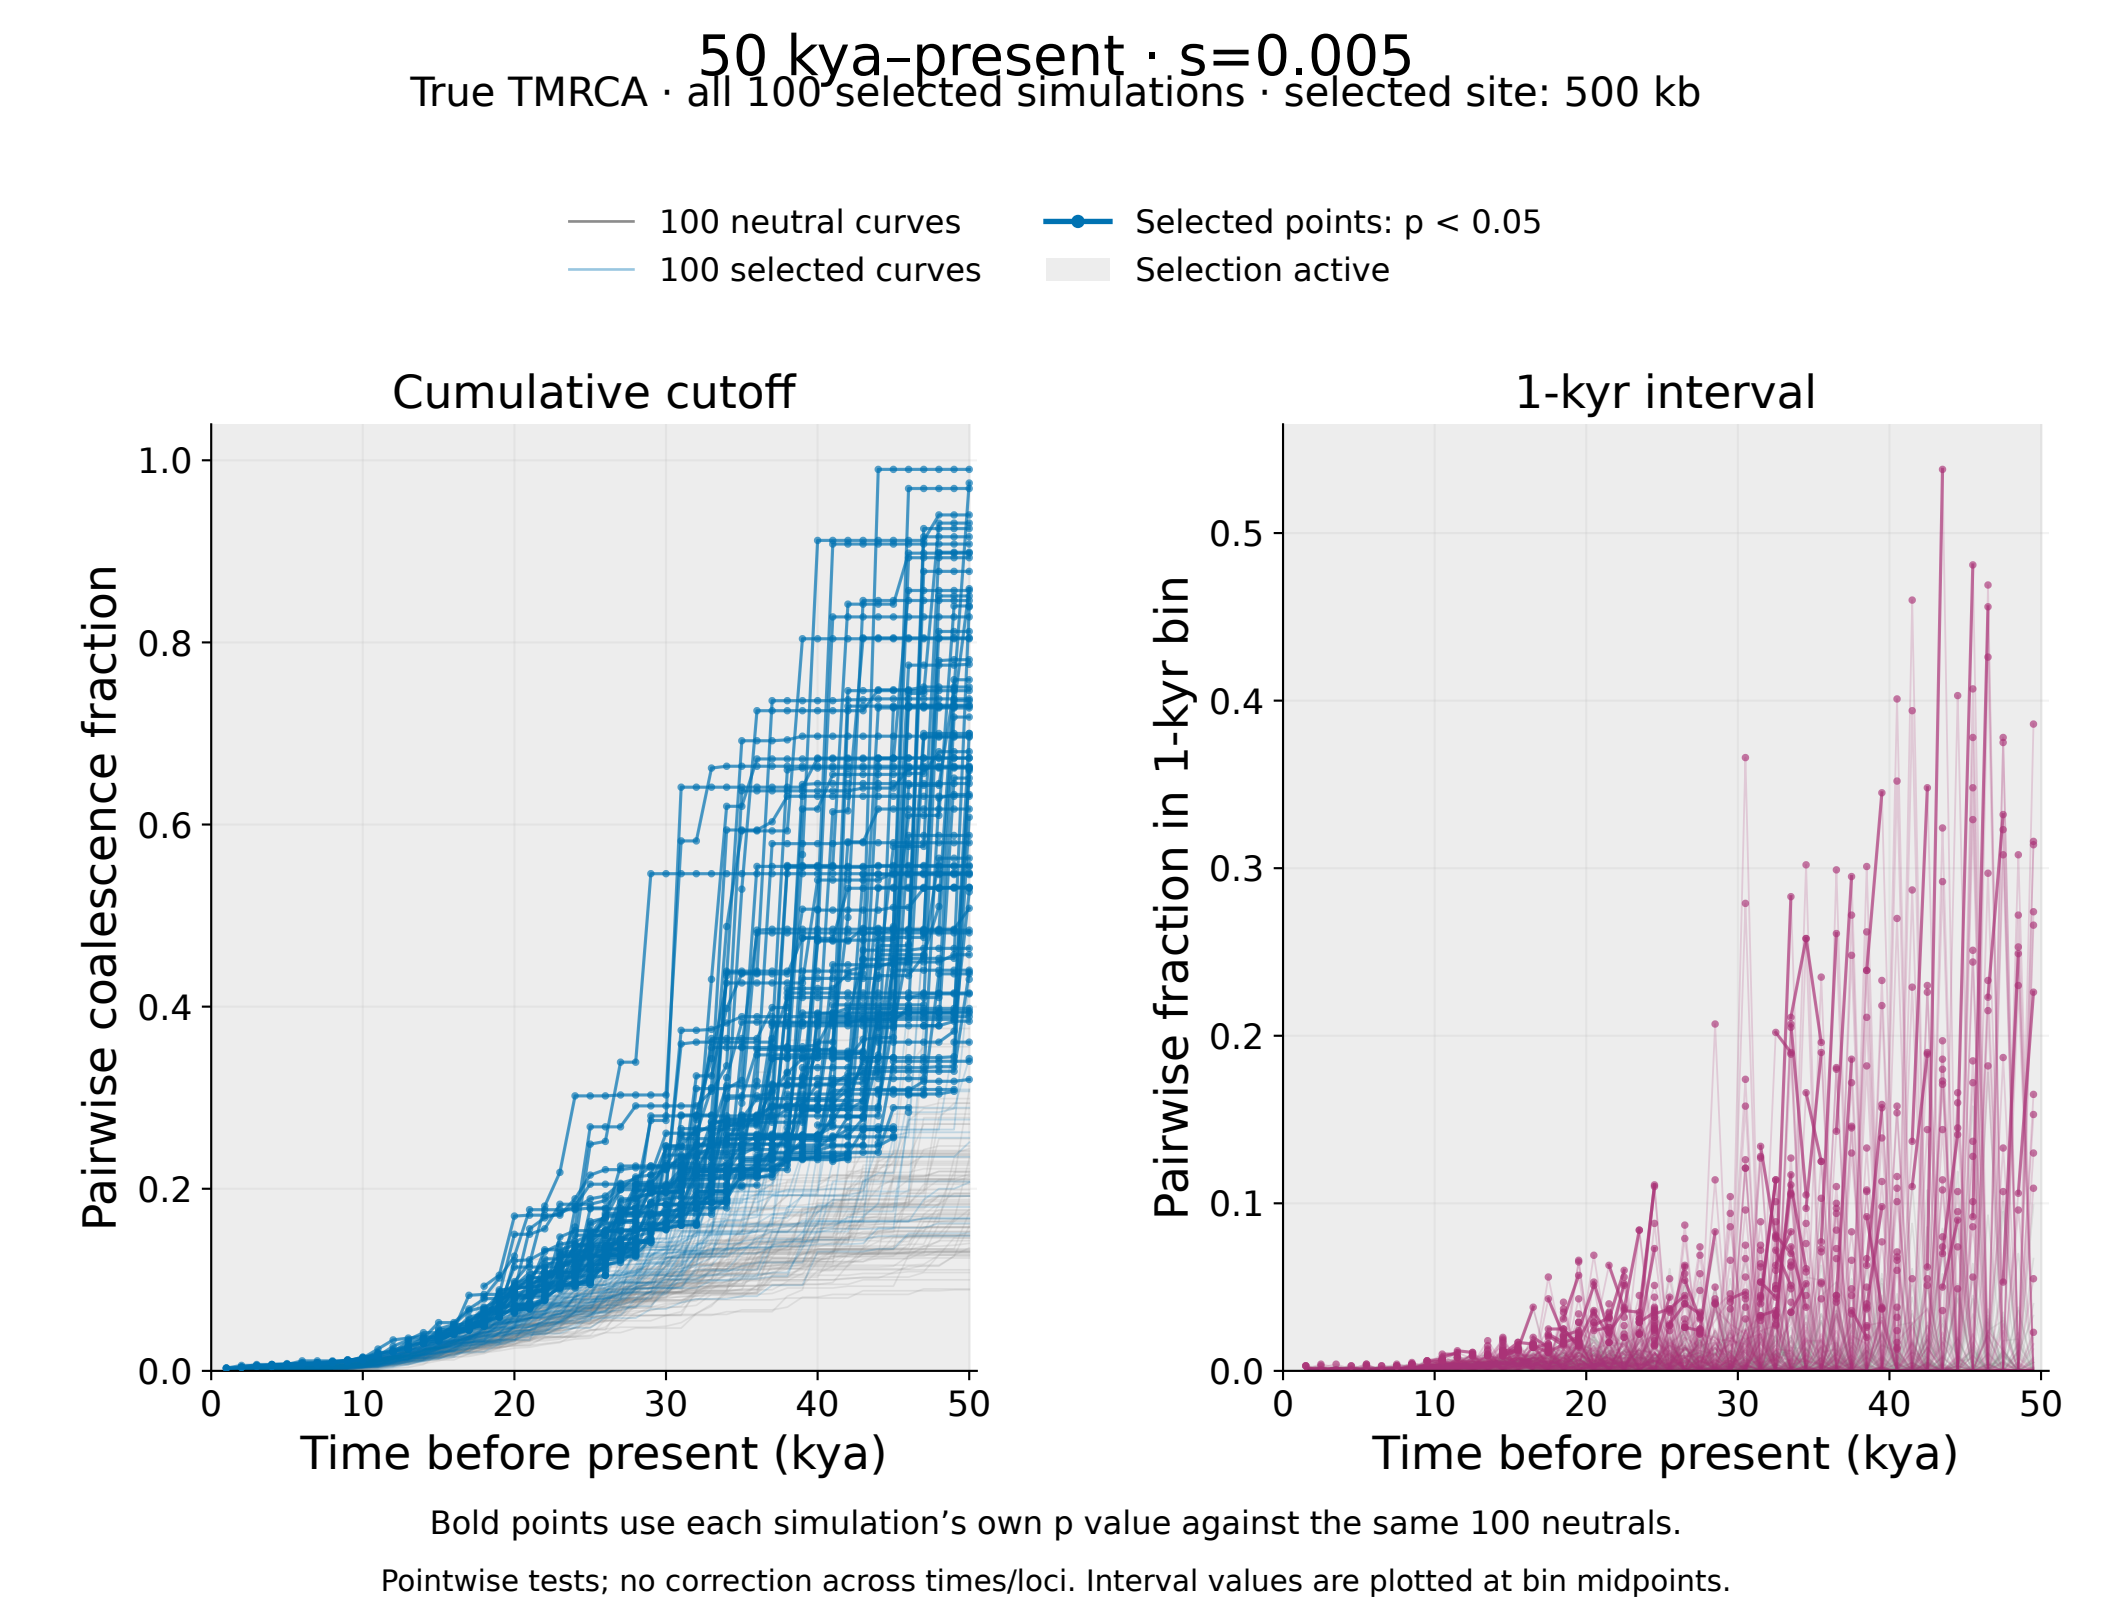


Bold points use each simulation's own p value against the same 100 neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

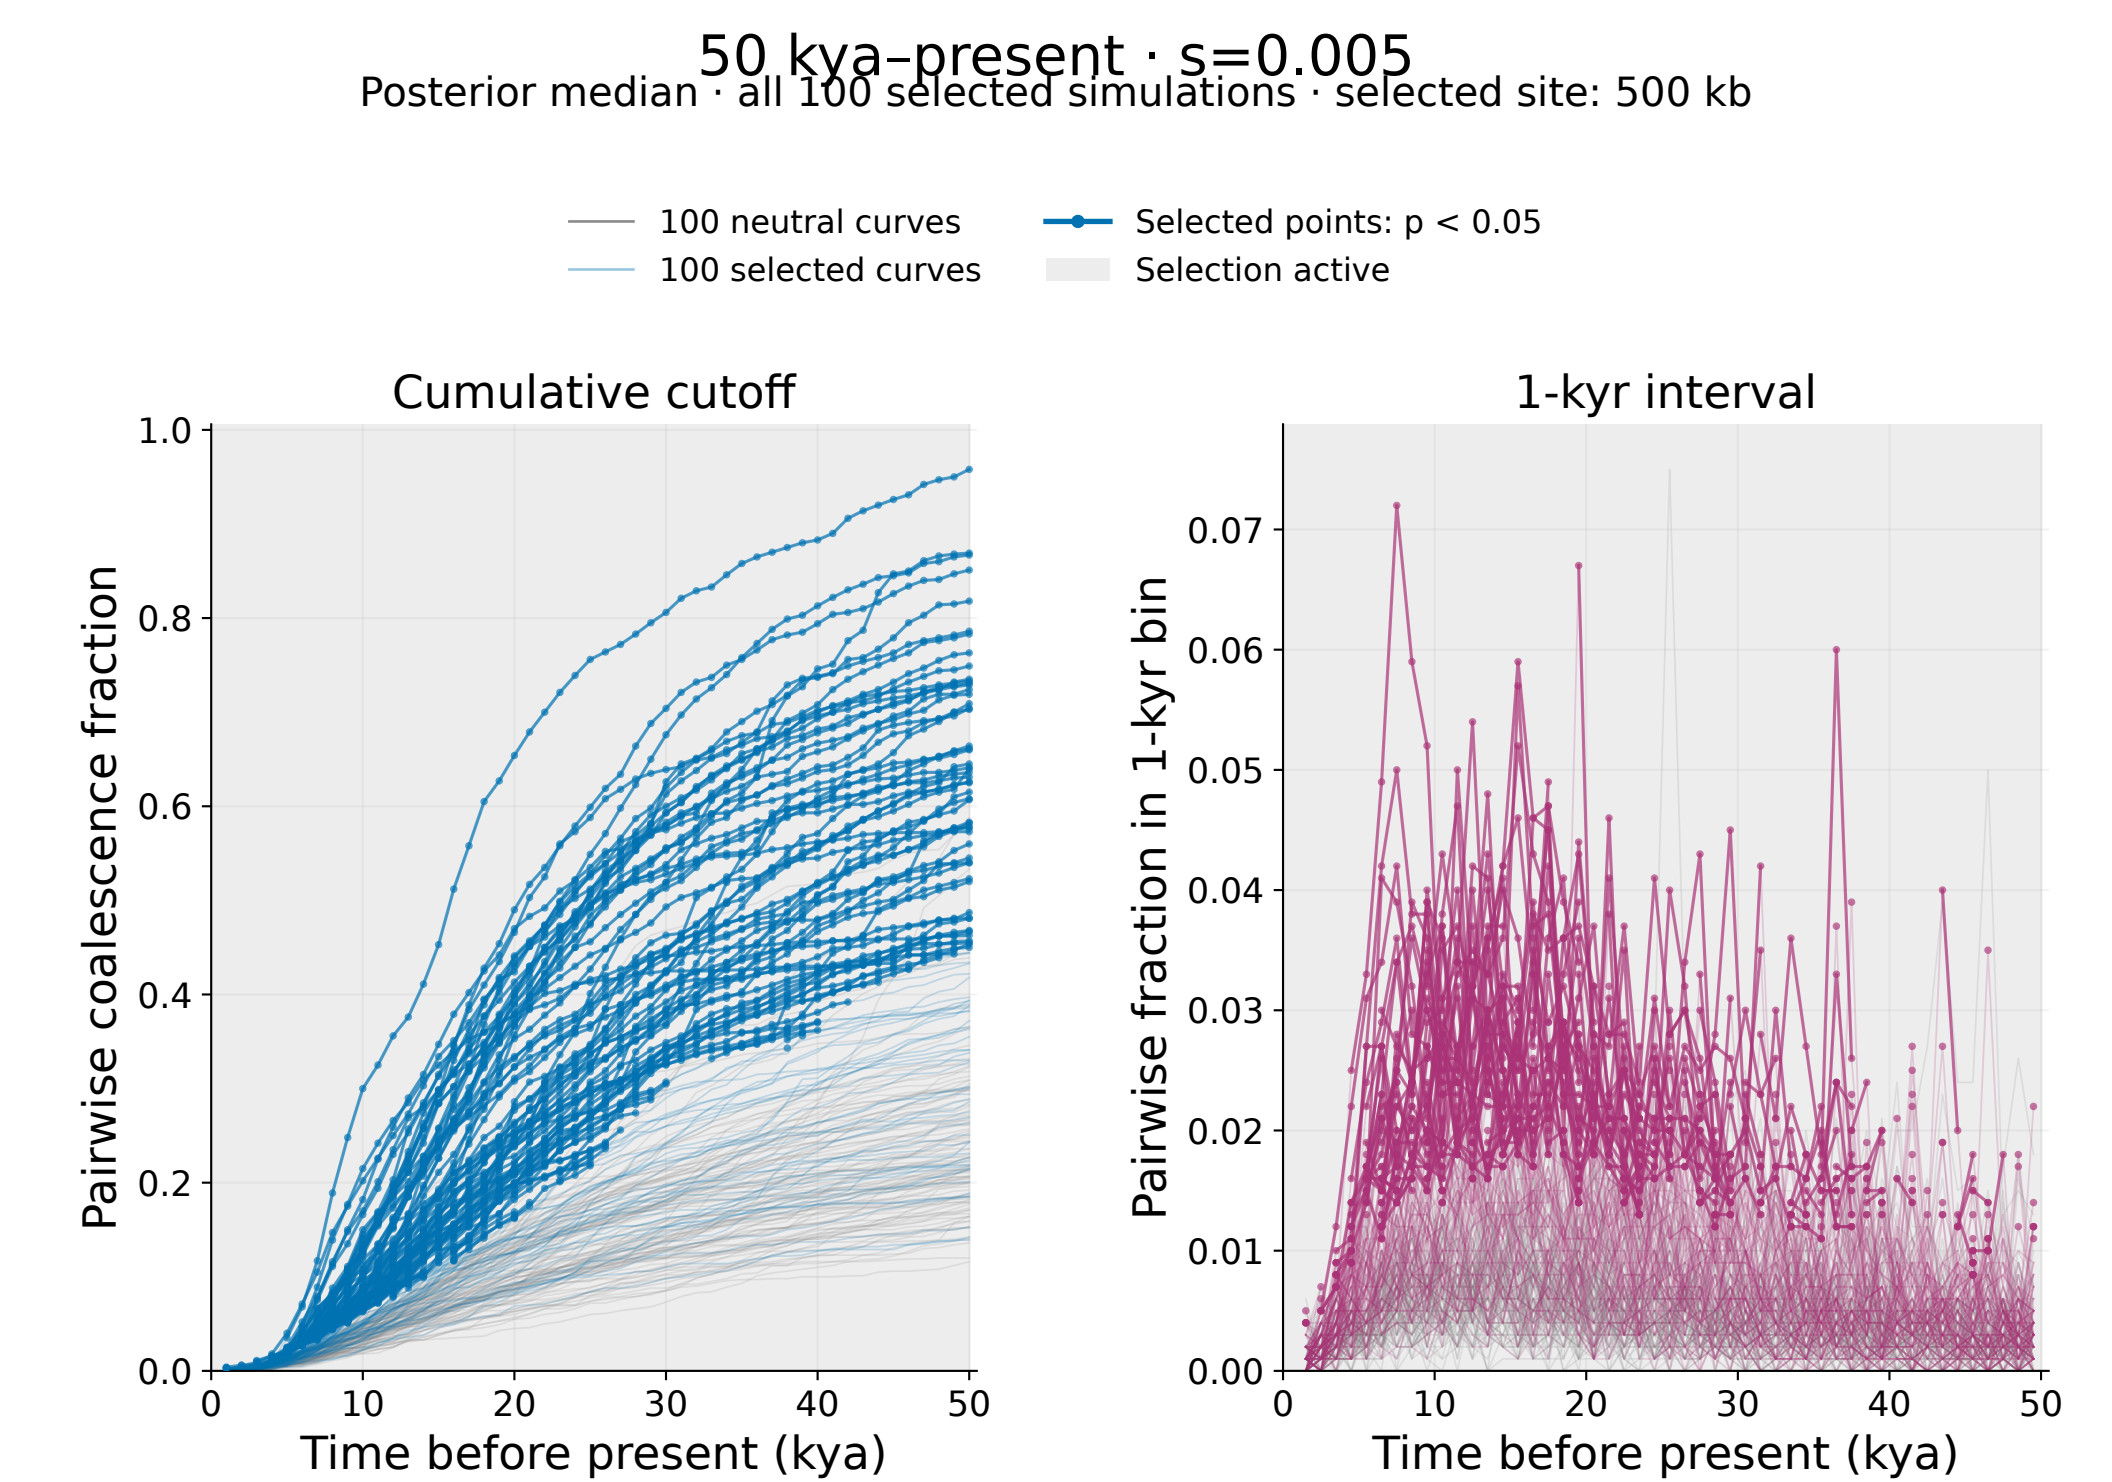

Bold points use each simulation's own p value against the same 100 neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

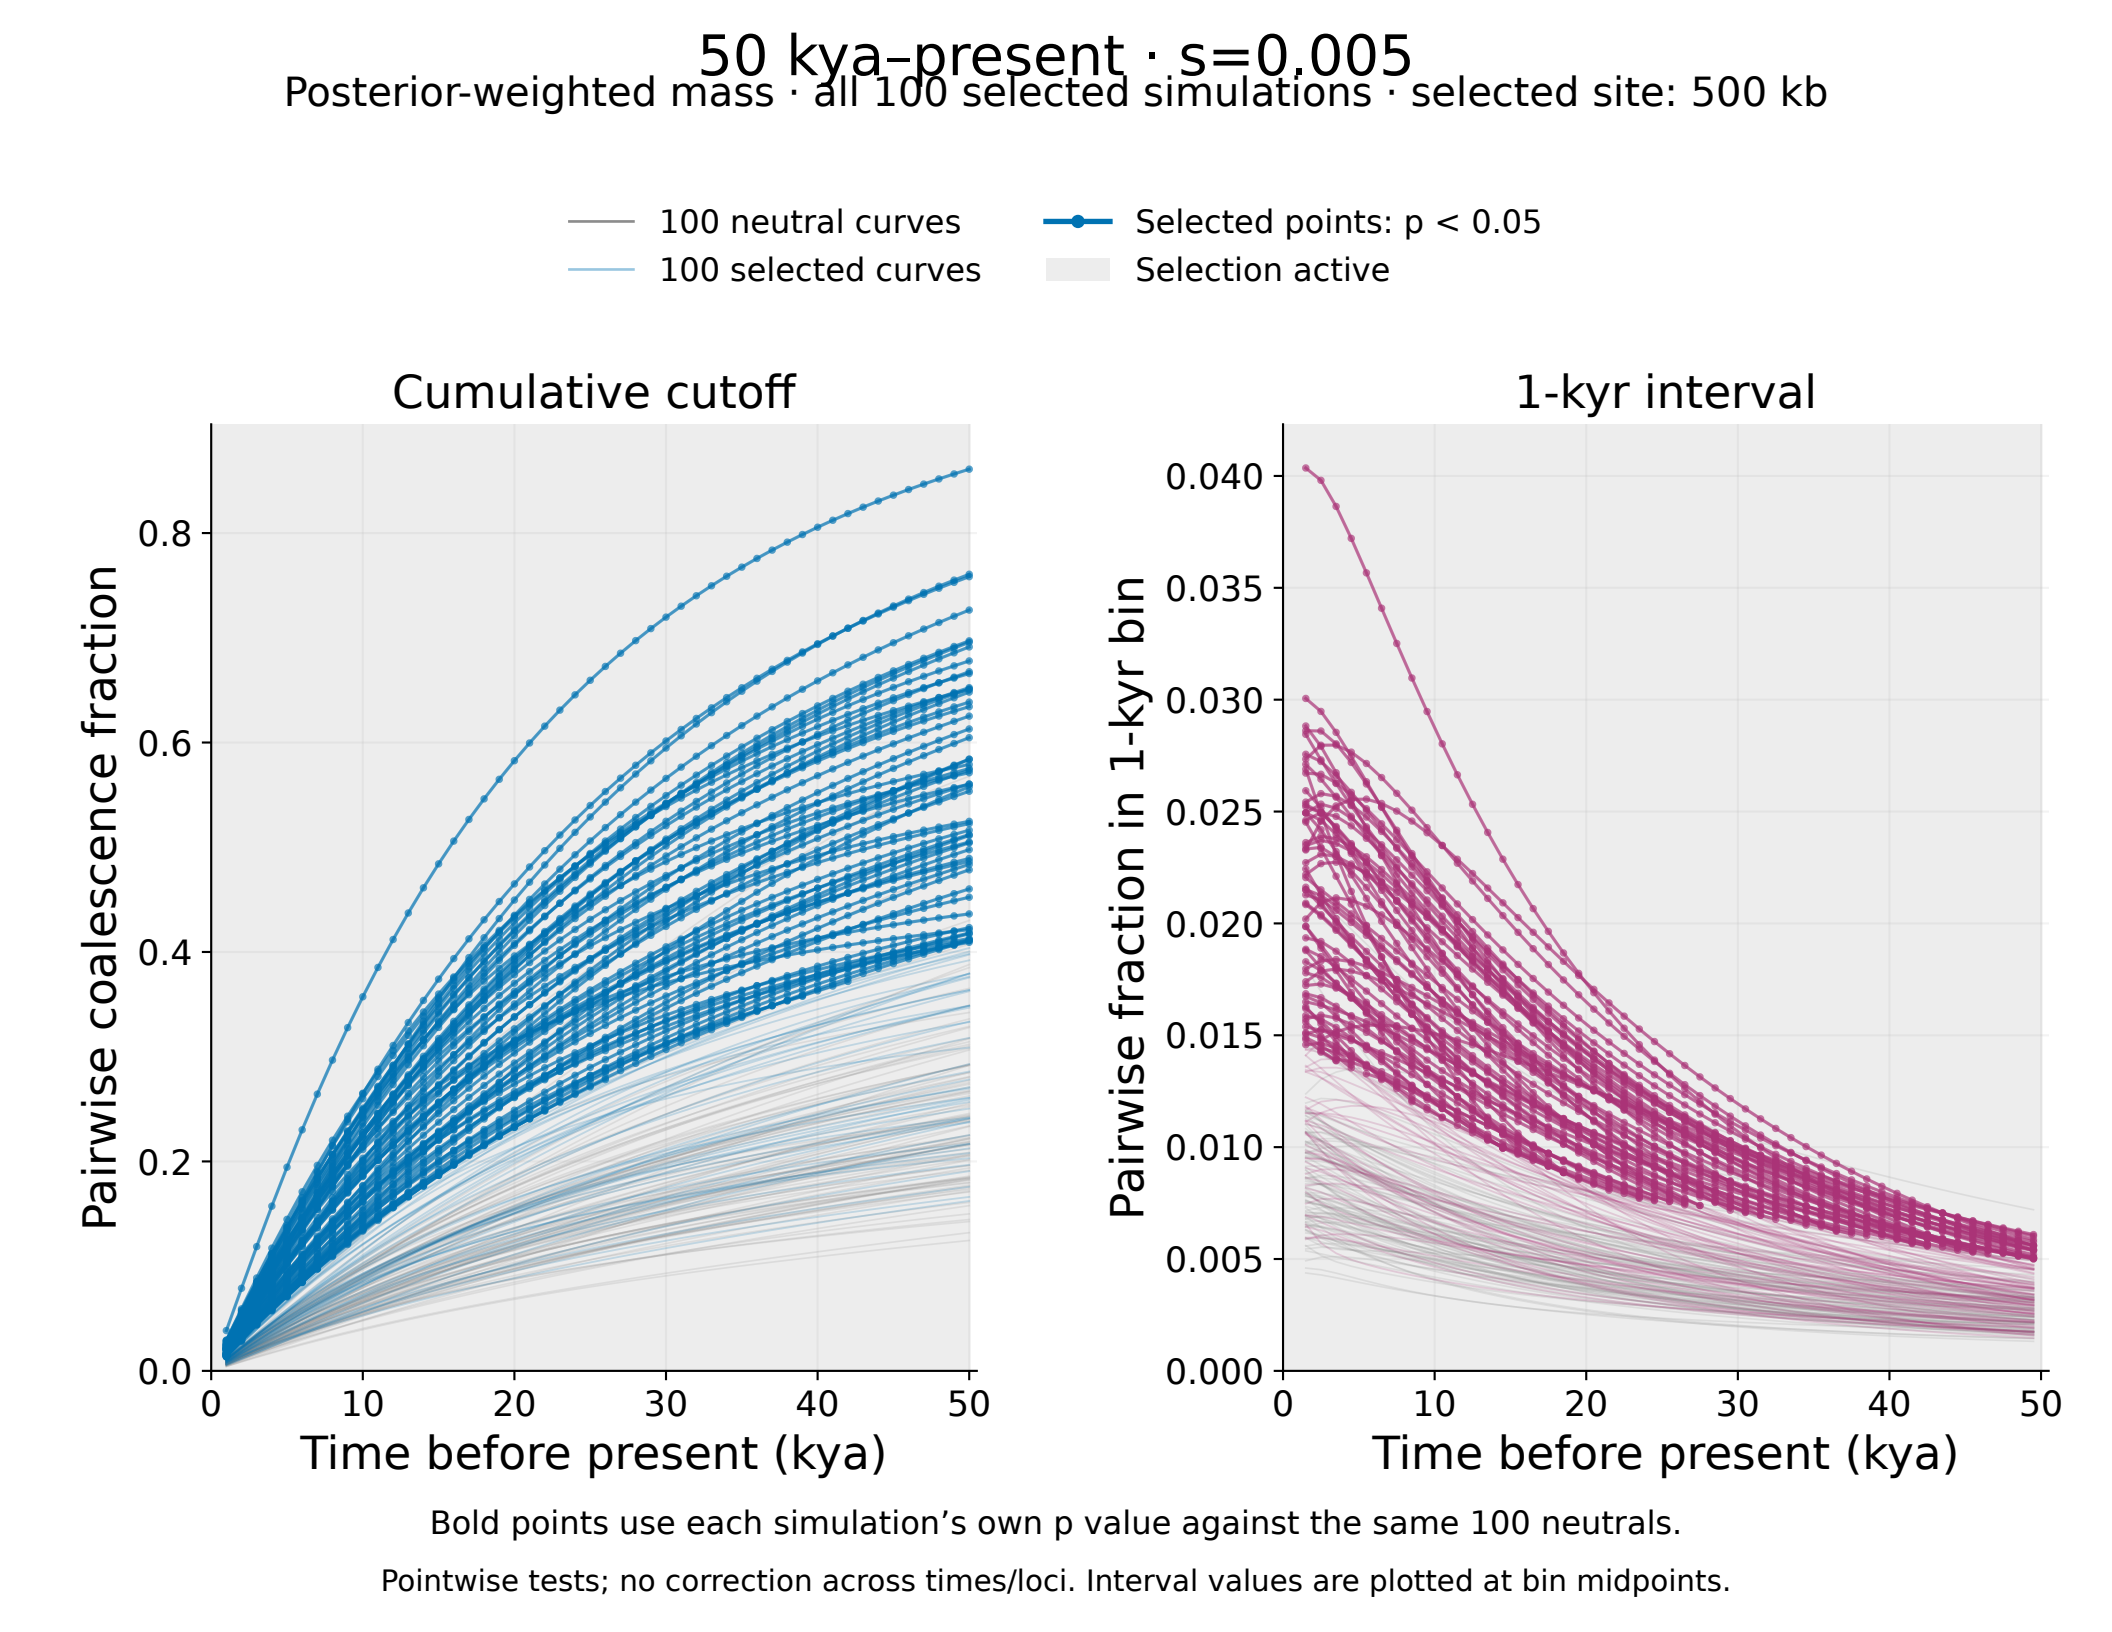
50 kya–present · s=0.005
Posterior-weighted mass · all 100 selected simulations · selected site: 500 kb
100 neutral curves
100 selected curves
Selected points: p < 0.05
Selection active
Cumulative cutoff
1-kyr interval
Pairwise coalescence fraction
Pairwise fraction in 1-kyr bin
Time before present (kya)
Time before present (kya)
0.0
0.2
0.4
0.6
0.8
0.000
0.005
0.010
0.015
0.020
0.025
0.030
0.035
0.040
0
10
20
30
40
50
Bold points use each simulation’s own p value against the same 100 neutrals.
Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.