F6 · Logical programs run by the pipeline

useless T: input

compile to Clifford + T

compiled: T count 0 · T removed (no effect before measurement)

Toffoli AND: input



compile to Clifford + T

compiled: T count 7 · 7 T/T† = 7 magic states from the factory

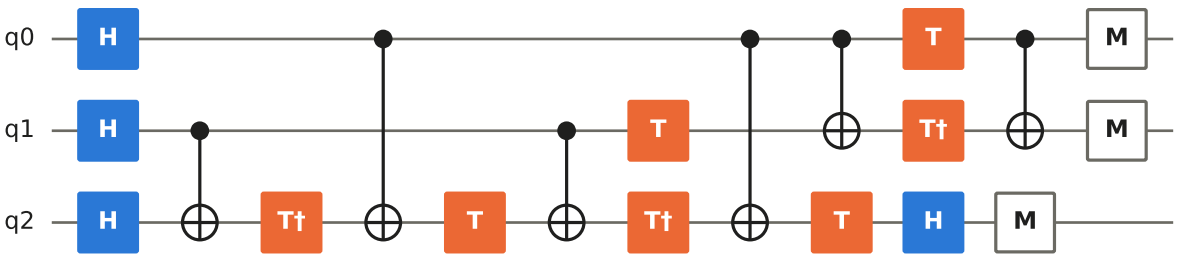

full_stack_sim.EXAMPLES, compiled by full_stack_sim.compile_clifford_t (Qiskit transpile + dropping diagonal gates before measurement). Orange = T/T† (each consumes one cultivated magic state); blue = Clifford; M = measurement. Unused qubits are not drawn.