

NoWalletConnect

Product documentation

How USDT checkout works without a wallet-connect popup.

For merchants, integrators, and operators.

1. What NoWalletConnect is

NoWalletConnect is a crypto checkout for **USDT**.

The customer does not connect MetaMask, Phantom, or any other wallet to the site. They send USDT themselves to a receive address. The product:

- shows the correct network and token
- shows a QR and address
- waits for a matching incoming payment
- confirms it and shows an explorer link

Money goes to the **merchant wallet**, not to a NoWalletConnect custody account.

2. Who uses it

Merchant

Has a merchant ID, an email, a Polygon wallet, and a Solana wallet. Shares a checkout link or embeds a Pay Now button.

Customer

Opens that link, types how much USDT to pay, picks Polygon or Solana, and sends the token from their own wallet.

NoWalletConnect

Looks up the merchant, shows the right receive address, and verifies the transfer.

3. The idea in one sentence

Pay by sending USDT to an address, not by connecting a wallet to a website.

That is why it is called NoWalletConnect.

4. Networks and tokens

Customer chooses	They must send	Token standard
Polygon	USDT only	ERC-20
Solana	USDT only	SPL

Wrong network or wrong token can be unrecoverable. The checkout warns before they send.

5. Objects in the system

Merchant ID

Short public handle, for example NWC. It appears in every payment link:

`checkout.html?merchant=NWC`

It is **not** a secret. Anyone with the link can start a payment to that merchant. It is not enough, by itself, to open the dashboard.

Email

Paired with the ID for dashboard sign-in. Both merchant ID and email must belong to the same database row.

Wallets

- Polygon address (0x...) receives Polygon USDT
- Solana address receives Solana USDT

The customer never types these. The payment page loads them from the merchant record.

Payment record

After a confirmed transfer, a row can store date, merchant ID, amount, transaction hash, and network. The dashboard uses that for analytics.

6. Pages

Integration guide

For merchants who want a button on their own site. They copy an HTML snippet, replace MERCHANT_ID, and paste it on a product or checkout page. The button can be restyled. The checkout URL and the “Powered by NoWalletConnect” line should stay.

checkout.html

First screen the customer sees from that button. Requires:

```
?merchant=YOUR_ID
```

If merchant is missing, checkout is blocked. The customer enters amount in USDT and network (Polygon or Solana), then continues to the payment page with:

```
?merchant=YOUR_ID&amount=50&network=polygon
```

Payment page

Shows exact amount, network and token, a network warning, QR, copyable address, status (waiting / expired / received), a 15-minute window, and a success view with explorer link.

The payment page must read merchant, amount, and network from the URL. If it ignores those params, checkout and payment stay disconnected.


merchant.html

Merchant dashboard. Sign-in is merchant ID + email against the database.

After sign-in it shows merchant name and ID, checkout link, wallets on file, volume / count / average / largest payment, Polygon vs Solana split, last 7 days, filterable history, and CSV export.

Register on this page does not invent a new database row from the browser. The merchant must already exist in the database, then they sign in with that ID and email.

7. Full payment path

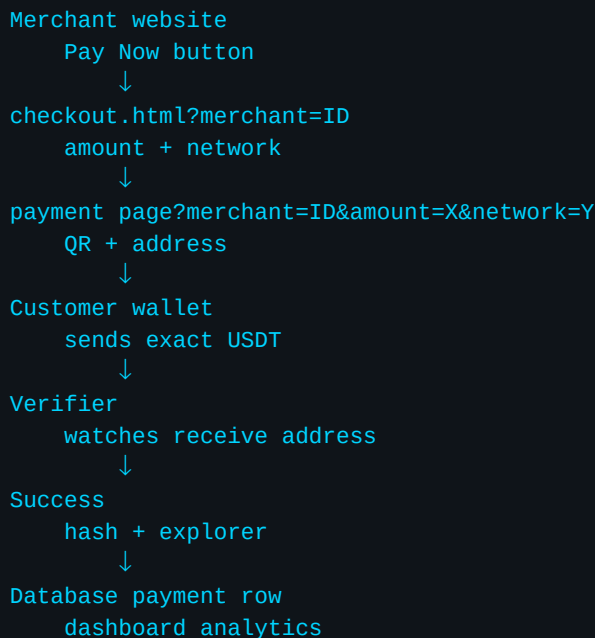

Step by step

- Merchant gets an ID and wallets recorded in the database.
- Merchant copies checkout.html?merchant=ID or the embed snippet.
- Customer opens the link.
- Customer types an amount greater than 0.
- Customer picks Polygon or Solana.
- Payment page resolves that merchant's matching wallet.
- Customer sends exactly that USDT amount on that network.
- Verifier polls until it sees a matching incoming transfer, or the window ends.
- Success page shows amount and transaction.
- Dashboard can list that payment under the same merchant ID.

8. Payment window

Watching starts when a valid amount and wallet exist.

- Poll every few seconds
- Treat a matching amount to the receive address as paid
- Expire after 15 minutes
- Last 5 minutes can show an urgent timer
- Check again restarts a lookup

Exact-amount matching matters. Underpay or overpay may not confirm automatically.

9. What merchants should tell customers

- Send USDT only
- Use the same network shown on screen
- Send the exact amount

- Do not close the page until it says received, or save the address and amount
- If the timer expires, start a new checkout

10. Embed rules

Allowed to change

- Button label (Pay Now, Pay with USDT, ...)
- Colors, padding, font size, radius

Do not change

- Checkout host path unless you were given a new URL
- Query param name merchant
- Dropping the Powered by NoWalletConnect credit

11. Dashboard analytics

Figures come from payment rows for that merchant ID only.

Metric	Meaning
Volume	Sum of USDT amounts
Payments	Number of rows
Average	Volume ÷ payments
Largest	Max single amount
Polygon / Solana	Count and volume per network
Last 7 days	Sum per day if the date field parses
Table	Date, amount, network, explorer link

Filters: All / Polygon / Solana. Search matches amount or transaction hash. Export downloads the visible rows as CSV.

If the table is empty, either that merchant has no rows, or the amount / network / ID columns do not match what the dashboard expects.

12. Pricing

- \$1 setup (one time)
- \$1 per month
- No NoWalletConnect cut per payment
- Sender pays network fees
- Merchant receives the USDT at their wallet

13. Limits and safety

- Merchant ID in a URL is public. Do not treat it as a password.

- Dashboard access is ID + email. Anyone who knows both can open the dashboard in this model.
- Apps that expose the full database make emails and wallets visible. Production should look up one row on a server.
- Never tell customers they can send ETH, SOL, BTC, or USDT on another chain.
- A static site cannot by itself create a live merchant. Rows are added in the database first.

14. Quick test

- Confirm a test merchant exists (ID, email, both wallets).
- Open merchant.html and sign in with that ID and email.
- Copy the checkout link.
- Open it in a private window (customer view).
- Enter 1 USDT, pick a network, continue.
- Confirm the QR address equals the wallet on file for that network.
- Send a test amount only if you intend to. Otherwise stop at the QR.

15. Glossary

Term	Meaning
Checkout	Amount + network screen
Payment page	Address, QR, waiting, success
Merchant ID	Public store handle
Database	Source of merchants and payment history
Verifier	Service that checks the chain for incoming USDT
Receive address	Merchant wallet for the chosen network

16. Support

Telegram: <https://t.me/noWalletConnect>

Product overview: README.md in the repository.