


Lab 2

Introduction

In lab 2 we are going to work with Mandelbrot Set. It is a set of complex numbers. With an algorithm to compute Mandelbrot Set we are going to observe how to paralelize in diferent ways. Point method and Row method are the methods we are going to work with.

Task descomposition and granularity analysis

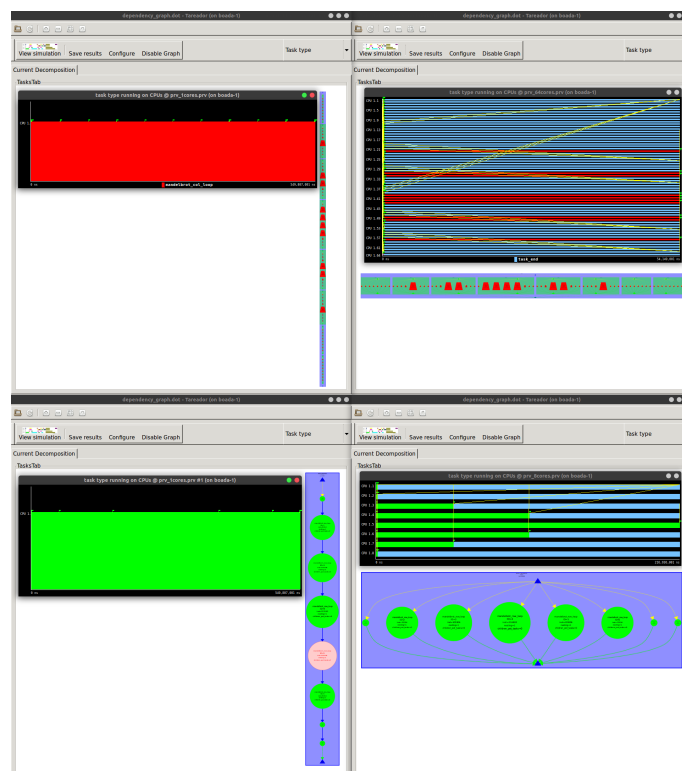

code:

```
void mandelbrot(int height,
               int width,
               double real_min,
               double imag_min,
               double scale_real,
               double scale_imag,
               int maxiter,
```

```
#if _DISPLAY_

    int setup_return,

    Display *display,

    Window win,

    GC gc,

    double scale_color,

    double min_color)

#else

    int ** output)

#endif

{

    for (row = 0; row < height; ++row) {

        tareador_start_task("mandelbrot row loop");

        for (col = 0; col < width; ++col) {

            tareador_start_task("mandelbrot col loop");

            complex z, c;

            z.real = z.imag = 0;

            c.real = real_min + ((double) col * scale_real);
            c.imag = imag_min + ((double) (height-1-row) * scale_imag);
            /* height-1-row so y axis displays
             * with larger values at top
             */

            /* Calculate z0, z1, .... until divergence or maximum
iterations */
            int k = 0;
            double lengthsq, temp;
            do {
                temp = z.real*z.real - z.imag*z.imag + c.real;
                z.imag = 2*z.real*z.imag + c.imag;
                z.real = temp;
                lengthsq = z.real*z.real + z.imag*z.imag;
                ++k;
            } while (lengthsq < (N*N) && k < maxiter);

        }

    }

#endif
```

```

        /* Scale color and display point */

        long color = (long) ((k-1) * scale_color) + min_color;

        if (setup_return == EXIT_SUCCESS) {
            SetForeground (display, gc, color);
            XDrawPoint (display, win, gc, col, row);

        }

    #else

        output[row][col]=k;

    #endif

        **tareador_end_task("mandelbrot col loop");**

    }

    tareador_end_task("mandelbrot row loop");
}
}

```

Which section of the code is causing the serialization of all tasks

```

        /* Scale color and display point */

        long color = (long) ((k-1) * scale_color) + min_color;

        if (setup_return == EXIT_SUCCESS) {
            SetForeground (display, gc, color);
            XDrawPoint (display, win, gc, col, row);

        }

```

Scale color and display point causes dependency in the graphical version. It uses vars.

The granularity in **point method** is smaller and with 64 threads the execution time is much lower than using **row method**. If you have enough cpus, the **point** strategy is more adequate, as it allows for a lower time, however, **row method** it's worth if you have less cores. You will reduce overhead time.

Code protection:

X11 use a variable, named X11_COLO_fake, with dependencies. With openMP you can declare critical regions. That protects your code while parallelize from decoherences.

Point decomposition in OpenMP

Elapsed time plot

