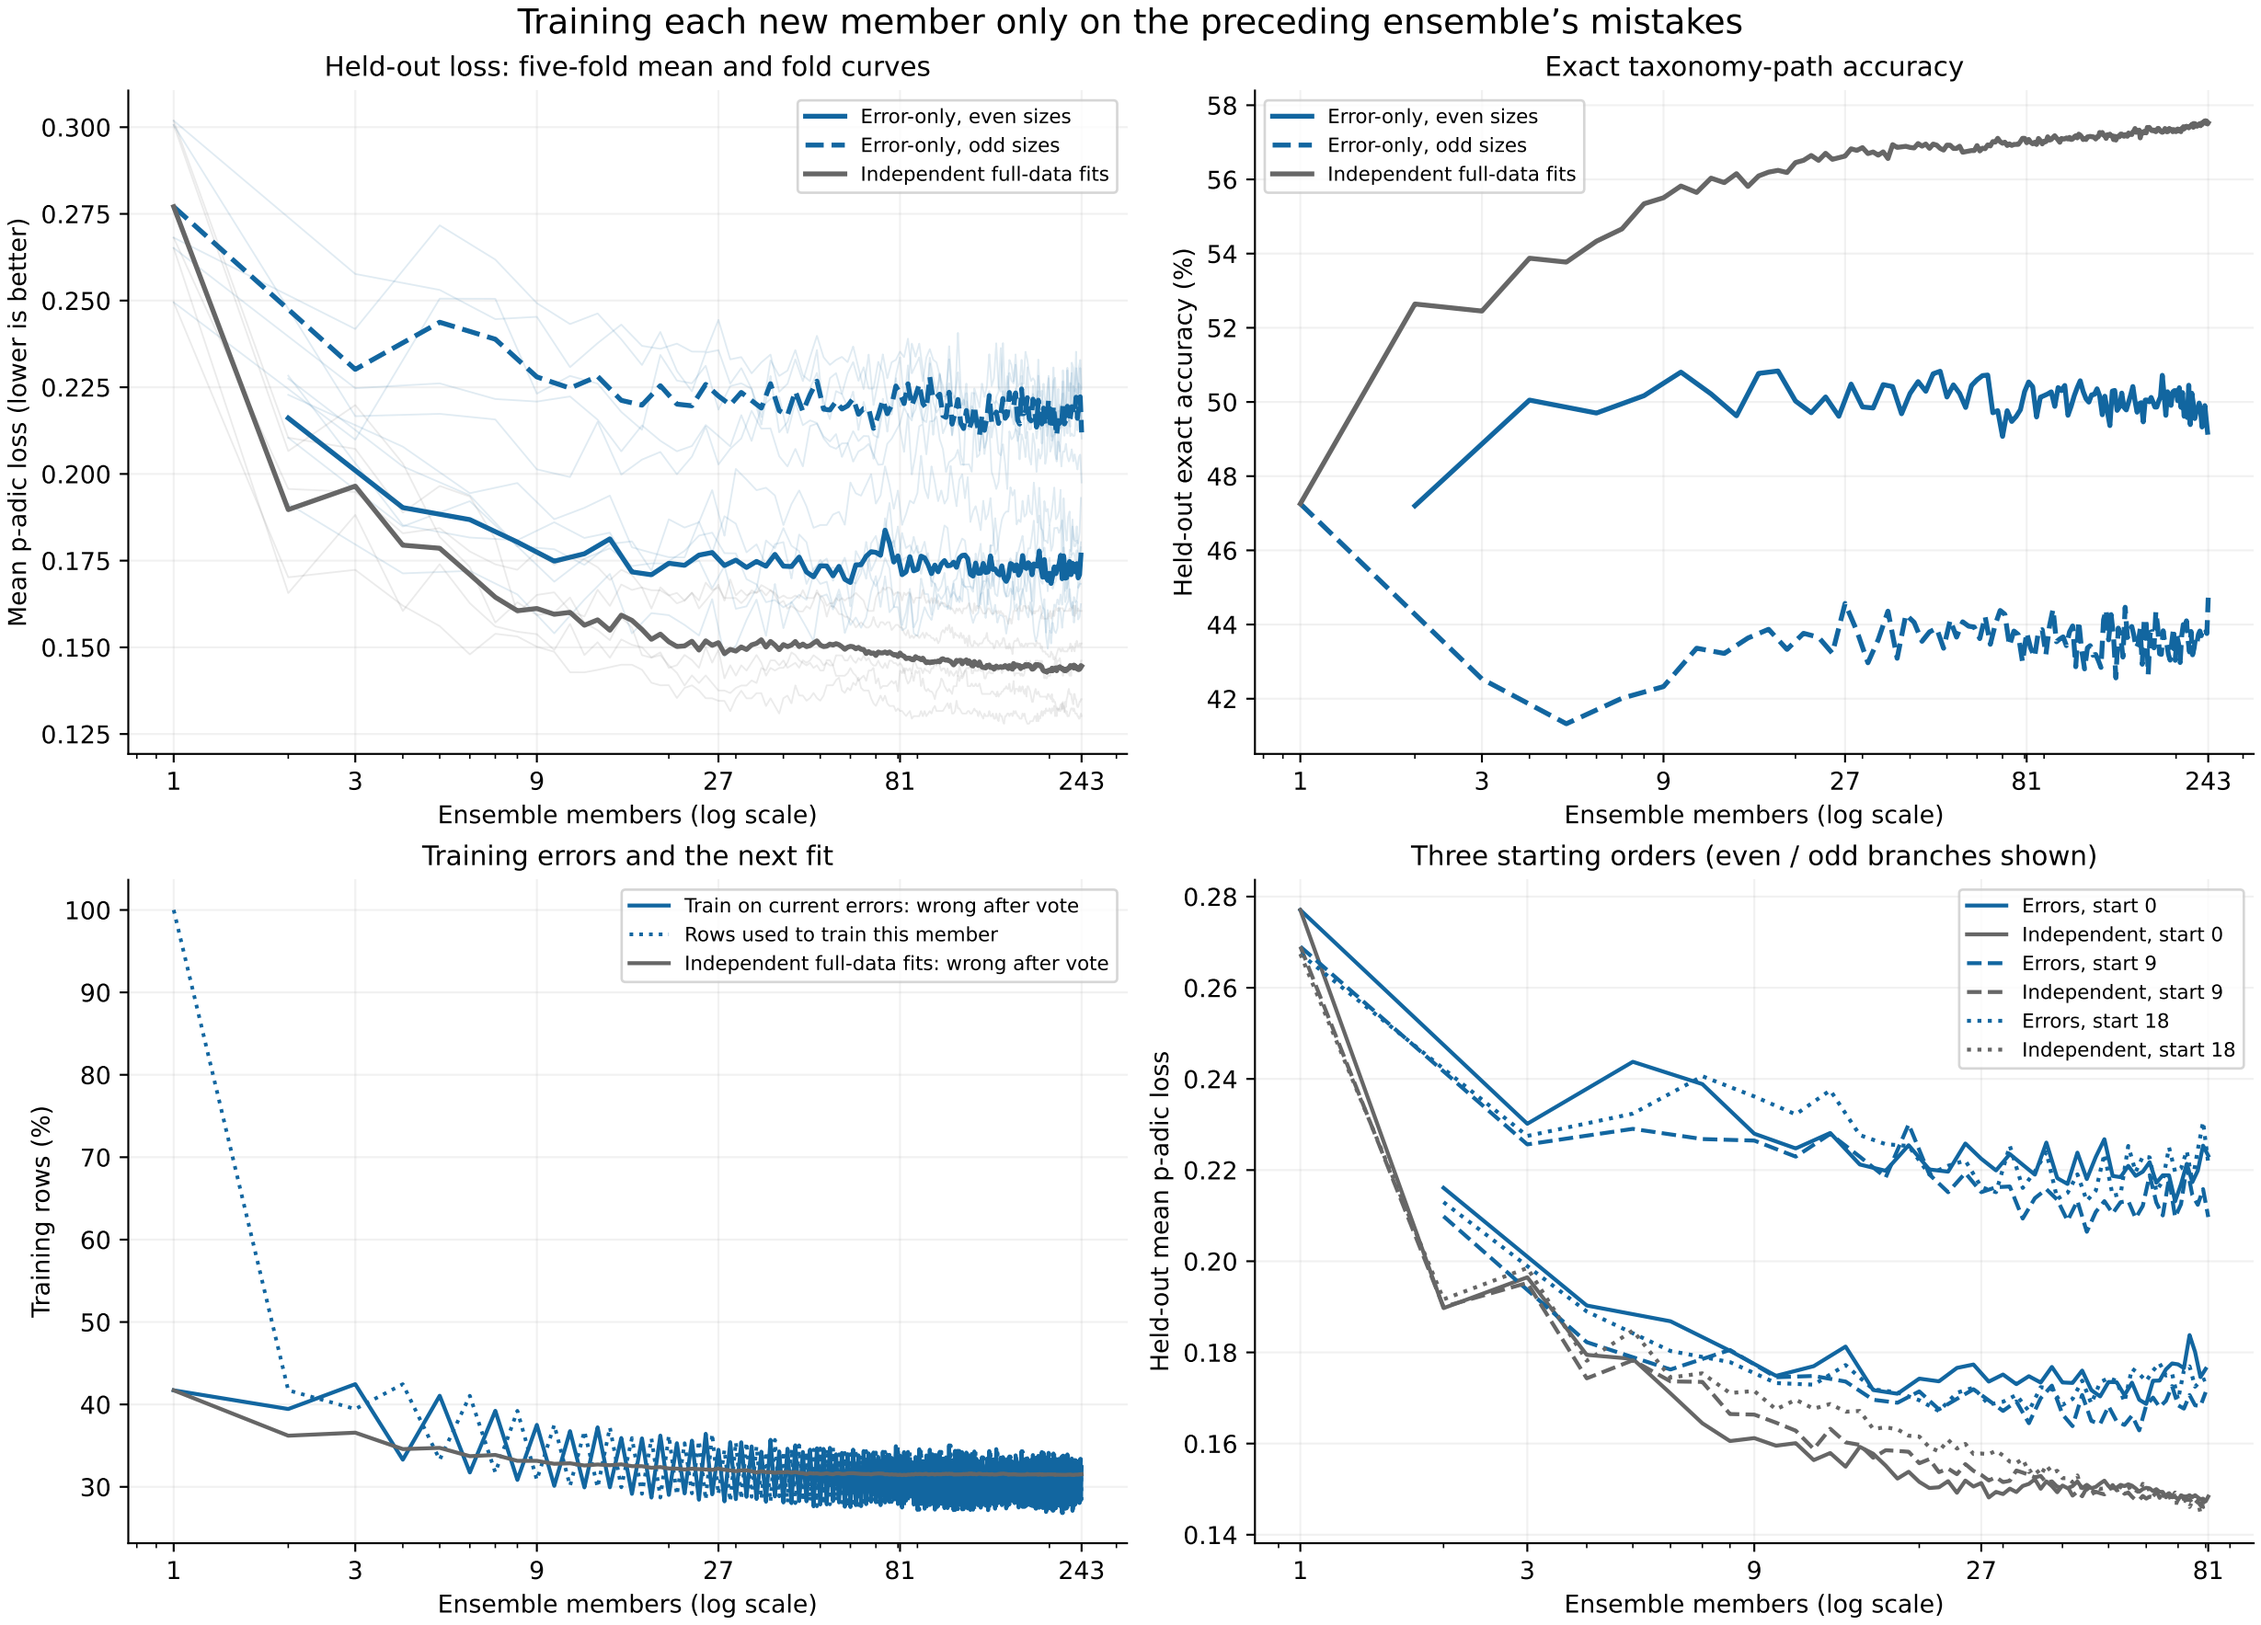

Training each new member only on the preceding ensemble’s mistakes
Held-out loss: five-fold mean and fold curves
Mean p-adic loss (lower is better)
Ensemble members (log scale)
Error-only, even sizes
Error-only, odd sizes
Independent full-data fits
Exact taxonomy-path accuracy
Held-out exact accuracy (%)
Training errors and the next fit
Training rows (%)
Train on current errors: wrong after vote
Rows used to train this member
Independent full-data fits: wrong after vote
Three starting orders (even / odd branches shown)
Held-out mean p-adic loss
Errors, start 0
Independent, start 0
Errors, start 9
Independent, start 9
Errors, start 18
Independent, start 18