

Parallage: Structured Alternatives for Auditing AI Translations of Ancient Texts

Greg Baker Shirley Chan Vanessa Enriquez Raido Greta Hawes

Preprint, 27 July 2026

Abstract

Large language models make it inexpensive to generate many translations, including for ancient and under-translated texts, but they do not make those translations easy to verify. A single fluent output can conceal ambiguity, unstable named entities, and interpretive decisions from readers who cannot inspect the source language. We introduce **Parallage**, a human-facing method that presents a focal translation with deliberately differentiated helper variants and lightweight audit scaffolding. Unlike n-best reranking, minimum-Bayes-risk decoding, or self-consistency, Parallage does not collapse its candidate set into one answer or treat agreement among correlated outputs as independent corroboration. It preserves structured variation as an object for inspection.

We implement the method for Ancient Greek and Classical Chinese, release a versioned library of twenty-seven helper profiles, and define an anticipated-divergence judgement that can be elicited before an expert reference is revealed. Formative co-author reviews show both possible signal and serious confounding. In Greek, one reviewer’s ratings track the focal translation’s XCOMET-XL divergence from the hidden human rendering strongly (Spearman $\rho = 0.80$, exact two-sided $p = 0.008$), which taken alone would read as a successful pilot. But XCOMET similarity falls steeply with passage length in this corpus, the same ratings rise with length, and controlling for length attenuates the association (partial rank $r = 0.51$, $p = 0.130$): a reader could have scored almost as well by distrusting long passages. In ten Chinese passages, where scores are not length-patterned, anticipated divergence correlates modestly with an eight-metric reference-divergence composite (Spearman $\rho = 0.47$, exact one-sided $p = 0.085$) and most strongly with XCOMET-XL ($\rho = -0.73$, exact two-sided $p = 0.020$). The five-pack/five-single Chinese split is too small and order-confounded to estimate a treatment effect, and timing instrumentation failed in the single-output condition. We therefore make no efficacy claim. The contribution is a reproducible way to generate and expose translation multiplicity, an auditable pilot with its confounds documented, and a controlled-study protocol for testing whether structured alternatives improve issue detection and confidence calibration.

1. Abundant Translation, Scarce Verification

Generative AI can produce fluent but incorrect translations quickly and cheaply, making it attractive for fragmentary, specialised, or under-translated ancient texts. The economics are stark: professional human translation is conventionally budgeted at roughly \$0.10–\$0.15 per source word, while generating this project’s full set of twenty-seven helper renderings cost about 0.7 cents per source word, and web dissemination costs almost nothing. The failures of generated translation, however, can be concentrated rather than gradual. In a reference-free expert evaluation of Ancient Greek technical prose, Zainaldin et al. (2026) found high average performance but catastrophic failures on two terminology-dense passages, with terminology rarity the dominant predictor of failure. Standard automatic metrics were informative only when the candidate set contained wide quality variation. This combination—mostly fluent output, sparse severe failures, and incomplete metric discrimination—makes verification a retrieval problem as well as a translation problem: limited expert attention must be directed to the passages and decisions most likely to need it.

The verification problem is especially acute when no stable complete translation exists. Readers of New Testament Greek can triangulate with dictionaries, parallel translations, and extensive commentary. Readers of Stephanos of Byzantium’s *Ethnica* or the Tsinghua bamboo manuscript *Xin shi wei zhong* often cannot: no complete prior English translation exists, the author cannot be asked what they meant, and no native speaker raised in the source culture survives to consult. A non-reader of Greek or Classical Chinese cannot independently inspect the source script. If one of the translations sounds fluent, how can they tell if there are problems?

The central question is not whether a candidate can be made to look reliable, but whether a reader can be given useful evidence about where it may not be. The design premise is deliberately inverted from conventional translation delivery: rather than trying to remove ambiguity and uncertainty, Parallage tries to make them obvious. It uses a set of role-conditioned translations for that purpose. The outputs are not votes, and the most fluent or central output is not automatically selected as correct. The set is presented to a person who must decide where to distrust, investigate, or seek expert help.

This paper makes four contributions:

1. A reproducible parallel-pack method with one focal translation, twenty-seven versioned helper profiles, and generation provenance.
2. A cross-script pilot over Ancient Greek and Classical Chinese.
3. An anticipated-divergence instrument that non-readers can answer and later compare with an independent human rendering.
4. An evidence-led protocol for a preregistered controlled study of whether packs improve issue detection and confidence calibration.

2. Related Work

2.1 Multiple Hypotheses in Machine Translation

Machine-translation systems have long generated candidate lists, lattices, or samples. Most computational uses of this multiplicity are decision procedures. Minimum-Bayes-risk decoding, for example, selects the candidate with the best expected utility under a model and metric rather than exposing the candidate set to a reader (Freitag et al. 2022). Multi-hypothesis evaluation instead uses diverse translations to model reference variation or quantify system uncertainty (Fomicheva, Specia, and Guzmán 2020). Parallage shares the premise that one reference and one output hide legitimate variation, but assigns multiplicity a different role: the variants are contrastive evidence in a user interface.

This difference matters because candidate agreement is not a calibrated confidence estimate. Twenty-seven outputs from the same model family, prompted by related instructions and trained on overlapping data, are not twenty-seven independent witnesses. A shared error can appear stable across the pack. Conversely, deliberate style changes can produce surface disagreement without any underlying semantic dispute. Parallage therefore uses role diversity to elicit inspectable decisions, not majority voting.

2.2 Quality Estimation and Human Reliance

Reference-free quality estimation aims to predict translation quality when no human reference is available. Learned metrics can help locate errors, but quality scores do not by themselves determine how a person should rely on a translation. In a clinical study, Mehandru et al. (2023) found that quality-estimation feedback and back-translation affected different aspects of physicians’ reliance decisions, illustrating the need to evaluate decision support in its context of use. Work on neural-MT hallucination detection likewise finds that fluent critical errors are rare and difficult to identify, and that commonly used detectors can fail in preventive settings (Guerreiro, Voita, and Martins 2023).

Parallage is complementary to quality estimation. It does not require a calibrated score at reading time, although scores and expert references can be used later to evaluate judgements. Its main object is the human decision: which spans or passages should be distrusted, and with what confidence?

2.3 Sampling-Based Self-Checking

Self-consistency, multi-agent debate, semantic entropy, and black-box self-checking generate multiple model outputs to select an answer or estimate uncertainty (Wang et al. 2023; Du et al. 2024; Farquhar et al. 2024; Manakul, Liusie, and Gales 2023). These approaches motivate using variation as evidence, while also exposing a limit relevant here: agreement can be uninformative when outputs are systematically wrong. Parallage moves the evidence boundary outward. Instead of using sampled variation only inside the system, it gives deliberately structured variation to the reader and measures the reader’s subsequent judgement.

3. The Parallage Method

Parallage draws on Greek παραλλαγή, variation or alternation. A parallel translation pack contains three layers:

1. A **focal translation**, representing the single fluent rendering at which a conventional interface might stop.
2. **Helper variants**, generated under systematically different prompt profiles rather than by repeatedly sampling one prompt.
3. **Audit scaffolding**, including source-segment alignment, named-entity handling, marked ambiguity points, disagreement cues, and review prompts.

The current implementation has one focal profile and twenty-seven helper profiles. The helper count is the “twenty-seven prompts” described in the associated talk; including the focal profile gives twenty-eight generated outputs per passage in the Chinese analysis. The profiles fall into four functional families:

Family	Example profiles	Intended inspection function
Philological	diplomatic literal, interlinear gloss, syntax scaffold, minimal inference	expose source structure and supplied inference
Reader-facing	scholarly readable, smooth idiomatic, controlled English, plain language	contrast editorial smoothing and accessibility choices
Analytical	entity explicit, forked lattice, uncertainty annotated, decision log, adversarial, back-translation audit	surface entities, forks, confidence claims, drift, and possible counter-readings
Creative/mnemonic	mnemonic, alliterative, rhyming	stress lexical choices under strong form constraints; not candidate critical translations

These roles are hypotheses about useful forms of multiplicity, not a claim that all twenty-seven helpers are necessary. Several profiles produce apparatus as well as translation text, and some “pack” profiles deliberately combine related functions. The controlled study will log which components readers actually use so that later versions can remove redundant or distracting roles.

Agreement across variants is a cue to inspect, not proof. Outputs produced by related models and prompts are correlated and may repeat the same error. Disagreement is likewise a cue rather than a guarantee that one variant is correct. The method’s claim is therefore narrower than ensemble corroboration: contrasting renderings can expose decisions that a single fluent output concealed.

Parallage turns AI abundance into inspectable evidence

A translation pack is not a vote. It is a structured field of alternatives.



Inspection cues: source-segment alignment | named entities | ambiguity points | differences that matter

AI4AS 2026 | Into the Parallage | 27 July 2026

Figure 1: Schematic of the core Parallage pack roles and inspection cues. A pack presents structured alternatives rather than treating the variants as a vote.

3.1 A Worked Crux: the Graph 麋

Chinese passage 7 reads:

寧心謀之、稽之、度之、鑒之，聞訊視聽，在善之麋，心焉為之。

Níng xīn móu zhī, jī zhī, duó zhī, jiàn zhī; wén xùn shì tīng, zài shàn zhī jūn; xīn yān wéi zhī.

The phrase 在善之麋 is genuinely difficult. The graph 麋 ordinarily denotes a deer; here it may stand for a herd, cluster, or gathering, and scholars generally read it as 攬, “to gather, glean”. The focal translation keeps the animal image, rendering the phrase “amid the gathered ‘herd’ of what is good”—fluent, and silent about the problem. The helpers are not silent: twenty-two of the twenty-seven helper profiles mark the graph as uncertain somewhere in their output. The scholarly-readable profile translates cautiously and then flags the crux in its glossary:

善之麋: uncertain. 麋 may suggest a “herd/cluster/gathering,” so translated cautiously as “the gathered forms of what is good.”

Even the rhyming profile, built for play rather than criticism, is forced to disclose the unresolved choice in its final line:

Calm the heart: devise it, search it, weigh its way;
Hold it to the mirror’s light by day.

Hear, question, look, and listen where you should;
The heart acts there—among the herd/deer? of good.

The rhyme is not a candidate critical translation. Its usefulness is diagnostic: the pressure to complete the rhyme makes the unresolved lexical choice impossible to miss. A reader might pass over the odd herd image in the focal translation alone; against the pack, the problem is unmissable. Shirley Chan’s expert reference translation, recorded after the pilot review, resolves the crux with the gather reading: “The tranquil heart-mind deliberates on it, examines it, measures it, and reflects on it. In hearing, questioning, looking and listening, lies within the gathered goodness (for which) the heart-mind thereby acts for it.”

The pack helps with smaller decisions in the same passage. Most profiles render 寧心 as an imperative (“calm the mind”, “settle the heart-mind”), while the forked-lattice and decision-log profiles record “with a tranquil mind” as a live alternative—a fork that a single fluent output would have closed silently.

4. Corpora and Implementation

4.1 Ancient Greek

The Greek corpus uses entries from Stephanos of Byzantium’s *Ethnica*, a late-antique geographical lexicon and arguably the oldest surviving alphabetically organised encyclopedic work—earlier alphabetical compilations are word-glossaries, and the *Suda* is four centuries later—preserved incompletely and without a complete published English translation (Meineke 1849; Billerbeck 2006-present). From a pool of 100 entries with approved human translations, we drew a reproducible seeded sample of twenty (seed 20260623). The entries are compressed, entity-heavy, and varied in length. The project’s automated scholarly rendering is the focal translation; the approved human translation is hidden during review.

Model-development results provide context for why inspection remains necessary. A companion operational benchmark contains 100 Kappa entries, each with one approved project translation, crossed with twelve dated OpenAI releases and three prompt conditions. The minimal condition simply asks the model to act as a classical translator. The reviewed prompt was written by Anthropic’s Claude when shown twenty project-corrected translations alongside the model’s earlier attempts, and encodes recurring constructions, named-entity handling, and editorial conventions. The detailed condition is its later, more modular revision, supplying guidance only for constructions present in an entry, and is the basis of the Greek focal profile (Section 4.3). Twenty prompt-development entries remain inside the benchmark, so these are retrospective measurements of the project workflow rather than scores on an untouched test set. Across the resulting 3,600 model-entry comparisons, the mean of BLEU-4, chrF++, METEOR, and ROUGE-L (Papineni et al. 2002; Popović 2017; Banerjee and Lavie 2005; Lin 2004) rose from 43.0% to 47.2% under a minimal prompt, from 60.9% to 70.0% under a reviewed prompt, and from 58.9% to 72.9% under a detailed prompt-plus-guidance workflow: gains of 4.2, 9.1, and 14.0 percentage points. Even the strongest 2026 cell remains more than eleven points be-

low the 84.3% mean overlap of retained expert first drafts against their approved revisions, so expert verification remains binding under every prompt condition.

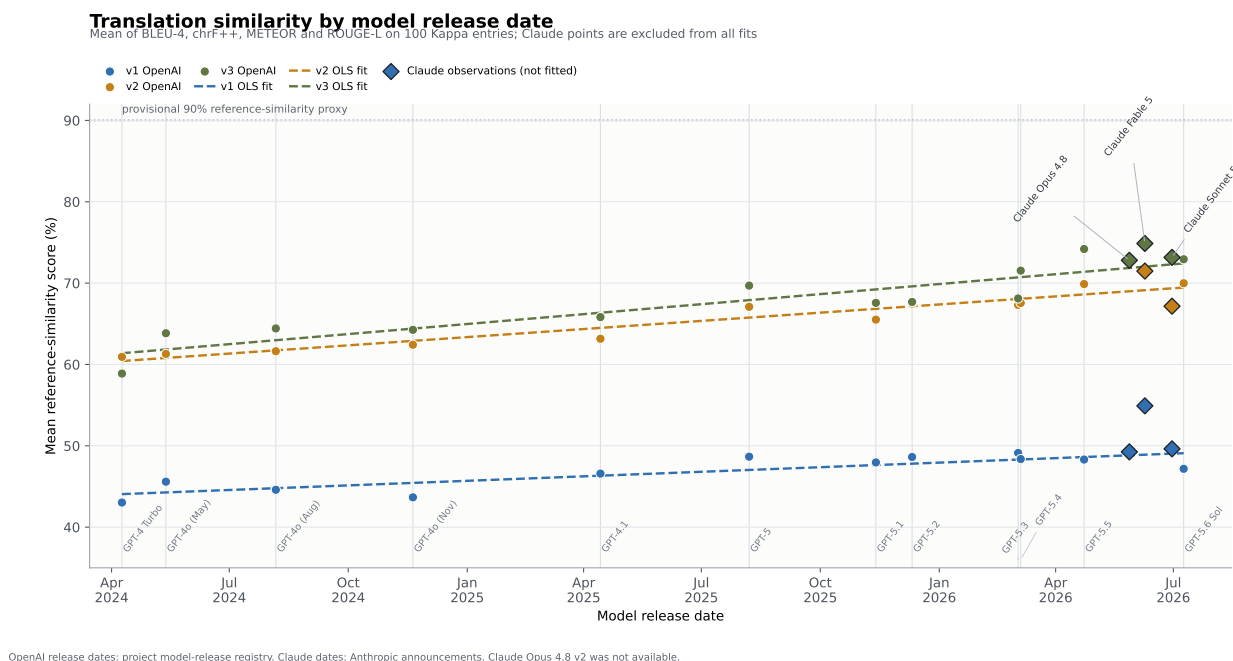


Figure 2: Mean four-metric reference similarity on the 100-entry Kappa benchmark by model release date under the three prompt conditions, with ordinary least-squares fits. Anthropic Claude observations are plotted for context and excluded from the fits. The dotted line is a provisional 90% reference-similarity proxy; no fitted trend crosses it before 2030.

Ordinary least-squares fits of the per-release means against release date give slopes of 2.2, 4.0, and 4.9 percentage points per year for the minimal, reviewed, and detailed conditions ($R^2 = 0.71, 0.93, \text{ and } 0.82$). Extrapolated naively, the detailed workflow does not reach the 84.3% draft-overlap bar until about 2029 and the provisional 90% proxy until 2030; the reviewed prompt crosses the same bars around 2030 and 2032; the minimal prompt would take until the 2040s. These extrapolations illustrate a verification horizon; they are not forecasts. The scores are within-project reference similarities rather than calibrated measures of philological correctness or human equivalence, the linear trend may saturate or jump, and crossing a similarity bar is necessary rather than sufficient for expert-quality translation. Nor does the literature supply a single number for “human-level” reference similarity: in the original BLEU evaluation a human translator scored 0.26 against two other human references and 0.35 against four (Papineni et al. 2002), and standard references concentrate around translationese, penalising legitimate alternative renderings (Freitag, Grangier, and Caswell 2020). Both bars used here are within-workflow yardsticks—the draft-overlap bar shares a translator and house conventions, and the 90% proxy is an illustration rather than a measured inter-translator ceiling. What survives those caveats is operational: unless capability growth breaks from its current trend, expert verification remains essential for ancient-language translation for the remainder of this decade at least, and prompt specification alone moves that horizon by years.

XCOMET-XL, a learned metric combining sentence scoring with error-span detection, gives a direct within-workflow calibration (Guerreiro et al. 2024). Seventy-nine retained initial expert drafts score 0.5741 on average against their approved revisions (95% CI 0.5213-0.6270). On those same entries GPT-5.6 scores 0.5944 under the reviewed prompt and 0.6013 under the detailed prompt. The paired model-minus-draft difference is inconclusive for the reviewed prompt (0.0203, $p=0.087$) and small but positive for the detailed prompt (0.0272, $p=0.023$). On this metric, the current production workflow has reached the reference similarity of the retained pre-review drafts. It does not establish human parity: the human comparison is a draft before expert review, the approved version is the scoring reference, and the prompts encode conventions learned during the same editorial process.

4.2 Classical Chinese

The Chinese corpus is *Xin shi wei zhong* 心是謂中, a Warring States bamboo manuscript published in volume 8 of the Tsinghua collection (Shen 2018). The manuscript concerns the heart-mind (xin 心), deliberation, and ethical judgement. The two corpora were chosen to differ: where the *Ethnica* is concrete, cataloguing particular places and peoples, *Xin shi wei zhong* is abstract and philosophical, equally compressed in syntax, and adds textual-reconstruction problems of its own. Shirley Chan supplied the project working transcription and approved a ten-part segmentation in July 2026. After Greta’s anticipated-divergence review had been completed, Shirley supplied an English reference translation for each of the ten passages. These references are recorded as the Chinese ground-truth set in the analysis database, but we treat them in the paper as expert reference translations rather than as uniquely correct renderings.

If Parallage works across both traditions, it is a candidate general method; if it works in only one, disciplinary design must remain local.

4.3 Generation and Review Infrastructure

All focal and helper translations used in the review interface were generated with gpt-5.5. The Greek focal translation used version 3 of the project’s reviewed scholarly profile; the Chinese focal profile requested one clear scholarly translation without commentary, a minimal instruction comparable to the benchmark’s minimal condition, so the Chinese focal translations should be expected to carry more errors than the prompt-engineered Greek ones. The twenty-seven helper profiles were version 1. For Chinese, each of the ten passages was generated once under each profile through the Responses API with a maximum of 2,400 output tokens. Temperature and seed were not supplied, so the stored outputs are reproducible as versioned artifacts rather than as deterministic regenerations. Each record stores passage, profile and version, model, run identifier, status, output text, response identifier, usage metadata, and completion time.

The Chinese assignment was created with seed 20260704. Five passages were assigned to show the focal translation plus all available helpers and five to show the focal translation alone; display order was also seeded. This is a within-reviewer pilot assignment, not participant-level randomisation. The Greek review set used a twenty-entry sample drawn with Python’s `random.Random(seed).sample`

from the sorted pool of entries with approved human translations (seed 20260623). Reviewers completed overlapping subsets rather than a controlled interface comparison.

The browser interface logs each saved rating and an exposure record for helper cards entering the tracked viewport. Viewport exposure is an interaction trace, not proof that a card was read. The database keeps focal and helper run identifiers, prompt versions, treatment assignment, display order, and later expert-reference records separately. Human attention and expert adjudication, rather than model generation, remain the limiting resources.

5. Pilot Method

5.1 Anticipated Divergence

The review interface asks one question on an eleven-point scale:

How different would you expect the human translation to be to this translation?

0 = will be the same; 10 = will be very different.

5.2 Reviewers, Materials, and Analysis

The pilot observations came from three co-authors and internal collaborators. Vanessa Enriquez Raido, a Translation Studies scholar, reviewed ten Greek passages. Shirley Chan, a scholar of Chinese language and culture, reviewed nineteen Greek passages. Nine passages overlap between their sets. Greta Hawes, an ancient-world scholar who does not read Classical Chinese, reviewed five Chinese passages with a full pack and five with a single translation. Neither Vanessa nor Shirley reads Ancient Greek, so every reviewer judged translations from a language they could not read. These are formative co-design observations, not an independent participant sample or evidence of efficacy. Greg Baker developed the system and conducted the analysis but did not contribute review ratings.

For the Greek passages we compared ratings with sentence-aligned BLEU-4 (Papineni et al. 2002), ROUGE-L (Lin 2004), character 3-gram F1, and character 3-gram Jaccard against the approved human rendering, and with XCOMET-XL scored on the same focal-reference pairs. Because the overlap measures decline with reference length in the wider 101-translation population, we fitted a per-metric log-length model and expressed each observed score as residual badness: standard deviations worse than expected for a passage of that length. We also report a composite of the four residual measures and a population-standardised lexical ensemble, the mean of the four per-metric z-scores against the same population. Overlap-metric correlations are Spearman coefficients with asymptotic two-sided p-values. XCOMET and ensemble correlations use permutation tests instead: exact enumeration of the 151,200 unique orderings of Vanessa’s tied ratings, and a seeded 999,999-draw Monte Carlo permutation for Shirley’s nineteen. Length-controlled Greek estimates are partial rank correlations between rating and XCOMET divergence given log source length, with approximate p-values.

For Chinese, all 280 completed translations (twenty-eight profiles by ten passages) were scored against Shirley’s reference set using BLEU-4, chrF++, METEOR, ROUGE-L, word unigram F1, word trigram F1, character trigram F1, and word-edit similarity (Papineni et al. 2002; Popović 2017; Banerjee and Lavie 2005; Lin 2004). The ten focal translations were additionally scored with BERTScore, COMET, XCOMET-XL, and BLEURT (Zhang et al. 2020; Rei et al. 2020; Guerreiro et al. 2024; Sellam et al. 2020). The primary divergence composite is the mean within-sample badness percentile, scaled from 0 to 10, across BLEU-4, chrF++, METEOR, ROUGE-L, BERTScore, COMET, XCOMET-XL, and BLEURT. It is a transparent rank aggregate rather than a calibrated quality score.

The overall Chinese directional diagnostic asks whether a higher anticipated-divergence rating predicts greater metric-derived divergence; we report its exact one-sided permutation p-value over the 226,800 unique permutations of Greta’s tied ratings. Individual-metric and five-passage condition analyses use exact two-sided permutation p-values. Pairwise ordering accuracy considers every comparable pair: a pair is concordant when the passage Greta expects to differ more also has greater composite divergence.

For the Chinese length diagnostic, source length is the number of Han-script characters, avoiding an unvalidated word segmentation; Shirley-reference word count is a sensitivity measure. We first collapsed the balanced 280-row translation grid to ten passage means and tested whether longer passages had lower mean lexical similarity. We then fitted each of the eight focal primary metrics against log source length, converted its negative residual to standardised badness, and averaged the eight residuals. Unlike the Greek adjustment, these Chinese length models are fitted on the same ten passages and therefore remain exploratory.

The interface captured page-load-to-first-save latency. Later saves for the same reviewer-passage pair were treated as revisions rather than independent observations. Helper-card viewport time can overlap and does not prove active reading.

All pilot analyses are exploratory and were performed after the observations had been collected. Exact tests enumerate the unique permutations of Greta’s tied ratings. The directional composite test is reported one-sided because the diagnostic asks whether greater anticipated divergence predicts greater measured divergence; metric-specific and condition-specific tests are two-sided. Confidence intervals and effect estimates are emphasised because the sample sizes are too small for stable threshold decisions.

6. Formative Results

6.1 Judgement Signal and the Length Confound

Judged against XCOMET-XL, the Greek pilot at first looks like a success. Across her ten passages, Vanessa’s ratings track the focal translation’s XCOMET divergence from the hidden human rendering at $\rho = 0.796$ (exact two-sided $p = 0.0085$). Shirley’s nineteen ratings trend the same way but remain

inconclusive ($\rho = 0.345$, Monte Carlo $p = 0.147$). Taken alone, the Vanessa association would usually be reported as a successful experiment.

Greek XCOMET Signal and Its Length Entanglement

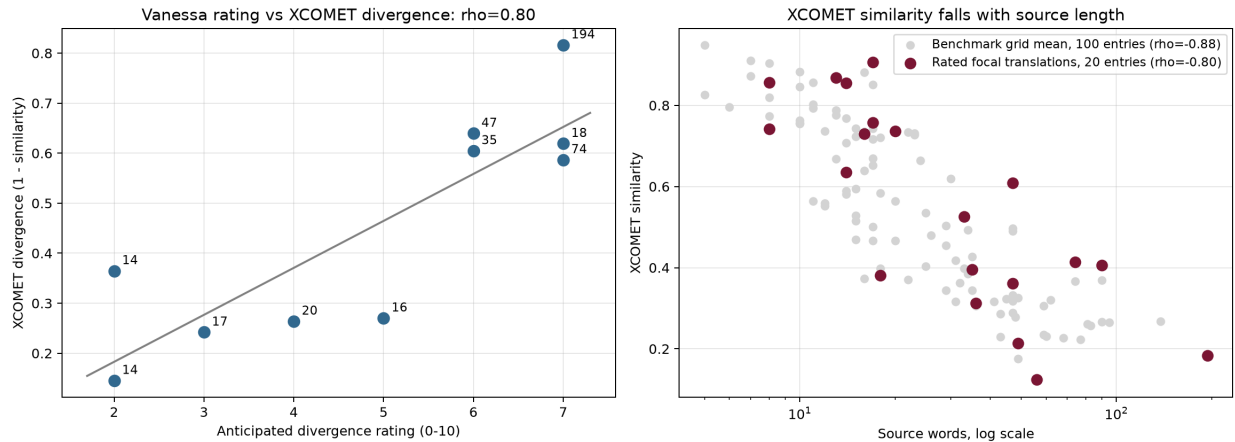


Figure 3: Vanessa’s anticipated-divergence ratings track XCOMET divergence (left; point labels give source word counts), but XCOMET similarity itself falls steeply with source length (right; grey points are per-entry means across the companion benchmark grid, dark points the twenty rated focal translations). A strong raw association is compatible with a length heuristic.

The corpus embeds a confound that blocks that reading. Among the twenty rated focal translations, XCOMET similarity falls steeply with source length ($\rho = -0.80$, $p < 0.001$), and the same gradient holds across per-entry means of the companion benchmark grid ($\rho = -0.88$ over the same 100 entries). Vanessa’s ratings in turn rise with reference length ($\rho = 0.69$, $p = 0.027$). A reader who understands neither the source nor the target language could therefore score well on this criterion simply by distrusting longer passages. Controlling for log source length attenuates Vanessa’s XCOMET association to a partial rank correlation of 0.51 ($p = 0.130$); Shirley’s becomes 0.19 ($p = 0.43$). XCOMET was also selected for this comparison after inspection because it was the strongest available measure; the overlap-metric results below keep that selection visible.

The raw overlap-metric associations point in the expected direction, but none is statistically significant. After adjustment for passage length, the residual associations remain weak and inconclusive.

Metric	Rating vs raw score	p	Rating vs residual badness	p
BLEU-4	-0.37	0.29	0.20	0.58
ROUGE-L	-0.49	0.15	0.22	0.55
3-gram F1	-0.48	0.16	0.40	0.25
3-gram Jaccard	-0.48	0.16	0.32	0.37

The population-standardised lexical ensemble behaves the same way: Vanessa’s rating versus ensemble divergence is $\rho = 0.48$ (exact $p = 0.17$), and versus composite length-adjusted badness only ρ

= 0.22 ($p = 0.55$). Shirley’s ratings occupy a narrower 5-9 range; rating versus log reference length is $\rho = 0.22$ ($p = 0.37$), and rating versus composite residual badness is $\rho = 0.13$ ($p = 0.60$). Across the nine passages rated by both reviewers, inter-reviewer association is moderate but uncertain ($\rho = 0.44$, $p = 0.24$).

The result is not that the pack works, and not that the reviewers failed. It is that anticipated divergence is measurable, non-trivial, and vulnerable to surface heuristics, and that a reference-based criterion can reward those heuristics when the metric itself is length-patterned. The controlled study must separate source difficulty, passage length, lexical difference, and expert-adjudicated error.

6.2 Chinese Reference-Based Validation

Across all ten Chinese passages, Greta’s anticipated-divergence rating has a modest positive association with the eight-metric composite divergence rank (Spearman $\rho = 0.472$; exact one-sided $p = 0.0848$; bootstrap 95% interval -0.272 to 0.851). Kendall’s tau is 0.303 (two-sided $p = 0.237$). Of the 41 passage pairs without a tied rating or composite score, 27 are ordered correctly (65.9%). Greta identifies two of the three most divergent translations, but only one of the three closest translations.

The metric-level signs are consistent: higher predicted divergence generally corresponds to lower reference similarity. XCOMET-XL gives the strongest individual association ($\rho = -0.730$, exact two-sided $p = 0.0203$). BLEURT is next strongest ($\rho = -0.626$, $p = 0.0584$), while the remaining metric estimates are directionally compatible but statistically inconclusive. These twelve metrics are dependent measures of the same ten translations. The XCOMET association is therefore a promising convergence with one learned metric, not a confirmatory result from twelve independent tests.

Metric	Rating vs similarity ρ	Exact p (two-sided)
BLEU-4	-0.417	0.2301
chrF++	-0.564	0.0936
METEOR	-0.295	0.4067
ROUGE-L	-0.337	0.3388
Word unigram F1	-0.393	0.2606
Word trigram F1	-0.540	0.1112
Character trigram F1	-0.564	0.0936
Word-edit similarity	-0.522	0.1252
BERTScore F1	-0.399	0.2526
COMET	-0.540	0.1112
XCOMET-XL	-0.730	0.0203
BLEURT	-0.626	0.0584

The five-passage condition estimates do not distinguish the interface treatments. Within the Parallage passages, composite ρ is 0.500 (exact two-sided $p = 0.450$); within the single-output passages it is 0.200 ($p = 0.783$). Each condition has six concordant and four discordant pairs, hence the same 60%

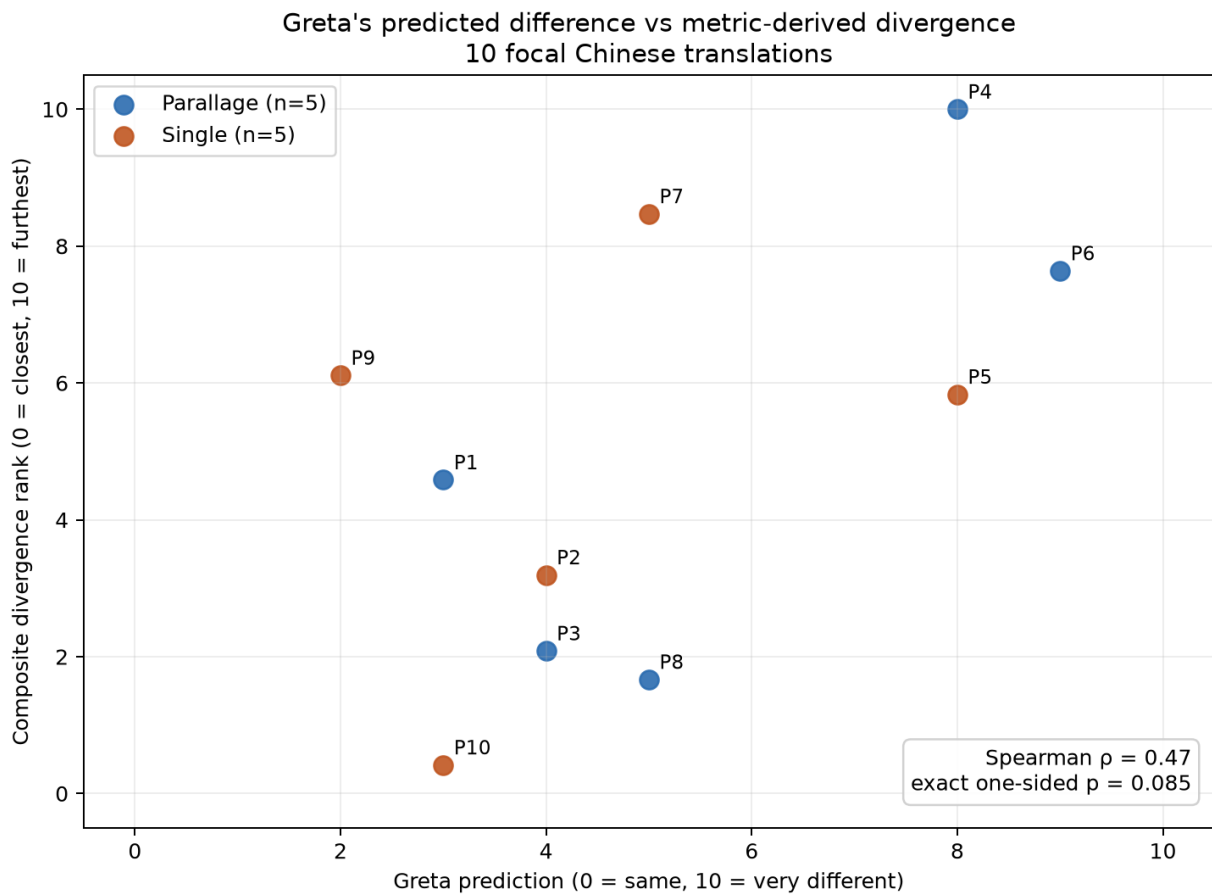


Figure 4: Greta's anticipated-divergence ratings against the eight-metric composite for the ten focal Chinese translations. Colours show the review condition, not independent samples.

pairwise ordering accuracy despite different Spearman coefficients. Spearman correlation reflects the full rank distances, whereas the pairwise measure counts only concordant versus discordant orderings. For XCOMET, the five pack passages give $\rho = -0.800$ (exact $p = 0.133$) and the five single-output passages $\rho = -0.600$ ($p = 0.350$). The two estimates differ, but not by enough to declare statistical significance with five passages per condition.

Condition	n	Composite ρ (exact p)	XCOMET ρ (exact p)	Concordant pairs
Pack	5	0.500 (0.450)	-0.800 (0.133)	6/10
Single	5	0.200 (0.783)	-0.600 (0.350)	6/10

Passage length does not account for the Chinese result. Across all twenty-eight profiles, source Han-character length versus the ten passage-average lexical similarity scores is $\rho = 0.122$ ($p = 0.738$); the weak positive sign is opposite to a length penalty. A doubling of source length corresponds to a +0.021 change on the 0-1 similarity scale (95% CI -0.109 to +0.151). Shirley-reference word count gives the same conclusion ($\rho = 0.164$, $p = 0.651$). The individual all-profile lexical correlations range only from -0.116 to +0.219, with no p -value below 0.54.

Controlling for source length slightly strengthens, rather than attenuates, Greta's association. The partial rank correlation between rating and the unadjusted composite is $\rho = 0.507$ (approximate two-sided $p = 0.164$). The Greek-style residual composite gives $\rho = 0.546$ (exact one-sided $p = 0.0534$), compared with $\rho = 0.472$ before adjustment. For XCOMET divergence alone, the partial rank correlation given source length is 0.757 (approximate $p = 0.011$), marginally stronger than the unadjusted 0.730. This contrast with Greek matters: here the criterion metric is not length-patterned, so the association cannot be reproduced by a length heuristic. Within conditions, the adjusted Parallax estimate remains 0.500 ($p = 0.450$), while the adjusted single-output estimate rises from 0.200 to 0.600 ($p = 0.350$). That change is too unstable at $n = 5$ to interpret as evidence of a subgroup effect.

Chinese estimator	Spearman ρ		p-value
Unadjusted eight-metric divergence rank	0.472		0.0848, exact one-sided
Partial rank correlation controlling source length	0.507	0.1636, approximate two-sided	
Eight-metric residual badness composite	0.546		0.0534, exact one-sided

The Chinese pilot is compatible with preliminary criterion-related validity for the anticipated-divergence instrument: Greta's judgements contain information about subsequent expert-reference divergence, especially as measured by XCOMET. It does not show that the full pack is superior to

a single translation. The treatment groups are only five passages each, passage assignment is not an independent participant randomisation, and metric agreement with one expert reference is not the same as expert-adjudicated correctness.

6.3 Timing and Interface Instrumentation

For Greek, nineteen first ratings from Shirley and ten from Vanessa yielded a pooled median latency of 15.6 seconds (IQR 10.5-18.5); 25 of 29 occurred within 30 seconds. The pooled relationship between source-word count and latency was negligible ($\rho = 0.05$, $p = 0.78$), but reviewer behaviour differed. Vanessa's latency rose with source length ($\rho = 0.66$, $p = 0.036$) while Shirley's did not ($\rho = -0.08$, $p = 0.75$), so the length gradient in Vanessa's ratings appears in her reading time as well. Shirley brought at least one helper card into the tracked viewport on 17 of 19 first evaluations; Vanessa did so on only 1 of 10. The pooled timing is therefore not an estimate of time required to use a Parallax pack.

Greta's five Chinese pack passages recorded exact page-load-to-rating durations with non-zero helper exposure: median 312 seconds, range 74-824 seconds. Exact durations are structurally missing for all five single-output passages because the exposure tracker returned before starting timing when no helper cards existed. All pack passages were completed before all single passages. The apparent later speed difference is confounded by missing timing, order, familiarity, and fatigue and is not a treatment-effect estimate.

These failures are useful design findings. The next interface must time both conditions from the same event, record page visibility, counterbalance condition order, and distinguish exposure from active engagement.

7. Planned Preregistered Controlled Study

This section records the intended confirmatory design. It is not itself a completed preregistration. After ethics approval and before recruiting or inspecting student outcome data, the final materials, allocation procedure, power or precision analysis, exclusions, models, and adjudication rubric will be frozen in a timestamped registration. The funded pilot can support approximately 15–25 students, so feasibility and interval width may be more informative than a binary null-hypothesis decision unless additional recruitment becomes available.

The primary target population is readers who do not know the relevant source language. The design also answers a teaching question: students will consult AI translations whatever they are advised, so the study asks what to give them so that a fluent-but-wrong rendering does not fool them—whether structured multiplicity can instil well-founded scepticism where scepticism is warranted. Semi-experts and professional translators will contribute a separate qualitative workflow track rather than being pooled into the primary efficacy estimate.

The controlled study will compare:

1. **Single translation:** one fluent focal translation.
2. **Full Parallage pack:** the same focal translation plus role-based helper variants and audit scaffolding.

The primary outcome will be the proportion of predefined, expert-adjudicated material translation issues correctly identified. Secondary outcomes will be false reassurance (high confidence when a material issue is missed), confidence calibration, time to decision, distrusted spans, and component use. For student participants the anticipated-divergence question will be reframed as a quotation-trust judgement (“Would you trust this translation enough to quote it in an essay?”), which is closer to a decision students actually face; the final wording will be frozen in the registration. Passages will be assigned to conditions within participant under a counterbalanced schedule so that each passage appears equally often in each condition and no participant sees the same passage twice.

The primary analysis will be a mixed-effects logistic model for issue detection, with condition as the fixed effect of interest and random intercepts for participant and passage. Language and declared prior knowledge will be fixed covariates; any condition-by-language interaction will be secondary. The preregistration will specify exclusions, missing-data handling, confidence thresholds, multiplicity handling, and the exact adjudication rubric before outcome data are inspected.

The hypotheses to be fixed in that registration are:

1. Full packs improve detection of expert-adjudicated material issues relative to a single translation.
2. Full packs reduce false reassurance and improve confidence calibration.
3. Full packs increase time on task, which is a measured cost rather than a design failure.
4. Creative mnemonic and rhyming profiles do not improve error detection.

8. Limitations and Contribution

The current evidence has severe limits. The samples are small; the reviewers are co-authors; the reviewers’ professional experience with translation may supply cues, such as expectations about how English renderings behave, that student participants will not have; the Greek task is not a controlled pack comparison; the Chinese condition groups contain only five passages each; the Chinese timing comparison is incomplete and order-confounded; reference similarity is not correctness; and all variants may share model-family errors. Shirley’s reference set permits reproducible scoring but does not make one English rendering uniquely correct. XCOMET was trained for modern machine-translation evaluation rather than Ancient Greek lexicography or Classical Chinese manuscript translation, and its raw score is not a calibrated measure of philological correctness. In the Greek corpus its scores are also strongly length-patterned, so reference-based validation there cannot separate genuine difficulty detection from a length heuristic; the Chinese sample, whose scores are not length-patterned, is the more informative validation setting. The Chinese composite and its length adjustment are fitted within the same ten passages, the metric-level comparisons are dependent, and the exploratory analyses were not preregistered. The corpora cover only one Greek lexicographical tradition and one short

Classical Chinese manuscript. The pilot therefore supports instrument and interface development, not a claim that Parallage has already improved translation judgement.

Parallage responds to a change in the translation environment: alternative renderings are inexpensive, but verification is not. The system turns model multiplicity into an inspectable interface object, records the provenance of every role-conditioned output, and makes the resulting human judgement testable against later expert adjudication. The pilot shows why the controlled comparison is needed rather than supplying its answer.

Data and Code Availability

The versioned prompt library, review-site generator, pilot outputs, and analysis scripts are maintained in the Variantum repository: <https://github.com/solresol/variantum>. The helper-profile catalogue, with each role's purpose and distinguishing instruction, is browsable at <https://parallage.symmac.hus.org/prompts.html>. The proposed release accompanying this preprint contains all 280 Chinese profile-passage outputs, Shirley's ten expert reference translations, lexical and neural metric inputs and outputs, the text-free Greek XCOMET and length data behind the confound analysis, the benchmark trend cells and projection code behind the verification-horizon extrapolation, treatment summaries, exact-permutation code, length diagnostics, the complete saved rating and helper-exposure history for the three co-author reviewers, and the seeded Greek and Chinese assignment procedures. The review logs identify the co-author reviewers and preserve revisions and timestamps; they contain no email addresses, IP addresses, authentication material, or student-participant data. The complete bundle will be made public only after all co-authors approve the paper and release.

Appendix A. Co-author Pilot Rating Records

Table 6 gives the complete saved rating history underlying the formative pilot, including records superseded by later saves. The accompanying machine-readable release additionally preserves the helper-card exposure instrumentation. Ratings use the eleven-point anticipated-divergence scale from 0 (expected to be the same) to 10 (expected to be very different). “Latest” identifies the final save for a reviewer-passage-translation tuple; “superseded” identifies an earlier save. Trust flags are omitted because neither flag was selected in these records.

Table 6: Complete saved co-author anticipated-divergence rating history.

Record	Reviewer	Corpus	Passage	Run	Rating	Saved	State
17	Vanessa Enriquez Raido	Greek	Καλύβη	3302	9	2026-06-30 08:57:19	superseded
18	Vanessa Enriquez Raido	Greek	Κύρτωνες	3431	6	2026-06-30 08:57:41	superseded
19	Vanessa Enriquez Raido	Greek	Καβασσός	3229	6	2026-06-30 08:58:43	superseded
20	Vanessa Enriquez Raido	Greek	Καρία	3612	6	2026-06-30 08:59:54	superseded
21	Vanessa Enriquez Raido	Greek	Καλύβη	3302	3	2026-06-30 09:00:08	superseded
22	Vanessa Enriquez Raido	Greek	Καλύβη	3302	2	2026-06-30 09:00:20	superseded
23	Vanessa Enriquez Raido	Greek	Κύρτωνες	3431	4	2026-06-30 09:00:38	latest
24	Vanessa Enriquez Raido	Greek	Καβασσός	3229	7	2026-06-30 09:00:55	latest
25	Vanessa Enriquez Raido	Greek	Καρία	3612	7	2026-06-30 09:01:20	latest
26	Vanessa Enriquez Raido	Greek	Καβαλίσ	3226	6	2026-06-30 09:07:15	latest
27	Vanessa Enriquez Raido	Greek	Καρδαμύλη	3331	6	2026-06-30 09:08:04	latest
28	Vanessa Enriquez Raido	Greek	Κντέριον	3440	7	2026-06-30 09:08:22	latest
29	Vanessa Enriquez Raido	Greek	Καδεμία	3534	3	2026-06-30 09:08:39	latest
30	Vanessa Enriquez Raido	Greek	Κυρτώνιος	3434	2	2026-06-30 09:09:09	latest
31	Vanessa Enriquez Raido	Greek	Κατάβαθμος	3370	5	2026-06-30 09:09:27	latest
32	Vanessa Enriquez Raido	Greek	Καλύβη	3302	2	2026-07-01 06:53:12	latest
33	Shirley Chan	Greek	Καλύβη	3302	7	2026-07-01 19:52:22	superseded
34	Shirley Chan	Greek	Καλύβη	3302	6	2026-07-01 19:52:44	superseded
35	Shirley Chan	Greek	Κύρτωνες	3431	5	2026-07-01 19:53:24	latest
36	Shirley Chan	Greek	Καβασσός	3229	6	2026-07-01 19:53:56	superseded
37	Shirley Chan	Greek	Καβασσός	3229	5	2026-07-01 19:53:58	latest
38	Shirley Chan	Greek	Καρία	3612	7	2026-07-01 19:54:57	latest
39	Shirley Chan	Greek	Καβαλίσ	3226	7	2026-07-01 19:55:28	superseded
40	Shirley Chan	Greek	Καβαλίσ	3226	6	2026-07-01 19:55:35	superseded
41	Shirley Chan	Greek	Καβαλίσ	3226	7	2026-07-01 19:55:44	latest
42	Shirley Chan	Greek	Καρδαμύλη	3331	7	2026-07-01 19:56:04	latest
43	Shirley Chan	Greek	Κντέριον	3440	7	2026-07-01 19:56:36	latest
44	Shirley Chan	Greek	Κυρτώνιος	3434	6	2026-07-01 19:57:16	latest
45	Shirley Chan	Greek	Κατάβαθμος	3370	7	2026-07-01 19:57:54	latest
46	Shirley Chan	Greek	Καλαβρία	2347	6	2026-07-01 19:58:27	latest
47	Shirley Chan	Greek	Καταννοί	3385	7	2026-07-01 19:58:39	latest

Continued on next page

Table 6 – continued

Record	Reviewer	Corpus	Passage	Run	Rating	Saved	State
48	Shirley Chan	Greek	Κυχρεῖος πάγος	3452	7	2026-07-01 19:58:47	latest
49	Shirley Chan	Greek	Καλλία	3290	7	2026-07-01 19:59:11	superseded
50	Shirley Chan	Greek	Καλλία	3290	6	2026-07-01 19:59:17	latest
51	Shirley Chan	Greek	Κάλπη	2361	6	2026-07-01 19:59:44	latest
52	Shirley Chan	Greek	Κώμη	3470	7	2026-07-01 20:00:01	latest
53	Shirley Chan	Greek	Καλή ἀκτή	4054	7	2026-07-01 20:00:25	superseded
54	Shirley Chan	Greek	Καλή ἀκτή	4054	6	2026-07-01 20:00:35	latest
55	Shirley Chan	Greek	Κάσπειρος	3358	7	2026-07-01 20:00:55	superseded
56	Shirley Chan	Greek	Κάσπειρος	3358	8	2026-07-01 20:00:56	superseded
57	Shirley Chan	Greek	Κύρρος	3423	6	2026-07-01 20:01:21	superseded
58	Shirley Chan	Greek	Κύρρος	3423	7	2026-07-01 20:01:24	superseded
59	Shirley Chan	Greek	Κύρρος	3423	6	2026-07-01 20:01:36	latest
60	Shirley Chan	Greek	Κύρβη	3403	6	2026-07-01 20:01:54	latest
61	Shirley Chan	Greek	Κάσπειρος	3358	9	2026-07-01 20:02:41	latest
62	Shirley Chan	Greek	Καλύβη	3302	5	2026-07-01 22:05:07	latest
67	Greta Hawes	Chinese	Xin shi wei zhong 04	165	7	2026-07-08 23:32:19	superseded
68	Greta Hawes	Chinese	Xin shi wei zhong 04	165	8	2026-07-08 23:32:22	latest
69	Greta Hawes	Chinese	Xin shi wei zhong 08	389	5	2026-07-08 23:38:19	latest
70	Greta Hawes	Chinese	Xin shi wei zhong 06	277	9	2026-07-08 23:43:38	latest
71	Greta Hawes	Chinese	Xin shi wei zhong 01	1	3	2026-07-08 23:46:58	latest
72	Greta Hawes	Chinese	Xin shi wei zhong 03	109	4	2026-07-08 23:48:27	latest
73	Greta Hawes	Chinese	Xin shi wei zhong 05	221	8	2026-07-08 23:57:56	latest
74	Greta Hawes	Chinese	Xin shi wei zhong 09	445	2	2026-07-08 23:58:24	latest
75	Greta Hawes	Chinese	Xin shi wei zhong 02	53	4	2026-07-08 23:58:54	latest
76	Greta Hawes	Chinese	Xin shi wei zhong 07	333	5	2026-07-08 23:59:27	latest
77	Greta Hawes	Chinese	Xin shi wei zhong 10	501	3	2026-07-08 23:59:49	latest

Appendix B. Classical Chinese Focal-Translation Metrics

Tables 7 and 8 report the per-passage scores used for the Chinese analysis. They make the individual XCOMET-XL and related scores visible rather than reporting only correlations and aggregates. All individual metrics are similarities, while composite divergence is the 0–10 within-sample badness-rank aggregate defined in Section 5.2. Candidate/reference word counts and translation-run identifiers make each row traceable to the texts in the accompanying data release.

Table 7: Lexical similarity scores for the ten focal Classical Chinese translations.

Passage	Run	Condition	Rating	Cand./ref. words	BLEU-4	chrF++	METEOR	ROUGE-L	Edit sim.
1	1	pack	3	40/42	0.394	0.670	0.726	0.756	0.690
2	53	single	4	28/28	0.744	0.859	0.927	0.929	0.893
3	109	pack	4	51/54	0.773	0.793	0.873	0.895	0.870
4	165	pack	8	40/37	0.092	0.366	0.463	0.416	0.275
5	221	single	8	64/68	0.408	0.583	0.680	0.697	0.618
6	277	pack	9	29/33	0.341	0.565	0.633	0.645	0.455
7	333	single	5	39/35	0.177	0.505	0.632	0.676	0.410
8	389	pack	5	36/34	0.790	0.891	0.928	0.943	0.861
9	445	single	2	30/32	0.399	0.603	0.620	0.613	0.594
10	501	single	3	39/39	0.833	0.904	0.948	0.949	0.949

Table 8: Neural similarity scores and divergence summaries for the ten focal Classical Chinese translations.

Passage	Run	Rating	BERTScore	COMET	XCOMET-XL	BLEURT	Composite divergence
1	1	3	0.960	0.791	0.761	0.751	4.58
2	53	4	0.973	0.791	0.702	0.773	3.19
3	109	4	0.982	0.804	0.830	0.858	2.08
4	165	8	0.878	0.613	0.323	0.482	10.00
5	221	8	0.963	0.755	0.663	0.749	5.83
6	277	9	0.922	0.748	0.529	0.687	7.64
7	333	5	0.906	0.706	0.429	0.586	8.47
8	389	5	0.986	0.854	0.671	0.800	1.67
9	445	2	0.937	0.778	0.695	0.776	6.11
10	501	3	0.991	0.826	0.817	0.843	0.42

Appendix C. Ancient Greek Focal-Translation XCOMET Scores

Table 9 reports the per-entry XCOMET-XL scores behind the Greek analysis in Section 6.1, with each entry’s source length and the co-author ratings it received. The steep length gradient discussed there is visible directly: every entry longer than thirty source words scores below 0.62. Ratings are on the eleven-point anticipated-divergence scale; a dash marks an entry the reviewer did not rate.

Table 9: XCOMET-XL similarity of the twenty rated Greek focal translations to their hidden approved human renderings.

Entry	Run	Source words	XCOMET-XL	Vanessa rating	Shirley rating
Καβάλις	3226	47	0.361	6	7
Καβασός	3229	74	0.413	7	5
Καδμεία	3534	17	0.758	3	–
Καλαβρία	2347	13	0.869	–	6
Καλή άκτη	4054	49	0.214	–	6
Καλλία	3290	17	0.906	–	6
Κάλπη	2361	36	0.312	–	6
Καλύβη	3302	14	0.635	2	5
Καρδαμύλη	3331	35	0.395	6	7
Καρία	3612	194	0.184	7	7
Κάσπειρος	3358	90	0.406	–	9
Κατάβαθμος	3370	16	0.730	5	7
Καταννοί	3385	8	0.857	–	7
Κύρβη	3403	8	0.741	–	6
Κύρρος	3423	33	0.525	–	6
Κύρτωνες	3431	20	0.736	4	5
Κυρτώνιος	3434	14	0.855	2	6
Κυτέριον	3440	18	0.381	7	7
Κυχρεΐος πάγος	3452	47	0.609	–	7
Κώμη	3470	56	0.124	–	7

References

- Banerjee, Satyanjeev, and Alon Lavie. 2005. “[METEOR: An Automatic Metric for MT Evaluation with Improved Correlation with Human Judgments.](#)” *Proceedings of the ACL Workshop on Intrinsic and Extrinsic Evaluation Measures for Machine Translation and/or Summarization*, 65-72.
- Billerbeck, Margarethe, ed. 2006-present. *Stephani Byzantii Ethnica*. Berlin: De Gruyter.
- Du, Yilun, Shuang Li, Antonio Torralba, Joshua B. Tenenbaum, and Igor Mordatch. 2024. “[Improving Factuality and Reasoning in Language Models through Multiagent Debate.](#)” *Proceedings of the 41st International Conference on Machine Learning*, 11733-11763.
- Farquhar, Sebastian, Jannik Kossen, Lorenz Kuhn, and Yarin Gal. 2024. “[Detecting Hallucinations in Large Language Models Using Semantic Entropy.](#)” *Nature* 630: 625-630.
- Fomicheva, Marina, Lucia Specia, and Francisco Guzmán. 2020. “[Multi-Hypothesis Machine Translation Evaluation.](#)” *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 1218-1232.
- Freitag, Markus, David Grangier, and Isaac Caswell. 2020. “[BLEU might be Guilty but References are not Innocent.](#)” *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*, 61-71.

- Freitag, Markus, David Grangier, Qijun Tan, and Bowen Liang. 2022. “High Quality Rather than High Model Probability: Minimum Bayes Risk Decoding with Neural Metrics.” *Transactions of the Association for Computational Linguistics* 10: 811-825.
- Guerreiro, Nuno M., Elena Voita, and André F. T. Martins. 2023. “Looking for a Needle in a Haystack: A Comprehensive Study of Hallucinations in Neural Machine Translation.” *Proceedings of EACL 2023*, 1059-1075.
- Guerreiro, Nuno M., Ricardo Rei, Daan van Stigt, Luisa Coheur, Pierre Colombo, and André F. T. Martins. 2024. “xCOMET: Transparent Machine Translation Evaluation through Fine-grained Error Detection.” *Transactions of the Association for Computational Linguistics* 12: 979-995.
- Lin, Chin-Yew. 2004. “ROUGE: A Package for Automatic Evaluation of Summaries.” *Text Summarization Branches Out*, 74-81.
- Manakul, Potsawee, Adian Liusie, and Mark J. F. Gales. 2023. “SelfCheckGPT: Zero-Resource Black-Box Hallucination Detection for Generative Large Language Models.” *Proceedings of EMNLP 2023*, 9004-9017.
- Mehandru, Nikita, Sweta Agrawal, Yimin Xiao, Ge Gao, Elaine Khoong, Marine Carpuat, and Niloufar Salehi. 2023. “Physician Detection of Clinical Harm in Machine Translation: Quality Estimation Aids in Reliance and Backtranslation Identifies Critical Errors.” *Proceedings of EMNLP 2023*, 11633-11647.
- Meineke, August, ed. 1849. *Stephani Byzantii Ethnicorum quae supersunt*. Berlin: Reimer.
- Papineni, Kishore, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. “BLEU: A Method for Automatic Evaluation of Machine Translation.” *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics*, 311-318.
- Popović, Maja. 2017. “chrF++: Words Helping Character n-grams.” *Proceedings of the Second Conference on Machine Translation*, 612-618.
- Rei, Ricardo, Craig Stewart, Ana C. Farinha, and Alon Lavie. 2020. “COMET: A Neural Framework for MT Evaluation.” *Proceedings of EMNLP 2020*, 2685-2702.
- Sellam, Thibault, Dipanjan Das, and Ankur Parikh. 2020. “BLEURT: Learning Robust Metrics for Text Generation.” *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 7881-7892.
- Shen, Jianhua. 2018. “Xin shi wei zhong” 心是謂中. In *Qinghua daxue cang Zhanguo zhujuan (ba)* 清華大學藏戰國竹簡（捌）, edited by the Research and Conservation Center for Unearthed Texts, Tsinghua University. Shanghai: Zhongxi Shuju.
- Wang, Xuezhi, Jason Wei, Dale Schuurmans, Quoc V. Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023. “Self-Consistency Improves Chain of Thought Reasoning in Language Models.” *Proceedings of the Eleventh International Conference on Learning Representations*.
- Zhang, Tianyi, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. 2020. “BERTScore: Evaluating Text Generation with BERT.” *Proceedings of the Eighth International Conference on Learning Representations*.

Zainaldin, James L., Cameron Pattison, Manuela Marai, Jacob Wu, and Mark J. Schiefsky. 2026. [“Evaluating LLM-Based Translation of a Low-Resource Technical Language: The Medical and Philosophical Greek of Galen.”](#) arXiv:2602.24119 [cs.CL].