Webservices – Dimensions

Twinfield v5.4

September 2010

For general information about our webservices see the Twinfield Webservices Manual

Twinfield International NV
De Beek 9-15
3871 MS Hoevelaken
Netherlands

copyright © 2005 – 2011 - Twinfield International N.V.

the no. 1 in online accounting

Table of contents

1 Dimension types 3

2 Dimension groups 6

3 Dimensions 9

Determine the next dimension code 10
General Ledger accounts (GL accounts) 11
Customers 15
Suppliers 20
Payment and direct debit settings 24
Cost Centers 26
Project 28

4 Dimension actions 31


Dimension read 32

1 Dimension types

Menu path: Accounting>Dimensions>Type

- General Ledger
  - Balance, code BAS
  - Profit & Loss, code PNL
- Relations
  - Customers, code DEB
  - Suppliers, code CRD
- Cost centers, code KPL
- Fixed assets, code AST
- Projects, code PRJ

Screen in Twinfield

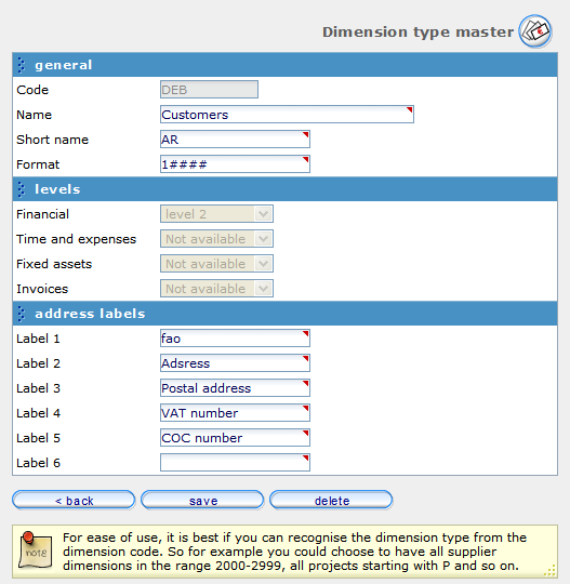

the no. 1 in online accounting

Description of the dimension type XML elements

Tag	Parent node	Description	Type definition
dimensiontype	-	root node	-
office	dimensiontype	Office code	CODE, optional
code	dimensiontype	Dimensiontype	CODE, mandatory
mask	dimensiontype	Dimension mask	CODE, optional
name	dimensiontype	Dimension type name	STRING(36), optional
shortname	dimensiontype	Dimension type shortname	STRING(20), optional
addresses	dimensiontype	node	-
label1 – label6	addresses	Address labels, description of field1 – field6 in the dimension address element	STRING(20), optional
levels	dimensiontype	node	- (read only)
financials	levels	Financial level	INTEGER, read only
time	levels	Level in time & expenses	INTEGER, read only
fixedassets	levels	Level in fixed assets (future use)	INTEGER, read only
invoices	levels	Level in invoice articles (future use)	INTEGER, read only

Example

This example changes the dimension mask to "1####" for the Customers (DEB) dimension type.

Request

```
<?Xml version="1.0" encoding="ISO-8859-1"?>
<dimensiontype>
  <office>0000</office>
  <code>DEB</code>
  <mask>1####</mask>
  <name>Customers</name>
</dimensiontype>
```


the no. 1 in online accounting


Response XML

```
<dimensiontype status="active" result="1">
  <office name="Webshop JJLammers.com" shortname="">0000</office>
  <code>DEB</code>
  <mask>1####</mask>
  <name>Customers</name>
  <shortname>AR</shortname>
  <touched>2</touched>
  <levels>
    <financials>2</financials>
    <time>0</time>
    <fixedassets>0</fixedassets>
    <invoices>0</invoices>
  </levels>
  <address>
    <label1>foa</label1>
    <label2>Address</label2>
    <label3>Postal address</label3>
    <label4>VAT nummer</label4>
    <label5>COC nummer</label5>
    <label6 />
  </address>
</dimensiontype>
```



the no. 1 in online accounting

2 Dimension groups

Screen in Twinfield

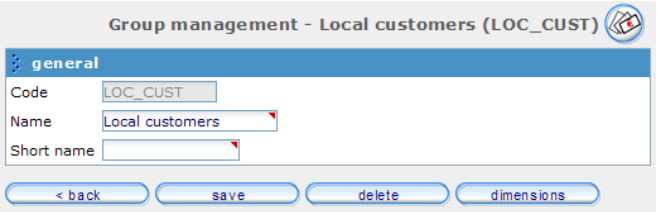

Corresponding XML node: dimensiongroup

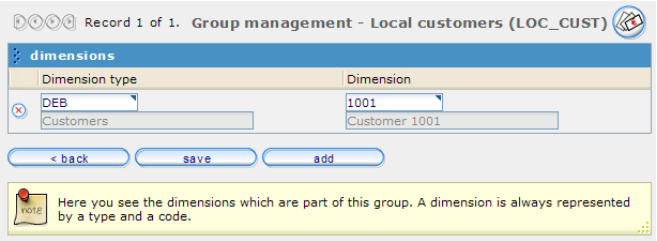

Corresponding XML node: dimensions/dimension

Structure of the dimension group elements

Tag	Attributes	Description	Occurs
<dimensiongroups>	result="1" result="0" msg=""	OK Not OK, an error occurred, see also **Fout! Verwijzingsbron niet gevonden.**	1
<dimensiongroup>	status="active|deleted"	The status of the dimension group.	1-∝
<dimensions>			0,1
<dimension/>			0-∝
</dimensions>			
</dimensiongroup>			
</dimensiongroups>			

the no. 1 in online accounting

Description of the dimension group elements

Tag	Parent node	Description	Type definition
dimensiongroups	-	root node	-
dimensiongroup	dimensiongroups	node	-
office	dimensiongroup	Office code	CODE, mandatory
code	dimensiongroup	Dimensiontype	CODE, mandatory
name	dimensiongroup	Dimension type name	STRING(36), optional
shortname	dimensiongroup	Dimension type shortname	STRING(20), optional
dimensions	dimensiongroup	node	- optional
dimension	dimensions	node	- optional
type	dimension	Dimension type	CODE
code	dimension	Dimension code	CODE

the no. 1 in online accounting

Example

This example creates a new dimension group and adds the customer 1001 to this dimension group.

```
<?Xml version="1.0" encoding="ISO-8859-1"?>
<dimensiongroup>
  <office>0000</office>
  <code>LOC_CUST</code>
  <name>Customers</name>
  <dimensions>
    <dimension>
      <type>DEB</type>
      <code>1001</code>
    </dimension>
  </dimensions>
</dimensiongroup>
```

Response XML

```
<dimensiongroup status="active" result="1">
  <office name="Webshop JJLammers.com" shortname="">0000</office>
  <code>LOC_CUST</code>
  <name>Local customers</name>
  <shortname />
  <touched>1</touched>
  <dimensions>
    <dimension>
      <type name="Customers" shortname="Customers">DEB</type>
      <code name="Customer 1001" shortname="">1001</code>
    </dimension>
  </dimensions>
</dimensiongroup>
```


the no. 1 in online accounting

3 Dimensions

Menu path: Accounting>Dimensions>Manage


Structure of the dimensions XML

Tag	Attributes	Description	Occur
<dimensions>	result="1" result="0" msg=""	OK An error occurred, see also **Fout! Verwijzingsbron niet gevonden.**	1
<dimension>	status="active|hidden"		1-∝
<financials>			0,1
<childvalidations>			0-∝
<childvalidation/>	type="code|group|type" level="1|2|3|4"	Validiate against Dimension code, - group or –type Dimension level	1
</childvalidations>			
</financials>			
<addresses>			0,1
<address/>	id="xx" default="true|false" type="invoice|postal|contact"	Sequence number Default address Address type	0-∝
</addresses>			
<banks>			0,1
<bank/>	id="xx" default="true/false"	Sequence number Default bank	0-∝
<address/>			0,1
</banks>			
<creditmanagement/>			0,1
<groups>			1
<group/>			0-∝
</groups>			
<invoicing/>			1
<postingrules>			0,1
<postingrules>			0-∝
<lines>			0,1
<line/>			0-∝
</lines>			0,1
</postingrules>			0-∝
</dimension>			
</dimensions>			

the no. 1 in online accounting

Determine the next dimension code

The option “next free code” is added to the dimension Xml. When the code field is not added to the dimension Xml, Twinfield will determine the code which must be used.

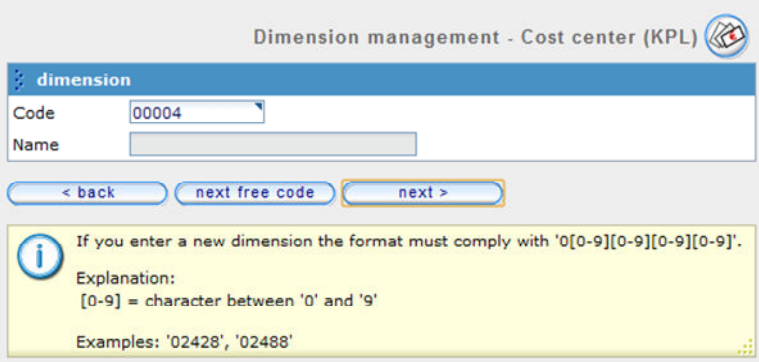

Example Request Xml

```
<?xml version="1.0"?>
<dimension>
    <office>0000</office>
    <type>KPL</type>
    <name>Sales &amp;amp; Markerting</name>
</dimension>
```

Response Xml

```
<?xml version="1.0"?>
<dimension status="active" result="1">
    <office name="Webshop JJLammers.com" shortname="">0000</office>
    <type name="Cost center" shortname="Kostenplaatsen">KPL</type>
    <name>Sales &amp;amp; Markerting</name>
    <code>00004</code>
    <editdimensionname>true</editdimensionname>
    <financials>
        <level>2</level>
        <matchtype>notmatchable</matchtype>
        <accounttype>inherit</accounttype>
        <subanalyse>maybe</subanalyse>
        <payavailable>false</payavailable>
        <paycode></paycode>
        <ebilling>false</ebilling>
        <ebillmail></ebillmail>
        <duedays>0</duedays>
        <relationsreference></relationsreference>
        <substitutionlevel>0</substitutionlevel>
        <substitutewith></substitutewith>
        <vatobligatory>false</vatobligatory>
        <performancetype/>
        <vatcode name="" shortname="" type=""></vatcode>
        <vattype name="" shortname=""></vattype>
    </financials>
</dimension>
```



the no. 1 in online accounting

General Ledger accounts (GL accounts)


- Balance
- Profit & Loss

This documentation only the BAS Dimension type will be described, the PNL dimension type has the same XML structure. Only the fixed value of the “type” element is different, PNL (=Profit & Loss).


Screens in Twinfield

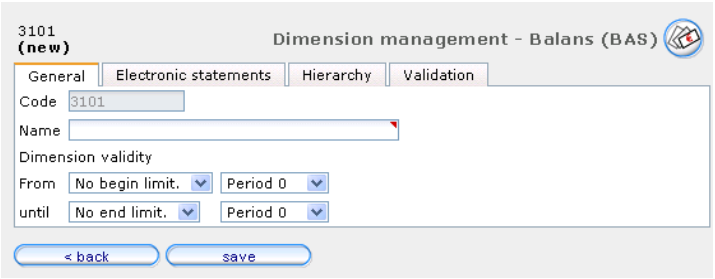


Corresponding XML node: dimension

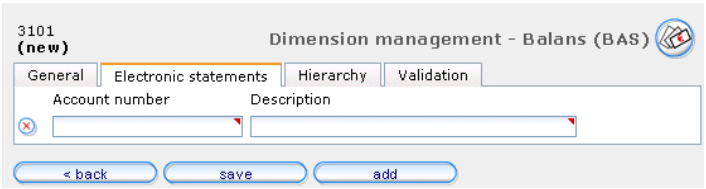

Corresponding XML node: banks/bank

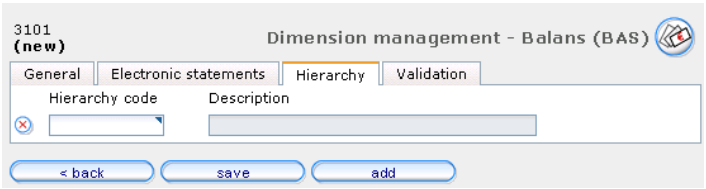

Corresponding XML node: groups/group

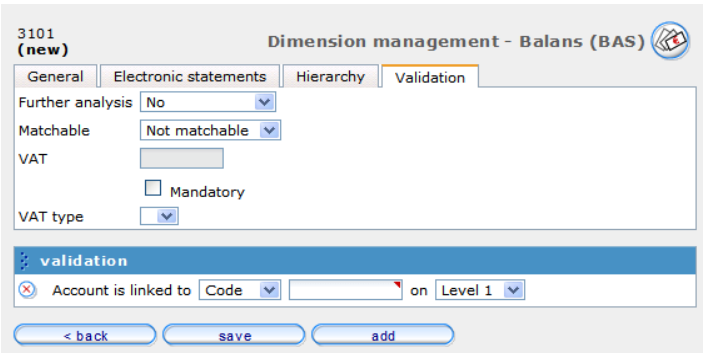

Corresponding XML node: dimension financials and for the validation rules the corresponding XML node is: childvalidations/childvalidation

the no. 1 in online accounting

Description of the General Ledger elements

Tag	Parent node	Description	Type definition
dimensions	-	root node	- (optional)
dimension	dimensions	node	-
office	dimension	Office code	CODE, optional
code	dimension	dimension code, must be compliant with the mask in the Dimension type	CODE, optional (see: "Determine the next dimension code")
type	dimension	Dimension type, fixed to BAS or PNL	FIXED VALUE
name	dimension		STRING(40)
beginyear	dimension		INTEGER
beginperiod	dimension		INTEGER
endyear	dimension		INTEGER
endperiod	dimension		INTEGER
banks	dimension	node	-
bank	bank	node	-
ascription	bank	Description of the (bank) account number	STRING(40)
accountnumber	bank	Local bank account number	STRING(40)
groups	dimension	node	- (optional)
group	groups		CODE, optional
financials	dimension	node	-
subanalyse	financials	Is subanalyse to a customer, supplier or cost center needed.	ENUMERATION: - true - false - maybe
matchtype	financials	Sets the GL account match able value. The preferred value for suspense accounts is "matchable".	ENUMERATION: - not matchable - matchable - relation
vattype	financials	Type vat code, for future use	-
vatcode	financials	Default VAT code, for future use	CODE, optional
vatobligatory	financials	Is the VAT code obligatory, for future use	BOOLEAN
childvalidations	financials	node	-

the no. 1 in online accounting

Tag	Parent node	Description	Type definition
childvalidation	childvalidations	Validation rule when sub analyses to a customer, supplier or cost center is needed.	
type	attrubute of childvalidation	Validation to which Dimension type.	ENUMERATION: - code (=dimension code) - type (= Dimension type) - group (=dimension group)
level	attrubute of childvalidation	Financial level	ENUMERATION: - 1 (=GL account) - 2 (= customer, supplier or cost center) - 3 (=project or asset) - 4 (= project activity)

Example

This example adds a new Balance sheet account, "3101 Work in Progress - Consultants" in Twinfield. In this example we add also a validation rule. In the Twinfield input function the user must also enter a cost center and project when posting a journal on this GL account.

Request

```
<?Xml version="1.0" encoding="ISO-8859-1"?>
<dimension>
  <office>0000</office>
  <code>3101</code>
  <type>BAS</type>
  <name>Work in Progress - Consultants</name>
  <financials>
    <subanalyse>true</subanalyse>
    <childvalidations>
      <childvalidation type="type" level="2">KPL</childvalidation>
      <childvalidation type="type" level="3">PRJ</childvalidation>
    </childvalidations>
  </financials>
  <groups>
    <group>GLB30</group>
    <group>SLB30.20</group>
  </groups>
</dimension>
```


the no. 1 in online accounting


Response XML

```
<dimension status="active" result="1">
  <office name="Webshop JJLammers.com" shortname="">0000</office>
  <code>3101</code>
  <type name="Balans" shortname="Balans">BAS</type>
  <inuse>false</inuse>
  <shortname />
  <name>Work in Progress - Consultants</name>
  <behaviour>system</behaviour>
  <touched>0</touched>
  <beginperiod>0</beginperiod>
  <beginyear>0</beginyear>
  <endperiod>0</endperiod>
  <endyear>0</endyear>
  <website />
  <vatnumber />
  <cocnumber />
  <inuse>false</inuse>
  <financials>
    <matchtype>notmatchable</matchtype>
    <accounttype>balance</accounttype>
    <subanalyse>true</subanalyse>
    <duedays>0</duedays>
    <level>1</level>
    <payavailable>false</payavailable>
    <paycode name="" shortname="" />
    <ebilling>false</ebilling>
    <ebillmail />
    <substitutionlevel>0</substitutionlevel>
    <substitutewith />
    <relationsreference />
    <vattype name="" shortname="" />
    <vatcode name="" shortname="" />
    <vatobligatory>false</vatobligatory>
    <childvalidations>
      <childvalidation type="type" level="2">KPL</childvalidation>
      <childvalidation type="type" level="3">PRJ</childvalidation>
    </childvalidations>
  </financials>
  <groups>
    <group shortname="Stock" name="Stock">GLB30</group>
    <group shortname="WIP" name="Work in Progress">SLB30.20</group>
  </groups>
</dimension>
```



the no. 1 in online accounting

Customers


Screens in Twinfield

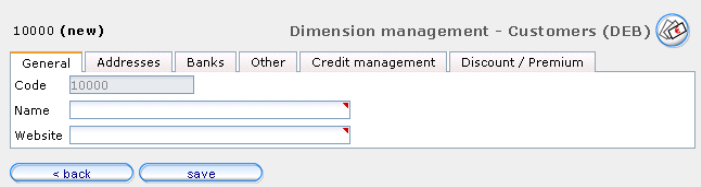


Corresponding XML node: dimension

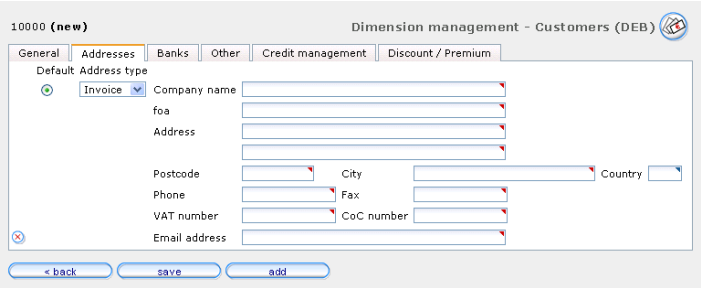

Corresponding XML node: addresses/address

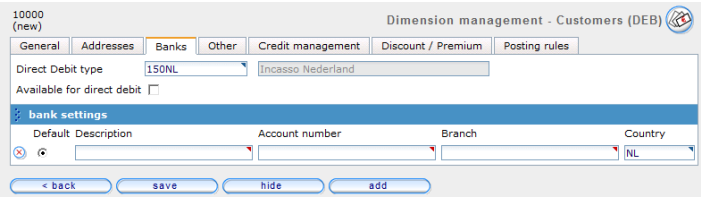


Corresponding XML node: banks/bank. This customer is linked to the Dutch Clieop direct debit “payment file”. The bank settings are be different per payment (or direct debit) file. A full description can be found in the chapter: International payments.

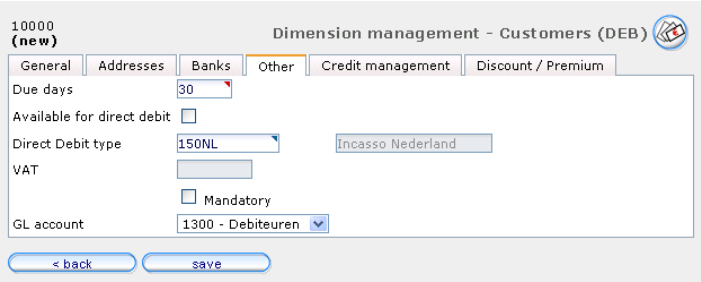


Corresponding XML node: financials


the no. 1 in online accounting

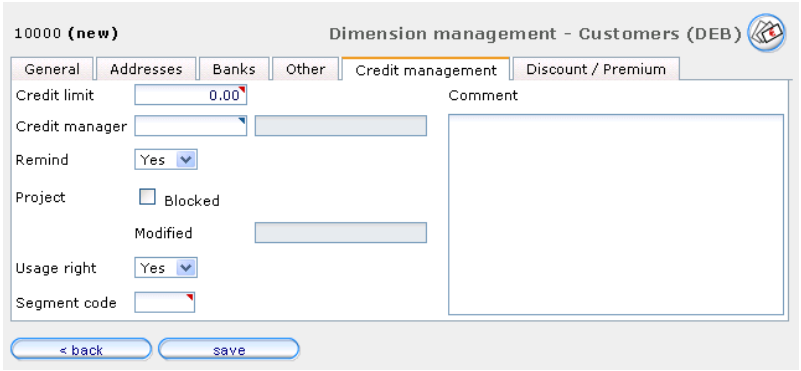

Corresponding XML node: creditmanagement

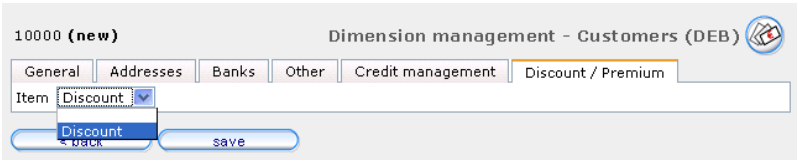

Corresponding XML node: invoicing

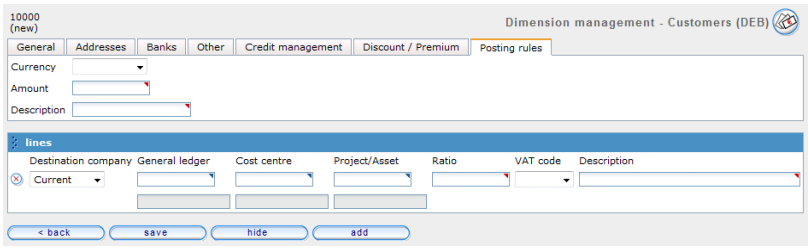

Corresponding XML node: postingrules

Description of the customer elements

Tag	Parent node	Description	Type definition
dimensions	-	root node	- (optional)
dimension	dimensions	node	-
office	dimension	Office code	CODE
code	dimension	dimension code, must be compliant with the mask in the Dimension type	CODE, optional ("Determine the next dimension code")
type	dimension	Dimension type, fixed to DEB	FIXED VALUE
name	dimension	Name of the customer	STRING(40)
website	dimension	Website	STRING(40)
addresses	dimension	node	-
address	addresses	node	-

the no. 1 in online accounting

Tag	Parent node	Description	Type definition
id	attribute of address	Sequence number	INTEGER
type	attribute of address	Address type	ENUMERATION: - invoice - postal - contact
default	attribute of address	Is this the default address, only one default address is possible	Boolean
name	address	Company name	STRING(80)
field1 – field6	address	User defined fields, the labels are configured in the Dimension type.	STRING(40)
postcode	address	Postal code	STRING(40)
city	address	City	STRING(40)
country	address	ISO country code.	STRING(2)*
telephone	address		STRING(15)
telefax	address		STRING(15)
email	address	E-mail address	STRING(128)
banks	dimension	node	-
bank	banks	node	-
ascription	bank	Name of the account number holder	
accountnumber	bank	Bank account number	
city	bank	City of the account number holder	
financials	dimension	node	-
duedays	financials		INTEGER
payavailable	financials	Is a direct debit possible?	BOOLEAN
paycode	financials	Direct Debit code	CODE
vattype	financials	Type vat code, for future use	-
vatcode	financials	Default VAT code, for future use	CODE
vatobligatory	financials	Is the VAT code obligatory, for future use	BOOLEAN
substitutewith	financials	Default customer GL account.	CODE
ebilling	financials	Send the invoice per email to the	BOOLEAN

the no. 1 in online accounting

Tag	Parent node	Description	Type definition
		customer.	
ebillmail	financials	E-mail address to send the invoice to.	STRING(128)
creditmanagement	dimension	node	-
basecreditlimit	creditmanagement		
responsibleuser	creditmanagement	Credit manager	CODE
sendreminder	creditmanagement	Remind	BOOLEAN
blocked	creditmanagement	Are the related projects for this customer blocked in Projects>Data entry	BOOLEAN
freetext1	creditmanagement	Usage rights	BOOLEAN
freetext2	creditmanagement	Segment code	STRING(20)
comment	creditmanagement	Comments	TEXT
invoicing	dimension	node	-
discountarticle	invoicing	Item (discount article)	CODE

Example

This example creates a new customer “10020 - Morgan Limited” in Twinfield.

Request XML

```
<?Xml version="1.0" encoding="ISO-8859-1"?>
<dimension>
  <code>10020</code>
  <name>Morgan Limited</name>
  <type>DEB</type>
  <website>www.yourdomain.com</website>
  <addresses>
    <address default="true" type="invoice">
      <field1>FAO Mr J.P. Morgan</field1>
      <field2>Streetname</field2>
      <field3 />
      <postcode>1234 AB</postcode>
      <city>Berlin</city>
      <country>DE</country>
      <telephone>010-12345</telephone>
      <telefax>010-1234</telefax>
      <field4>VAT12345</field4>
      <email>jpmorgan@yourdomain.com</email>
    </address>
```



the no. 1 in online accounting

```
  </addresses>
  <banks>
    <bank default="true">
      <ascription>Morgan Ltd.</ascription>
      <accountnumber>123456</accountnumber>
      <city>Berlin</city>
    </bank>
  </banks>
  <financials>
    <duedays>30</duedays>
    <payavailable>true</payavailable>
    <paycode>250NL</paycode>
    <ebilling>true</ebilling>
    <ebillmail>bills@yourdomain.com</ebillmail>
  </financials>
  <creditmanagement>
    <sendreminder>true</sendreminder>
    <responsibleuser />
    <basecreditlimit />
    <comment />
    <freetext1 />
    <freetext2 />
    <blocked />
  </creditmanagement>
  <invoicing>
    <discountarticle />
  </invoicing>
</dimension>
```



the no. 1 in online accounting

Suppliers


Screen in Twinfield:

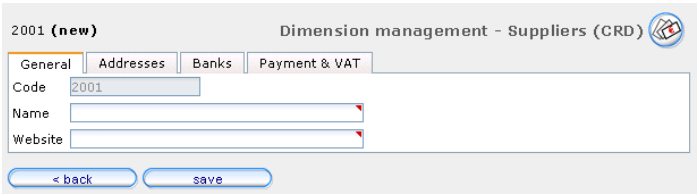


Corresponding XML node: dimension

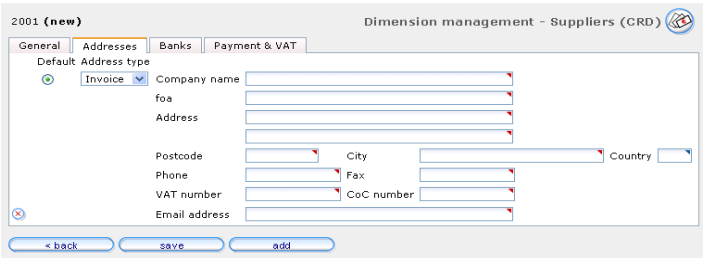

Corresponding XML node: addresses/address

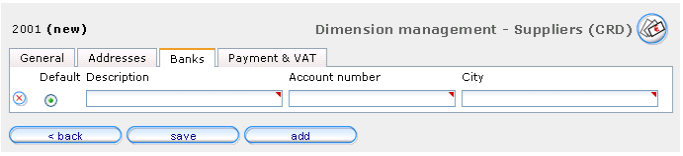

Corresponding XML node: banks/bank. This customer is linked to the Dutch Clieop direct debit “payment file”. The bank settings are be different per payment (or direct debit) file. A full description can be found in the chapter: International payments.

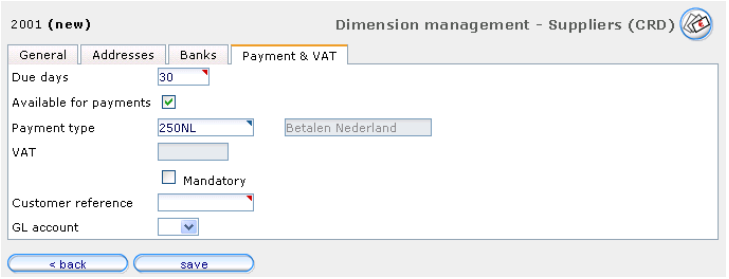

Corresponding XML node: financials

the no. 1 in online accounting

Description of the supplier elements

Tag	Parent node	Description	Type definition
dimensions	-	root node	- (optional)
dimension	dimensions	Node	-
office	dimension	Office code	CODE
code	dimension	dimension code, must be compliant with the mask in the Dimension type	CODE, optional ("Determine the next dimension code")
type	dimension	Dimension type, fixed to CRD	CODE, mandatory
name	dimension	Name of the supplier	STRING(40)
website	dimension	Website	STRING(40)
addresses	dimension	node	-
address	addresses	node	-
id	attribute of address	Sequence number	INTEGER
type	attribute of address	Address type	ENUMERATION: - invoice - postal - contact
default	attribute of address	Is this the default address, only one default address is possible	BOOLEAN
name	address	Company name	STRING(80)
field1 – field6	address	User defined fields, the labels are configured in the dimension type.	STRING(40)
postcode	address	Postal code	STRING(40)
city	address	City	STRING(40)
country	address	ISO country code.	STRING(2)
telephone	address		STRING(15)
telefax	address		STRING(15)
email	address	E-mail address	STRING(128)
banks	dimension	node	-
bank	banks	node	-
ascription	bank	Name of the account number holder	STRING(40)

the no. 1 in online accounting

Tag	Parent node	Description	Type definition
accountnumber	bank	Bank account number	STRING(40)
city	bank	City of the account number holder	STRING(40)
financials	dimension	node	-
duedays	financials		INTEGER
payavailable	financials	Is a payment possible?	BOOLEAN
paycode	financials	Payment code	CODE
vattype	financials	Type vat code, for future use	-
vatcode	financials	Default VAT code, for future use	CODE
vatobligatory	financials	Is the VAT code obligatory, for future use	- (BOOLEAN)
relationsreference	financials	Customer reference, your customer number by the supplier	STRING(40)
substitutewith	financials	Default supplier GL account.	CODE

Example

This example creates a new supplier "2001 – Vodafone Ltd." in Twinfield.

```
<?Xml version="1.0" encoding="ISO-8859-1"?>
<dimension>
  <code>2001</code>
  <type>CRD</type>
  <name>Vodafone Ltd.</name>
  <addresses>
    <address default="true" type="invoice">
      <field1>FAO Mr J.P. Hone</field1>
      <field2>145 Streetname</field2>
      <postcode>EC1V 4UK </postcode>
      <city>London</city>
      <country>GB</country>
      <telephone>010-12345</telephone>
      <telefax>010-1234</telefax>
      <field4>VAT12345</field4>
      <email>JPhone@vodaf.com</email>
    </address>
  </addresses>
  <banks>
    <bank default="true">
      <ascription>Vodafone Ltd.</ascription>
      <accountnumber>98745</accountnumber>
      <city>London</city>
```


the no. 1 in online accounting

```
    </bank>
  </banks>
  <financials>
    <duedays>14</duedays>
    <payavailable>true</payavailable>
    <paycode>250NL</paycode>
    <relationsreference>2345</relationsreference>
  </financials>
</dimension>
```


the no. 1 in online accounting

Payment and direct debit settings

Corresponding XML node: dimension

m = mandatory a = available x = not available or required

BANK FIELDS	Xmlfield	NO PAYMENT TYPE	NL (DOM) CLIEOP03	NL (INT) BTL91 - IBAN	NL (INT) BTL91 - NON IBAN	DE DTAUS	DE (INT) DTAZV	IE (DOM) EMTS	FI (DOM) LM02	AT (DOM) PAYMUL (DOM)	AT (INT) PAYMUL (INT)	GENERIC TWFPAY*	FI (INT) ULMP - IBAN	FI (INT) ULMP - NON IBAN
Account holder	ascription	m	m	m	a	m	a	m	m	m	a	*country**	m	a
Account number	accountnumber	*NON-IBAN*	m	a	a	m	a	m	m	m	a	a	a	a
Address	address/field1	x	x	m	m	x		x	x	x	x	x	m	m
No.	address/field2	x	x	m	m	x		x	x	x	x	x	m	m
Bank name	bankname	a	x	m	m	x	a	x	x	a	a	a	a	a
BIC code	biccode	*IBAN*	x	m		x	a	x	x	a	a	*country**	m	a
Branch		a	a	m	m	x	a	a	a	a	a	a	a	a
Country		*BOTH*	*NL*	m	m	m	a	*IE*	m	*AT*	a	m	a	m
IBAN	iban	*IBAN*	x	m	a	x	a	x	x	a	a	a	m	a
National bank code	natbiccode	*NON-IBAN*	x	a	a	a	a	m	x	m	a	*country**	m	a
Number		a	x	m	m	x	a	x	x	a	a	a	a	a
Postcode	postcode	a	x	a	a	x	a	x	x	a	a	a	a	a
State	state	a	x	a	a	x	a	x	x	a	a	a	a	a
Way of payment	wayofpayment	x	x	a	a	x	x	x	x	x	x	x	x	x
Pay address	payaddress	x	x	a	a	x	x	x	x	x	x	x	x	x

* mandatory fields are determined on country level


the no. 1 in online accounting

ADDRESS FIELDS	Xmlfield	NO PAYMENT TYPE	CLIEOP03	BTL91 - IBAN	BTL91 - NON IBAN	DTAUS	DTAZV	EMTS	LM02	PAYMUL (DOM)	PAYMUL (INT)	TWFPAY*	ULMP - IBAN	ULMP - NON IBAN
		NL (DOM)	NL (INT)	NL (INT)	DE	DE (INT)	IE (DOM)	FI (DOM)	AT (DOM)	AT (INT)	GENERIC	FI (INT)	FI (INT)	
Address		x	x	x	x	x		x	x	x	x	x	m	m
City		x	x	m	m	x		x	x	x	x	x	m	m
Country		x	x	m	m	x		x	x	x	x	x	m	m

the no. 1 in online accounting

Cost Centers

Screen in Twinfield:

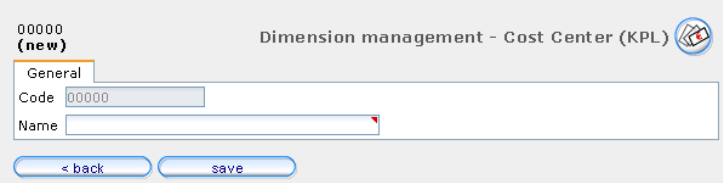

Corresponding XML node: dimension

Description of the cost center elements

Tag	Parent node	Description	Type definition
dimensions	-	root node	- (optional)
dimension	dimensions	node	-
office	dimension	Office code	CODE, optional
code	dimension	Dimension code, must be compliant with the mask in the Dimension type	CODE, optional ("Determine the next dimension code")
type	dimension	Dimension type, fixed to KPL	FIXED VALUE
name	dimension	Dimension name	STRING(40)

Example

This example creates a new cost center "00001 - Sales & Marketing" in Twinfield

Request XML

```
<?Xml version="1.0" encoding="ISO-8859-1"?>
<dimension>
  <office>0000</office>
  <code>00001</code>
  <type>KPL</type>
  <name>Sales &amp;amp; Markerting</name>
</dimension>
```


the no. 1 in online accounting


Response XML

```
<dimension status="active" result="1">
  <office name="Webshop JJLammers.com" shortname="">0000</office>
  <code>00001</code>
  <type name="Cost Center" shortname="">KPL</type>
  <name>Sales & Markerting</name>
  <inuse>false</inuse>
  <shortname />
  <behaviour>normal</behaviour>
  <touched>0</touched>
  <beginperiod>0</beginperiod>
  <beginyear>0</beginyear>
  <endperiod>0</endperiod>
  <endyear>0</endyear>
  <website />
  <vatnumber />
  <cocnumber />
  <inuse>false</inuse>
  <financials>
    <level>2</level>
    <matchtype>notmatchable</matchtype>
    <accounttype>inherit</accounttype>
    <subanalyse>maybe</subanalyse>
    <payavailable>false</payavailable>
    <paycode />
    <ebilling>false</ebilling>
    <ebillmail />
    <duedays>0</duedays>
    <relationsreference />
    <substitutionlevel>0</substitutionlevel>
    <substitutewith />
    <vatobligatory>false</vatobligatory>
    <vatcode />
    <vattype />
  </financials>
</dimension>
```



the no. 1 in online accounting

Project


Screen in Twinfield:

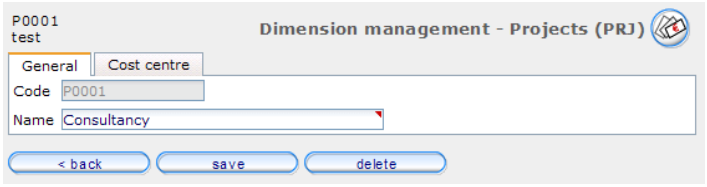

Corresponding XML node: dimension



Corresponding XML node: financials

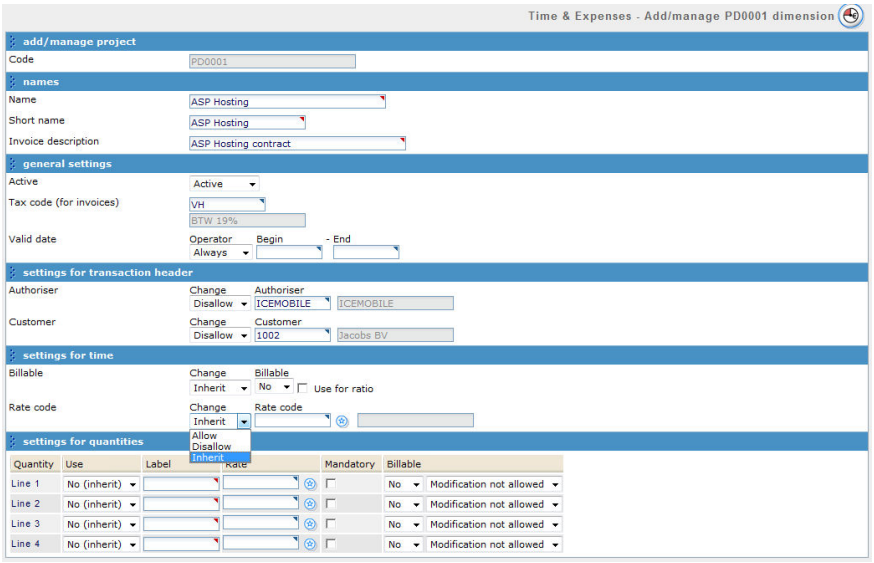

Corresponding XML node: projects

Description of the project elements

Tag	Parent node	Description	Type definition
dimensions	-	root node	- (optional)
dimension	dimensions	node	-
office	dimension	Office code	CODE, optional
code	dimension	Dimension code, must be compliant with the mask in the Dimension type	CODE, optional (“Determine the next dimension code”)
type	dimension	Dimension type, fixed to PRJ	FIXED VALUE
name	dimension	Dimension name	STRING(40)

the no. 1 in online accounting

Tag	Parent node	Description	Type definition
financials	dimension	node	-
substitutionlevel	financials	Dimension level, fixed to 2	FIXED VALUE
substitutewith	financials	Cost center code	CODE
projects	dimension	node	-
invoicedescription	projects	Invoice description	STRING(256)
startdate	projects	Valid date (from)	DATE
enddate	projects	Valid date (to)	DATE
authoriser	projects	Authoriser	CODE
authoriser@locked	projects	Attribute	BOOLEAN
customer	projects	Customer	CODE
customer@locked	projects	Attribute; Can the customer code be changed during input	BOOLEAN
billable	projects	Billable	BOOLEAN
billable@locked	projects	Attribute; Can the billable option be changed during input	BOOLEAN
billable@inherit	projects	Attribute	BOOLEAN
billable@forratio	projects	Attribute	BOOLEAN
quantities	projects	node	-
quantity	quantities	node	-
mandatory	quantity	Use quantities	BOOLEAN
label	quantity	Preferred label	STRING(40)
rate	quantity	The project (quantity) rate code	CODE
billable	quantity	Are the quantities billable	BOOLEAN
billable@locked	quantity		BOOLEAN

the no. 1 in online accounting

Example

This example creates a new project "P001 - Consultancy" in Twinfield

Request XML

```
<?Xml version="1.0" encoding="ISO-8859-1"?>
<dimension>
  <office>0000</office>
  <code>P001</code>
  <type>PRJ</type>
  <name>Consultancy</name>
  <financials>
    <substitutionlevel>2</substitutionlevel>
    <substitutewith>00001</substitutewith>
  </financials>
</dimension>
```


the no. 1 in online accounting

4 Dimension actions

This chapter describes the methods to delete or hide a dimension in Twinfield. When a journal entry has been posted on a dimension the deleted status is not available. To prevent users to post journals in the future to this dimension you need to hide this dimension.

Description of the dimension actions elements

Tag	Parent node	Description	Type definition
dimensions	-	root node	- (optional)
dimension	dimensions	node	-
status	attribute of dimension	Delete or hides a dimension in Twinfield. When a dimension is hidden you can enable the dimension by setting the status to “active”.	ENUMERATION: - deleted - hide - active
office	dimension	Office code	CODE, optional
code	dimension	Dimension code, must be compliant with the mask in the Dimension type	CODE, mandatory
type	dimension	Dimension type, fixed to KPL	CODE, mandatory

Example

This example deletes customer 1000 in office 0000, hide customer 1001 in the current office and re-enables customer 1002.

Request Xml

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<dimensions>
  <dimension status="deleted">     <!-- Delete dimension -->
    <office>0000</office>
    <code>1000</code>
    <type>DEB</type>
  </dimension>
  <dimension status="hide">        <!-- Hide dimension -->
    <type>DEB</type>
    <code>1001</code>
  </dimension>
  <dimension status="active">      <!-- Save/re-enable -->
    <type>DEB</type>
    <code>1002</code>
  </dimension>
</dimensions>
```


the no. 1 in online accounting

Dimension read

This example reads the dimension setting of customer (DEB) 1000 in office 001. More information about the read Xml message is described in the manual: “Twinfield Web Services”

Request Xml

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<read>
   <type>dimensions</type>
   <office>001</office>
   <dimtype>DEB</dimtype>
   <code>1000</code>
</read>
```


the no. 1 in online accounting