Twinfield – Single Sign On

manual, version 5.4

April 2009

For general information about our webservices see the Twinfield Webservices Manual

Twinfield International NV
De Beek 9-15
3871 MS Hoevelaken
Netherlands

copyright © 2005 – 2011 - Twinfield International N.V.


the no. 1 in online accounting

Table of contents

Single Sign On login	3
Resources	3
Methods	4
Prepare	4
Web page	5
Resources	5
Post	5
User management	6

Single Sign On login

Twinfield Single Sign-On is a method of automated access control that enables a user to let a third party server safely authenticate through a web service to gain access to a restricted web page without the user having to fill in its user name, password and organization credentials.

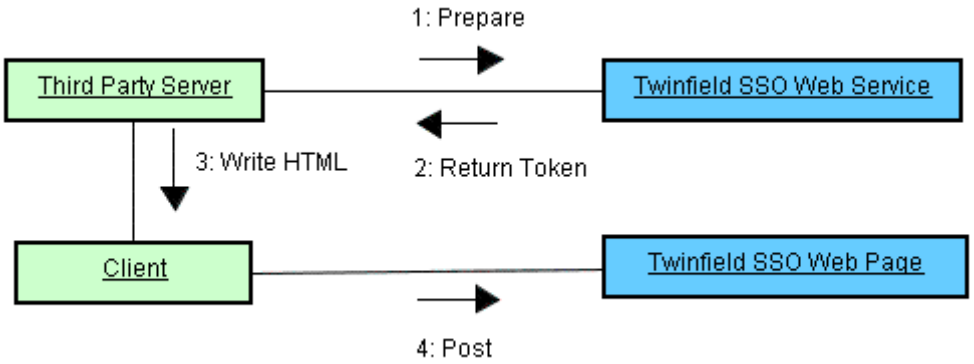

1. The third party server must make a call to the Twinfield Web Service, to request the preparation of an authentication token.
2. The Twinfield Web Service will return a token if authentication is successful.
3. The third party server must write HTML containing post variables to its client.
4. The client then automatically posts the variables to the Twinfield Web Page using SSL.

Resources

The Twinfield Single Sign On web services is related to the URL: https://login.twinfield.com

resource	location
Web Service	/webservices/singlesignon.asmx
WSDL File	/webservices/singlesignon.asmx?wsdl

the no. 1 in online accounting

Methods

Prepare

This function is called with a user code, password and organization code parameters to prepare an authentication token. The token out parameter is assigned by the function if the credentials are authenticated successfully and the return value is OK. Authentication can fail because the user may not use single sign-on, because the log-on credentials are invalid, because the log-on has been deleted or disabled or because the organization is inactive.

Parameters

parameter	description
user	User code.
password	Password.
organisation	Organisation code.
token	Token string. The token is only valid once and is valid for only 30 seconds.

Return value
Log-on result enumeration type.

log-on result	description
Ok	Token prepared successful.
NotAllowed	Single sign-on is not allowed.
Blocked	Log-on is blocked, because of system maintenance.
Invalid	Log-on is invalid.
Deleted	Log-on is deleted.
Disabled	Log-on is disabled.
OrganisationInactive	Organization is inactive.

the no. 1 in online accounting

Web page

The third party server should write an HTML page to the client that submits itself to the Web Page, with at least the mandatory variables. If the variables are posted correctly, a redirect will be done to the next page. The next page depends on the user settings and could for instance be the main desktop page, but could also be the SMS authentication page if extended authentication is required. If the post fails, an error message will be displayed with a link to the return-URL if assigned or recoverable.

Resources

resource	location
Web page	/logon/singlesignon.aspx

Post

Methods

The sessionID must be sent as a SOAP header.

Parameters

parameter	description
user	User code (Required)
organisation	Organisation code. (Required)
token	Authentication token, requested at the Web service. (Required)
returnurl	URL to return to when the user logs off.
company	Code of the company to be opened.

Return value

XML result string.

Example

The HTML code below is an example of what the client web page could look like. Of course the value attributes should be filled with the proper values.

```
<html>
<body onload="document.forms[0].submit();">
<form method="post"
action="https://login.twinfield.com/logon/singlesignon.aspx">
        <input type="hidden" name="user" value="">
        <input type="hidden" name="organisation" value="">
        <input type="hidden" name="token" value="">
        <input type="hidden" name="returnurl" value="">
        <input type="hidden" name="company" value="">
</form>
</body>
</html>
```



the no. 1 in online accounting

User management

Once single sign-on has been enabled in the organisation, Twinfield will provide a number of settings and restrictions for each user to start using single sign-on.


Settings

First of all a *Single Sign-on* setting will be made visible on the *Account status* tab of the *User manager* page, which is located under the *Access Manager* | *Users* menu.

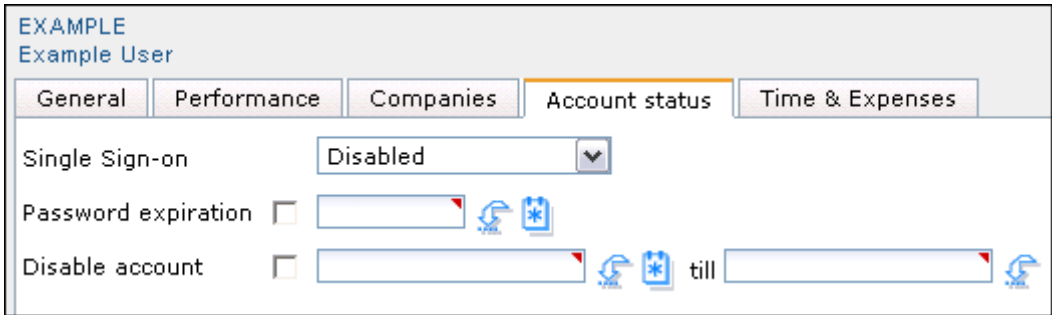

Clicking on the *Single Sign-on* drop down list gives three options:


- Disabled
- Enabled
- Required

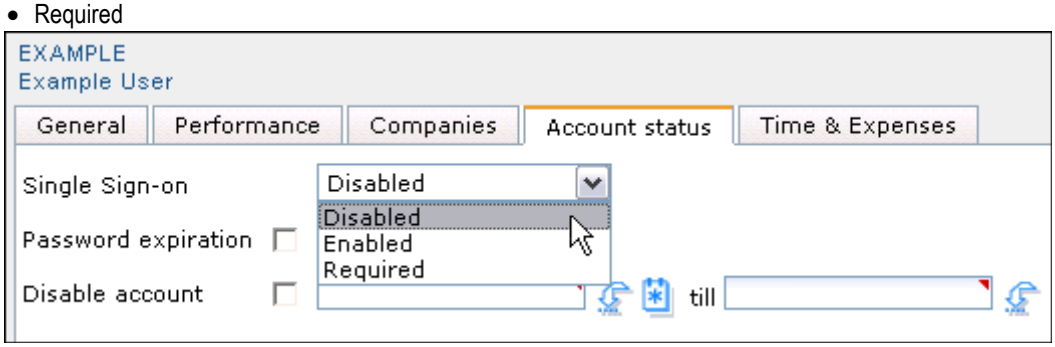


When *Single Sign-on* is *Disabled*, the user will not be able to log on using single sign-on. If the option is *Enabled*, the user will be able to log on with single sign-on, but will also still be able to log on using the regular log-on page. In case the *Required* option has been selected, the user can only log on with single sign-on.

Warnings and Restrictions


If the *Single Sign-on* setting is *Enabled* or *Required*, the *User manager* page contains a number of warnings and restrictions because changing certain settings might cause single sign-on to fail. First of all the *Password expiration* setting is disabled. This is needed to keep the Twinfield password synchronized with the externally managed password, used during single sign-on. This means that the change password page will never be shown during the log on, even if the settings is somehow turned on.

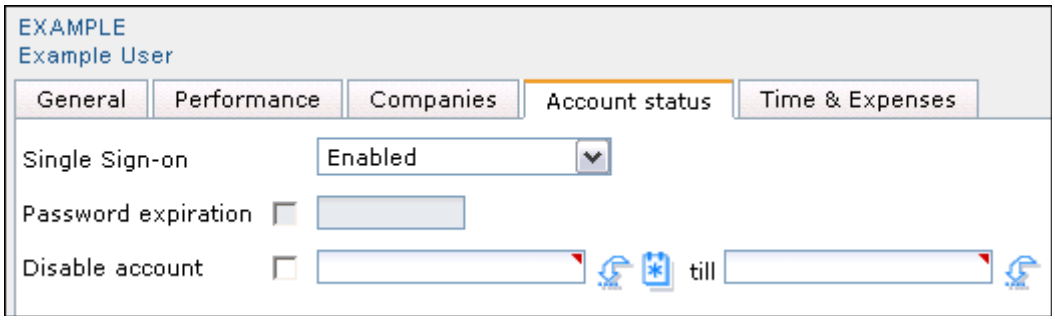

If the currently logged on user opens his user settings, the *password* and *password confirmation* fields are not displayed.

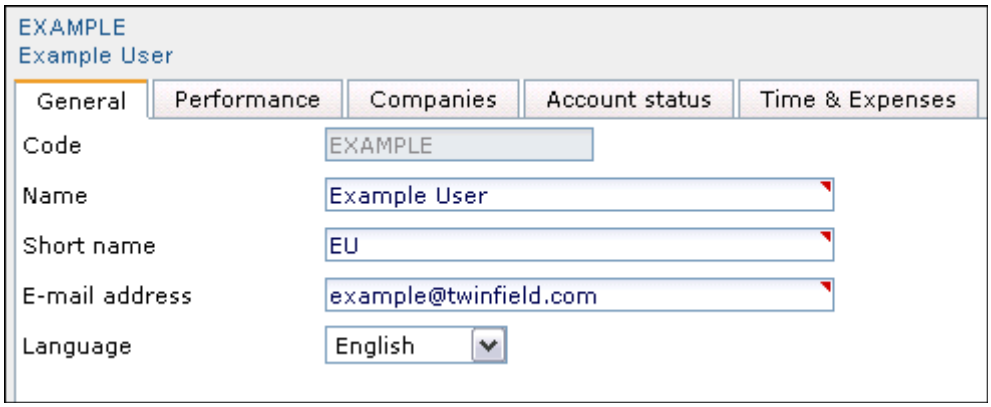


The current user can only change his password through the *Change password* button in the *Access Manager* menu. However if the *Single Sign-on* setting is *Enabled* or *Required*, change password is disabled.

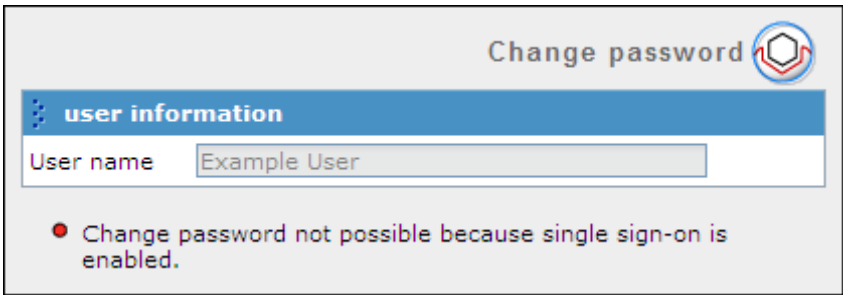

the no. 1 in online accounting

If someone else's user settings are edited, the *password* and *password confirmation* fields are displayed. But if the *Single Sign-on* setting is *Enabled* or *Required*, a warning message will be shown once the *password* value is changed.

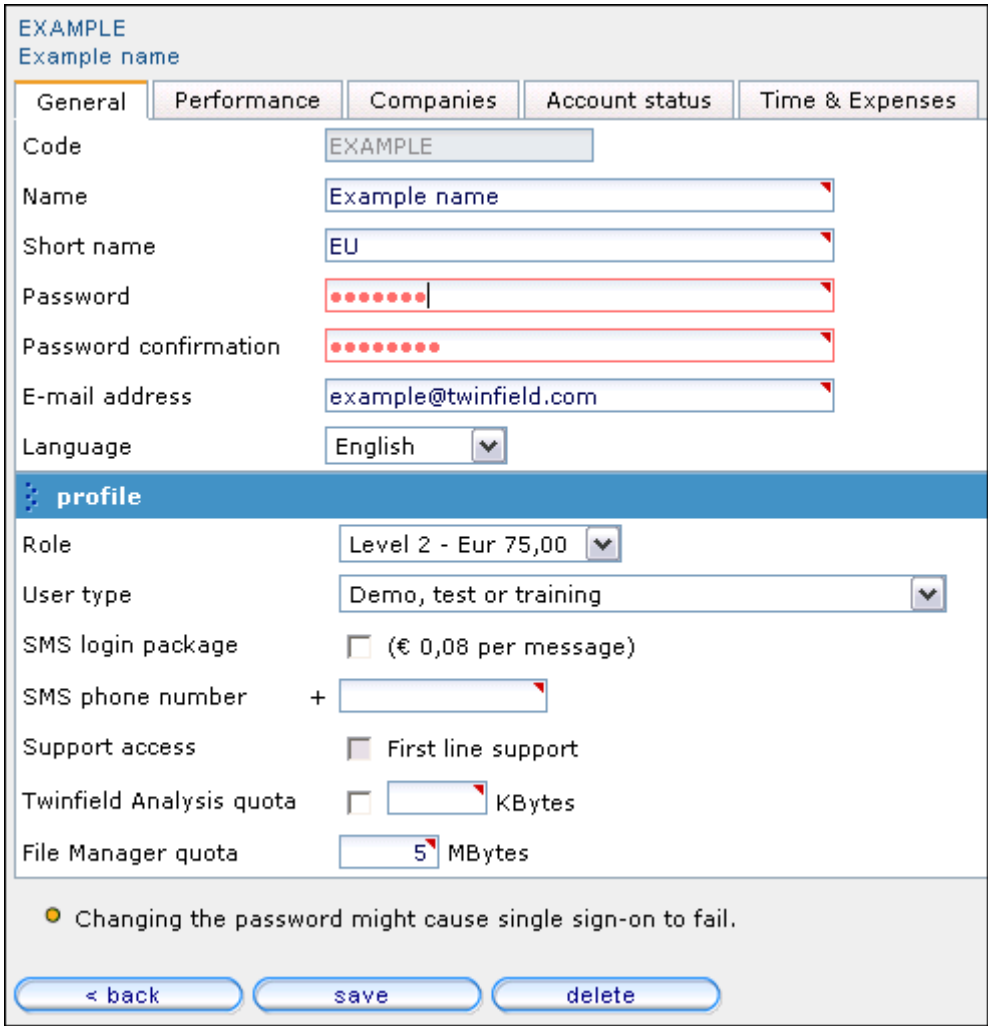

the no. 1 in online accounting