# Twinfield web services – User Xml

**manual, version 5.4**

January 2010

*For general information about our webservices see the Twinfield Webservices Manual*

**Twinfield International NV**
De Beek 9-15
3871 MS Hoevelaken
Netherlands

copyright © 2005 – 2011 - Twinfield International N.V.



the no. 1 in online accounting

## Table of contents

Maintain users .....3
User actions .....12



the no. 1 in online accounting

## Maintain users


Menu path: General>Access Manager>Users

**Structure of the dimensions XML**

| Tag | Attributes | Description | Occur |
|---|---|---|---|
| <users> | result="1"<br>result="0"<br>msg="" | OK<br>An error occurred, see also **Fout! Verwijzingsbron niet gevonden.** | 0,1 |
| <user> | status="active\|deleted" | User status | 1-∝ |
| <office> | | | 0,1 |
| <offices/> | | List of offices | 0-∝ |
| </office> | | | |
| <performance> | | | 1 |
| <input/> | | | 1 |
| </performance> | | | |
| <smslogin> | | | 0,1 |
| <services/> | | | 0,1 |
| </smslogin> | | | |
| <account> | | | 0,1 |
| <disable> | | | 0,1 |
| </account> | | | 0,1 |
| <time/> | | | 0,1 |
| <expenses/> | | | 0,1 |
| </user> | | | |
| </users> | | | |



the no. 1 in online accounting

## Screens in Twinfield

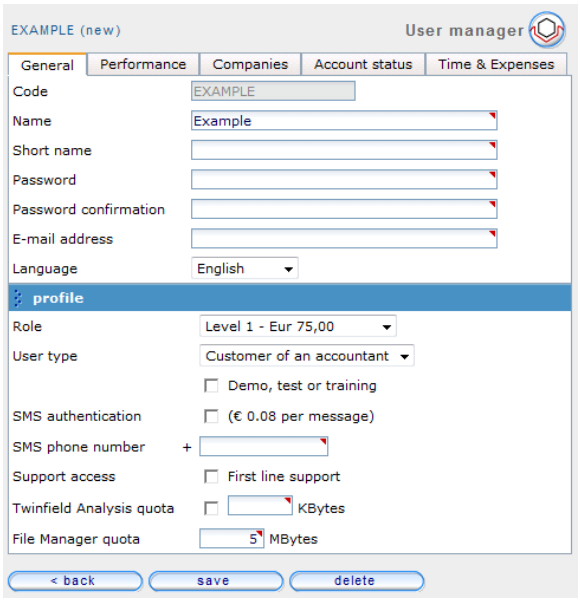



Corresponding XML node: user


**Note:** the dropdown “User type” and checkbox “Demo, test or training” is only available in an “accountant” environment.

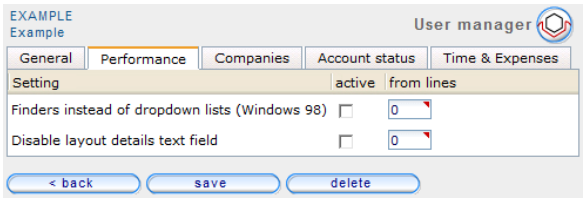


Corresponding XML node: performance

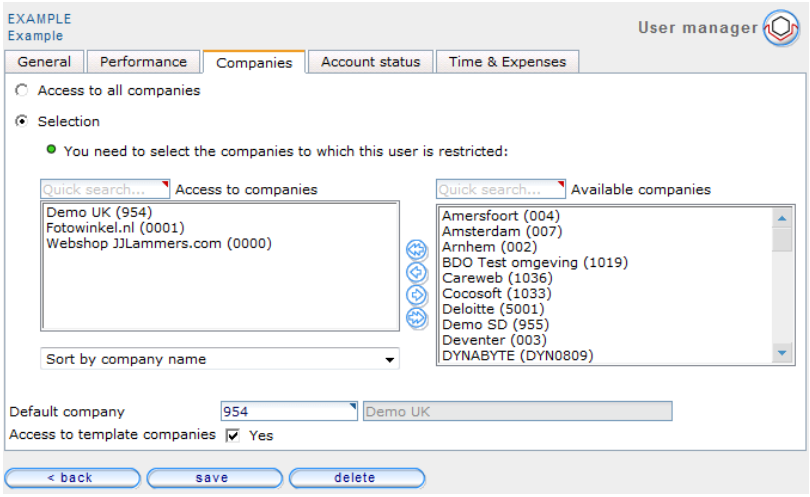



Corresponding XML node: office

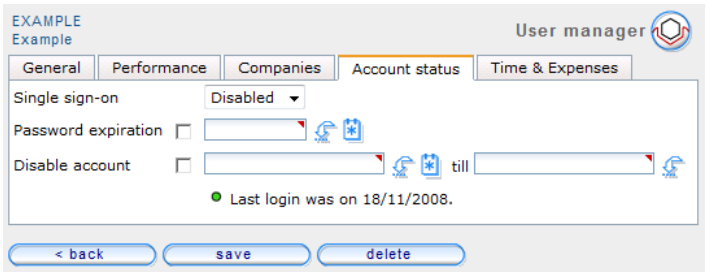



Corresponding XML node: account

**Note:** the dropdown "Single sign-on" is only available when the "single sign on" option has been enabled on your environment. For more information see the Single Sign On documentation.

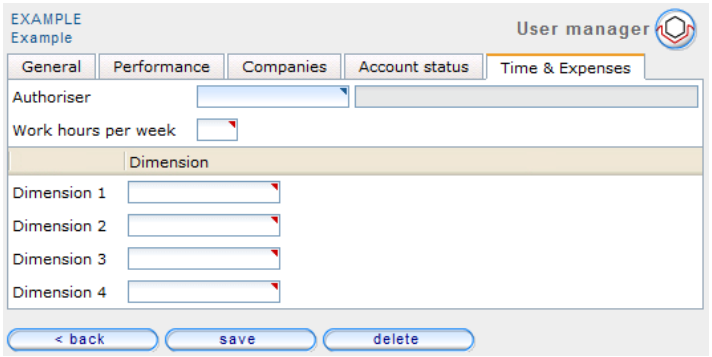


Corresponding XML node: time and expenses

When the user will be deleted the following screen will appear:

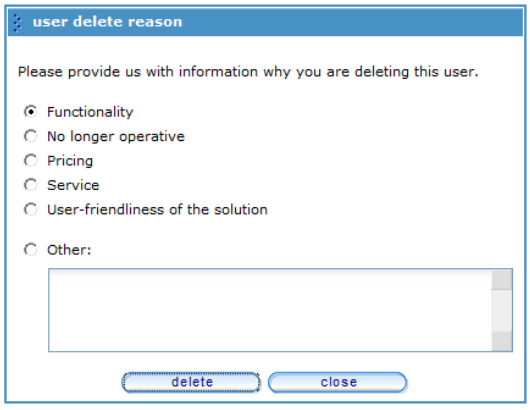


Corresponding XML node: deletereason

**Description of the user Xml**

| Tag | Parent node | Description | Type definition |
|---|---|---|---|
| users | - | root node | - (optional) |
| user | users | node | - |
| code | user | User code | CODE, mandatory |
| name | user | Name of the user | STRING(40) , mandatory |
| shortname | user | Short name of the user | STRING(20) |
| password | | Password (not encrypted).<br>Twinfield password requirements<br>• The password length is 5 or more characters.<br>• The password must contain at least 2 numeric characters and 2 alfanumeric characters<br>• The allowed characters are:<br>○ Capitals letters (A-Z)<br>○ Lowercase letters (a-z)<br>○ Numbers (0-9)<br>○ Special characters: {}[]<>:;"?/\|\`~!@#$%^&*()_-+=<br>• The password history is not stored.<br>• When a password must be changed the same password may not be used | STRING(32) , mandatory |
| email | user | Email address | STRING(128) , mandatory |
| language | user | Language | ENUMERATION:<br>- CS (for Czech)<br>- DE (for German)<br>- DK (for Danish)<br>- EN (for English)<br>- FR (for French)<br>- HU (for Hungarian)<br>- NL (for Dutch) |
| freetext1 | user | Free text field, the usage of this field is based on the role setting. | STRING(40) , mandatory |


the no. 1 in online accounting

<table>
<tr><th>Tag</th><th>Parent node</th><th>Description</th><th>Type definition</th></tr>
<tr><td>freetext2</td><td>user</td><td colspan="2">Free text field, the usage of this field is based on the role setting.</td><td>STRING(40) , mandatory</td></tr>
<tr><td>freetext3</td><td>user</td><td colspan="2">Free text field, the usage of this field is based on the role setting.</td><td>STRING(40) , mandatory</td></tr>
<tr><td>role</td><td>user</td><td colspan="2">The user level; role code</td><td>CODE, mandatory</td></tr>
<tr><td>type</td><td>user</td><td colspan="2">User type, will be validated with the office type.<br>User type | Allowed office type<br>accountant | accountantinternal, accountantexternal, demo<br>accountantcustomer | accountantexternal, demo<br>regular | regular</td><td>ENUMERATION, mandatory:<br>- accountant<br>- accountantcustomer<br>- regular</td></tr>
<tr><td>demo</td><td>user</td><td colspan="2">Is the user for demonstration purposes, only valid on “accountants” environments.</td><td>BOOLEAN</td></tr>
<tr><td>nameview</td><td>user</td><td colspan="2">For internal use</td><td>ENUMERATION, mandatory:<br>- name (default)<br>- shortname</td></tr>
<tr><td>smslogin</td><td>user</td><td colspan="2">node</td><td>-</td></tr>
<tr><td>phonenumber</td><td>smslogin</td><td colspan="2">The (international) phone number to where the SMS authentication code will be send. The country code must always be supplied eg. 31612345678 for the Dutch phone number (06) 12345678</td><td>INTEGER</td></tr>
<tr><td>service</td><td>smslogin</td><td colspan="2">To enable authentication via a SMS code this value must be set.</td><td>FIXED VALUE: 2</td></tr>
<tr><td>support</td><td>user</td><td colspan="2">Has the user access to first line Twinfield support?</td><td>ENUMERATION:<br>- none (default)<br>- primary</td></tr>
<tr><td>exchangequota</td><td>user</td><td colspan="2">Twinfield Analysis quota in Kbytes (0 is unlimited)</td><td>INTEGER</td></tr>
<tr><td>filemanagerquota</td><td>user</td><td colspan="2">File manager quota in Mbytes</td><td>INTEGER</td></tr>
<tr><td>performance</td><td>user</td><td colspan="2">node</td><td>-</td></tr>
</table>

| Tag | Parent node | Description | Type definition |
|---|---|---|---|
| input | performance | node | - |
| choicefield | input | Use a finder and not a dropdown field. The default is: 0 (no limitation) | ENUMERATION:<br>- finder<br>- dropdown |
| @fromoff | | Attribute of the choicefield element; Number of lines when to use a finder and not a dropdown field. The default is: 0 (no limitation) | INTEGER |
| styleimages | input | Show or disable layout details in text fields | BOOLEAN, default = false |
| @fromoff | | Attribute of the styleimages element; Number of lines when to disable layout details in text fields. The default is: 0 (no limitation) | INTEGER |
| office | user | node | - |
| restricted | | Option “Access to all companies”, when this option is set to false the user has access to all companies; a list of offices is not required. | BOOLEAN |
| offices | office | node | - |
| office | offices | Office code | CODE |
| default | office | Office code; if this field is empty the user will be asked to select a company after the login. | CODE |
| template | office | Access to template companies | BOOLEAN |
| account | user | node | - |
| sso | account | Single Sign On; This option is only available when Single Sign On is enabled on the environment. | ENUMERATION:<br>- 0 (for disabled)<br>- 1 (for enabled)<br>- 2 (for required) |
| expire | accout | Date when the password expires. This option is not available when SingleSignOn (sso) is enabled or required | DATE |
| disable | account | node | - |
| from | disable | Start date/time when the account is disabled. | DATETIME |
| to | disable | End date/time when the account is disabled. | DATETIME |
| time | user | node | - |
| authoriser | time | User code for authorizing time transactions. | CODE |
| weekhours | time | Work hours per week | INTEGER |


the no. 1 in online accounting

| Tag | Parent node | Description | Type definition |
|---|---|---|---|
| expenses | user | node | - |
| dimension1 | expenses | Default GL account for posting hour journals | CODE |
| dimension2 | expenses | Default Cost Center for posting hour journals | CODE |
| dimension3 | expenses | Default project for posting hour journals | CODE |
| dimension4 | expenses | Default activity for posting hour journals | CODE |


the no. 1 in online accounting

**Example Xml**

This example adds the user EXAMPLE1 to Twinfield.

**Request**

```
<?xml version="1.0"?>
<user>
    <code>EXAMPLE1</code>
    <name>Example user 1</name>
    <shortname>Example user 01</shortname>
    <nameview>name</nameview>
    <type>regular</type>
    <demo>false</demo>
    <password>Example01</password>
    <language>NL</language>
    <email>example@example.com</email>
    <role>LVL1</role>
    <support>none</support>
    <exchangequota>0</exchangequota>
    <filemanagerquota>5</filemanagerquota>
    <freetext1></freetext1>
    <freetext2></freetext2>
    <freetext3></freetext3>
    <office>
        <default>0000</default>
        <template>false</template>
        <restricted>true</restricted>
        <offices>
            <office>0000</office>
        </offices>
    </office>
    <performance>
        <input>
            <choicefield fromoff="0">dropdown</choicefield>
            <styleimages fromoff="0">false</styleimages>
        </input>
    </performance>
</user>
```



the no. 1 in online accounting

**Response XML**

```
<user xmlns="" result="1" status="active">
  <code>EXAMPLE01</code>
  <name>Example user 01</name>
  <shortname>Example user 01</shortname>
  <nameview>name</nameview>
  <type>regular</type>
  <password>Example01</password>
  <language name="English" nativename="English">EN</language>
  <email>example@example.com</email>
  <role name="Level 1 - Eur 75,00"
     shortname="Level 1" level="2">LVL1</role>
  <support count="1" max="1">none</support>
  <exchangequota>0</exchangequota>
  <filemanagerquota>5</filemanagerquota>
  <freetext1 />
  <freetext2 />
  <freetext3 />
  <office>
    <default name="Webshop Example.com" shortname="">0000</default>
    <template>false</template>
    <restricted>true</restricted>
    <offices>
      <office name="Webshop Example.com" shortname="">0000</office>
    </offices>
  </office>
  <performance>
    <input>
      <choicefield fromoff="0">dropdown</choicefield>
      <styleimages fromoff="0">false</styleimages>
    </input>
  </performance>
  <phonenumber></phonenumber>
  <service locked="false" name="" price="0">
  </service>
  <user name="Supervisor" shortname="Supervisor">SUPER</user>
  <created>20081210133146</created>
  <touched>0</touched>
  <modified>20081210133146</modified>
  <smslogin>
    <phonenumber />
    <service locked="false" name="" price="0" />
    <services numberofservices="1">
      <service name="Exclusief" price="0.0800">2</service>
    </services>
  </smslogin>
  <account locked="false" lastlogon="" failedlogons="0">
    <sso />
    <expire />
    <disable>
      <from />
      <to />
    </disable>
  </account>
  <time locked="false">
    <authoriser name="" shortname="" />
```

```
    <weekhours />
  </time>
  <expenses locked="false" numberofdimension="4">
    <dimension1 dimensiontype="" />
    <dimension2 dimensiontype="" />
    <dimension3 dimensiontype="" />
    <dimension4 dimensiontype="" />
  </expenses>
</user>
```

## User actions

This chapter describes the methods to delete, modify or reads the user settings of an existing user in Twinfield. A deleted user will remain in the Twinfield environment for audit purposes. The user actions are only valid for existing users.

**Description of the dimension actions elements**

| Tag | Parent node | Description | Type definition |
|---|---|---|---|
| users | - | root node | - (optional) |
| user | users | node | - |
| status | attribute of user | Delete a user in Twinfield. When a user is deleted you can re-enable the user by setting the status to “active”. | ENUMERATION:<br>- deleted<br>- active |
| code | user | Dimension code, must be compliant with the mask in the Dimension type | CODE, mandatory |
| deletereason | user | node | Mandatory when the action is “deleted” |
| code | deletereason | If you delete an user you must specify the reason why the user will be deleted. | ENUMERATION:<br>- other<br>- functionality<br>- pricing<br>- service<br>- externalinternal<br>- notoperative<br>- userfriendliness |
| comment | deletereason | Brief description why the user will be deleted. | STRING(1000), Mandatory when the “delete reason code” is “other” |


the no. 1 in online accounting

**Example**

This example deletes user EXAMPLE01, re-enables customer EXAMPLE02.

**Xml**

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<users>
  <user status="deleted"> <!-- Delete user: EXAMPLE01 -->
    <code>EXAMPLE01</code>
    <deletereason>
        <code>other</code>
        <comment>The user will be deleted</comment>
    </deletereason>
  </user>
  <user status="active"> <!-- Save/re-enables user: EXAMPLE02 -->
    <code>EXAMPLE02</code>
  </user>
</users>
```

This example describes how to change the user role from e.g. Service Desk (SD) to Level 1 (LVL1).

**Xml**

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<users>
  <user>
    <code>EXAMPLE01</code>
    <role>LVL1</role>
  </user>
</users>
```



the no. 1 in online accounting

This example describes how to change the user password to Example2009.

**Xml**

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<users>
  <user>
    <code>EXAMPLE01</code>
    <password>Example2009</password>
  </user>
</users>
```

This example describes how to give the user access to office 0000 and 0001

**Xml**

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<users>
  <user>
    <code>EXAMPLE01</code>
    <office>
        <offices>
            <office>0000</office>
            <office>0001</office>
        </offices>
    </office>
  </user>
</users>
```

This example describes how to give the user access to office 0000 only

**Xml**

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<users>
  <user>
    <code>EXAMPLE01</code>
    <office>
        <offices>
            <office>0000</office>
        </offices>
    </office>
  </user>
</users>
```

**Read user settings**

This example reads the user settings of user EXAMPLE.

```
<?xml version="1.0"?>
<read>
   <type>user</type>
   <code>EXAMPLE</code>
</read>
```



the no. 1 in online accounting