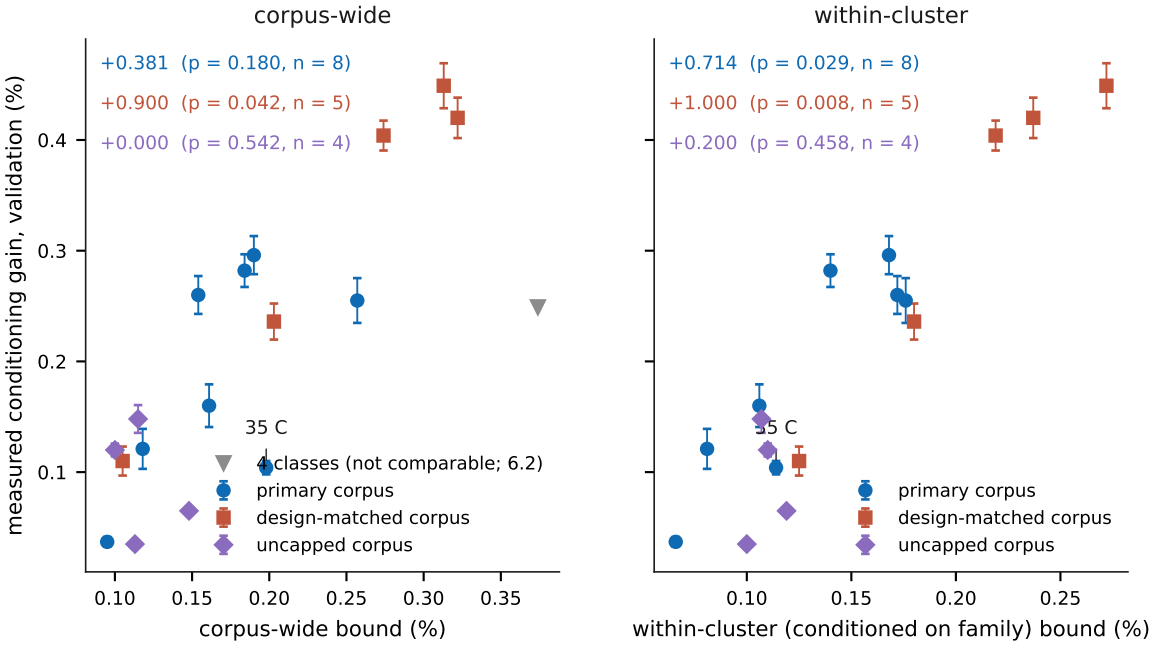

Spearman and exact permutation p, computed over each corpus's own thresholds; error bars are one standard deviation of the shuffle spread. Conditioning on family rescues the statistic on the two species-balanced corpora and not on the unselected one, where it is anti-correlated with measured gain (5.2d).