

LABORATORY OBSERVATION

Course: Full Stack Web Development

Course Code: 23CM4121

Experiment No.: 4

Student Name: D.Somya

Roll No.: A24126552258

Date: 31-08-2026

1. TITLE

Development of a Simple To-Do List using JavaScript ES6 Inheritance

2. AIM

To build an interactive To-Do List web application utilizing JavaScript ES6 class inheritance, object instantiation, and dynamic DOM manipulation for adding, completing, and deleting tasks.

3. OBJECTIVE

The objectives of this experiment are:

- To utilize ES6 `extends` and `super()` keywords for class inheritance.
 - To implement methods within classes to generate dynamic HTML markup.
 - To handle interactive events and manipulate specific DOM elements by ID dynamically.
 - To implement state-driven UI updates based on container contents (e.g., checking if empty).
-

4. THEORY

Class inheritance in ES6 allows a class (Child) to inherit properties and methods from another class (Parent) using the `extends` keyword. The `super()` method is called in the child's constructor to execute the parent's constructor.

Dynamic DOM interactions involve adding new nodes, modifying styles inline (e.g., strikethrough for completed tasks), and removing nodes entirely from the document flow using the `remove()` method.

5. ALGORITHM / PROCEDURE

1. Define a base `Task` class with generic ID and text properties.
 2. Define a `WebTask` class that extends `Task`, adding a method to return HTML markup.
 3. Create an HTML input layout and an empty container for the task list.
 4. Maintain a global counter to assign unique IDs to each new task instance.
 5. On 'Add Task', instantiate `WebTask`, append its HTML to the list, and update the counter.
 6. Implement a 'Complete' function that finds the task text by ID and applies text-decoration styling.
 7. Implement a 'Delete' function that completely removes the specific task element using `remove()`.
 8. Implement a helper function to toggle an empty state message if the list is empty.
-

6. PROGRAM

Source File: task3.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>My To-Do List</title>
  <link rel="stylesheet" href="task3.css">
</head>
<body>

  <h1>My To-Do List</h1>

  <!-- Input and Add Button -->
  <div class="input-container">
    <input type="text" id="taskInput" placeholder="Enter a task.....">
    <button id="addTaskBtn">Add Task</button>
  </div>

  <!-- Empty Message State -->
  <p id="emptyMessage" class="empty-message">No tasks available.</p>

  <!-- Dynamic Task List -->
  <ul id="taskList"></ul>

  <!-- Link External JavaScript -->
  <script src="task3.js"></script>
</body>
</html>
```

7. CODE EXPLANATION

Code / Syntax	Explanation
class WebTask extends Task	Defines a child class inheriting from the Parent Task class.
super(id, text)	Calls the constructor of the Parent class to initialize shared properties.
element.innerHTML += ...	Appends new HTML content to the existing content of a container.
element.style.textDecoration	Dynamically modifies inline CSS to apply strikethrough styles.
element.remove()	Removes the specific HTML element from the DOM entirely.


8. TEST CASES AND EXECUTION DATA

The experiment was executed with the following test cases to verify functionality:

Test Case	Input / Action	Expected Result	Actual Result	Status
TC-01	Add Task	Input text and click Add	Task renders dynamically in the list	Pass
TC-02	Complete Task	Click Complete on a task	Text is crossed out (strikethrough)	Pass
TC-03	Delete Task	Click Delete on a task	Task is entirely removed from the page	Pass
TC-04	Empty State	Delete all tasks	'No tasks available' message reappears	Pass

9. OUTPUT

Output 1

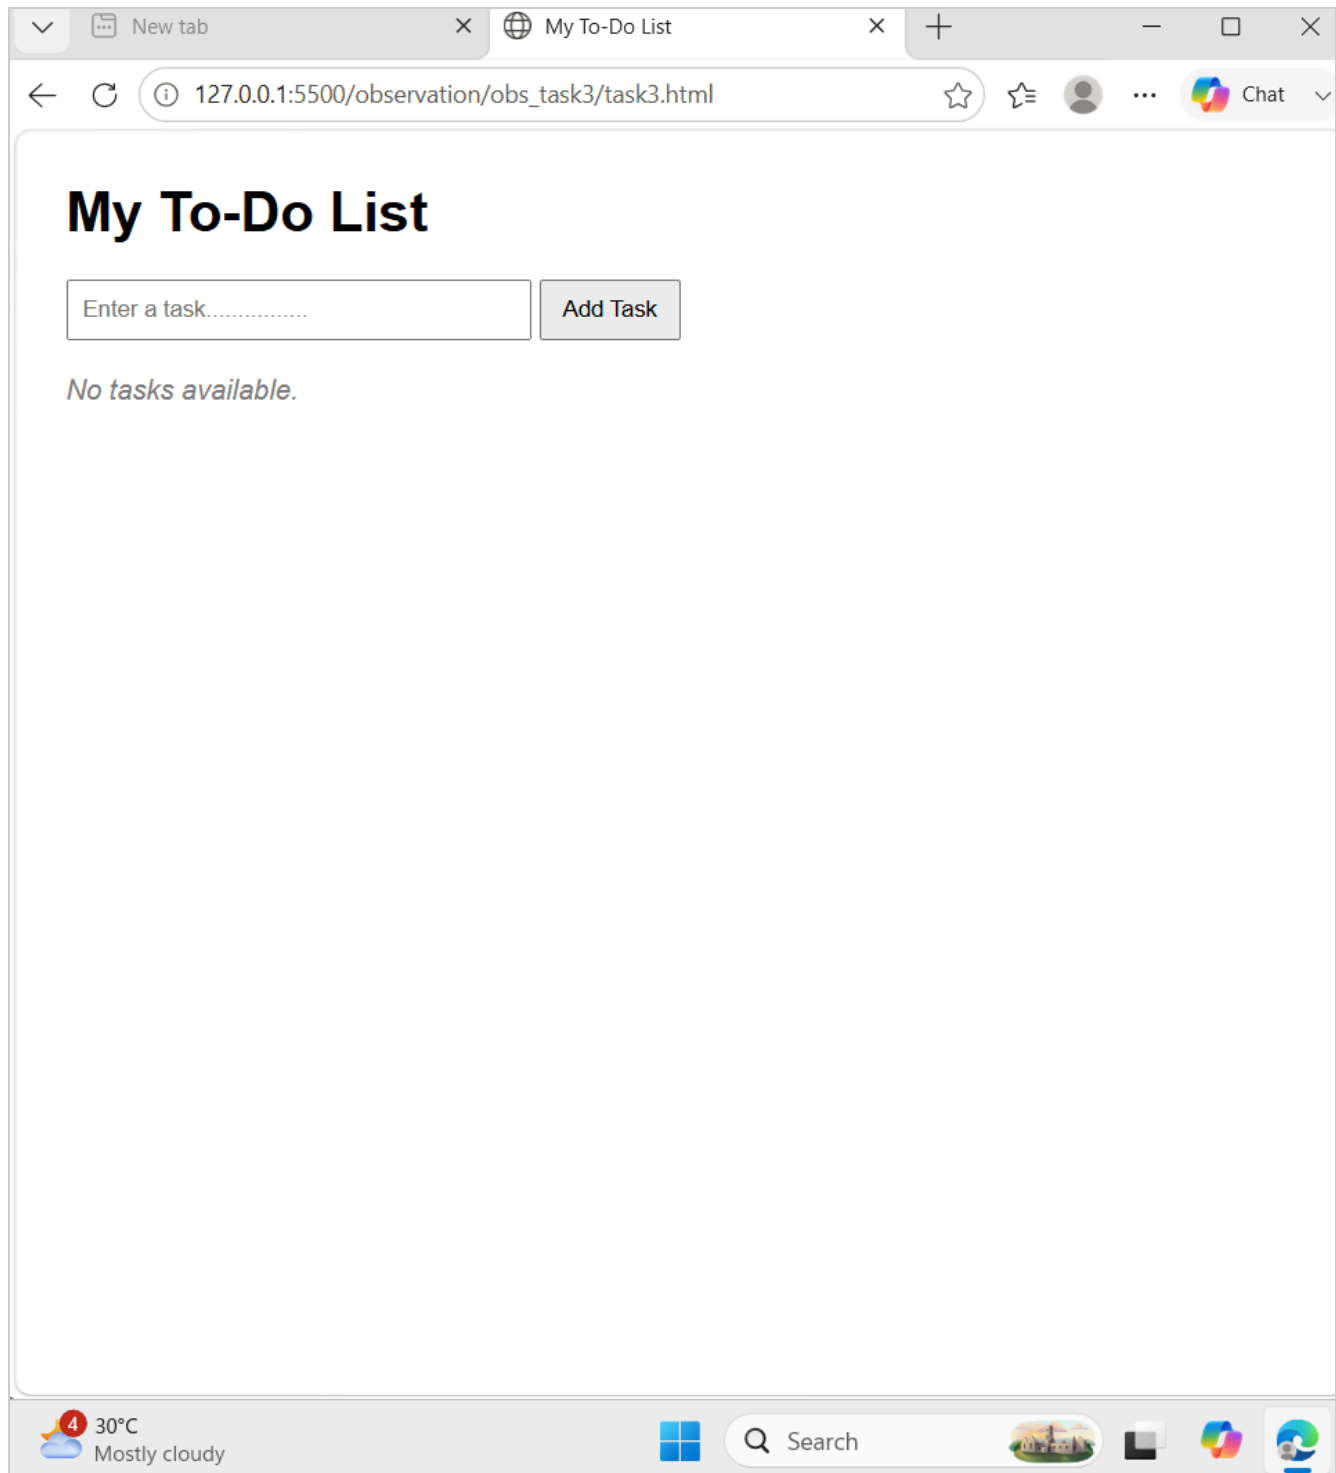

10. RESULT

Thus, the To-Do list application utilizing JavaScript ES6 class inheritance and advanced DOM manipulation was successfully implemented and verified.