



Mongo DB Installed

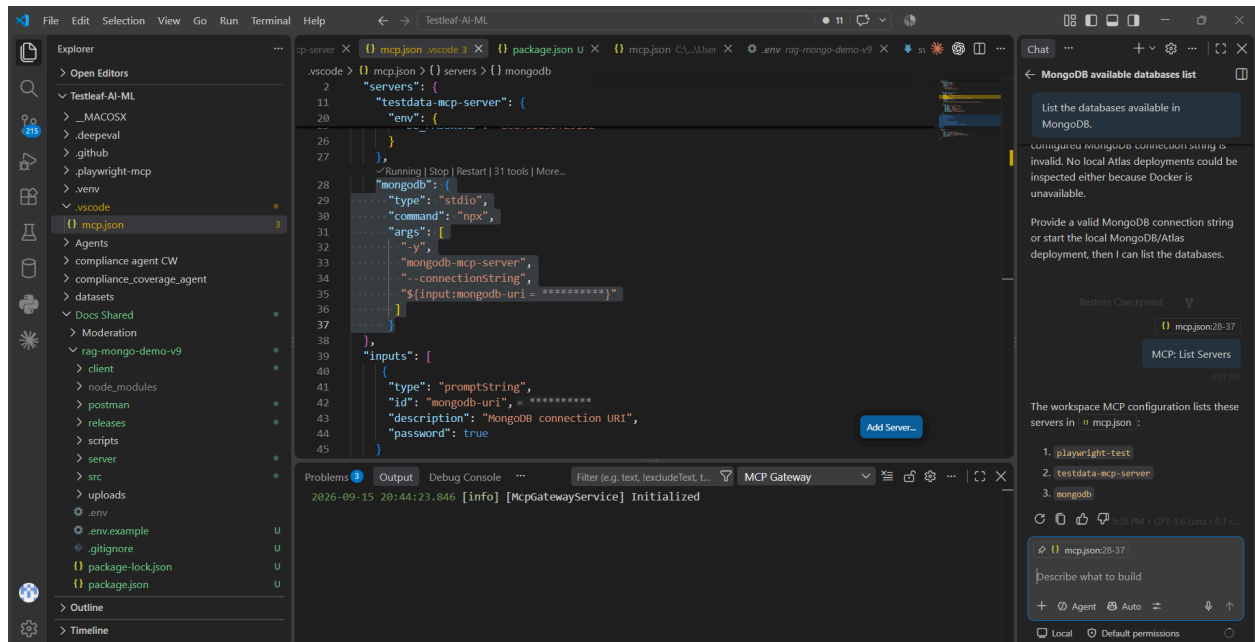

Database

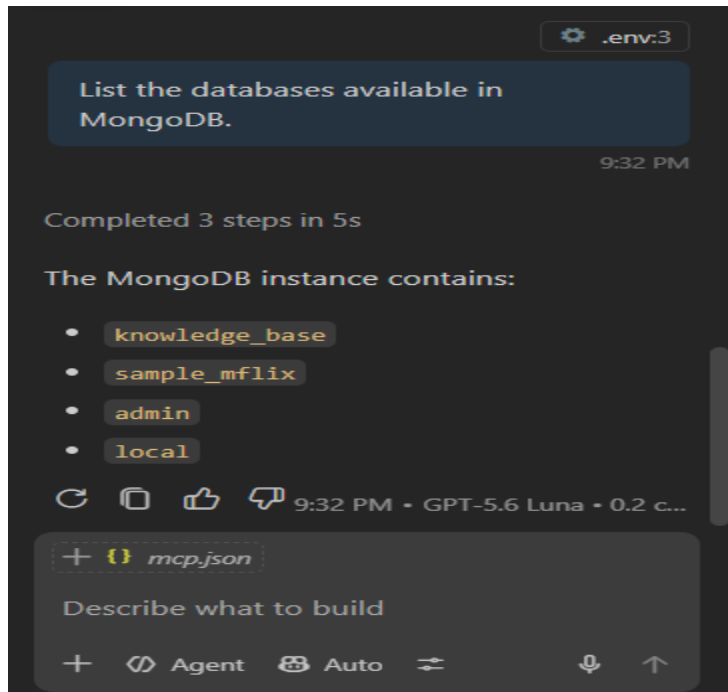

Search

Check whether any vector search indexes exist in the knowledge_base database.

Completed 7 steps in 23s

Yes. The `knowledge_base` database has two vector search indexes, both `READY` and queryable:

- `gdpr.vector_index_gdpr`
 - Vector field: `embedding`
 - Dimensions: `1024`
 - Similarity: `cosine`
 - Filters: `metadata.standard`, `metadata.clauseId`
- `eu.vector_index_eu`
 - Vector field: `embedding`
 - Dimensions: `1024`
 - Similarity: `cosine`
 - Filters: `metadata.standard`, `metadata.clauseId`

Show the first 5 documents from the gdpr collection in knowledge_base.

The first five documents in `knowledge_base.gdpr` are:

1. **Art. 1 GDPR — Subject-matter and objectives**
 - Defines rules for protecting natural persons during personal-data processing.
 - Protects fundamental rights, freedoms, and free movement of personal data.
 - Source: <https://gdpr-info.eu/art-1-gdpr/>
2. **Art. 2 GDPR — Material scope**
 - Defines when the GDPR applies to automated and filing-system processing.
 - Lists exclusions, including purely personal activities and certain law-enforcement activities.
 - Source: <https://gdpr-info.eu/art-2-gdpr/>
3. **Art. 3 GDPR — Territorial scope**
 - Covers processing connected to establishments in the Union.
 - Applies to certain processing of people in the Union by organizations outside the Union.
 - Source: <https://gdpr-info.eu/art-3-gdpr/>
4. **Art. 4 GDPR — Definitions**
 - Defines terms including personal data, processing, profiling, pseudonymisation, and filing system.
 - Source: <https://gdpr-info.eu/art-4-gdpr/>
5. **Art. 5 GDPR — Principles relating to processing of personal data**
 - Covers lawfulness, fairness, transparency, purpose limitation, data minimisation, accuracy, storage limitation, and integrity/confidentiality.
 - Source: <https://gdpr-info.eu/art-5-gdpr/>

+ ⚙️ .env

Describe what to build

+ 🔗 Agent 🗄️ Auto ↔️

⬇️ ⬆️

CRUD OPERATION

1. Create

Prompt:

Using the MongoDB MCP server, create a collection named `mcp_test` in the `test` database. Insert this document:

```
{
  "name": "MCP CRUD Test",
  "status": "created",
  "priority": "high",
  "createdBy": "VS Code MCP"
}
```

Return the inserted document ID.

Output

Restore Checkpoint · 

Using the MongoDB MCP server, create a collection named `mcp_test` in the `test` database. Insert this document:

```
{
  "name": "MCP CRUD Test",
  "status": "created",
  "priority": "high",
  "createdBy": "VS Code MCP"
}
```

Return the inserted document ID.

Completed 5 steps in 14s

Created the `test.mcp_test` collection and inserted the document successfully.

Inserted document ID: `6aa96e86decf45cfcfce97b`



The screenshot displays the Databricks Data Explorer interface. On the left, the 'Data Explorer' sidebar shows the 'mcp_test' table selected under the 'test' cluster. The main area shows the table's schema and data. The table has five columns: '_id' (ObjectID), 'name' (String), 'status' (String), 'priority' (String), and 'createdBy' (String). A single row of data is visible, with values: '1', 'ObjectID('6aa96a86decf45c...', 'MCP CRUD Test', 'created', 'high', and 'VS Code MCP'.

_id	ObjectID	name	String	status	String	priority	String	createdBy	String
1	ObjectID('6aa96a86decf45c...)	MCP CRUD Test		created		high		VS Code MCP	

2. UPDATE

Using the MongoDB MCP server, update the document in test.mcp_test where name is "MCP CRUD Test".


Change status to "updated" and priority to "medium".

Return the updated document.

Completed 5 steps in 15s

Updated the document successfully:

```
{
  "_id": "6aa96e86decf45cfcceb97b",
  "name": "MCP CRUD Test",
  "status": "updated",
  "priority": "medium",
  "createdBy": "VS Code MCP"
}
```



+ .env

Describe what to build

+ Agent Auto



ORGANIZATION
Sona's Org - 2026-08...

PROJECT
Project 0

Compare tiers

?

S

Data Explorer

() My Queries

🏠 Data Modeling

CLUSTERS (1)

Search clusters

Cluster0

- admin
- knowledge_base
- local
- sample_mflix
- test
 - mcp_test

mcp_test

+

Cluster0 > test > mcp_test

View monitoring

Visualize Your Data

Documents 1

Aggregations

Schema

Indexes 1

Validation

Type a query: { field: 'value' } or [Generate query](#)

Explain

Reset

Find

Options

ADD DATA

BULK

EXPORT CODE

25

1 - 1 of 1

	_id ObjectId	name String	status String	priority String	createdBy String	
1	ObjectId('6aa96e86decf45c...	"MCP CRUD Test"	"created"	"high"	"VS Code MCP"	

Alert System Status: All Good

©2026 MongoDB, Inc. Status Terms Privacy Atlas Blog Contact Sales

3. READ

Using the MongoDB MCP server, find all documents in test.mcp_test where name is "MCP CRUD Test".

Completed 3 steps in 7s

Found 1 matching document in test.mcp_test:

```
{
  "_id": "6aa96e86decf45cfcfceb97b",
  "name": "MCP CRUD Test",
  "status": "updated",
  "priority": "medium",
  "createdBy": "VS Code MCP"
}
```

🔄 📄 👍 🗑️

+ ⚙️ .env

Describe what to build

+ 🛠️ Agent 🤖 Auto ⚙️

⬇️ ⬆️

4. DELETE

Before Deletion: Confirmation Dialog

Using the MongoDB MCP server, delete the document from test.mcp_test where name is "MCP CRUD Test".
Confirm how many documents were deleted.

I'll delete the document matching `name: "MCP CRUD Test"` from `test.mcp_test` and report MongoDB's deletion count.

Waiting for the user's response – mongodb (MCP Server)

You are about to delete documents from the `mcp_test` collection in the `test` database:

- Filter: `{ "filter": { "name": "MCP CRUD Test" } }`

This operation will permanently remove all documents matching the filter.
Do you confirm the execution of the action?

Would you like to confirm? *

Would you like to confirm?

1 Yes
Yes, I confirm


2 No
No, I do not confirm

Ctrl+Enter to submit [Submit](#)

Using the MongoDB MCP server, delete the document from test.mcp_test where name is "MCP CRUD Test".
Confirm how many documents were deleted.

Completed 4 steps in 6s

Deleted 1 document from `test.mcp_test`.

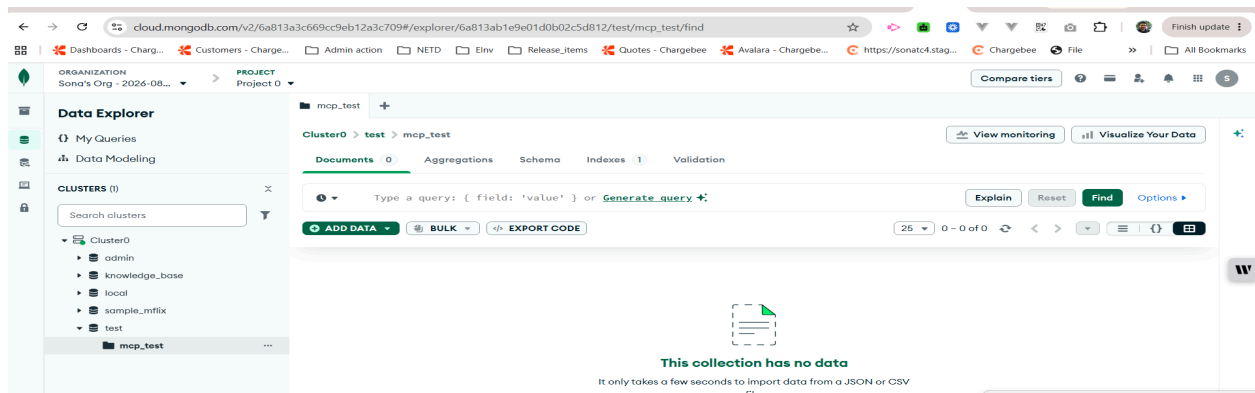

Using the MongoDB MCP server, count documents in test.mcp_test where name is "MCP CRUD Test".

Completed 3 steps in 13s

There are 0 documents in `test.mcp_test` where `name` is `MCP CRUD Test`.

+ `.env`

Describe what to build

+ Agent Auto