

UI Implementation of Swagger API Agent

Petstore JSON URL read: <https://petstore3.swagger.io/api/v3/openapi.json>

Step 1: Raw OpenAPI URL → import → endpoint discovery

The screenshot displays the Swagger API Agent interface, which is used for API verification. The main workspace is titled "Make every endpoint provable." and shows a list of 19 operations from the Swagger Petstore API. The operations are categorized by HTTP method (GET, POST, DELETE) and include a brief description of each endpoint. The "Target environment" panel on the right allows users to configure the environment for testing, including the environment name, base URL, and authentication details. The "Evidence desk" at the bottom provides a summary of the verification results, including a "Run overview" and a "Generated suite" of tests.

Operation explorer

Method	Endpoint	Description	Status
POST	/pet	Update an existing pet.	OK
POST	/pet	Add a new pet to the store.	OK
GET	/pet/findByStatus	Find pets by status.	OK
GET	/pet/findByTags	Find pets by tags.	OK
GET	/pet/{petId}	Find pet by ID.	OK
POST	/pet/{petId}	Update a pet in the store with form data.	OK
DELETE	/pet/{petId}	Deletes a pet.	OK
POST	/pet/{petId}/uploadImage	Uploads an image.	OK
GET	/store/inventory	Returns pet inventories by status.	OK
POST	/store/order	Place an order for a pet.	OK
GET	/store/order/{orderId}	Find purchase order by ID.	OK
DELETE	/store/order/{orderId}	Cancel purchase order by ID.	OK
POST	/user	Create user.	OK
POST	/user/createWithList	Creates list of users with given input array.	OK
GET	/user/login	Log user into the system.	OK
GET	/user/logout	Log out current logged in user session.	OK
GET	/user/{username}	Get user by user name.	OK
PUT	/user/{username}	Update user resource.	OK
DELETE	/user/{username}	Delete user resource.	OK

Target environment

Where should checks be sent?

Environment name: local

Base URL: https://petstore3.swagger.io/api/v3

Authentication: Bearer token

Token / key value: *****

Evidence desk

Run overview | Generated suite | Payload preview

Your run report will land here

Every response is grouped by endpoint, method, and tag as the useful signal steps show.

Step 2:

03

Target environment

Where should checks be sent?

Environment name

Base URL



Authentication

Bearer token

▼

Token / key value

.....

✓

 Update environment

Step 3: Plan the execution

EXECUTION CONTROL

Turn selection into evidence

☒ negative

☒ auth

☒ boundary

Plan run

▶ Run now

23 test cases ready in plan 23db510e...

Step 4: execute APIs → schema validation → negative/boundary checks

04 / REVIEW

Evidence desk

Generate Playwright suite

Run overview | Generated suite | Payload preview

State	Total	Passed	Failed
Running	23	6	5

✓ updatePet
updatePethappy

200 888ms

✗ updatePet
updatePetvalidation

400 · 422 1014ms

Review failure for Jira

REQUEST

```
{
  "method": "PUT",
  "url": "https://petstore3.swagger.io/api/v3/pet",
  "headers": {
    "authorization": "[REDACTED]",
    "content-type": "application/json"
  },
  "body": {
    "id": 10,
    "category": {
      "id": 1,

```

RESPONSE · 200


```
{
  "body": {
    "id": 10,
    "category": {
      "id": 1,
      "name": "Dogs"
    },
    "photoUrls": [
      "example"
    ],
    "tags": [

```


✓ addPet
addPethappy

200 1118ms

Step 5: Create the bug for the failed case

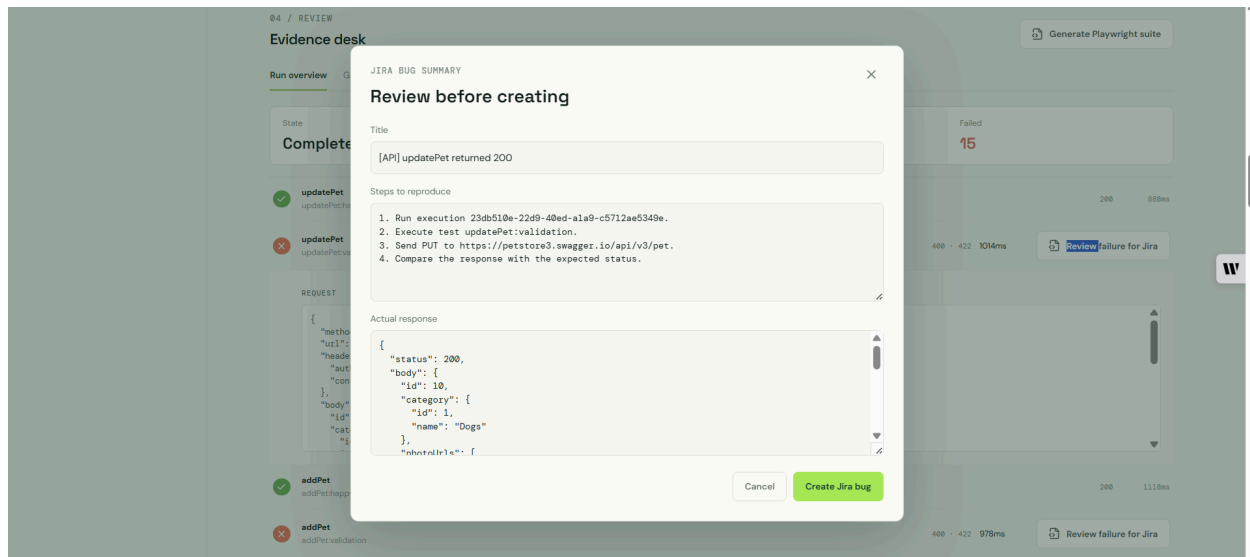

Step 6: Generate the Automation Suite

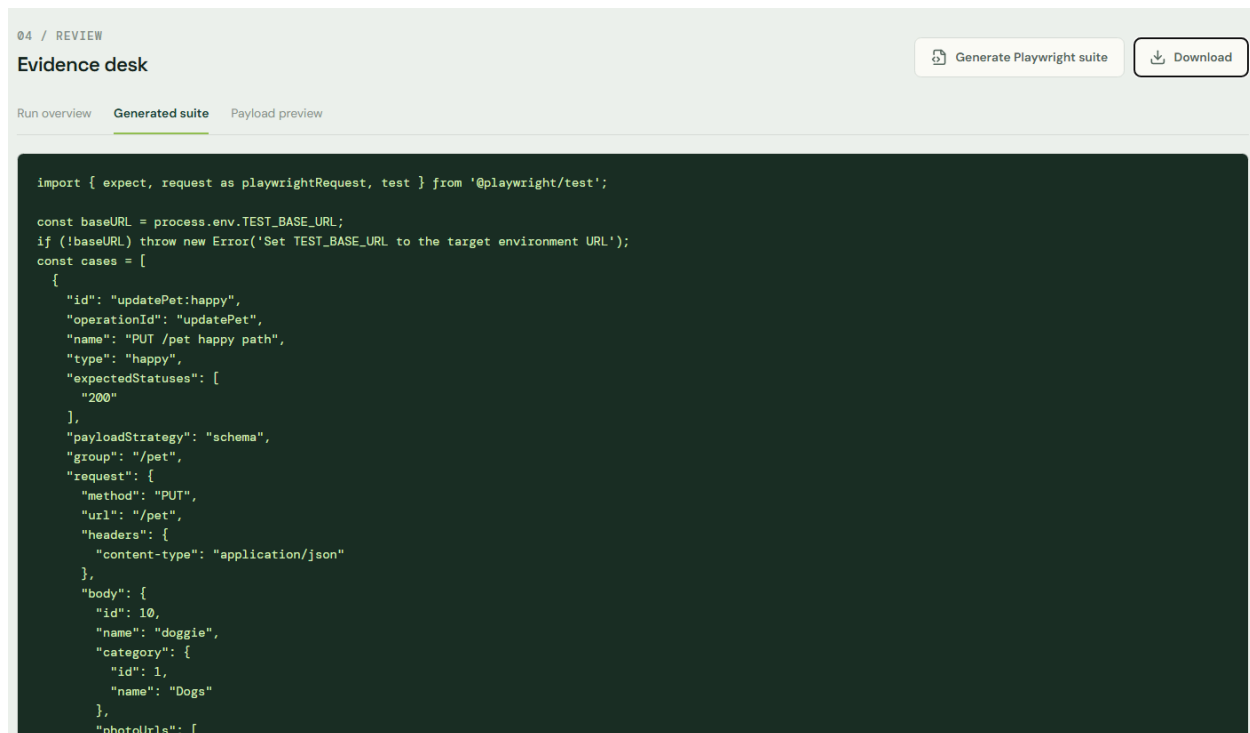

Via: Json

swaggerai

API VERIFICATION WORKSPACE

service connected

98

WORKSPACE

Customer Demo

API

active project

01

Import spec

Import another specification

02

Configure

Environment & credentials

03

Plan & run

Choose checks to execute

04

Review

Inspect the run report

API WORKSPACE / CUSTOMER DEMO API

Make every endpoint **provable**.

Reset

Run checks

Run queued. Live results will appear here.

02

Operation explorer

Select the surface you want to verify.

1 operations

GET

/customers/{id}

Get a customer by ID

Customers

1 selected

Clear selection

03

Target environment

Where should checks be sent?

Environment name

local

Base URL

http://127.0.0.1:8081

Authentication

Bearer token

Token / key value

Update environment

EXECUTION CONTROL

Turn selection into evidence

negative

auth

boundary

Plan run

Run now

Plan a run to preview the checks before they touch your API.

04 / REVIEW

Evidence desk

Generate Playwright suite

Run overview

Generated suite

Payload preview

State

Total

Passed

Failed

Completed

2

2

0

getCustomer

getCustomerhappy

200

18ms

REQUEST

RESPONSE - 200

RESPONSE

401

2/2

latest checks passed

Service settings

Swagger AI Agent

Contract-first verification for teams who like receipts.

Via YAML

swaggerai

API VERIFICATION WORKSPACE

service connected

98

WORKSPACE

Customer Demo

API

active project

01

Import spec

Import another specification

02

Configure

Environment & credentials

03

Plan & run

Choose checks to execute

04

Review

Inspect the run report

API WORKSPACE / CUSTOMER DEMO API

Make every endpoint **provable.**

Reset

Run checks

Run queued. Live results will appear here.

02

Operation explorer

Select the surface you want to verify.

1 operations

GET

/customers/{id}

Get a customer by ID

Customers

Clear selection

1 selected

03

Target environment

Where should checks be sent?

Environment name

local

Base URL

http://127.0.0.1:8081

Authentication

Bearer token

Token / key value

Update environment

EXECUTION CONTROL

Turn selection into evidence

negative

auth

boundary

Plan run

Run now

Plan a run to preview the checks before they touch your API.

04 / REVIEW

Evidence desk

Generate Playwright suite

Run overview

Generated suite

Payload preview

State

Total

Passed

Failed

Completed

2

2

0

getCustomer

getCustomerhappy

200

8ms

REQUEST

RESPONSE - 200

```
{
  "method": "GET",
  "url": "http://127.0.0.1:8081/customers/123",
  "headers": {
    "authorization": "[REDACTED]"
  }
}
```

```
{
  "body": {
    "id": "123",
    "name": "Ada"
  },
  "headers": {
    "x-powered-by": "Express",
    "content-type": "application/json; charset=utf-8",
    "content-length": "25",
    "etag": "W/\"19-OzqjeH07UQb6TljzcofZ4huIA\"",
    "date": "Sun, 13 Sep 2026 11:50:18 GMT",
    "connection": "close"
  }
}
```

getCustomer

getCustomerauth

401

8ms

REQUEST

RESPONSE - 401

```
{
  "method": "GET",
  "url": "http://127.0.0.1:8081/customers/123",
  "headers": {}
}
```

```
{
  "body": {
    "error": "Unauthorized"
  },
  "headers": {
    "x-powered-by": "Express",
    "content-type": "application/json; charset=utf-8",
    "content-length": "24",
    "etag": "W/\"18-XP0V8b6Nk4Yl/PADG4jYM4sI\"",
    "date": "Sun, 13 Sep 2026 11:50:18 GMT",
    "connection": "close"
  }
}
```

2/2

latest checks passed

Service settings

Swagger AI Agent

Contract-first verification for teams who like receipts.

Via Upload File:

swaggerai

API VERIFICATION WORKSPACE

service connected

56

WORKSPACE

Swagger Agent Upload Test API

active project

01 Import spec

Import another specification

02 Configure

Environment & credentials

03 Plan & run

Choose checks to execute

04 Review

Inspect the run report

API WORKSPACE / SWAGGER AGENT UPLOAD TEST API

Reset

Run checks

Make every endpoint **provable**.

Import a contract, configure a target, and turn your OpenAPI document into an executable verification plan.

Run queued. Live results will appear here.

02 Operation explorer

Select the surface you want to verify.

2 operations

GET /pet/findByStatus

Find pets by status

default

GET /pet/{petId}

Find pet by ID

default

2 selected

Clear selection

03 Target environment

Where should checks be sent?

Environment name

local

Base URL

https://petstore3.swagger.io/api/v3

Authentication

Bearer token

Token / key value

Update environment

EXECUTION CONTROL

Turn selection into evidence

negative

auth

boundary

Plan run

Run now

Retry failed cases

Plan a run to preview the checks before they touch your API.

04 / REVIEW

Evidence desk

Generate Playwright suite

Run overview

Generated suite

Payload preview

State

Total

Passed

Failed

Completed

2

1

1

findPetsByStatus

findPetsByStatushappy

200

1920ms

REQUEST

RESPONSE · 200

{ "method": "GET", "url": "https://petstore3.swagger.io/api/v3/pet/findByStatus?status=available", "headers": { "authorization": "[REDACTED]" } }

{ "body": { "id": 35928647, "name": "regression-35928647", "photoUrls": ["https://example.invalid/pet.png"], "tags": [], "status": "available" }, "headers": { "date": "Sun, 13 Sep 2026 11:55:53 GMT", "content-type": "application/xml", "content-length": "13", "connection": "close", "access-control-allow-origin": "*", "access-control-allow-methods": "GET, POST, DELETE, PUT", "access-control-allow-headers": "Content-Type, api_key, Authorization", "access-control-expose-headers": "Content-Disposition", "x-swagger-api-version": "3.0" } }

getPetById

getPetByIdhappy

200

1180ms

REQUEST

RESPONSE · 404

{ "method": "GET", "url": "https://petstore3.swagger.io/api/v3/pet/1", "headers": { "authorization": "[REDACTED]" } }

{ "body": "Pet not found", "headers": { "date": "Sun, 13 Sep 2026 11:55:53 GMT", "content-type": "application/xml", "content-length": "13", "connection": "close", "access-control-allow-origin": "*", "access-control-allow-methods": "GET, POST, DELETE, PUT", "access-control-allow-headers": "Content-Type, api_key, Authorization", "access-control-expose-headers": "Content-Disposition", "x-swagger-api-version": "3.0" } }

1/2

latest checks passed

Service settings

Swagger AI Agent · Contract-first verification for teams who like receipts.