

### QUESTION-1

#### PROGRAM

```
#include <stdio.h>

int main( )
{
    char wd[100], chtr;
    int i=0;
    printf("enter text \n");
    while(chtr != '\n')
    {
        chtr = getchar();
        wd[i] = chtr;
        i++;
    }
    printf("\n%s\n", wd);
}
```

### QUESTION-2

#### PROGRAM:

```
#include <stdio.h>

int main( )
{
    char wd[100], chtr;
    int i=0;
    char st[50];
    printf("enter text \n");
    fgets(st, 50 , stdin);
    puts( st);
}
```

```
}
```

OUTPUT:-

```
enter text
RAM IS A GOOD BOY
RAM IS A GOOD BOY
```

3.(A)

```
#include<stdio.h>

#include <string.h>

int main(){

char str[20];

printf("Enter string: ");

gets(str);

printf("String is: %s",str);

printf("\nLower String is: %s",strlwr(str));

return 0;

}
```

OUTPUT:-

```
Enter string: PROGRAMMING
String is: PROGRAMMING
Lower String is: programming
-----
Process exited after 6.393 seconds with r
```

(B).

```
#include<stdio.h>


#include <string.h>

int main(){

char str[20];
```

```
printf("Enter string: ");  
  
gets(str);  
  
printf("String is: %s",str);  
  
printf("\nLower String is: %s",strupr(str));  
  
return 0;  
  
}
```

#### OUTPUT:-

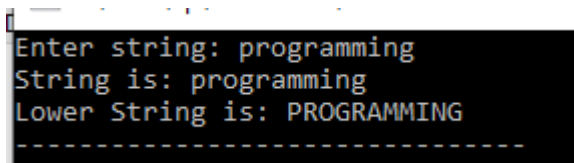

```
Enter string: programming  
String is: programming  
Lower String is: PROGRAMMING  
-----
```

#### (C).

```
#include <stdio.h>  
  
int main()  
{  
  
    char  str[100];  
  
    int   counter;  
  
  
    printf("Enter a string: ");  
  
    gets(str);  
  
    for(counter=0;str[counter]!=NULL;counter++)  
    {  
  
        if(str[counter]>='A' && str[counter]<='Z')  
            str[counter]=str[counter]+32;  
  
        else if(str[counter]>='a' && str[counter]<='z')  
            str[counter]=str[counter]-32;  
  
    }  
  
    printf("String after toggle each characters: %s",str);  
  
    return 0;  
}
```

```
}
```

#### OUTPUT:-

```
Enter a string: proGRAMmInG
String after toggle each characters: PROgraMMiNg
-----
Process exited after 12.49 seconds with return value
Press any key to continue . . .
```

#### (D).


PROGRAM:-

```
#include<stdio.h>

int main()
{
    char s[100];int i=0;
    printf("Enter a sentence :\n");
    gets(s);
    for(i=0;s[i]!='.' && i<100;i++)
    {
        if(i==0){
            if(s[i]>=97&&s[i]<=122){
                s[i]-=32;
            }
        }
        else{
            if(s[i]>=65&&s[i]<=90)
            {
                s[i]+=32;
            }
        }
    }
}
```

```
printf("\n%s",s);  
  
return 0;  
  
}
```

OUTPUT:-

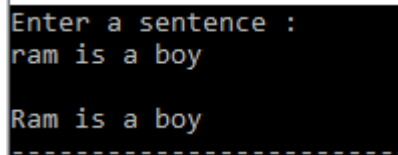

```
Enter a sentence :  
ram is a boy  
  
Ram is a boy  
-----
```

#### 4. Without String Handling Functions

PROGRAM:-

```
#include<stdio.h>  
  
#include<string.h>  
  
void concat(char[], char[]);  
  
int main() {  
  
    char s1[50], s2[30];  
  
    printf("\nEnter String 1 :");  
  
    gets(s1);  
  
    printf("\nEnter String 2 :");  
  
    gets(s2);  
  
    concat(s1, s2);  
  
    printf("\nConcatated string is :%s", s1);  
  
    return (0);  
  
}  
  
void concat(char s1[], char s2[]) {  
  
    int i, j;  
  
    i = strlen(s1);  
  
    for (j = 0; s2[j] != '\0'; i++, j++) {  
  
        s1[i] = s2[j];  

```

```

    }

    s1[i] = '\0';
}

```

OUTPUT:-

```

Enter String 1 :PROGRAMMING
Enter String 2 :LANGUAGE
Concated string is :PROGRAMMINGLANGUAGE
-----

```

### With String Handling Functions

PROGRAM:-

```

#include<stdio.h>

#include <string.h>

int main(){

char ch[10]={'P','R','O','G','R','A','M','I','N','G','\0'};

char ch2[10]={'L','A','N','G','U','A','G','E','\0'};

strcat(ch,ch2);

printf("Value of first string is: %s",ch);

return 0;

}

```

OUTPUT:-

```

Enter String 1 :PROGRAMMING
Enter String 2 :LANGUAGE
Concated string is :PROGRAMMINGLANGUAGE
-----

```

### 5. With String Handling Functions

PROGRAM:-

```

#include<stdio.h>

```

```

#include <string.h>

int main(){

char str[20];

printf("Enter string: ");

printf("String is: %s",str);


printf("\nReverse String is: %s",strrev(str));

return 0;

}

```

OUTPUT:-

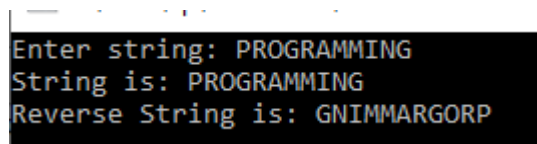

```

Enter string: PROGRAMMING
String is: PROGRAMMING
Reverse String is: GNIMMARGORP

```

### Without String Handling Functions

PROGRAM:-

```

#include <stdio.h>

int main()

{

char s[1000], r[1000];

int begin, end, count = 0;


printf("Input a string\n");

gets(s);


while (s[count] != '\0')

count++;


end = count - 1;

```

```

for (begin = 0; begin < count; begin++) {

    r[begin] = s[end];

    end--;

}


r[begin] = '\0';

printf("%s\n", r);

return 0;
}

```

OUTPUT:-

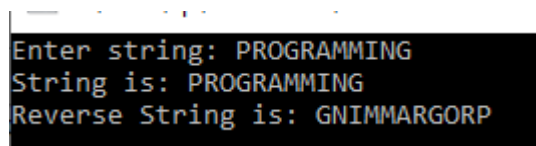

```

Enter string: PROGRAMMING
String is: PROGRAMMING
Reverse String is: GNIMMARGORP

```

## QUESTION-6

### Without String Handling Functions

PROGRAM:-

```

#include <stdio.h>

int main()
{
    char str1[100], str2[100];

    int m,n, i = 0;

    printf("Input the string : ");

    fgets(str1, 100, stdin);

    printf("Input start position :");

```



```
scanf("%d", &m);
```

```
printf("Input the length of substring :");
```

```
scanf("%d", &n);
```

```
while (i < n)
```

```
{
```

```
    str2[i] = str1[m+i-1];
```

```
    i++;
```

```
}
```

```
str2[i] = '\0';
```

```
printf("substring is %s", str2);
```

```
}
```

### With String Handling Functions

```
#include <stdio.h>
```

```
void main()
```

```
{
```

```
    charstr[100], sstr[100];
```

```
    intpos, l, c = 0;
```

```
    printf("\n\nExtract a substring from a given string:\n");
```

```
    printf("Input the string : ");
```

```
    fgets(str, sizeofstr, stdin);
```

```

printf("Input the position to start extraction :");

scanf("%d", &pos);


printf("Input the length of substring :");

scanf("%d", &l);


while (c < l)

{

sstr[c] = str[pos+c-1];

c++;

}


sstr[c] = '\0';


printf("The substring retrieve from the string is : %s", sstr);

}

```

OUTPUT:-

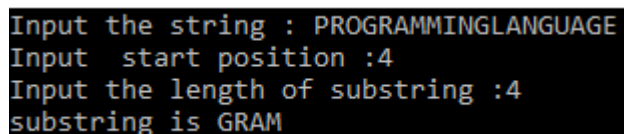

```

Input the string : PROGRAMMINGLANGUAGE
Input start position :4
Input the length of substring :4
substring is GRAM

```

#### Q7. With String Handling Functions

PROGRAM:-

```

#include<stdio.h>

#include<string.h>

int main(){

char str1[10]="Hello",str2[10]="India",j;


strcpy(str1,str2);

j=strlen(str1);

```

```
printf("The text copied to string 1 is %s \nand the number of elements copied is %d\n",str1,j);  
}
```

OUTPUT:-

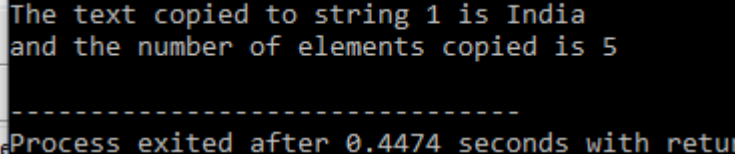

```
-----  
The text copied to string 1 is India  
and the number of elements copied is 5  
-----  
Process exited after 0.4474 seconds with return code 0
```

### Without String Handling Functions

PROGRAM:-

```
#include <stdio.h>  
  
int copy_string(char *target, char *source)  
{  
    int len=0;  
    while(source[len] != '\0')  
    {  
        target[len] = source [len];  
        len++;  
    }  
    target[len] = '\0';  
    return len;  
}  
  
int main()  
{ char str1[]="programming language";  
  
    char str2[30];  
    int count;  
    count = copy_string(str2,str1);  
    printf("Source string (str1): %s\n",str1);
```

```

printf("Target string (str2): %s\n",str2);


printf("Copied characters are: %d\n",count);


return 0;

}

```

OUTPUT:-

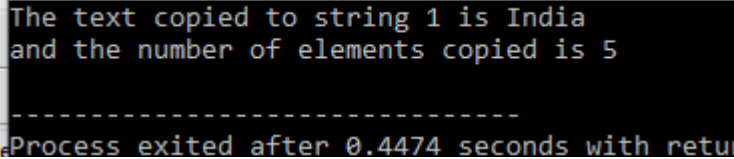

```

The text copied to string 1 is India
and the number of elements copied is 5
-----
Process exited after 0.4474 seconds with return code 0

```

### QUESTION-8

PROGRAM:-

```

#include <stdio.h>

#include <string.h>

int main()

{

    char s[1000];

    int i,n,c=0;

printf("Enter the string : ");

    gets(s);

    n=strlen(s);

    for(i=0;i<n/2;i++)

    {

        if(s[i]==s[n-i-1])

            c++;

    }

    if(c==i)

        printf("string is palindrome");

```

```

    else


printf("string is not palindrome");

    return 0;

}

```

OUTPUT:-

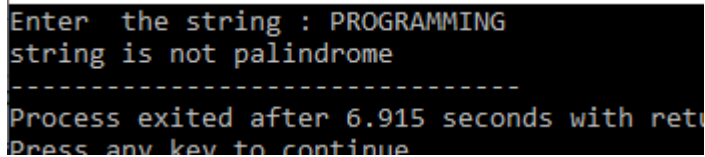

```

Enter the string : PROGRAMMING
string is not palindrome
-----
Process exited after 6.915 seconds with return code 0
Press any key to continue

```

### QUESTION-9

PROGRAM:-

```

#include<stdio.h>

#include <string.h>

int main()

{

    char s[1000],wrd[1000];

    int n,a[1000],i,j,k=0,l,found=0,t=0;

printf("Enter the string : ");

    gets(s);

printf("Enter word to be searched: ");

    gets(wrd);

    for(i=0;s[i];i++)

    {

        if(s[i]==' ')

        {

            a[k++]=i;

        }

    }
}

```

```

a[k++]=i;

j=0;

for(i=0;i<k;i++)
{
    n=a[i]-j;

    if(n==strlen(wrd))
    {
        t=0;

        for(l=0;wrd[l];l++)
        {
            if(s[l+j]==wrd[l])
            {
                t++;
            }
        }

        if(t==strlen(wrd))
        {
            found++;
        }
    }

    j=a[i]+1;
}

printf("word '%s' is occurred count=%d ",wrd,found);
}

```

OUTPUT:-

```
Enter the string : RAM IS A GOOD BOY
Enter word to be searched: GOOD
word 'GOOD' is occurred count=1
-----
Process exited after 11.25 seconds with return
```

#### QUESTION-10

PROGRAM:-

```
#include<stdio.h>

#include <stdlib.h>

#include <string.h>

int main()

{

    char ch, input[100], output[100];

    int no[26] = {0}, n, c, t, x;

    printf("Enter some word:");

    scanf("%s", input);

    n = strlen(input);

    for (c = 0; c < n; c++)

    {

        ch = input[c] - 'a';

        no[ch]++;

    }

    t = 0;

    for (ch = 'a'; ch <= 'z'; ch++)

    {

        x = ch - 'a';

        for (c = 0; c < no[x]; c++)

        {

            output[t] = ch;
```

```

        t++;

    }

}

output[t] = '\0';

printf("%s\n", output);

return 0;

}

```

OUTPUT:-

```

Enter some word:programming
aggimnopr
-----
Process exited after 29.21 seconds with return value 0
Press any key to continue . . .

```

### QUESTION-11

PROGRAM:-

```

#include <stdio.h>

#include <string.h>

char str[100];

int main()

{

    int i, t, j, len;

    printf("Enter a string : ");

    scanf("%[^\n]s", str);

    len = strlen(str);

```




```

str[len] = ' ';
for (t = 0, i = 0; i < strlen(str); i++)
{
    if ((str[i] == ' ') && (str[i - 1] == 's'))
    {
        for (j = t; j < i; j++)
printf("%c", str[j]);

        t = i + 1;
printf("\n");
    }
    else
    {
        if (str[i] == ' ')
        {
            t = i + 1;
        }
    }
}
}

```

OUTPUT:-

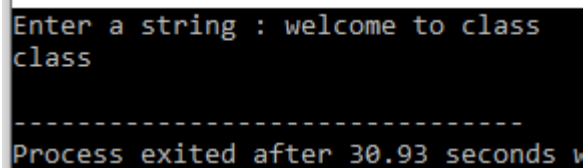

```

Enter a string : welcome to class
class
-----
Process exited after 30.93 seconds

```

#### QUESTION-12

PROGRAM:-

```
#include <stdio.h>
```

```

#include <string.h>

int main() {

    char string[256], text[256], words[100][256];

    int i, j, k, n;

    i = j = k = n = 0;

    printf("Enter your input string:");

    fgets(string, 256, stdin);

    string[strlen(string) - 1] = '\0';

    while (string[i] != '\0') {

        if (string[i] == ' ') {

            words[j][k] = '\0';

            k = 0;

            j++;

        } else {

            words[j][k++] = string[i];

        }

        i++;

    }

    words[j][k] = '\0';

    n = j;

    for (i = 0; i < n; i++) {

        for (j = i + 1; j <= n; j++) {

            if (strcmp(words[i], words[j]) == 0) {

                for (k = j; k < n; k++) {

                    strcpy(words[k], words[k + 1]);

                }

```

```

        n--, j--;
    }
}

}

for (i = 0; i <= n; i++) {
printf("%s ", words[i]);

}


printf("\n");

return 0;

}

```

OUTPUT:-

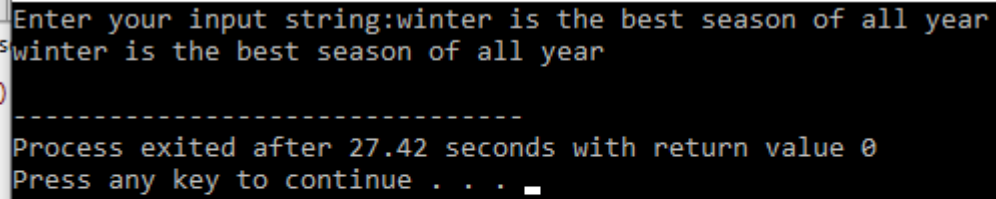

```

Enter your input string:winter is the best season of all year
winter is the best season of all year
-----
Process exited after 27.42 seconds with return value 0
Press any key to continue . . .

```