

Join GitHub today

GitHub is home to over 36 million developers working together to host and review code, manage projects, and build software together.

Sign up

Dismiss

Supervisor LNMP环境 配置信息

4 commits

1 branch

0 releases

1 contributor

Branch: master

New pull request

Find File

Clone or download

tyua07 docs(\*) 更新readme.md


Latest commit c932ab2 on 15 Jan 2016

conf.d	docs(*) 初始化	3 years ago
images	docs(*) 初始化	3 years ago
.DS_Store	docs(*) 初始化	3 years ago
README.md	docs(*) 更新readme.md	3 years ago
supervisord.conf	docs(*) 初始化	3 years ago
supervisor配置	docs(*) 初始化	3 years ago

README.md

Supervisor LNMP环境 配置信息

效果图

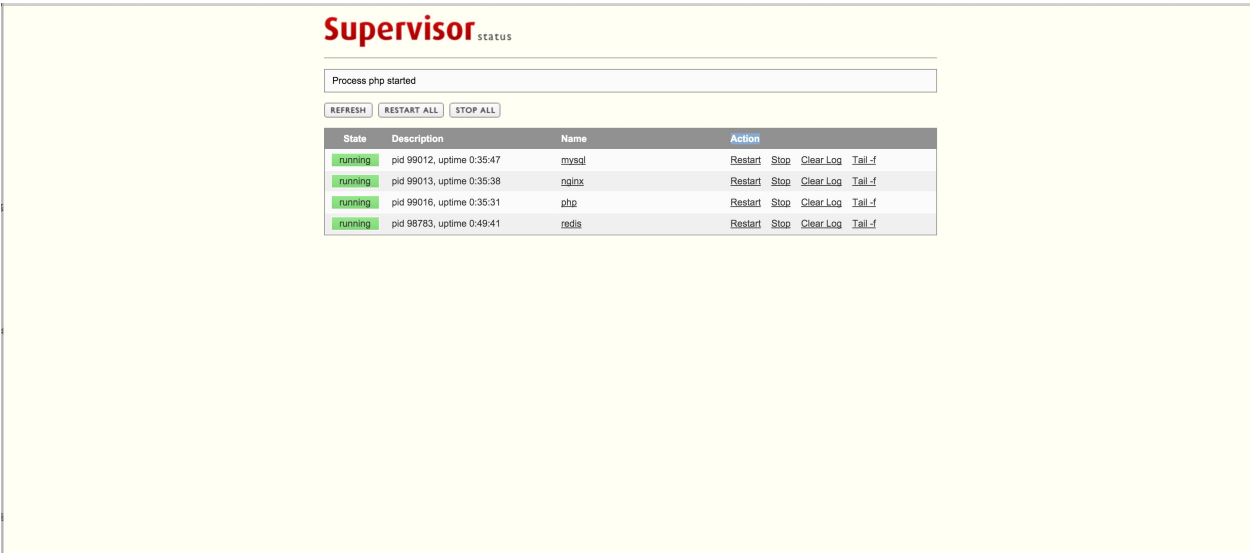

安装 Supervisor

- yum -y install python-setuptools
- easy\_install supervisor
- mkdir -p /etc/supervisor/conf.d
- echo\_supervisord\_conf > /etc/supervisor/supervisord.conf

修改配置文件

- /etc/supervisor/supervisord.conf

```
[inet_http_server]      ; inet (TCP) server disabled by default
port=127.0.0.1:9501    ; (ip_address:port specifier, *:port for all iface)
username=yangyifan      ; (default is no username (open server))
password=fengqianqian   ; (default is no password (open server))
```

开启 web终端操作

port	username	password
ip和端口，如果是外网访问，则需要改成正式ip，port则自己配置	登录名	登陆密码

```
[include]
files = /etc/supervisor/conf.d/*.conf
```

引入 conf文件夹下面的全部配置文件（这样比较好管理一点，不同的服务，在不同的配置文件，然后一并引入当前的 supervisord.conf 就好了）

创建 webserver.conf demo

- 创建 nginx

```
[program:nginx]
command=/usr/local/nginx/sbin/nginx -g "daemon off;"
autostart=true
autorestart=true
```

- 创建 php

```
[program:php]
user = root
command = /usr/local/php5.6/sbin/php-fpm --nodaemonize
stdout_logfile=/var/log/supervisor/webserver.log
stderr_logfile=/var/log/supervisor/webserver.error.log
autostart=true
autorestart=true
```

- 创建 mysql

```
[program:mysql]
user = root
command = /usr/local/mysql/bin/mysqld --basedir=/usr/local/mysql --datadir=/data/mysql/data --plugin-dir=/usr/local/mysql/lib/plugin --user=mysql --log-error=/data/mysql/data/zaiseouldeMacBook-Pro.local.err --pid-file=/data/mysql/data/zaiseouldeMacBook-Pro.local.pid --socket=/tmp/mysql.sock --port=3306
stdout_logfile=/var/log/supervisor/webserver.log
stderr_logfile=/var/log/supervisor/webserver.error.log
autostart=true
autorestart=true
```

- 创建 redis

```
[program:redis]
command = /usr/local/redis/bin/redis-server /usr/local/redis/redis.conf
stdout_logfile=/var/log/supervisor/webserver.log
stderr_logfile=/var/log/supervisor/webserver.error.log
autostart=true
autorestart=true
user=root
```

注意

- 请保持这些服务都是前台运行，比如redis.conf 里面的 daemonize 必须要是 no （重要）

