

📋 APP SCORES



Security Score52/100

Trackers Detection0/432

📁 FILE INFORMATION

File NameiGoat-Swift.ipa

Size15.93MB

MD5e73a7bf48e090a445febc06253a2ae60

SHA1e560f00633d96a40f1d0f949ff3a854830e3af50

SHA256364273106c7fdb7b627bf7821a1539af4044025bf7190ebb760afb4b85c15a47

ℹ️ APP INFORMATION

App NameiGoat-Swift

App TypeSwift

IdentifierOWASP.iGoat-Swift

SDK Nameiphoneos13.2

Version1.0Build1Platform Version13.2

Min OS Version10.0

Supported PlatformsiPhoneOS,

🔍 BINARY INFORMATION

ArchARM

Sub ArchCPU_SUBTYPE_ARM_V7

Bit32-bitEndian<

⚙️ SCAN OPTIONS

📄 DECOMPILED ASSETS

CUSTOM URL SCHEMES

Search:

URL NAME	SCHEMES
com.iGoat.myCompany Editor	iGoat

Showing 1 to 1 of 1 entries

☰ APPLICATION PERMISSIONS

Search:

PERMISSIONS	STATUS	INFO	REASON IN MANIFEST
NSFaceIDUsageDescription	normal	Access the ability to authenticate with Face ID.	iGoat would like to use FaceID to authenticate you.

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)

 APP TRANSPORT SECURITY (ATS)

HIGH1

WARNING0

INFO0

SECURE0

Search:

NO	ISSUE	SEVERITY	DESCRIPTION
1	App Transport Security AllowsArbitraryLoads is allowed	high	App Transport Security restrictions are disabled for all network connections. Disabling ATS means that unsecured HTTP connections are allowed. HTTPS connections are also allowed, and are still subject to default server trust evaluation. However, extended security checks like requiring a minimum Transport Layer Security (TLS) protocol version—are disabled. This setting is not applicable to domains listed in NSExceptionDomains.

Showing 1 to 1 of 1 entries

[Previous](#) [1](#) [Next](#)

 IPA BINARY CODE ANALYSIS

HIGH0

WARNING3

INFO2

SECURE0

SUPPRESSED0

Search:

NO 	ISSUE 	SEVERITY 	STANDARDS 	DESCRIPTION 	OPTIONS 
1	Binary makes use of insecure API(s)	warning	CWE: CWE-676: Use of Potentially Dangerous Function OWASP Top 10: M7: Client Code Quality OWASP MASVS: MSTG-CODE-8	The binary may contain the following insecure API(s) _fopen , _memcpy , _strcpy , _strlen , _strncpy	
2	Binary makes use of the insecure Random function(s)	warning	CWE: CWE-330: Use of Insufficiently Random Values OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-6	The binary may use the following insecure Random function(s) _random	
3	Binary makes use of Logging function	info	CWE: CWE-532: Insertion of Sensitive Information into Log File OWASP MASVS: MSTG-STORAGE-3	The binary may use _NSLog function for logging.	
4	Binary makes use of malloc function	warning	CWE: CWE-789: Uncontrolled Memory Allocation OWASP Top 10: M7: Client Code Quality OWASP MASVS: MSTG-CODE-8	The binary may use _malloc function instead of calloc	
5	Binary uses WebView Component.	info	OWASP MASVS: MSTG-CODE-9	The binary may use UIWebView Component.	

Showing 1 to 5 of 5 entries

[Previous](#)[1](#)[Next](#)

IPA BINARY ANALYSIS

Search:

PROTECTION 	STATUS 	SEVERITY 	DESCRIPTION 
ARC	True	info	The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.
CODE SIGNATURE	True	info	This binary has a code signature.
ENCRYPTED	False	warning	This binary is not encrypted.
NX	True	info	The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.
PIE	True	info	The binary is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.
RPATH	True	warning	The binary has Runpath Search Path (@rpath) set. In certain cases an attacker can abuse this feature to run arbitrary executable for code execution and privilege escalation. Remove the compiler option -rpath to remove @rpath.
STACK CANARY	True	info	This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.
SYMBOLS STRIPPED	True	info	Debug Symbols are stripped

Showing 1 to 8 of 8 entries

[Previous](#)[1](#)[Next](#)

 DYNAMIC LIBRARY & FRAMEWORK BINARY ANALYSIS

Search:

NO 	DYLIB/Framework 	NX 	STACK CANARY 	ARC 	RPATH 	CODE SIGNATURE 	ENCRYPTED 	SYMBOLS STRIPPED 
1	Frameworks/ libswiftQuartzCore.dylib	True  The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	False  This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	False  The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	False  The binary does not have Runpath Search Path (@rpath) set.	True  This binary has a code signature.	False  This binary is not encrypted.	False  Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
2	Frameworks/ libswiftCoreData.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
3	Frameworks/ libswiftDispatch.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
4	Frameworks/ libswiftCore.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
5	Frameworks/ libswiftCoreGraphics.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
6	Frameworks/ libswiftos.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
7	Frameworks/ libswiftCoreImage.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	False high The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
8	Frameworks/ libswiftUIKit.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
9	Frameworks/ libswiftObjectiveC.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	False high The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
10	Frameworks/ libswiftFoundation.dylib	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

Showing 1 to 10 of 13 entries

 FILE ANALYSIS

Search:

NO	ISSUE	FILES

NO	ISSUE	FILES
1	Plist Files	

Showing 1 to 1 of 1 entries

 FIREBASE DATABASE ANALYSIS

Search:

TITLE	SEVERITY	DESCRIPTION
No data available in table		

Showing 0 to 0 of 0 entries

 MALWARE LOOKUP


 [VirusTotal Report](#)

 [Triage Report](#)

 [MetaDefender Report](#)

 [Hybrid Analysis Report](#)

 SERVER LOCATIONS

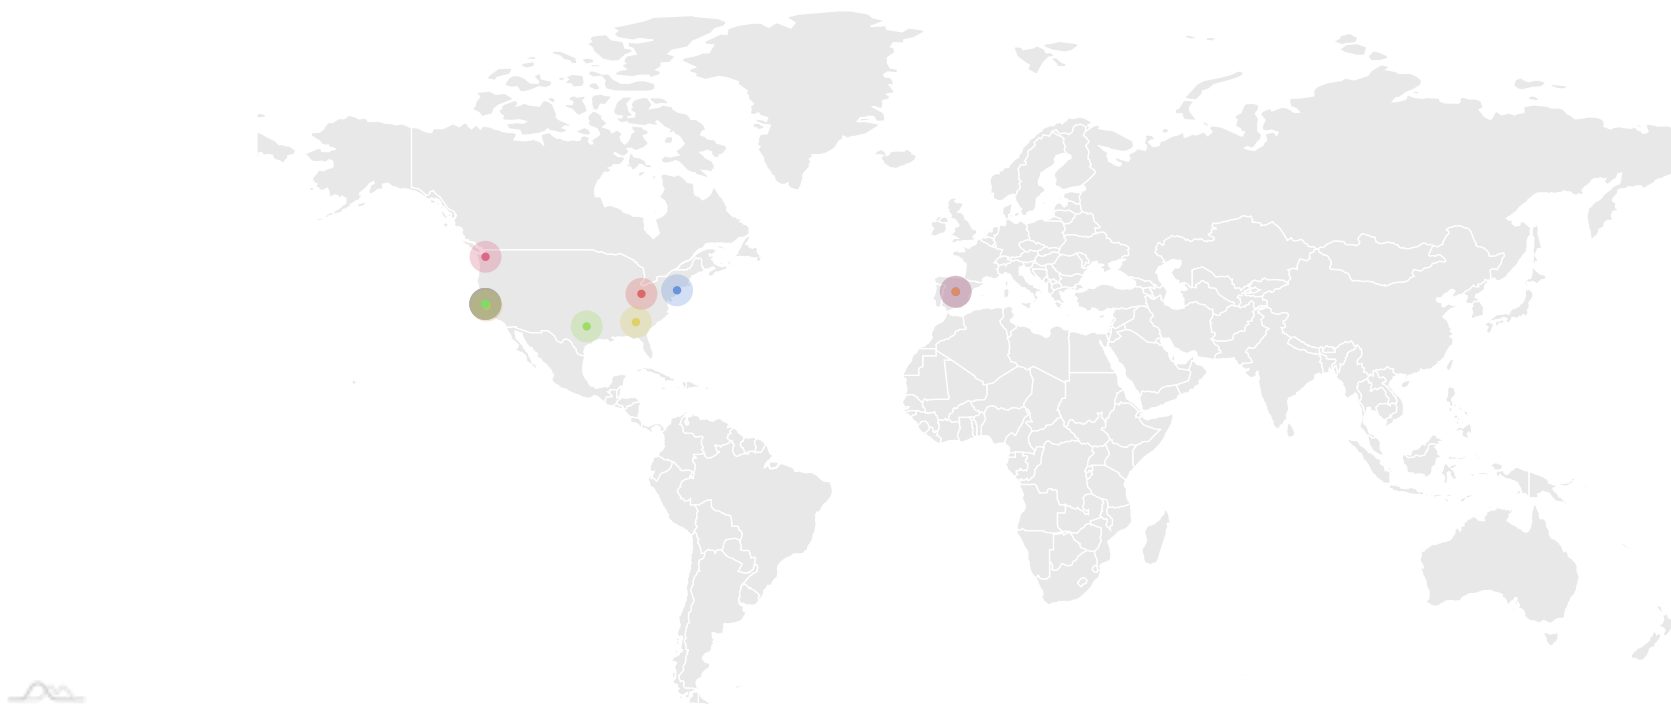

This app may communicate with the following OFAC sanctioned list of countries.

Search:

DOMAIN	COUNTRY/REGION
No data available in table	

Showing 0 to 0 of 0 entries

[Previous](#)

[Next](#)

 DOMAIN MALWARE CHECK

Search:

DOMAIN	STATUS	GEOLOCATION
crl.apple.com	ok	IP: 17.253.65.134 Country: United States of America Region: New York City: New York City Latitude: 40.714272 Longitude: -74.005966 View: Google Map
github.com	ok	IP: 140.82.121.3 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
m.youtube.com	ok	IP: 216.58.204.206 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map

DOMAIN	STATUS	GEOLOCATION
ocsp.apple.com	ok	IP: 23.14.138.45 Country: Spain Region: Madrid, Comunidad de City: Madrid Latitude: 40.416500 Longitude: -3.702560 View: Google Map
platform.twitter.com	ok	IP: 151.101.132.157 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
s3.us-east-2.amazonaws.com	ok	IP: 3.5.129.39 Country: United States of America Region: Ohio City: Columbus Latitude: 39.961182 Longitude: -82.998787 View: Google Map
twitter.com	ok	IP: 172.66.0.227 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.apple.com	ok	IP: 23.14.136.246 Country: Spain Region: Madrid, Comunidad de City: Madrid Latitude: 40.416500 Longitude: -3.702560 View: Google Map
www.arxan.com	ok	IP: 99.83.129.68 Country: United States of America Region: Washington City: Seattle Latitude: 47.606209 Longitude: -122.332069 View: Google Map
www.github.com	ok	IP: 140.82.121.3 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

Showing 1 to 10 of 17 entries



URLS

Search:

URL	FILE

URL	FILE
Data:compress: http://localhost:8080/igoat/token?username= http://crl.apple.com/root.crl0 http://localhost:8080/igoat/user data:forCollectionKey:withRowid: http://localhost:8081/webkit.php Data:options:error: Data:toJSONDictionaryData: http://www.apple.com/certificateauthority/0 data:forRowid: https://github.com/yapstudios/YapDatabase/wiki/Views http://localhost:8081/checkout/ http://www.apple.com/DTDs/PropertyList-1.0.dtd data:forKey:inCollection:withSerializedMetadata: data:toGroup: https://www.apple.com/appleca/0 http://ocsp.apple.com/ocsp03-wwdr190 http://s3.us-east-2.amazonaws.com/igoat774396510/catty.gif data:rowid: data:inGroup:withChanges:isNew: Data:options:format:error: Data:value:docRevision: data:atIndex:inGroup: Data:headers:toDatabase:status: http://www.github.com/OWASP/iGoat http://www.w3.org/TR/html4/strict.dtd data:forKey:inCollection: data:serializedObject:serializedMetadata: Data:contentType: Data:totalBytesSent:totalBytesExpectedToSend: Data:encoding: data:forKey:inCollection:withRowid:serializedMetadata: Data:options:range:	IPA Strings Dump

URL	FILE
http://localhost:8081/cryptoKey.php	
Data:toURL:options:error: http://crl.apple.com/root.crl0 Data:error: Data:options:format:error: Data:options:relativeToURL:bookmarkDataIsStale:error: Data:options: Data:options:error: Data:typeIdentifier:error: http://www.apple.com/certificateauthority/0 https://www.apple.com/appleca/0 http://ocsp.apple.com/ocsp03-wwdr190 Data:encoding: http://www.apple.com/DTDs/PropertyList-1.0.dtd Data:options:range:	Payload/iGoat-Swift.app/Frameworks/libswiftFoundation.dylib
http://crl.apple.com/root.crl0 Data:typeIdentifier:error: https://www.apple.com/appleca/0 http://www.apple.com/certificateauthority/0 http://ocsp.apple.com/ocsp03-wwdr190 http://www.apple.com/DTDs/PropertyList-1.0.dtd	Payload/iGoat-Swift.app/Frameworks/libswiftUIKit.dylib
http://crl.apple.com/root.crl0 https://www.apple.com/appleca/0 http://www.apple.com/certificateauthority/0 http://ocsp.apple.com/ocsp03-wwdr190 http://www.apple.com/DTDs/PropertyList-1.0.dtd	Payload/iGoat-Swift.app/Frameworks/libswiftQuartzCore.dylib

URL	FILE
http://crl.apple.com/root.crl0 https://www.apple.com/appleca/0 http://www.apple.com/certificateauthority/0 http://ocsp.apple.com/ocsp03-wwdr190 http://www.apple.com/DTDs/PropertyList-1.0.dtd	Payload/iGoat-Swift.app/Frameworks/libswiftCoreData.dylib
http://crl.apple.com/root.crl0 https://www.apple.com/appleca/0 http://www.apple.com/certificateauthority/0 http://ocsp.apple.com/ocsp03-wwdr190 http://www.apple.com/DTDs/PropertyList-1.0.dtd	Payload/iGoat-Swift.app/Frameworks/libswiftDispatch.dylib
http://crl.apple.com/root.crl0 https://www.apple.com/appleca/0 http://www.apple.com/certificateauthority/0 http://ocsp.apple.com/ocsp03-wwdr190 http://www.apple.com/DTDs/PropertyList-1.0.dtd	Payload/iGoat-Swift.app/Frameworks/libswiftCore.dylib
http://crl.apple.com/root.crl0 https://www.apple.com/appleca/0 http://www.apple.com/certificateauthority/0 http://ocsp.apple.com/ocsp03-wwdr190 http://www.apple.com/DTDs/PropertyList-1.0.dtd	Payload/iGoat-Swift.app/Frameworks/libswiftCoreGraphics.dylib
http://crl.apple.com/root.crl0 https://www.apple.com/appleca/0 http://www.apple.com/certificateauthority/0 http://ocsp.apple.com/ocsp03-wwdr190 http://www.apple.com/DTDs/PropertyList-1.0.dtd	Payload/iGoat-Swift.app/Frameworks/libswiftos.dylib

URL	FILE
http://crl.apple.com/root.crl0 https://www.apple.com/appleca/0 http://www.apple.com/certificateauthority/0 http://ocsp.apple.com/ocsp03-wwdr190 http://www.apple.com/DTDs/PropertyList-1.0.dtd	Payload/iGoat-Swift.app/Frameworks/libswiftCoreImage.dylib

Showing 1 to 10 of 26 entries

 EMAILS

Search:

EMAIL	FILE

EMAIL	FILE
frf3fg@f20f.pf h@f.eva f@5.o1 f@fin.qjf fs4pfs0@fs.0f x@f.n1 0f@f.jl0 fj4@fj20fj.xfj f@f.lxf johndoe@yap.com h@f-.0f h@f.0f john@test.com fx@ftpfyf.5iqfzf h@f.a0	iGoat-Swift.app/iGoat-Swift
jcarter@arxan.com ken@krvw.com	iGoat-Swift.app/KRvWAssociates.html
john@test.com johndoe@yap.com	IPA Strings Dump
mansi.sheth@gmail.com	iGoat-Swift.app/mansi.html
ophychius@gmail.com	iGoat-Swift.app/rutger.html
swaroop.yermalkar@owasp.org	iGoat-Swift.app/Swaroop_Heefan.html
swaroop.yermalkar@owasp.org	iGoat-Swift.app/Swaroop_Junard.html
swaroop.yermalkar@owasp.org	iGoat-Swift.app/Swaroop_anthony.html

EMAIL	FILE
swaroop.yermalkar@owasp.org	iGoat-Swift.app/Swaroop.html
swaroop.yermalkar@owasp.org paypal@owasp.org	iGoat-Swift.app/splash.html

Showing 1 to 10 of 10 entries

[Previous](#) [1](#) [Next](#)

TRACKERS

Search:

TRACKER NAME	CATEGORIES	URL
No data available in table		

Showing 0 to 0 of 0 entries

[Previous](#) [Next](#)

POSSIBLE HARDCODED SECRETS

▼ Showing all **2** secrets

Password : Secret@123

User : admin

A STRINGS

► Show all **150269** strings

≡ LIBRARIES

▼ Showing all **26** libraries

/System/Library/Frameworks/SystemConfiguration.framework/SystemConfiguration (compatibility version: 1.0.0, current version: 1061.40.2)
/usr/lib/libc++.1.dylib (compatibility version: 1.0.0, current version: 800.7.0)
/usr/lib/libz.1.dylib (compatibility version: 1.0.0, current version: 1.2.11)
/usr/lib/libsqlite3.dylib (compatibility version: 9.0.0, current version: 308.4.0)
/System/Library/Frameworks/Foundation.framework/Foundation (compatibility version: 300.0.0, current version: 1673.126.0)
/usr/lib/libobjc.A.dylib (compatibility version: 1.0.0, current version: 228.0.0)
/usr/lib/libSystem.B.dylib (compatibility version: 1.0.0, current version: 1281.0.0)
/System/Library/Frameworks/CFNetwork.framework/CFNetwork (compatibility version: 1.0.0, current version: 0.0.0)
/System/Library/Frameworks/CloudKit.framework/CloudKit (compatibility version: 1.0.0, current version: 854.0.0)
/System/Library/Frameworks/CoreData.framework/CoreData (compatibility version: 1.0.0, current version: 973.0.0)
/System/Library/Frameworks/CoreFoundation.framework/CoreFoundation (compatibility version: 150.0.0, current version: 1673.126.0)
/System/Library/Frameworks/CoreGraphics.framework/CoreGraphics (compatibility version: 64.0.0, current version: 1348.12.1)
/System/Library/Frameworks/ImageIO.framework/ImageIO (compatibility version: 1.0.0, current version: 0.0.0)
/System/Library/Frameworks/LocalAuthentication.framework/LocalAuthentication (compatibility version: 1.0.0, current version: 693.40.8)
/System/Library/Frameworks/QuartzCore.framework/QuartzCore (compatibility version: 1.2.0, current version: 1.11.0)
/System/Library/Frameworks/Security.framework/Security (compatibility version: 1.0.0, current version: 59306.42.2)
/System/Library/Frameworks/UIKit.framework/UIKit (compatibility version: 1.0.0, current version: 61000.0.0)
@rpath/Realm.framework/Realm (compatibility version: 1.0.0, current version: 1.0.0)
@rpath/libswiftCore.dylib (compatibility version: 1.0.0, current version: 1100.2.255)
@rpath/libswiftCoreData.dylib (compatibility version: 1.0.0, current version: 0.0.0)
@rpath/libswiftCoreGraphics.dylib (compatibility version: 1.0.0, current version: 0.0.0)
@rpath/libswiftDarwin.dylib (compatibility version: 1.0.0, current version: 0.0.0)
@rpath/libswiftDispatch.dylib (compatibility version: 1.0.0, current version: 0.0.0)
@rpath/libswiftFoundation.dylib (compatibility version: 1.0.0, current version: 0.0.0)
@rpath/libswiftObjectiveC.dylib (compatibility version: 1.0.0, current version: 0.0.0)
@rpath/libswiftUIKit.dylib (compatibility version: 1.0.0, current version: 0.0.0)

📁 FILES

▼ Showing all **187** files

- iGoat-Swift.app/Sentinel.txt
- iGoat-Swift.app/rutger.html
- iGoat-Swift.app/splash.html
- iGoat-Swift.app/Swaroop_Heefan.html
- iGoat-Swift.app/about.html
- iGoat-Swift.app/Info.plist
- iGoat-Swift.app/AppIcon29x29@3x.png
- iGoat-Swift.app/embedded.mobileprovision
- iGoat-Swift.app/Swaroop_Junard.html
- iGoat-Swift.app/AppIcon60x60@2x.png
- iGoat-Swift.app/Swaroop_anthony.html
- iGoat-Swift.app/Credentials.plist
- iGoat-Swift.app/AppIcon60x60@3x.png
- iGoat-Swift.app/PkgInfo
- iGoat-Swift.app/Swaroop.html
- iGoat-Swift.app/README.txt
- iGoat-Swift.app/Assets.plist
- iGoat-Swift.app/iGoat-Swift
- iGoat-Swift.app/Assets.car
- iGoat-Swift.app/KRvWAssociates.html
- iGoat-Swift.app/AppIcon29x29@2x.png
- iGoat-Swift.app/mansi.html
- iGoat-Swift.app/HTMLViewController.nib/objects-13.0x.nib
- iGoat-Swift.app/HTMLViewController.nib/objects-11.0x.nib
- iGoat-Swift.app/HTMLViewController.nib/runtime.nib
- iGoat-Swift.app/URLSchemeAttackExerciseVC.nib/objects-13.0x.nib
- iGoat-Swift.app/URLSchemeAttackExerciseVC.nib/objects-11.0x.nib
- iGoat-Swift.app/URLSchemeAttackExerciseVC.nib/runtime.nib
- iGoat-Swift.app/RuntimeAnalysisChallengeVC.nib/objects-13.0x.nib
- iGoat-Swift.app/RuntimeAnalysisChallengeVC.nib/objects-11.0x.nib
- iGoat-Swift.app/RuntimeAnalysisChallengeVC.nib/runtime.nib
- iGoat-Swift.app/ServerCommunicationExerciseVC.nib/objects-13.0x.nib
- iGoat-Swift.app/ServerCommunicationExerciseVC.nib/runtime.nib
- iGoat-Swift.app/_CodeSignature/CodeResources
- iGoat-Swift.app/SQLInjectionExerciseVC.nib/objects-13.0x.nib

iGoat-Swift.app/SQLInjectionExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/SQLInjectionExerciseVC.nib/runtime.nib
iGoat-Swift.app/StringAnalysisExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/StringAnalysisExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/StringAnalysisExerciseVC.nib/runtime.nib
iGoat-Swift.app/CoreDataExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/CoreDataExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/CoreDataExerciseVC.nib/runtime.nib
iGoat-Swift.app/BrokenCryptographyExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/BrokenCryptographyExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/BrokenCryptographyExerciseVC.nib/runtime.nib
iGoat-Swift.app/BackgroundingExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/BackgroundingExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/BackgroundingExerciseVC.nib/runtime.nib
iGoat-Swift.app/BinaryCookiesExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/BinaryCookiesExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/BinaryCookiesExerciseVC.nib/runtime.nib
iGoat-Swift.app/DeviceLogsExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/DeviceLogsExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/DeviceLogsExerciseVC.nib/runtime.nib
iGoat-Swift.app/CryptoChallengeVC.nib/objects-13.0x.nib
iGoat-Swift.app/CryptoChallengeVC.nib/objects-11.0x.nib
iGoat-Swift.app/CryptoChallengeVC.nib/runtime.nib
iGoat-Swift.app/WebkitCacheExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/WebkitCacheExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/WebkitCacheExerciseVC.nib/runtime.nib
iGoat-Swift.app/RealmExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/RealmExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/RealmExerciseVC.nib/runtime.nib
iGoat-Swift.app/CrossSiteScriptingExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/CrossSiteScriptingExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/CrossSiteScriptingExerciseVC.nib/runtime.nib
iGoat-Swift.app/SVProgressHUD.bundle/error@3x.png
iGoat-Swift.app/SVProgressHUD.bundle/success@3x.png
iGoat-Swift.app/SVProgressHUD.bundle/success.png
iGoat-Swift.app/SVProgressHUD.bundle/info.png

iGoat-Swift.app/SVProgressHUD.bundle/error.png
iGoat-Swift.app/SVProgressHUD.bundle/angle-mask@3x.png
iGoat-Swift.app/SVProgressHUD.bundle/error@2x.png
iGoat-Swift.app/SVProgressHUD.bundle/info@3x.png
iGoat-Swift.app/SVProgressHUD.bundle/angle-mask.png
iGoat-Swift.app/SVProgressHUD.bundle/success@2x.png
iGoat-Swift.app/SVProgressHUD.bundle/angle-mask@2x.png
iGoat-Swift.app/SVProgressHUD.bundle/info@2x.png
iGoat-Swift.app/PlistStorageExerciseViewController.nib/objects-13.0x.nib
iGoat-Swift.app/PlistStorageExerciseViewController.nib/objects-11.0x.nib
iGoat-Swift.app/PlistStorageExerciseViewController.nib/runtime.nib
iGoat-Swift.app/YapExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/YapExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/YapExerciseVC.nib/runtime.nib
iGoat-Swift.app/CoreData.momd/CoreData.mom
iGoat-Swift.app/CoreData.momd/VersionInfo.plist
iGoat-Swift.app/MemoryManagementVC.nib/objects-13.0x.nib
iGoat-Swift.app/MemoryManagementVC.nib/objects-11.0x.nib
iGoat-Swift.app/MemoryManagementVC.nib/runtime.nib
iGoat-Swift.app/RandomKeyGenerationExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/RandomKeyGenerationExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/RandomKeyGenerationExerciseVC.nib/runtime.nib
iGoat-Swift.app/Frameworks/libswiftQuartzCore.dylib
iGoat-Swift.app/Frameworks/libswiftCoreData.dylib
iGoat-Swift.app/Frameworks/libswiftDispatch.dylib
iGoat-Swift.app/Frameworks/libswiftCore.dylib
iGoat-Swift.app/Frameworks/libswiftCoreGraphics.dylib
iGoat-Swift.app/Frameworks/libswiftos.dylib
iGoat-Swift.app/Frameworks/libswiftCoreImage.dylib
iGoat-Swift.app/Frameworks/libswiftUIKit.dylib
iGoat-Swift.app/Frameworks/libswiftObjectiveC.dylib
iGoat-Swift.app/Frameworks/libswiftFoundation.dylib
iGoat-Swift.app/Frameworks/libswiftCoreFoundation.dylib
iGoat-Swift.app/Frameworks/libswiftMetal.dylib
iGoat-Swift.app/Frameworks/libswiftDarwin.dylib
iGoat-Swift.app/SocialEngineeringVC.nib/objects-13.0x.nib

iGoat-Swift.app/SocialEngineeringVC.nib/objects-11.0x.nib
iGoat-Swift.app/SocialEngineeringVC.nib/runtime.nib
iGoat-Swift.app/BruteForceRuntimeVC.nib/objects-13.0x.nib
iGoat-Swift.app/BruteForceRuntimeVC.nib/objects-11.0x.nib
iGoat-Swift.app/BruteForceRuntimeVC.nib/runtime.nib
iGoat-Swift.app/CutAndPasteExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/CutAndPasteExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/CutAndPasteExerciseVC.nib/runtime.nib
iGoat-Swift.app/BinaryPatchingVC.nib/objects-13.0x.nib
iGoat-Swift.app/BinaryPatchingVC.nib/objects-11.0x.nib
iGoat-Swift.app/BinaryPatchingVC.nib/runtime.nib
iGoat-Swift.app/MethodSwizzlingExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/MethodSwizzlingExerciseVC.nib/runtime.nib
iGoat-Swift.app/NSUserDefaultsStorageExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/NSUserDefaultsStorageExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/NSUserDefaultsStorageExerciseVC.nib/runtime.nib
iGoat-Swift.app/KeychainExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/KeychainExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/KeychainExerciseVC.nib/runtime.nib
iGoat-Swift.app/KeyStorageServerSideVC.nib/objects-13.0x.nib
iGoat-Swift.app/KeyStorageServerSideVC.nib/objects-11.0x.nib
iGoat-Swift.app/KeyStorageServerSideVC.nib/runtime.nib
iGoat-Swift.app/CloudMisconfigurationExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/CloudMisconfigurationExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/CloudMisconfigurationExerciseVC.nib/runtime.nib
iGoat-Swift.app/SQLInjectionArticlesVC.nib/objects-13.0x.nib
iGoat-Swift.app/SQLInjectionArticlesVC.nib/runtime.nib
iGoat-Swift.app/CouchBaseExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/CouchBaseExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/CouchBaseExerciseVC.nib/runtime.nib
iGoat-Swift.app/KeystrokeLoggingExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/KeystrokeLoggingExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/KeystrokeLoggingExerciseVC.nib/runtime.nib
iGoat-Swift.app/RemoteAuthenticationExerciseVC.nib/objects-13.0x.nib
iGoat-Swift.app/RemoteAuthenticationExerciseVC.nib/objects-11.0x.nib
iGoat-Swift.app/RemoteAuthenticationExerciseVC.nib/runtime.nib

iGoat-Swift.app/AboutCell.nib/objects-13.0x.nib
iGoat-Swift.app/AboutCell.nib/objects-11.0x.nib
iGoat-Swift.app/AboutCell.nib/runtime.nib
iGoat-Swift.app/Base.lproj/LaunchScreen.storyboardc/Info.plist
iGoat-Swift.app/Base.lproj/Main.storyboardc/Info.plist
iGoat-Swift.app/Base.lproj/Main.storyboardc/afX-uu-zug-view-OJY-Ki-RJ3.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/afX-uu-zug-view-OJY-Ki-RJ3.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/afX-uu-zug-view-OJY-Ki-RJ3.nib/runtime.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/SaT-dJ-rCo-view-W0e-We-Guf.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/SaT-dJ-rCo-view-W0e-We-Guf.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/SaT-dJ-rCo-view-W0e-We-Guf.nib/runtime.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExerciseDemoVC.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExerciseDemoVC.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExerciseDemoVC.nib/runtime.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/UINavigationController-eoL-kl-iyG.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/UINavigationController-eoL-kl-iyG.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/UINavigationController-eoL-kl-iyG.nib/runtime.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/HintVC.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/HintVC.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/HintVC.nib/runtime.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/e5d-bq-qrr-view-5XG-6B-Gog.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/e5d-bq-qrr-view-5XG-6B-Gog.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/e5d-bq-qrr-view-5XG-6B-Gog.nib/runtime.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/h8x-Fl-CuZ-view-Nvs-V0-4P2.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/h8x-Fl-CuZ-view-Nvs-V0-4P2.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/h8x-Fl-CuZ-view-Nvs-V0-4P2.nib/runtime.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExerciseIntroductionVC.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExerciseIntroductionVC.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExerciseIntroductionVC.nib/runtime.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExercisesVC.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExercisesVC.nib/objects-11.0x.nib
iGoat-Swift.app/Base.lproj/Main.storyboardc/ExercisesVC.nib/runtime.nib
iGoat-Swift.app/Base.lproj/LaunchScreen.storyboardc/01J-lp-oVM-view-Ze5-6b-2t3.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/LaunchScreen.storyboardc/01J-lp-oVM-view-Ze5-6b-2t3.nib/runtime.nib
iGoat-Swift.app/Base.lproj/LaunchScreen.storyboardc/UIViewController-01J-lp-oVM.nib/objects-13.0x.nib
iGoat-Swift.app/Base.lproj/LaunchScreen.storyboardc/UIViewController-01J-lp-oVM.nib/runtime.nib

iGoat-Swift.app/Frameworks/Realm.framework/CHANGELOG.md
iGoat-Swift.app/Frameworks/Realm.framework/Info.plist
iGoat-Swift.app/Frameworks/Realm.framework/strip-frameworks.sh
iGoat-Swift.app/Frameworks/Realm.framework/B4B669ED-4B54-31F8-B1C4-590F7A8E40B9.bcsymbolmap
iGoat-Swift.app/Frameworks/Realm.framework/LICENSE
iGoat-Swift.app/Frameworks/Realm.framework/Realm
iGoat-Swift.app/Frameworks/Realm.framework/9547FB99-FA9C-39B6-B1E2-9053962F78F3.bcsymbolmap
iGoat-Swift.app/Frameworks/Realm.framework/_CodeSignature/CodeResources