

«Хмарні технології обробки даних»

Лабораторна робота №5

Студентка: Кувавiна Софiя


Розгортання баз даних засобами RDS-сервісу

Мета роботи: розгорнути сервер MySQL в сервісі RDS


Завдання на лабораторну роботу:

1. Створити RDS-інстанс (free-tier) для MySQL СУБД. Забезпечити можливість конекту до БД як з EC2-інстансу, так і з вашого десктопу

На цьому етапі я перейшла в сервіс RDS та натиснула Create database

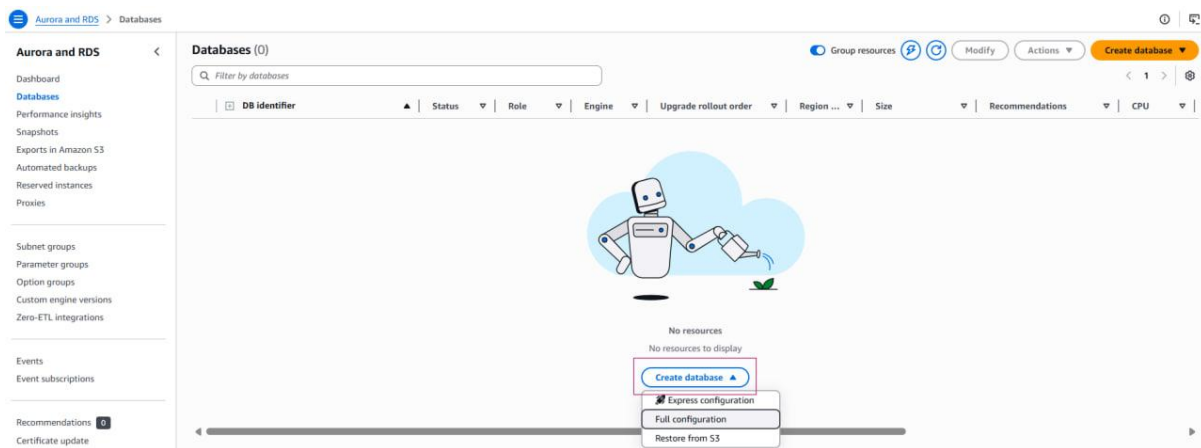

Обрала MySQL як СУБД та Full configuration, щоб самостійно налаштувати всі параметри

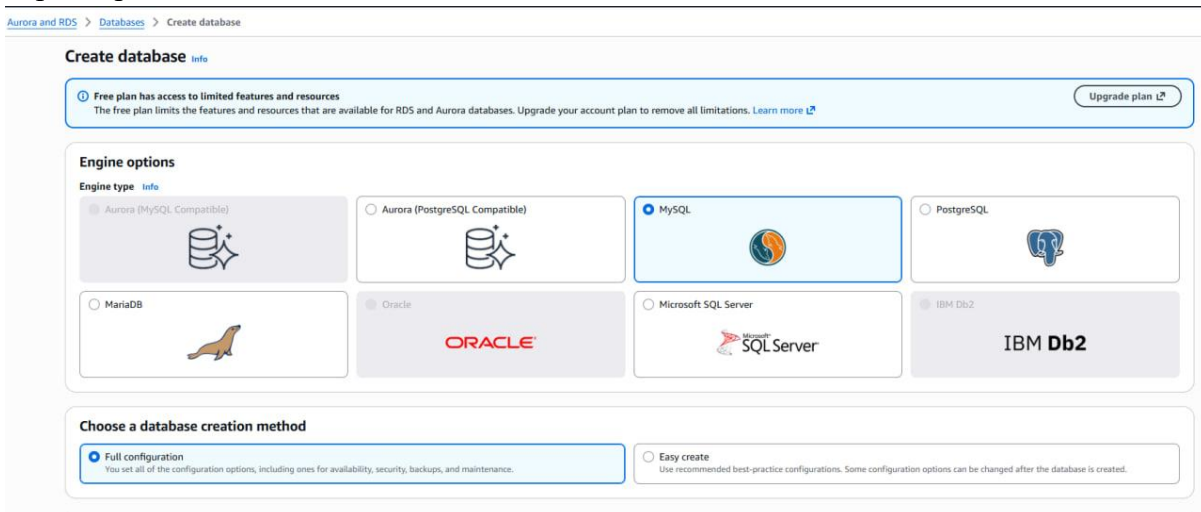

Вибрала Free tier, щоб використовувати безкоштовні ресурси

Aurora and RDS > Databases > Create database

Templates

Choose a sample template to meet your use case.

- ☐ Production
Use defaults for high availability and fast, consistent performance.
- ☐ Dev/Test
This instance is intended for development use outside of a production environment.
- ☒ **Free tier**
Use RDS Free Tier to develop new applications, test existing applications, or gain hands-on experience with Amazon RDS.

Availability and durability

Deployment options [Info](#)
Choose the deployment option that provides the availability and durability needed for your use case. AWS is committed to a certain level of uptime depending on the deployment option you choose. Learn more in the [Amazon RDS service level agreement \(SLA\)](#).

- ☐ Multi-AZ DB cluster deployment (3 instances)
Creates a primary DB instance with two readable standbys in separate Availability Zones. This setup provides:
 - 99.99% uptime
 - Redundancy across Availability Zones
 - Increased read capacity
 - Reduced write latency
- ☐ Multi-AZ DB instance deployment (2 instances)
Creates a primary DB instance with a non-readable standby instance in a separate Availability Zone. This setup provides:
 - 99.95% uptime
 - Redundancy across Availability Zones
- ☒ **Single-AZ DB instance deployment (1 instance)**
Creates a single DB instance without standby instances. This setup provides:
 - 99.5% uptime
 - No data redundancy

Засіб захоплення фрагментів
Знімок екрана скопійовано до буфера об'єкту
Автоматичне збереження в папці знімків
Виправлення та надання спільного до

Задала назву інстансу та логін адміністратора

Aurora and RDS > Databases > Create database

Engine version

[Info](#)
View the engine versions that support the following database features.

Hide filters

- ☒ Show only versions that support the Multi-AZ DB cluster [Info](#)
Create a Multi-AZ DB cluster with one primary DB instance and two readable standby DB instances. Multi-AZ DB clusters provide up to 2x faster transaction commit latency and automatic failover in typically under 35 seconds.
- ☐ Show only versions that support the Amazon RDS Optimized Writes [Info](#)
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.

Engine version

MySQL 8.4.7

☐ **Enable RDS Extended Support** [Info](#)
Amazon RDS Extended Support is a [paid offering](#). By selecting this option, you consent to being charged for this offering if you are running your database major version past the RDS end of standard support date for that version. Check the end of standard support date for your major version in the [RDS for MySQL documentation](#).

DB instance identifier [Info](#)
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.

database5

The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

Credentials Settings

Master username [Info](#)
Type a login ID for the master user of your DB instance.

admin

1 to 16 alphanumeric characters. The first character must be a letter.

Credentials management
You can use AWS Secrets Manager or manage your master user credentials.

- ☐ Managed in AWS Secrets Manager - **most secure**
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
- ☒ **Self managed**
Create your own password or have RDS create a password that you manage.

Створила власний пароль для підключення до бази даних

Credentials management
You can use AWS Secrets Manager or manage your master user credentials.

- ☐ Managed in AWS Secrets Manager - **most secure**
RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
- ☒ **Self managed**
Create your own password or have RDS create a password that you manage.

☐ **Auto generate password**
Amazon RDS can generate a password for you, or you can specify your own password.

Master password [Info](#)

Password strength **Very strong**

Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' * @

Confirm master password [Info](#)

Additional credentials settings

Database authentication options [Info](#)

- ☒ **Password authentication**
Authenticates using database passwords.
- ☐ Password and IAM database authentication
Authenticates using the database password and user credentials through AWS IAM users and roles.
- ☐ Password and Kerberos authentication
Choose a directory in which you want to allow authorized users to authenticate with this DB instance using Kerberos Authentication.

Обрала тип db.t4g.micro та залишила стандартний обсяг пам'яті 20 GB

Instance configuration

The DB instance configuration options below are limited to those supported by the engine that you selected above.

DB instance class [Info](#)

▼ Hide filters

☒ Show instance classes that support Amazon RDS Optimized Writes [Info](#)

Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.

☐ Include previous generation classes

☐ Standard classes (includes m classes)

☐ Memory optimized classes (includes r and x classes)

☒ Burstable classes (includes t classes)

Instance type

db.t4g.micro

2 vCPUs 1 GiB RAM EBS Bandwidth: Up to 2.085 Mbps Network: Up to 5 Gbps

Storage

Storage type [Info](#)

Provisioned IOPS SSD (io2) storage volumes are now available.

General Purpose SSD (gp2)

Baseline performance determined by volume size

Allocated storage [Info](#)

20

GiB

Allocated storage value must be 20 GiB to 6 144 GiB

► Additional storage configuration

Обрала default VPC та дозволила публічний доступ до бази

Connectivity [Info](#)

Compute resource

Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.

☒ Don't connect to an EC2 compute resource

Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.

☐ Connect to an EC2 compute resource

Set up a connection to an EC2 compute resource for this database.

Virtual private cloud (VPC) [Info](#)

Choose the VPC. The VPC defines the virtual networking environment for this DB instance.

Default VPC (vpc-0fd04462f9b82d0a0)

6 Subnets, 6 Availability Zones

After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.

ⓘ After a database is created, you can't change its VPC.

DB subnet group [Info](#)

Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.

default

Public access [Info](#)

☒ Yes

RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify to the database.

☐ No

RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.

Створила нову security group

VPC security group (firewall) [Info](#)

Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.

☐ Choose existing
Choose existing VPC security groups

☒ Create new
Create new VPC security group

New VPC security group name

lab5

Availability Zone [Info](#)

No preference

RDS Proxy

RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.

☐ Create an RDS Proxy [Info](#)
RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see [Amazon RDS Proxy pricing](#).

Certificate authority - optional [Info](#)

Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.

rds-ca-rsa2048-g1 (default)

Expiry: May 26, 2061

If you don't select a certificate authority, RDS chooses one for you.

Залишила стандартні налаштування моніторингу

Monitoring [Info](#)

Choose monitoring tools for this database. Database Insights provides a combined view of Performance Insights and Enhanced Monitoring for your fleet of databases. Database Insights pricing is separate from RDS monthly estimates. See [Amazon CloudWatch pricing](#).

☐ Database Insights - Advanced

- Retains 15 months of performance history
- Fleet-level monitoring
- Integration with CloudWatch Application Signals

☒ Database Insights - Standard

▼ Additional monitoring settings

Enhanced Monitoring, CloudWatch Logs and DevOps Guru

Enhanced Monitoring

☐ Enable Enhanced monitoring

Enabling Enhanced Monitoring metrics are useful when you want to see how different processes or threads use the CPU.

Log exports

Select the log types to publish to Amazon CloudWatch Logs

- ☐ Audit log
- ☐ Error log
- ☐ General log
- ☐ iam-db-auth-error log
- ☐ Slow query log

IAM role

The following service-linked role is used for publishing logs to CloudWatch Logs.

RDS service-linked role

Задала початкову назву бази даних

▼ Additional configuration

Database options, encryption turned on, backup turned off, backtrack turned off, maintenance, CloudWatch Logs, delete protection turned off.

Database options

Initial database name [Info](#)

sqllab5

If you do not specify a database name, Amazon RDS does not create a database.

DB parameter group [Info](#)

default:mysql8.4

Option group [Info](#)

default:mysql-8-4

Backup

☐ Enable automated backup

Creates a point-in-time snapshot of your database.

Backup tags [Info](#)

Copies tags from the source database to the automated backup and snapshots respectively.

☐ Copy tags to automated backup

This is a one-time setting. Future tag modifications need manual updates.

☒ Enable encryption

Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console. [Info](#)

☒ **Enable encryption**
Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console. [Info](#)

AWS KMS key [Info](#)
(default) aws/rds

Account
418862088861

KMS key ID
alias/aws/rds

Maintenance
Auto minor version upgrade [Info](#)

☐ **Enable auto minor version upgrade**
Enabling auto minor version upgrade will automatically upgrade your database minor version. For limitations and more details, see Automatically upgrading the minor engine version [documentation](#).

Maintenance window [Info](#)
Select the period you want pending modifications or maintenance applied to the database by Amazon RDS.

☐ Choose a window

☒ No preference

☐ **Enable deletion protection**
Protects the database from being deleted accidentally. While this option is enabled, you can't delete the database.

You are responsible for ensuring that you have all of the necessary rights for any third-party products or services that you use with AWS services.

Після запуску створення база перейшла у стан Creating

Creating database databaselab5
Your database might take a few minutes to launch. You can use settings from databaselab5 to simplify configuration of suggested database add-ons while we finish creating your DB for you.

Databases (1) Group resources Modify

Filter by databases

DB identifier	Status	Role	Engine	Upgrade rollout order	Region ...	Size
databaselab5	Creating	Instance	MySQL Co...	SECOND	-	db.t4g.micro

База даних успішно створилась

databaselab5

Summary

DB identifier databaselab5	Status Creating	Role Instance	Engine MySQL Community	Recommendation
CPU -	Class db.t4g.micro	Current activity	Region & AZ us-east-1d	

Connectivity & security | Monitoring | Logs & events | Configuration | Zero-ETL integrations | Maintenance & backups | Data migrations | Tags | Recommendations

Connect using [Info](#)

☒ **Code snippets**
Use when connecting through SDK, APIs, or third-party tools including agents.

☐ **CloudShell**
Use for a quick access to AWS CLI that launches directly from the AWS Management Console.

☐ **Endpoints**
Use when connecting through any IDE interface.

Internet access gateway
☐ Disabled

IAM Authentication
☐ Disabled

Programming language
MySQL (macOS)

Endpoint type
Instance endpoint

Connection steps
Follow the steps below to paste the code of each step in your tool and run the commands. The snippets dynamically reflect the authentication configuration.

☐ Pending database creation

Connected compute resources (0) [Info](#)
Connections to compute resources that were created automatically by RDS are shown here. Connections to compute resources that were created manually aren't shown.

Змінюю inbound rules на 0.0.0.0/0

Security group rules (2)

Filter by Security group rules

Security group	Type	Rule
lab5 (sg-0093d6546207bc2e0)	CIDR/IP - Inbound	185.191.178.41/32
lab5 (sg-0093d6546207bc2e0)	CIDR/IP - Outbound	0.0.0.0/0

Edit inbound rules Info

Inbound rules control the incoming traffic that's allowed to reach the instance.

Inbound rules Info

Security group rule ID: sgr-0d1bacf5e9a47f5a7

Type: Info MySQL/Aurora

Protocol: Info TCP

Port range: Info 3306

Source: Info Anywhere...

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Дала дозвіл на з'єднання БД до EC2

Connection setup successfully for RDS database databaselab5 and EC2 instance i-070346724e9ef7da7 View details

Databases (1)

Filter by databases

DB Identifier	Status	Role	Engine	Upgrade rollout order	Region ...	Size	Recommendations	CPU
databaselab5	Available	Instance	MySQL Co...	SECOND	us-east-1d	db.t4g.micro		3.45%

Підключилась до бази даних з EC2 через mysql клієнт

```
[ec2-user@ip-172-31-64-139 ~]$ mysql -h databaselab5.ci30qoqo67a4.us-east-1.rds.amazonaws.com -P 3306 -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 65
Server version: 8.4.7 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> SHOW DATABASES;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sqllab5 |
| sys |
+-----+
5 rows in set (0.00 sec)
```

я відкрила базу sqllab5, переглянула таблицю spotify_stats і переконатась, що дані в ній успішно зберігаються


```
mysql> USE sqllab5;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A


Database changed
mysql> SHOW TABLES;
+-----+
| Tables_in_sqllab5 |
+-----+
| spotify_stats      |
+-----+
1 row in set (0.00 sec)

mysql> SELECT COUNT(*) FROM spotify_stats;
+-----+
| COUNT(*) |
+-----+
|        366 |
+-----+
1 row in set (0.02 sec)

mysql> |
```

2. Для датасету з роботи No2 створити БД та таблицю відповідної структури.

Підключаюсь до створеної RDS бази даних через DBeaver, для цього використовую endpoint, логін і пароль

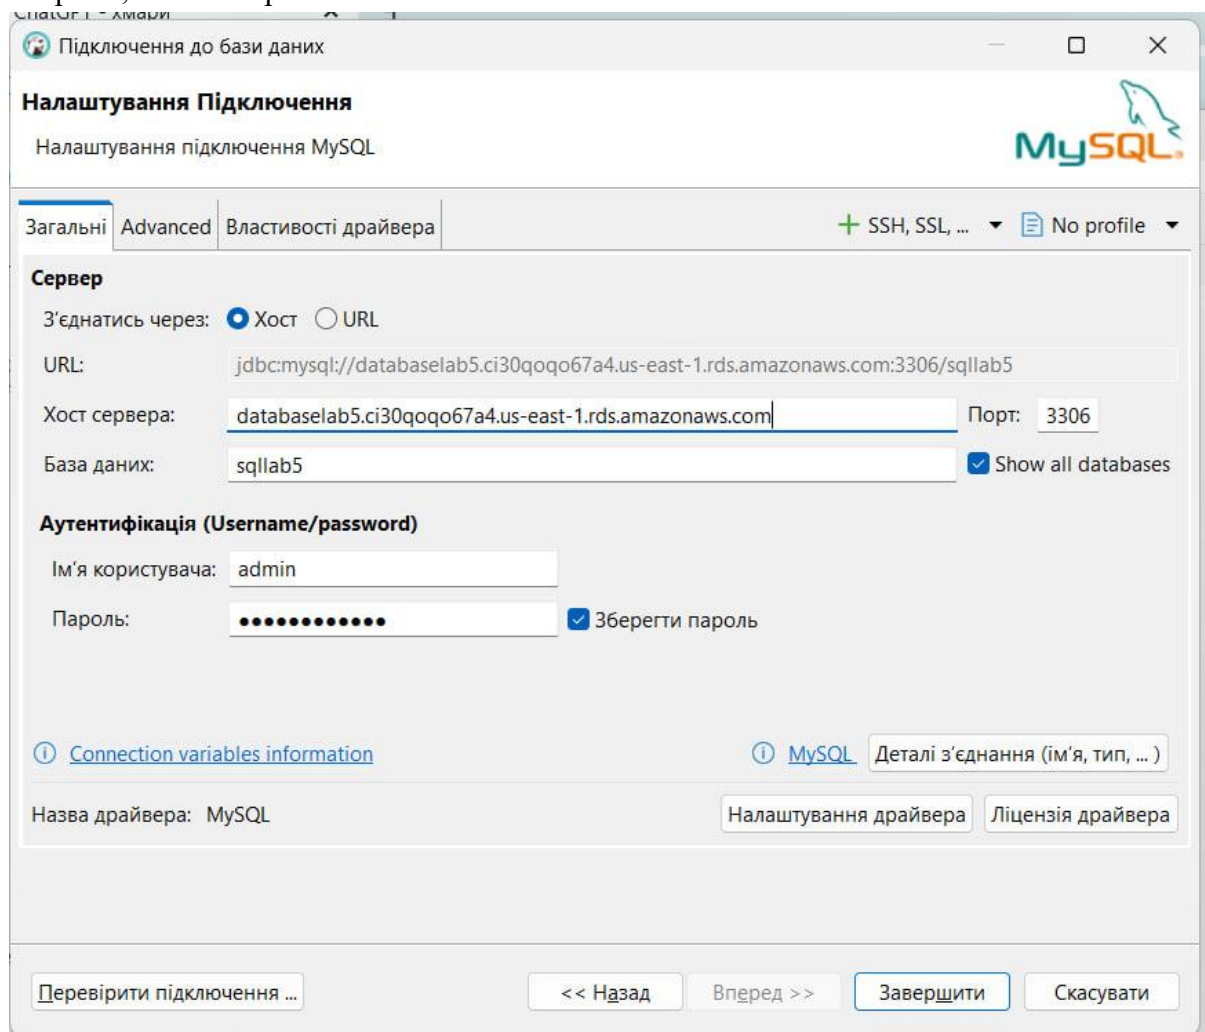

Підключення до бази даних

Налаштування Підключення

Налаштування підключення MySQL

Загальні | Advanced | Властивості драйвера

Сервер

З'єднатись через: ☒ Хост ☐ URL

URL: jdbc:mysql://databaselab5.ci30qoqo67a4.us-east-1.rds.amazonaws.com:3306/sqllab5

Хост сервера: databaselab5.ci30qoqo67a4.us-east-1.rds.amazonaws.com Порт: 3306

База даних: sqllab5 ☒ Show all databases

Аутентифікація (Username/password)

Ім'я користувача: admin


Пароль: ☒ Зберегти пароль

[Connection variables information](#) [MySQL](#) Деталі з'єднання (ім'я, тип, ...)


Назва драйвера: MySQL [Налаштування драйвера](#) [Ліцензія драйвера](#)

[Перевірити підключення ...](#) << Назад Вперед >> [Завершити](#) Скасувати

Перевірила, що підключення працює - база sqllab5 відображається в списку баз даних

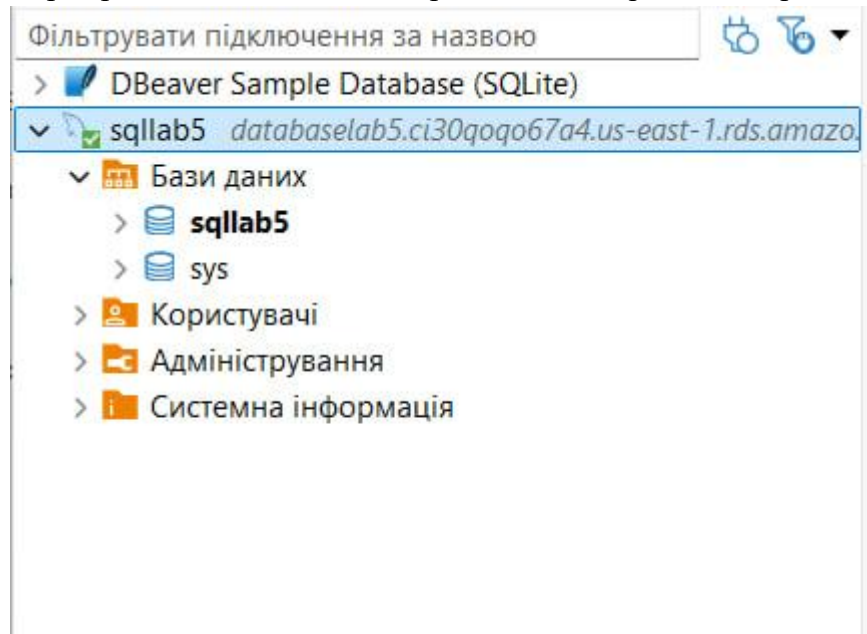

Написала SQL-запит і створила таблицю spotify_stats під свій датасет

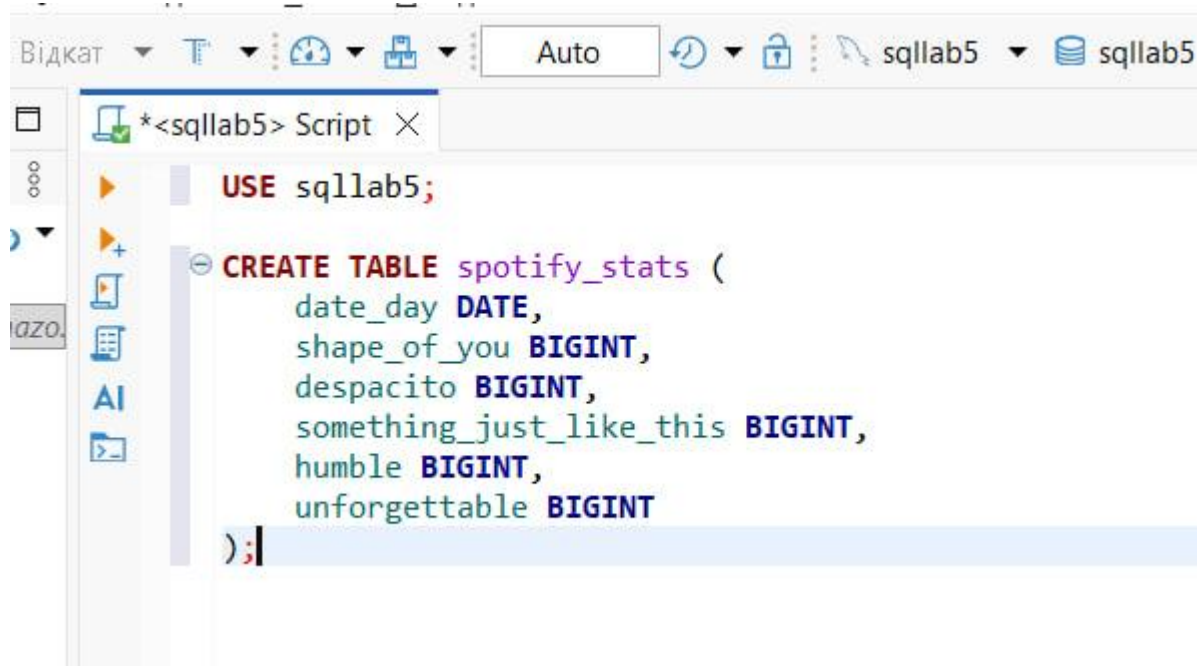

Натиснула виконати і таблиця створилась, все ок без помилок

*<sqlab5> Script

AI

```
date_day DATE,  
shape_of_you BIGINT,  
despacito BIGINT,  
something_just_like_this BIGINT,  
humble BIGINT,  
unforgettable BIGINT  
);
```

Статистика 1

Name	Value
Updated Rows	0
Execute time	0.366s
Start time	Thu Mar 26 00:13:02 EET 2026
Finish time	Thu Mar 26 00:13:03 EET 2026
Query	CREATE TABLE spotify_stats (date_day DATE, shape_of_you BIGINT, despacito BIGINT, something_just_like_this BIGINT, humble BIGINT, unforgettable BIGINT)

Перевірила таблицю бачимо що всі колонки є і виглядає так, як треба

Властивості

Дані

Діаграма

Назва таблиці:

spotify_stats

Автоматичне збільшення:

0

Опис:

Кодувальник:

utf8mb4

Упорядкування:

utf8mb4_0900_ai_ci

Двигун:

InnoDB

☐ Розділено

Стовпці

Обмеження

Зовнішні ключі

Посилання

Тригери

Індекси

Розділи

Statistics

DDL

Віртуальний

Назва колонки	#	Тип даних	Обов'язкове	Автоінкремент	Ключ
🕒 date_day	1	date	[]	[]	
123 shape_of_you	2	bigint	[]	[]	
123 despacito	3	bigint	[]	[]	
123 something_just_like_this	4	bigint	[]	[]	
123 humble	5	bigint	[]	[]	
123 unforgettable	6	bigint	[]	[]	

3. Засобами Python реалізувати запис датафрейму з даними в створену таблицю.

Написала скрипт, який зчитує мій CSV-файл, приводить назви колонок до нормального вигляду і завантажує ці дані в таблицю spotify_stats

```

1 import pandas as pd
2 from sqlalchemy import create_engine
3 df = pd.read_csv("spotify.csv")
4 df.columns = [
5     "date_day",
6     "shape_of_you",
7     "despacito",
8     "something_just_like_this",
9     "humble",
10    "unforgettable"
11 ]
12
13 df["date_day"] = pd.to_datetime(df["date_day"])
14 user = "admin"
15 password = " "
16 host = "databaseslab5.ci30qoqo67a4.us-east-1.rds.amazonaws.com"
17 port = 3306
18 database = "sqllab5"
19
20 engine = create_engine(
21     f"mysql+pymysql://{user}:{password}@{host}:{port}/{database}"
22 )
23
24 df.to_sql("spotify_stats", con=engine, if_exists="append", index=False)
25 print("Дані завантажено")

```


У коді я спочатку підключила бібліотеки pandas і sqlalchemy, далі зчитала файл spotify.csv у датафрейм, після чого перейменувала колонки так, щоб вони збігалися з

назвами полів у таблиці MySQL. Потім перевела колонку з датою у правильний формат, створила підключення до RDS MySQL через create_engine і за допомогою to_sql завантажила весь датафрейм у таблицю spotify_stats

Запустила скрипт, і після виконання бачимо повідомлення що дані успішно завантажені

```
PS S:\навчання\cloudtech\лаб65> py lab5.py
Дані завантажено
PS S:\навчання\cloudtech\лаб65> |
```

Після запуску скрипта перевірила таблицю в DBeaver і бачу що дані записались у базу

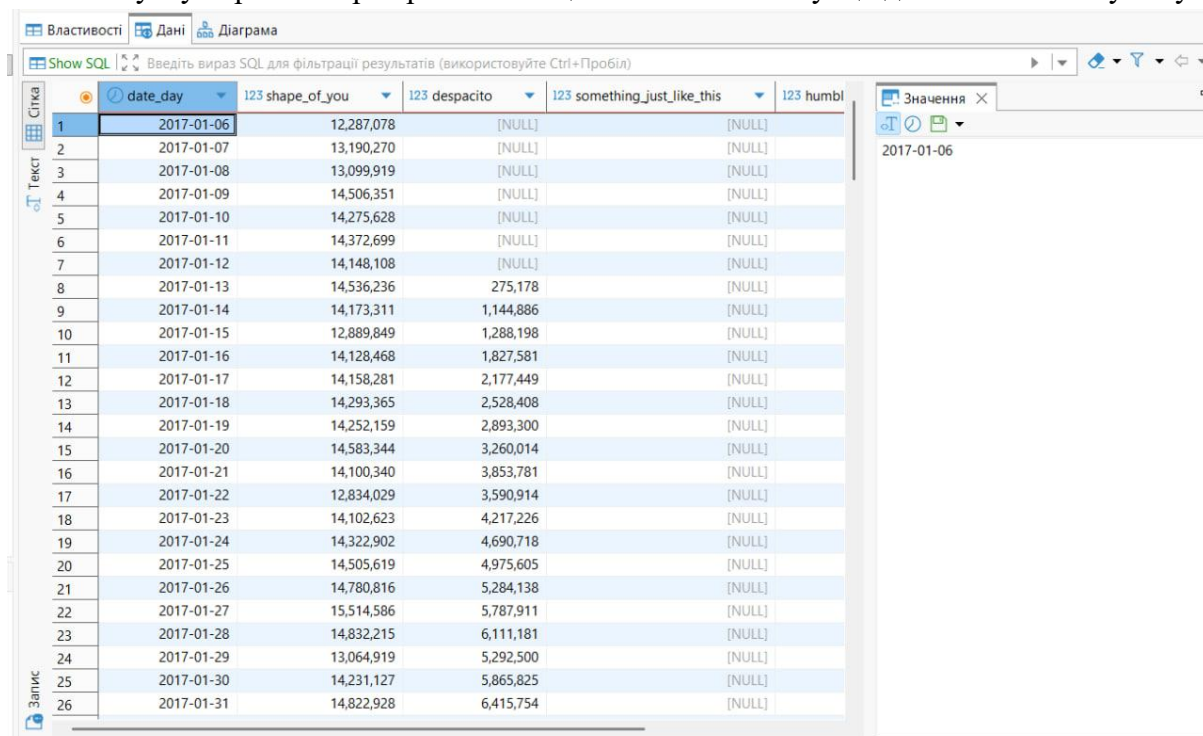

	date_day	123 shape_of_you	123 despacito	123 something_just_like_this	123 humbl
1	2017-01-06	12,287,078	[NULL]	[NULL]	
2	2017-01-07	13,190,270	[NULL]	[NULL]	
3	2017-01-08	13,099,919	[NULL]	[NULL]	
4	2017-01-09	14,506,351	[NULL]	[NULL]	
5	2017-01-10	14,275,628	[NULL]	[NULL]	
6	2017-01-11	14,372,699	[NULL]	[NULL]	
7	2017-01-12	14,148,108	[NULL]	[NULL]	
8	2017-01-13	14,536,236	275,178	[NULL]	
9	2017-01-14	14,173,311	1,144,886	[NULL]	
10	2017-01-15	12,889,849	1,288,198	[NULL]	
11	2017-01-16	14,128,468	1,827,581	[NULL]	
12	2017-01-17	14,158,281	2,177,449	[NULL]	
13	2017-01-18	14,293,365	2,528,408	[NULL]	
14	2017-01-19	14,252,159	2,893,300	[NULL]	
15	2017-01-20	14,583,344	3,260,014	[NULL]	
16	2017-01-21	14,100,340	3,853,781	[NULL]	
17	2017-01-22	12,834,029	3,590,914	[NULL]	
18	2017-01-23	14,102,623	4,217,226	[NULL]	
19	2017-01-24	14,322,902	4,690,718	[NULL]	
20	2017-01-25	14,505,619	4,975,605	[NULL]	
21	2017-01-26	14,780,816	5,284,138	[NULL]	
22	2017-01-27	15,514,586	5,787,911	[NULL]	
23	2017-01-28	14,832,215	6,111,181	[NULL]	
24	2017-01-29	13,064,919	5,292,500	[NULL]	
25	2017-01-30	14,231,127	5,865,825	[NULL]	
26	2017-01-31	14,822,928	6,415,754	[NULL]	

4. Виконати кілька простих запитів на пошук даних

Спочатку подивилась, скільки всього записів є в таблиці. У результаті вийшло 366 рядків

Windows interface showing a SQL script editor with the following content:

```
SELECT COUNT(*) FROM spotify_stats;
```

The results pane shows the following data:

123 COUNT(*)
366

Далі вивела перші 10 рядків таблиці

Windows interface showing a SQL script editor with the following content:

```
SELECT * FROM spotify_stats LIMIT 10;
```

The results pane shows the following data:

	123 date_day	123 shape_of_you	123 despacito	123 something_just_like_this	123 humble
1	2017-01-06	12,287,078	[NULL]	[NULL]	[I
2	2017-01-07	13,190,270	[NULL]	[NULL]	[I
3	2017-01-08	13,099,919	[NULL]	[NULL]	[I
4	2017-01-09	14,506,351	[NULL]	[NULL]	[I
5	2017-01-10	14,275,628	[NULL]	[NULL]	[I
6	2017-01-11	14,372,699	[NULL]	[NULL]	[I
7	2017-01-12	14,148,108	[NULL]	[NULL]	[I
8	2017-01-13	14,536,236	275,178	[NULL]	[I
9	2017-01-14	14,173,311	1,144,886	[NULL]	[I
10	2017-01-15	12,889,849	1,288,198	[NULL]	[I

Окремо подивилась найбільше значення прослуховувань для пісні Shape of You

Tools: *<sqlab5> Script, sqlab5, sqlab5, spotify_stats, *<sqlab5> Script-1

```
SELECT MAX(shape_of_you) FROM spotify_stats;
```

Результати 1

SELECT MAX(shape_of_you) FROM spotify_stats | Введіть вираз SQL для фільтрації результатів (використовуйте Ст

Сітка	123 MAX(shape_of_you)
1	19,764,745

Текст

Також перевірила найменше значення прослуховувань для цієї ж пісні

Tools: *<sqlab5> Script, sqlab5, sqlab5, spotify_stats, *<sqlab5> Script-1

```
SELECT MIN(shape_of_you) FROM spotify_stats;
```

Результати 1

SELECT MIN(shape_of_you) FROM spotify_stats | Введіть вираз SQL для фільтрації результатів (використовуйте Ст

Сітка	123 MIN(shape_of_you)
1	3,497,682

Текст

Ще зробила вибірку по Despacito, щоб подивитись дати, де для цієї пісні вже є значення, а не порожні поля

The screenshot shows a SQL client interface with a query editor at the top and a results pane below. The query is:

```
SELECT date_day, despacito
FROM spotify_stats
WHERE despacito IS NOT NULL
LIMIT 10;
```

The results pane shows a table with two columns: `date_day` and `despacito`. The table contains 10 rows of data, with the first row highlighted. The `despacito` column values are in scientific notation.

	date_day	despacito
1	2017-01-13	275,178
2	2017-01-14	1,144,886
3	2017-01-15	1,288,198
4	2017-01-16	1,827,581
5	2017-01-17	2,177,449
6	2017-01-18	2,528,408
7	2017-01-19	2,893,300
8	2017-01-20	3,260,014
9	2017-01-21	3,853,781
10	2017-01-22	3,590,914

5. Видалити базу даних в RDS сервісі / показати процес видалення – на момент захисту у вас має бути наявна створена інфраструктура.

Відкрила меню дій для RDS-інстансу і перейшла до процесу його видалення

The screenshot shows the AWS Management Console interface for RDS instances. A table lists the instance 'databaselab5' with status 'Available'. A context menu is open for this instance, and the 'Delete' option is highlighted. The menu also includes options like 'Stop temporarily', 'Reboot', 'Set up EC2 connection', 'Set up Lambda connection', 'Migrate data from EC2 database', 'Create read replica', 'Create Aurora read replica', 'Create blue/green deployment', 'Promote', 'Convert to Multi-AZ deployment', 'Turn on backups', 'Take snapshot', 'Restore to point in time', 'Migrate snapshot', and 'Create zero-ETL integration'.

Далі відкрилась форма підтвердження видалення, на цьому етапі видно, як саме видаляється інстанс

Delete databaselab5 instance

×

Permanently delete **databaselab5** DB instance. You can't undo this action.

⚠ Proceeding with this action will delete the instance with all its content and can affect related resources. [Learn more](#)

☒ Create final snapshot
Determines whether a final DB Snapshot is created before the DB instance is deleted.

Final snapshot name
The identifier of the new DB snapshot that is created.

To avoid accidental deletion provide additional written consent.

To confirm deletion, type *delete me* into the field.

CancelDelete

Висновки:

У цій роботі я створила базу даних в AWS RDS, підключилась до неї за допомогою DBeaver, та через EC2, створила таблицю під свій датасет і завантажила туди дані за допомогою Python. Після цього перевірила, що все працює, виконала кілька SQL-запитів і подивилась результати. В цілому розібралась, як працює RDS і як з ним працювати на практиці