


Test Name: 40 km Video-Link Range Test Using Two 0.5 W Units

Test Date: December 23, 2025

Test Locations: Wangweishan Mountain and Majiawu Viewing Platform

Test Method: One module was installed at the summit of Wangweishan Mountain and connected to a computer via Ethernet. The other module was installed at Majiawu Viewing Platform and connected to another computer via Ethernet. After the link was established, bidirectional UDP traffic was generated between the two modules to measure real-time throughput.

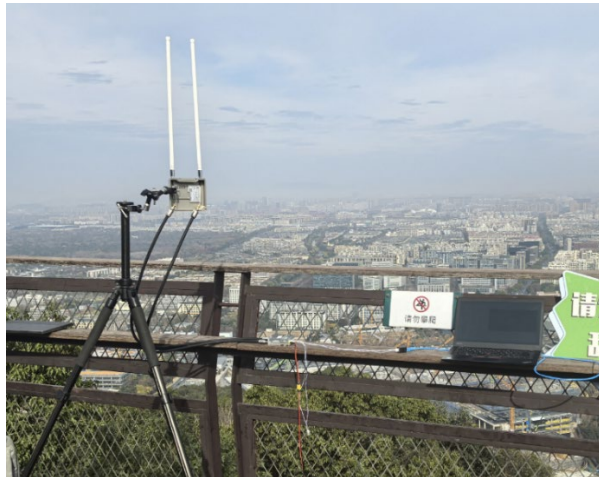

Spectrum of the Test Environment:



Wangweishan Mountain elevation: 700 m; Majiawu Viewing Platform elevation: 200 m


Test Configuration: Center frequency: 1360 MHz; transmit power: 800 mW; bandwidth: 20 MHz. A 2 dBi antenna was used at Wangweishan Mountain and a 5 dBi antenna at Majiawu Viewing Platform for the throughput test.



Test Results:

Intelligent Frequency Selection Mode	Wangweishan (2 dBi Antenna)	Majiawu (5 dBi Antenna)	Majiawu-to-Wangweishan Rate	Wangweishan-to-Majiawu Rate
Output Power	SNR	SNR		
29 dBm (20 MHz)	-0.3/3.2	2.8/2.8	5.3 Mbps	5.3 Mbps
29 dBm (10 MHz)	5.4	1.7	5.6 Mbps	5.6 Mbps

Wangweishan Mountain - 20 MHz Bandwidth

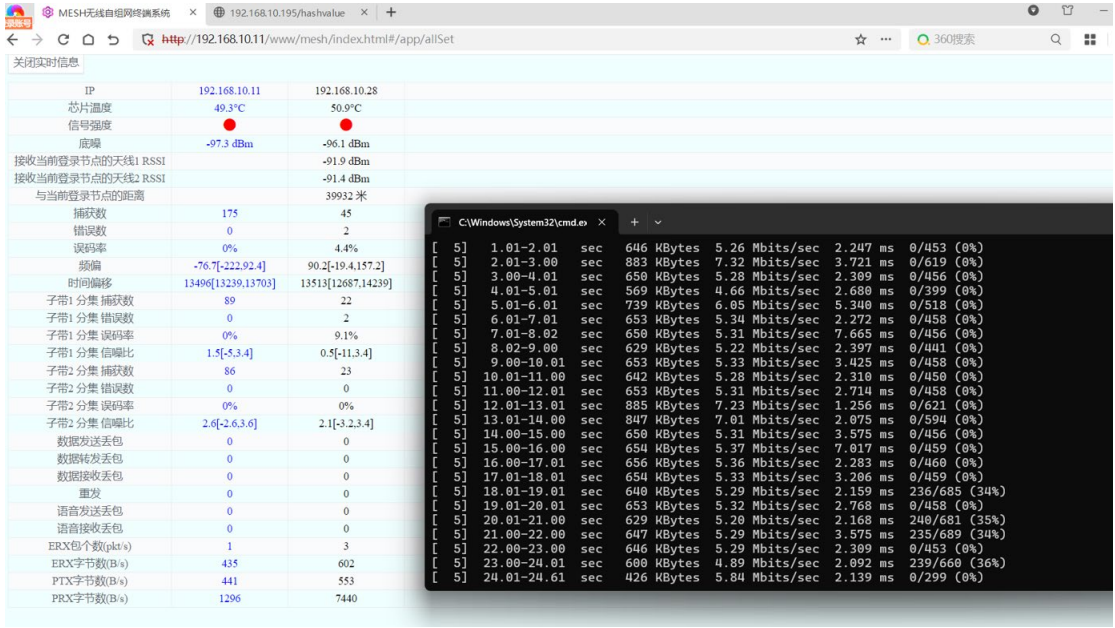

Wangweishan Mountain - 10 MHz Bandwidth

← → ↺ ↻

http://192.168.10.11/www/mesh/indexhtml#/app/allSet

☆ ... 360搜索

空间复用模式

无空间复用

修改

DSCP优先级列表

修改

关闭实时信息

IP	192.168.10.11	192.168.10.28
芯片温度	43.1°C	50.9°C
信号强度		
底噪	-99.8 dBm	-99.6 dBm
接收当前登录节点的天线1 RSSI		-92.3 dBm
接收当前登录节点的天线2 RSSI		-91.2 dBm
与当前登录节点的距离		40117 米
捕获数	569	18
错误数	0	4
误码率	0%	22.2%
频偏	-13.1[-85.7,50.7]	12.5[-136.3,119.2]
时间偏移	13606[13427,13747]	13563[13402,13674]
子带1 分集 捕获数	569	18
子带1 分集 错误数	0	4
子带1 分集 误码率	0%	22.2%
子带1 分集 信噪比	5.8[0.3,6.8]	1.7[-2.6,6.3]
数据发送丢包	0	0
数据转发丢包	0	0
数据接收丢包	0	0
重发	0	0
语音发送丢包	0	0
语音接收丢包	0	0
ERX包个数(pkt/s)	1	1
ERX字节数(B/s)	590	61
PTX字节数(B/s)	829	492447

C:\Windows\System32\cmd.exe

[5] 1.01-2.01 sec 636 KBytes 5.20 Mbits/sec 2.282 ms 0/446 (0%)

[5] 2.01-3.01 sec 666 KBytes 5.47 Mbits/sec 2.442 ms 0/467 (0%)

[5] 3.01-4.00 sec 677 KBytes 5.59 Mbits/sec 6.783 ms 0/475 (0%)

[5] 4.00-5.01 sec 690 KBytes 5.62 Mbits/sec 3.822 ms 0/484 (0%)

[5] 5.01-6.01 sec 663 KBytes 5.40 Mbits/sec 3.455 ms 0/465 (0%)

[5] 6.01-7.01 sec 662 KBytes 5.42 Mbits/sec 2.915 ms 0/464 (0%)

[5] 7.01-8.00 sec 674 KBytes 5.59 Mbits/sec 2.334 ms 0/473 (0%)

[5] 8.00-9.01 sec 693 KBytes 5.64 Mbits/sec 5.074 ms 0/486 (0%)

[5] 9.01-10.01 sec 690 KBytes 5.62 Mbits/sec 2.518 ms 0/484 (0%)

[5] 10.01-11.00 sec 672 KBytes 5.57 Mbits/sec 2.351 ms 0/471 (0%)

[5] 11.00-12.01 sec 690 KBytes 5.62 Mbits/sec 4.747 ms 0/484 (0%)

[5] 12.01-13.01 sec 680 KBytes 5.56 Mbits/sec 3.018 ms 0/477 (0%)

[5] 13.01-14.02 sec 690 KBytes 5.62 Mbits/sec 1.977 ms 0/484 (0%)

[5] 14.02-15.01 sec 683 KBytes 5.62 Mbits/sec 4.095 ms 0/479 (0%)

[5] 15.01-16.01 sec 689 KBytes 5.63 Mbits/sec 2.498 ms 0/483 (0%)

[5] 16.01-17.02 sec 687 KBytes 5.61 Mbits/sec 6.138 ms 0/482 (0%)

[5] 17.02-18.00 sec 656 KBytes 5.45 Mbits/sec 7.808 ms 0/469 (0%)

[5] 18.00-19.00 sec 666 KBytes 5.45 Mbits/sec 6.291 ms 0/467 (0%)

[5] 19.00-20.01 sec 673 KBytes 5.47 Mbits/sec 4.168 ms 0/472 (0%)

[5] 20.01-21.00 sec 680 KBytes 5.62 Mbits/sec 2.596 ms 0/477 (0%)

[5] 21.00-22.01 sec 677 KBytes 5.52 Mbits/sec 2.440 ms 0/475 (0%)

[5] 22.01-23.02 sec 692 KBytes 5.61 Mbits/sec 4.835 ms 0/485 (0%)

[5] 23.02-24.00 sec 644 KBytes 5.33 Mbits/sec 1.976 ms 0/452 (0%)

[5] 24.00-24.62 sec 405 KBytes 5.41 Mbits/sec 2.785 ms 0/284 (0%)