

# **20MCA-132 OBJECT ORIENTED PROGRAMMING LAB RECORD**

**Muhammed Sonu Ribin  
S2-RMCA – B  
ROLL NO:09**

**TABLE OF CONTENTS**

| EXP NO. | EXPERIMENT                                                       | PAGE NO. |
|---------|------------------------------------------------------------------|----------|
| 1       | Create 3 objects of the class                                    | 6        |
| 2       | matrix addition                                                  | 8        |
| 3       | Add complex numbers                                              | 11       |
| 4       | Read a matrix and check whether it is symmetric or not           | 12       |
|         |                                                                  |          |
| 5       | Program to Sort strings                                          | 16       |
| 6       | Search an element in an array                                    | 18       |
| 7       | Perform string manipulations                                     | 20       |
| 8       | Program using Array of Objects                                   | 21       |
| 9       | Area of different shapes using overloaded functions              | 24       |
| 10      | Use array of objects to display details of N teachers (Employee) | 26       |
| 11      | Use array of objects to display details of N teachers (Person)   | 29       |
| 12      | Program to read and print book information using inheritance     | 34       |

|    |                                                                                    |    |
|----|------------------------------------------------------------------------------------|----|
| 13 | Multiple inheritance using interface                                               | 38 |
| 14 | Create a menu driven program to find area and perimeter of objects using interface | 40 |
| 15 | Program to calculate method from interface                                         | 44 |
| 16 | Create a graphic package and test it                                               | 47 |
| 17 | Create an arithmetic package and test it                                           | 52 |
| 18 | Write a user defined exception class to authenticate the user name and password    | 55 |
| 19 | Find average of n positive integer and raise exception for each negative integer   | 58 |
| 20 | Arithmetic operation using thread                                                  | 60 |
| 21 | Fibonacci series and even numbers using thread                                     | 63 |
| 22 | Producer/Consumer using ITC                                                        | 65 |
| 23 | Program to create a generic stack and do the Push and Pop operations.              | 68 |
| 24 | Using generic method perform Bubble sort                                           | 71 |
| 25 | Perform built-in operations in Array List                                          | 78 |
| 26 | Program to remove all the elements from a linked list                              | 81 |

|     |                                                                                              |     |
|-----|----------------------------------------------------------------------------------------------|-----|
| 27  | Program to demonstrate the creation of queue object using the PriorityQueue class            | 85  |
| 28  | program to demonstrate the addition and deletion of elements in dequeue                      | 89  |
| 29  | Program to demonstrate the working of map interface by adding ,removing,changing.            | 90  |
| 30` | program to convert hash map to tree map.                                                     | 92  |
| 31  | Program to draw Circle, Rectangle, Line in Applet                                            | 94  |
| 32  | Program to find maximum of three numbers using AWT.                                          | 99  |
| 33  | Display happy face and sad face using applet based on marks secured                          | 103 |
| 34  | Construct a House on Applet, on mouse click event change the colour of door from blue to red | 105 |
| 35  | Implement a simple calculator using AWT components.                                          | 106 |
| 36  | Draw shapes for given parameters as per user's choice                                        | 108 |
| 37  | Develop a program to handle all mouse events                                                 | 110 |
| 38  | Develop a program to handle all window events                                                | 111 |
| 39  | Develop a program to handle Key events                                                       | 112 |
| 40  | Program list subdirectory and files, perform search operation                                | 113 |

|           |                                                                                                    |            |
|-----------|----------------------------------------------------------------------------------------------------|------------|
| <b>41</b> | <b>Program to write content to a file and display it on the console</b>                            | <b>115</b> |
| <b>42</b> | <b>Program to copy one file to another</b>                                                         | <b>117</b> |
| <b>43</b> | <b>Program to reads from a file having integers and copy even and odd number in separate files</b> | <b>120</b> |
| <b>44</b> | <b>Client server communication using Socket-TCP/IP</b>                                             | <b>122</b> |

- 1. Define a class 'product' with data members pcode, pname and price. Create 3 objects of the class and find the product having the lowest price.**

```
import java.util.*;

public class Product {
    int pcode;

    String pname;

    int price;

    public static void main(String[] args) {
        int smallest;

        Product p1 = new Product();

        Product p2 = new Product();

        Product p3 = new Product();

        p1.pcode=1001;

        p1.pname="RAM";

        p1.price=7000;

        p2.pcode=1002;

        p2.pname="Processor";

        p2.price=37000;
```

```
p3.pcode=1003;

p3.pname="SSD";

p3.price=16700;

if(p1.price<p2.price) {

    if(p3.price<p1.price) {

        smallest = p3.price;

        System.out.println(p3.pname+ " is the cheapest.");

    } else {

        smallest = p1.price;

        System.out.println(p1.pname+ " is the cheapest.");

    }

} else {

    if(p2.price<p3.price) {

        smallest = p2.price;

        System.out.println(p2.pname+ " is the cheapest.");

    } else {

        smallest = p3.price;

        System.out.println(p3.pname+ " is the cheapest.");

    }

}
```

```
    }  
  
    }  
  
    }  
  
}
```

## OUTPUT

```
D:\java1ab>javac Product.java  
D:\java1ab>java Product  
RAM is the cheapest.  
D:\java1ab>
```

## 2. Read 2 matrices from the console and perform matrix addition.

```
import java.util.*;  
  
class matrixadd{  
  
    public static void main(String[] args)  
    {  
        int row,col,i,j;  
        Scanner sc=new Scanner(System.in);  
        System.out.print("enter the no of rows:");  
        row=sc.nextInt();  
        System.out.print("enter the no of columns:");
```



```
col=sc.nextInt();
int mat1 [][]=new int[row][col];
int mat2 [][]=new int[row][col];
int mat3 [][]=new int[row][col];
System.out.print("enter the elements of matrix1 :");
for(i=0;i<row;i++)
{
for(j=0;j<col;j++)
{
mat1 [i] [j]=sc.nextInt();
}
System.out.println();
}
System.out.print("enter the elements of matrix2 :");
for(i=0;i<row;i++)
{
for(j=0;j<col;j++)
{
mat2[i] [j]=sc.nextInt();
}
```

```
System.out.println();  
}  
for(i=0;i<row;i++)  
{  
for(j=0;j<col;j++)  
{  
mat3[i][j]=mat1[i][j]+mat2[i][j];  
}  
}  
System.out.print("sum of matrix :");  
for(i=0;i<row;i++)  
{  
for(j=0;j<col;j++)  
{  
System.out.print(mat3[i][j]+"\\t");  
}  
System.out.println();  
}  
}  
}
```

## OUTPUT

```
D:\javab>javac matrixadd.java
D:\javab>java matrixadd
enter the no of rows:2
enter the no of columns:2
enter the elements of matrix1 :2
4
4
2
enter the elements of matrix2 :1
2
2
1
sum of matrix :3      6
6      3
D:\javab>
```

### 3. Add complex numbers

```
public class Complex{
    double a, b;
    Complex(double r, double i){
        this.a = r;
        this.b = i;
    }
    public static Complex sum(Complex c1, Complex c2)
    {
        Complex temp = new Complex(0, 0);
```

```
        temp.a = c1.a + c2.a;

        temp.b = c1.b+ c2.b;

        return temp;
    }

    public static void main(String args[]) {


        Complex c1 = new Complex(5, 4);
        Complex c2 = new Complex(6, 3.5);

        Complex temp = sum(c1, c2);

        System.out.printf("Sum is: "+ temp.a+" "+ temp.b +"i");

    }
}
```

## OUTPUT

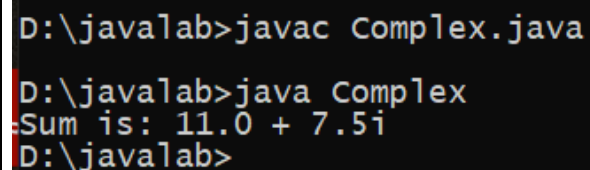

```
D:\java1ab>javac Complex.java
D:\java1ab>java Complex
Sum is: 11.0 + 7.5i
D:\java1ab>
```

## 4. Read a matrix from the console and check whether it is symmetric or not.

```
import java.util.Scanner;

public class Symmetric
{
```

```
public static void main(String[] args)
{
    Scanner sc = new Scanner(System.in);
    System.out.println("Enter the no. of rows :");
    int rows = sc.nextInt();
    System.out.println("Enter the no. of columns :");
    int cols = sc.nextInt();
    int matrix[][] = new int[rows][cols];
    System.out.println("Enter the elements :");
    for (int i = 0; i < rows; i++)
    {
        for (int j = 0; j < cols; j++)
        {
            matrix[i][j] = sc.nextInt();
        }
    }
    System.out.println("Printing the input matrix :");
    for (int i = 0; i < rows; i++)
    {
        for (int j = 0; j < cols; j++)
```

```
        {
            System.out.print(matrix[i][j]+"\\t");
        }
        System.out.println();
    }
    if(rows != cols)
    {
        System.out.println("The given matrix is not a square
matrix, so it can't be symmetric.");
    }
    else
    {
        boolean symmetric = true;
        for (int i = 0; i < rows; i++)
        {   for (int j = 0; j < cols; j++)   {
                if(matrix[i][j] != matrix[j][i])   {
                    symmetric = false;
                    break;           }
            }
        }
    }
}
```

```
        if(symmetric)
        {
            System.out.println("The given matrix is
symmetric...");
        }
        else
        {
            System.out.println("The given matrix is not
symmetric...");
        }
    }  sc.close();
    }
}
```

## OUTPUT

```
D:\javab>javac Symmetric.java
D:\javab>java Symmetric
Enter the no. of rows :
3
Enter the no. of columns :
3
Enter the elements :
2
1
4
3
5
1
7
8
7
Printing the input matrix :
2      1      4
3      5      1
7      8      7
The given matrix is not symmetric...
D:\javab>
```

## 5.Program to Sort strings

```
public class sortstring{
public static void main(String[] args)
{
String names[]={"amal","jyothi","college","of","engineering"};
String temp;
int n= names.length;
int i;
int j;
for(i=0;i<n;i++)
{
```



```
for(j=i+1;j<n;j++)
{
if(names[i].compareTo(names[j])>0)
{
    temp=names[i];
    names[i]=names[j];
    names[j]=temp;
}
}
}

System.out.println("the sorted array of string is :");
for(i=0;i<n;i++)
{
    System.out.println(names[i]);
}
}
}
```

## OUTPUT

```
D:\java1ab>javac sortstring.java
D:\java1ab>java sortstring
the sorted array of string is :
amal
college
engineering
jyothi
of
D:\java1ab>
```

### 6.Search an element in an array.

```
import java.util.*;

public class searchele{

public static void main(String[] args)

{

int n,i,b,flag=0;

Scanner s=new Scanner(System.in);

System.out.println("enter the number of elements for the
array :");

n=s.nextInt();

int a[]=new int[n];

System.out.println("enter the elements of the array :");


for(i=0;i<n;i++)

{
```

```
a[i]=s.nextInt();  
}  
System.out.println("enter the element u want to search :");  
b=s.nextInt();  
for(i=0;i<n;i++)  
{  
if(a[i]==b)  
{  
flag=1;  
break;  
}  
else  
{  
flag=0;  
}  
}  
if(flag==1)  
{  
System.out.println("element found at position :"+(i+1));  
}
```

```
else
{
System.out.println("element not found");
}
}
}
```

## OUTPUT

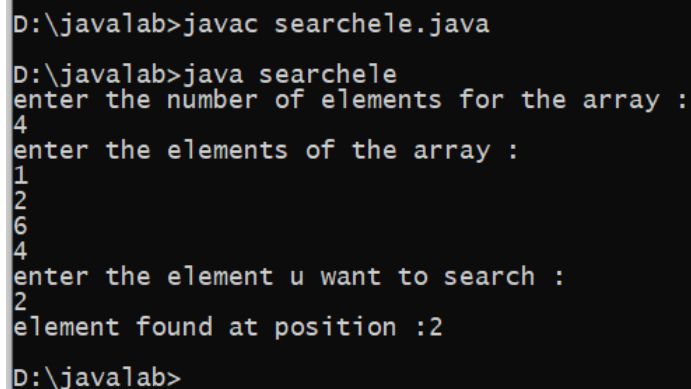


```
D:\javalab>javac searchele.java
D:\javalab>java searchele
enter the number of elements for the array :
4
enter the elements of the array :
1
2
6
4
enter the element u want to search :
2
element found at position :2
D:\javalab>
```

## 7. Perform string manipulations.

```
public class Sample_String
{
    public static void main(String[] args)
    {
        String str_Sample = "RockStar";
        System.out.println("Length of String: " + str_Sample.length());
    }
}
```

```
System.out.println("Character at position 5: " +  
str_Sample.charAt(5));  
  
System.out.println("EndsWith character 'r': " +  
str_Sample.endsWith("r"));  
  
System.out.println("Replace 'Rock' with 'Duke': " +  
str_Sample.replace("Rock", "Duke"));  
  
}  
  
}
```

## OUTPUT

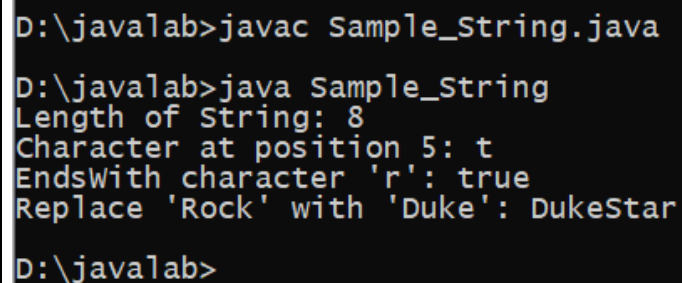

```
D:\javalab>javac Sample_String.java  
D:\javalab>java Sample_String  
Length of String: 8  
Character at position 5: t  
EndsWith character 'r': true  
Replace 'Rock' with 'Duke': DukeStar  
D:\javalab>
```

**8. Program to create a class for Employee having attributes eNo, eName eSalary. Read n employ information and Search for an employee given eNo, using the concept of Array of Objects.**

```
import java.util.Scanner;  
  
public class Employee {  
  
    int empid;  
  
    String name;
```

```
float salary;

public void getInput() {
    Scanner in = new Scanner(System.in);
    System.out.print("Enter the empid :: ");
    empid = in.nextInt();
    System.out.print("Enter the name :: ");
    name = in.next();
    System.out.print("Enter the salary :: ");
    salary = in.nextFloat();
}

public void display() {
    System.out.println("Employee id = " + empid);
    System.out.println("Employee name = " + name);
    System.out.println("Employee salary = " + salary);
}

public static void main(String[] args) {
    Employee e[] = new Employee[5];
    for(int i=0; i<5; i++) {
        e[i] = new Employee();
        e[i].getInput();
    }
}
```

```
}  
  
System.out.println("**** Data Entered as below ****");  
for(int i=0; i<5; i++) {  
    e[i].display();  
}  
}  
}
```

## OUTPUT

```
D:\javab>javac Employee.java  
D:\javab>java Employee  
Enter the empid :: 1  
Enter the name :: ankitha  
Enter the salary :: 32000  
Enter the empid :: 2  
Enter the name :: sree  
Enter the salary :: 31000  
Enter the empid :: 3  
Enter the name :: farhan  
Enter the salary :: 54000  
Enter the empid :: 4  
Enter the name :: farha  
Enter the salary :: 92000  
Enter the empid :: 5  
Enter the name :: arnav  
Enter the salary :: 81000  
**** Data Entered as below ****  
Employee id = 1  
Employee name = ankitha  
Employee salary = 32000.0  
Employee id = 2  
Employee name = sree  
Employee salary = 31000.0  
Employee id = 3  
Employee name = farhan  
Employee salary = 54000.0  
Employee id = 4  
Employee name = farha  
Employee salary = 92000.0  
Employee id = 5  
Employee name = arnav  
Employee salary = 81000.0  
D:\javab>
```

## 9.Area of different shapes using overloaded functions

```
public class shape
{
    int side,as,ar;

    public void area(int a)//area of square
    {
        side=a;
        as=a*a;
        System.out.println("area of square is"+as);
    }

    public void area(double r)//area of circle
    {
        double radi=r;
        double ac=(22/7)*radi*radi;
        System.out.println("area of circle is"+ac);
    }

    public void area(int l,int w)//area of rectangle
    {
        int len=l;
        int wid=w;
        ar=len*wid;
    }
}
```



```
System.out.println("area of rectangle"+ar);  
}  
public void area(int h,double r)//area of cylinder  
{ int he=h;  
double rad=r;  
double acy=(2*(22/7)*rad*he)+((22/7)*rad*rad);  
System.out.println("area of cylinder"+acy); }  
public static void main(String[] args)  
{ shape s=new shape();  
s.area(4);//area of square  
s.area(5.52);//area of circle  
s.area(5,4);//area of rectangle  
s.area(5,4.5); //area of cylinder }  
}
```

## OUTPUT

```
D:\javab>javac shape.java  
D:\javab>java shape  
area of square is16  
area of circle is91.41119999999998  
area of rectangle20  
area of cylinder195.75  
D:\javab>
```

**10.Create a class 'Employee' with data members Empid, Name, Salary, Address and constructors to initialize the data members. Create another class 'Teacher' that inherit the properties of class employee and contain its own data members department, Subjects taught and constructors to initialize these data members and also include display function to display all the data members. Use array of objects to display details of N teachers.**

```
import java.util.*;
```

```
class Employee
```

```
{
```

```
int empid;
```

```
String name,address;
```

```
double salary;
```

```
public Employee(int empid, String name, String address,  
double salary) {
```

```
this.empid = empid;
```

```
this.name = name;
```

```
this.address = address;
```

```
this.salary = salary;
```

```
}
```

```
}
```

```
public class Teacher extends Employee
{
String subject,department;

public Teacher(int empid, String name, String address,
double salary,String department,String subject ) {
super(empid, name, address, salary);
this.subject = subject;
this.department = department;
}

void display()
{
System.out.println("Empid    :    "+this.empid+"    Name    :
"+this.name+" Salary : "+this.salary+" Address : "+this.address+"
department : "+this.department+" Subjects : "+this.subject);
}

public static void main(String[] args) {
// TODO Auto-generated method stub
Scanner sc=new Scanner(System.in);
int n;

System.out.println("Enter number of Teachers : ");

n=sc.nextInt();
```

```
Teacher obj[]=new Teacher[n];
for(int i=0;i<n;i++) {
int j = i+1;
System.out.print("Enter Empid of teacher "+j+" : ");
int Empid = sc.nextInt();
System.out.print("Enter Name of teacher "+j+" : ");
String Name = sc.next();
System.out.print("Enter Salary of teacher "+j+" : ");
double Salary = sc.nextDouble();
System.out.print("Enter Address of teacher "+j+" : ");
String Address = sc.next();
System.out.print("Enter department of teacher "+j+" : ");
String department =sc.next();
System.out.print("Enter Subjects of teacher "+j+" : ");
String Subjects =sc.next();
obj[i] = new Teacher(Empid, Name, Address, Salary,
department, Subjects);
}
System.out.println("\n-----
-----\n");
```

```
System.out.println("Teacher's List \n");  
for(int i=0;i<n;i++) {  
    obj[i].display();  
}  
}  
}
```

## OUTPUT

```
D:\javallab>javac Teacher.java  
D:\javallab>java Teacher  
Enter number of Teachers :  
2  
Enter Empid of teacher 1 : 1  
Enter Name of teacher 1 : grace  
Enter Salary of teacher 1 : 50000  
Enter Address of teacher 1 : idukki  
Enter department of teacher 1 : mca  
Enter Subjects of teacher 1 : virtualization  
Enter Empid of teacher 2 : 2  
Enter Name of teacher 2 : meera  
Enter Salary of teacher 2 : 45000  
Enter Address of teacher 2 : kottayam  
Enter department of teacher 2 : mca  
Enter Subjects of teacher 2 : network  
  
-----  
Teacher's List  
Empid : 1 Name : grace Salary : 50000.0 Address : idukki department : mca Subjects : virtualization  
Empid : 2 Name : meera Salary : 45000.0 Address : kottayam department : mca Subjects : network  
D:\javallab>
```

**11. Create a class 'Person' with data members Name, Gender, Address, Age and a constructor to initialize the data members and another class 'Employee' that inherits the properties of class Person and also contains its own data members like Empid, Company\_name, Qualification, Salary and its own constructor. Create another class 'Teacher' that**

**inherits the properties of class Employee and contains its own data members like Subject, Department, Teacherid and also contain constructors and methods to display the data members. Use array of objects to display details of N teachers.**

```
import java.util.Scanner;

class Person
{ String name,gender,address;
  int age;

  public Person(String name, String gender, String address, int
  age) {
    super();
    this.name = name;
    this.gender = gender;
    this.address = address;
    this.age = age; } }

class Employee extends Person {
  int empid;
  String company_name,qualification;
  double salary;

  public Employee(String name, String gender, String address,
  int age, int empid, String company_name,
  String qualification, double salary) {
    super(name, gender, address, age);
```

```
this.empid = empid;
this.company_name = company_name;
this.qualification = qualification;
this.salary = salary; } }

class Teacher extends Employee {
String subject,department;
int teacherid;

public Teacher(String name, String gender, String address, int
age, int empid, String company_name,
String qualification, double salary, String subject, String
department, int teacherid) {
super(name, gender, address, age, empid, company_name,
qualification, salary);
this.subject = subject;
this.department = department;
this.teacherid = teacherid; }

void display() {
System.out.println("....Personal details...");
System.out.println("  Name   : "+this.name+"  Gender   :
"+this.gender+" Age :"+this.age);
System.out.println("...Employee details....");
System.out.println("Empid : "+this.empid +" company_name :
"+this.company_name+" Salary : "+this.salary+" Address :
"+this.address+" qualification : "+this.qualification);
```

```
System.out.println("...Teacher's details...");
System.out.println("    teacherid    :    "+this.teacherid+    "
department : "+this.department+" Subjects : "+this.subject); }
}

public class Main {
public static void main(String[] args)
{
Scanner s=new Scanner(System.in);
int n;
System.out.println("Enter    number    of    Teachers    : ");
n=s.nextInt();
Teacher obj[]=new Teacher[n];
for(int i=0;i<n;i++) {
System.out.println("Enter    the    person    name:"); String
nam1=s.next();
System.out.println("Enter the Gender: "); String gen1=s.next();
System.out.println("Enter the Address: "); String adr1=s.next();
System.out.println("Enter the Age:"); int age1=s.nextInt();
System.out.println("Enter the Employee id: ");
int id1=s.nextInt();
System.out.println("Enter the Company name: ");
String cname1=s.next();
System.out.println("Enter the Salary:");
```



```
double sal1=s.nextDouble();
System.out.println("Enter the Qualification:");
String qu1=s.next();
System.out.println("Enter the Teacher id: ");
int tid1=s.nextInt();
System.out.println("Enter the Department:");
String dept1=s.next();
System.out.println("Enter the Subject:");
String sub1=s.next();
obj[i]=new
Teacher(nam1,gen1,adr1,age1,id1,cname1,qu1,sal1,sub1,dept1,tid1); }
System.out.println("\n-----
-----\n");
for(int i=0;i<n;i++) {
obj[i].display(); }
}
}
```

## OUTPUT

```
D:\java1ab>javac Main.java
D:\java1ab>java Main
Enter number of Teachers :
1
Enter the person name:
navya
Enter the Gender:
female
Enter the Address:
kottayam
Enter the Age:
27
Enter the Employee id:
5
Enter the Company name:
AJCE
Enter the Salary:
45000
Enter the Qualification:
mca
Enter the Teacher id:
2
Enter the Department:
mca
Enter the Subject:
Network
-----
....Personal details...
Name : navya Gender : female Age :27
...Employee details....
Empid : 5 company_name : AJCE Salary : 45000.0 Address : kottayam qualification : mca
...Teacher's details...
teacherid : 2 department : mca Subjects : Network
D:\java1ab>
```

**12. Write a program has class Publisher, Book, Literature and Fiction. Read the information and print the details of books from either the category, using inheritance.**

```
import java.util.Scanner;

class Publisher {
    String Pubname;
    Publisher()
    {
        Scanner s=new Scanner(System.in);
```

```
System.out.println("Enter publisher name");
Pubname=s.next();
}
}
class Book extends Publisher
{
String title, author;
int price;
Book()
{
Scanner s=new Scanner(System.in);
System.out.println("Enter Title of the book");
title=s.next();
System.out.println("Enter Author's name");
author=s.next();
System.out.println("Enter price");
price=s.nextInt();
}}
class Literature extends Book
{ Literature()
{ System.out.println("Literature Books"); }
void display()
```

```
{
System.out.println("Publisher name: "+Pubname);
System.out.println("Title of the book: "+title);
System.out.println("Author's name: "+author);
System.out.println("Price: "+price);
}}

class Fiction extends Literature
{ Fiction()
{ System.out.println("Friction Books"); }
void display()
{ super.display(); }
public static void main(String args[])
{ int n;
Scanner s=new Scanner(System.in);
System.out.println("Enter the No of literature book: ");
int a=s.nextInt();
Literature L[]=new Literature[a];
for(int i=0;i<a;i++)
{ L[i]=new Literature(); }
System.out.println("Enter the No of Fiction book: ");
int b=s.nextInt();
Fiction F[]=new Fiction[b];
```

```
for(int i=0;i<b;i++)
{ F[i]=new Fiction(); }
int no;
System.out.println("Enter your choice of book");
no=s.nextInt();
int type =no;
switch (no) {
case 1:
System.out.println(".....Details of literature books");
for(int i=0;i<a;i++)
L[i].display();
break;
case 2:
System.out.println(".....Details of fiction books");
for(int i=0;i<b;i++)
F[i].display();
break;
default:
System.out.println("Wrong input"); } }
}
```

## OUTPUT

```
D:\java\lab>javac Fiction.java
D:\java\lab>java Fiction
Enter the No of literature book:
1
Enter publisher name
aroh
Enter Title of the book
dream
Enter Author's name
aroh
Enter price
340
Literature Books
Enter the No of Fiction book:
```

**13. Create classes Student and Sports. Create another class Result inherited from Student and Sports. Display the academic and sports score of a student.**

```
interface student
```

```
{ void stresult(); }
```

```
interface sports
```

```
{ void spresult(); }
```

```
class result implements student,sports{
```

```
    public void spresult() {
```

```
        String hundred="First";
```

```
        String twohundred="Second";
```

```
        String fivehundred="First";
```

```
        String relay="Second";
```

```
        System.out.println("Sports Result");
```

```
        System.out.println("Hundred Meter:"+hundred);
```

```
System.out.println("Two Hundred Meter:"+twohundred);
System.out.println("Five Hundred Meter:"+fivehundred);
System.out.println("Relay:"+relay); }
public void stresultt() {
    int physics=30;
    int chemistry=40;
    int maths=45;
    int english=50;
    int computer=50;
    System.out.println("Marks");
    System.out.println("Physics:"+physics);
    System.out.println("Chemistry:"+chemistry);
    System.out.println("Mathematics:"+maths);
    System.out.println("English:"+english);
    System.out.println("Computer:"+computer); }
    public static void main(String[] args)
    {    result r = new result();
        r.stresultt();
        r.spresult(); }
}
```

## OUTPUT

```
D:\javab>javac result.java
D:\javab>java result
Marks
Physics:30
Chemistry:40
Mathematics:45
English:50
Computer:50
Sports Result
Hundred Meter:First
Two Hundred Meter:Second
Five Hundred Meter:First
Relay:Second
D:\javab>
```

**14.Create an interface having prototypes of functions area() and perimeter(). Create two classes Circle and Rectangle which implements the above interface. Create a menu driven program to find area and perimeter of objects.**

```
import java.util.Scanner;

interface Shape
{
    void input();
    void area();
    void perimeter();
}

class Circle implements Shape
{
```



```
int r = 0;

double pi = 3.14, ar = 0, per=0;

public void input()
{
    Scanner s = new Scanner(System.in);
    System.out.print("Enter radius of circle:");
    r= s.nextInt();
}

public void area()
{
    ar = pi * r * r;
    System.out.println("Area of circle:"+ar);
}

public void perimeter()
{
    per = 2 * pi * r;
    System.out.println("Perimeter of circle:"+per);
}

}

class Rectangle implements Shape
```

```
{  
    int l = 0, b = 0;  
    double ar, per;  
    public void input()  
    {   Scanner s = new Scanner(System.in);  
        System.out.print("Enter length of rectangle:");  
        l = s.nextInt();  
        System.out.print("Enter breadth of rectangle:");  
        b = s.nextInt();   }  
    public void area()  
    {   ar = l * b;  
        System.out.println("Area of rectangle:"+ar);   }  
    public void perimeter()  
    {   per = 2 * (l + b);  
        System.out.println("Perimeter of  
rectangle:"+per);   }   }  
public class shapes  
{  
    public static void main(String[] args)  
    { int n;
```

```
Scanner s = new Scanner(System.in);  
Rectangle obj1 = new Rectangle();  
Circle obj2 = new Circle();  
System.out.println("1.Area of circle");  
System.out.println("2.Perimeter of circle");  
System.out.println("3.Area of rectangle");  
System.out.println("4.Perimeter of rectangle");  
System.out.println("Enter your option:");  
    n= s.nextInt();  
switch(n) {  
    case 1:  
        obj2.input();  
        obj2.area();  
        break;  
    case 2:  
        obj2.input();  
        obj2.perimeter();  
        break;  
    case 3:  
        obj2.input();
```

```
        obj2.area();  
        break;  
    case 4:  
        obj2.input();  
        obj2.perimeter();  
        break;  
    default:  
        System.out.println("Invalid option");  
}  
}  
}1
```

## OUTPUT

```
D:\javab>javac shapes.java  
D:\javab>java shapes  
1.Area of circle  
2.Perimeter of circle  
3.Area of rectangle  
4.Perimeter of rectangle  
Enter your option:  
1  
Enter radius of circle:4  
Area of circle:50.24  
D:\javab>
```

**15.Prepare bill with the given format using calculate method from interface. Order No.**

```
interface bill
{
    int productdetails();
}

class product1 implements bill{
    int id = 101,quantity= 2,unit=25,total=0;
    String name="A";
    public int productdetails()
    {
        total = quantity * unit;
        System.out.println("Product Id :"+id);
        System.out.println("Name :"+name);
        System.out.println("Quantity :"+quantity);
        System.out.println("Unit price :"+unit);
        System.out.println("Total :"+total);
        return(total);
    }
}

class product2 implements bill{
    int id = 102,quantity= 1,unit=100,total=0;
```


```
        String name="B";

        public int productdetails()
        {
            total = quantity * unit;
            System.out.println("Product Id :"+id);
            System.out.println("Name :"+name);
            System.out.println("Quantity :"+quantity);
            System.out.println("Unit price :"+unit);
            System.out.println("Total :"+total);
            return(total); } }

public class productbill
{
    public static void main(String[] args)
    {
        product1 p1 = new product1 ();
        product2 p2 = new product2();
        int t1= p1.productdetails();
        int t2= p2.productdetails();
        int t3=t1+t2;
```

```
        System.out.println("Net. Amount :"+t3);  
    }  
}
```

## OUTPUT

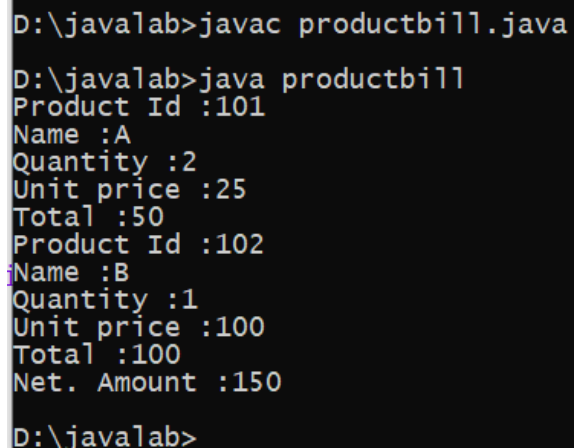

```
D:\javab>javac productbill.java  
D:\javab>java productbill  
Product Id :101  
Name :A  
Quantity :2  
Unit price :25  
Total :50  
Product Id :102  
Name :B  
Quantity :1  
Unit price :100  
Total :100  
Net. Amount :150  
D:\javab>
```

**16.Create a Graphics package that has classes and interfaces for figures Rectangle, Triangle, Square and Circle. Test the package by finding the area of these figures.**

Package

Graphics;

interface

Area1

```
{  
    public void  
    Rectangle();  
    public void  
    Triangle(); public  
    void Square();
```

```
    public void  
    Circle(); public  
    void getRect();  
    public void  
    getTri(); public  
    void getSqr();  
    public void  
    getCrI();  
}
```

```
//shapess.java
```

```
package
```

```
Graphiccs;
```

```
import
```

```
java.util.*;
```

```
public class shapess implements Area1
```

```
{
```

```
    double
```

```
    lr,lb,ra,th,tb,ta,saa,sa,c,
```

```
    cc;
```

```
    public void getrect()
```

```
    {
```

```
        Scanner ab= new
```



```
Scanner(System.in);

System.out.println("Enter the length
of the rectangle");lr=ab.nextInt();

System.out.println("Enter the
breadth of the rectangle");

lb=ab.nextInt();

}

public void rectangle()
{
    ra=lr*lb;
    System.out.println("Area of Rectangle is "+ra);
}

public void getTri()
{
    Scanner cb= new
    Scanner(System.in);

    System.out.println("Enter the
    height of the Triangle");

    th=cb.nextInt();

    System.out.println("Enter the base
```

```
        of the Triangle");tb=cb.nextInt();
    }
    public void Triangle()
    {
        ta=0.5*th*tb;
        System.out.println("Area of Triangle angle is "+ta);
    }
    public void getSqr()
    {
        Scanner sq= new
        Scanner(System.in);
        System.out.println("Enter the
        Side of the Square");
        sa=sq.nextInt();
    }
    public void Square()
    {
        saa=sa*sa;
        System.out.println("Area of Square is "+saa);
    }
    public void getCrI()
    {
```

```
Scanner sc= new
Scanner(System.in);
System.out.println("Enter the
radius of the Circle");
cc=sc.nextInt();
}
public void Circle()
{
    cr=3.14*cc*cc;
    System.out.println("Area of Square is "+cr);
}
public static void main(String[] args)
{
    shapess o= new
    shapess();
    o.getrect();
    o.rectangle
    ();o.getTri();
    o.Triangle();
    o.getSqr();
    o.Square();
}
```

```

        o.getCrI();
        o.Circle();
    }
}

```

## OUTPUT

```

D:\java_lab>javac -d . Area1.java
D:\java_lab>javac -d . shapess.java
D:\java_lab>java Graphics.shapes
Enter the length of the rectangle
5
Enter the breadth of the rectangle
2
Area of Rectangle is 10.0
Enter the height of the Triangle
9
Enter the base of the Triangle
2
Area of Triangle angle is 9.0
Enter the Side of the Square
4
Area of Square is 16.0
Enter the radius of the Circle
6
Area of Square is 113.03999999999999

```

**17. Create an Arithmetic package that has classes and interfaces for the 4 basic arithmetic operations. Test the package by implementing all operations on two given numbers**

package

Aarithmetic;

interface operations

{

public void

input(); public

void add();

```
public void  
subtract();  
public void  
multiply();  
public void  
division();  
  
}
```

```
package
```

```
Aarithmetic;
```

```
import
```

```
java.util.*;
```

```
public class basic implements operations
```

```
{
```

```
    double
```

```
    a,b,ad,dif,mult,div;
```

```
    public void input()
```

```
    {
```

```
        Scanner ab=new
```


```
        Scanner(System.in);
```

```
        System.out.println("Enter
```

```
        two numbers");
        a=ab.nextInt();
        b=ab.nextInt();
    }
    public void add()
    {
        ad=a+b;
        System.out.println("Sum is "+ad);
    }
    public void subtract()
    {
        dif=a-b;
        System.out.println("Difference is "+dif);
    }
    public void multiply()
    {
        mult=a*b;
        System.out.println("Product is "+mult);
    }
    public void division()
    {
        div=a/b;
```

```
        System.out.println("Quotient is "+div);  
    }  
    public static void main(String[] args)  
    {  
        basic o=new  
        basic();o.input();  
        o.add();  
        o.subtract(  
        );  
        o.multiply();  
        o.division();  
    }  
}
```

## OUTPUT

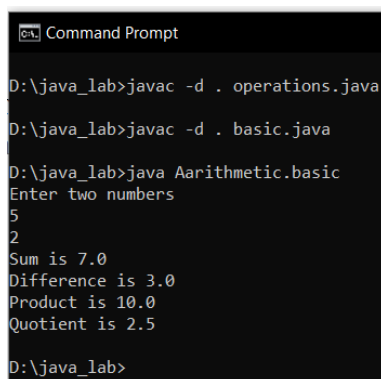

```
C:\> Command Prompt  
D:\java_lab>javac -d . operations.java  
D:\java_lab>javac -d . basic.java  
D:\java_lab>java Aarithmetic.basic  
Enter two numbers  
5  
2  
Sum is 7.0  
Difference is 3.0  
Product is 10.0  
Quotient is 2.5  
D:\java_lab>
```

**18. Write a user defined exception class to authenticate the user name and password.**

```
import java.util.Scanner;

class UsernameException extends Exception {
    public UsernameException(String msg) {
        super(msg);
    }
}

class PasswordException extends Exception {
    public PasswordException(String msg) {
        super(msg);
    }
}

public class CheckLoginCredential {
    public static void main(String[] args) {
        Scanner s = new Scanner(System.in);
        String username, password;
        System.out.print("Enter username :: ");
        username = s.nextLine();
        System.out.print("Enter password :: ");
        password = s.nextLine();
        int length = username.length();
        try {
            if(length < 6)
```



```
    throw new UsernameException("Username must be
greater than 6 characters ???");

    else if(!password.equals("hello"))

        throw new PasswordException("Incorrect password\nType
correct password ???");

    else

        System.out.println("Login Successful !!!");

}

catch (UsernameException u) {

    u.printStackTrace();

}

catch (PasswordException p) {

    p.printStackTrace();

}

finally {

    System.out.println("The finally statement is executed");

}

}

}
```

## OUTPUT

```
D:\javab>java CheckLoginCredential
Enter username :: swarna
Enter password :: Swarna#1
PasswordException: Incorrect password
Type correct password ???
    at CheckLoginCredential.main(CheckLoginCredential.java:25)
The finally statement is executed
D:\javab>
```


**19. Find the average of N positive integers, raising a user defined exception for each negative input.**

```
import java.util.Scanner;
import java.util.InputMismatchException;
public class TestDemo
{
    public static void main(String args[])
    {
        double total = 0, N, userInput;
        Scanner input = new Scanner(System.in);
        while (true)
        {
            System.out.print("Enter how many numbers(N) to
calculate average:");
            userInput = input.nextDouble();
            if (userInput > 0)
            {
                N = userInput;
            }
        }
    }
}
```

```
        break;
    }
    else
        System.out.println("N must be positive.");
    }
    for (int i = 0; i < N; i++)
    {
        while (true)
        {
            System.out.print("Enter number:");
            try
            {
                userInput = input.nextDouble();
                total += userInput;
                break;
            }
            catch (InputMismatchException e)
            {
                input.nextLine();
                System.out.println("Input must be a
number. Try again");
            }
        }
    }
}
```

```
        }  
    }  
    System.out.println("Average: "+ total / N);  
}  
}
```

## OUTPUT

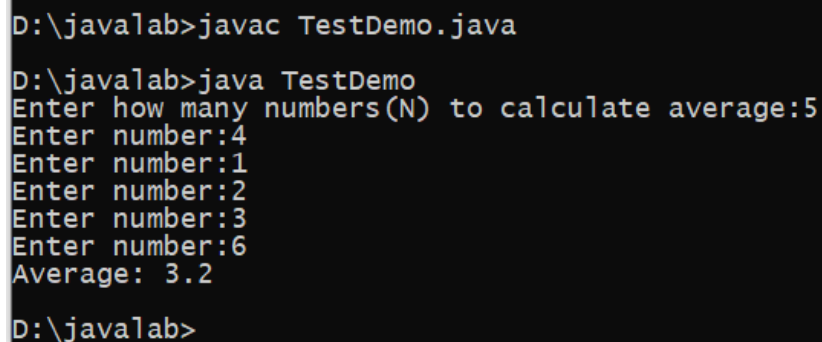

```
D:\java1ab>javac TestDemo.java  
D:\java1ab>java TestDemo  
Enter how many numbers(N) to calculate average:5  
Enter number:4  
Enter number:1  
Enter number:2  
Enter number:3  
Enter number:6  
Average: 3.2  
D:\java1ab>
```

**20. Define 2 classes; one for generating multiplication table of 5 and other for displaying first N prime numbers. Implement using threads. (Thread class)**

```
import java.util.*;
```

```
class ThreadA extends Thread{
```

```
    public void run( ) {
```

```
        int n = 5;
```

```
        for (int i = 1; i <= 10; ++i)
```

```
            System.out.println(n + " * " + i +
```

```
                " = " + n * i);
```

```
        System.out.println("Exiting from Thread A ...");
```

```
    }  
}  
  
class ThreadB extends Thread  
{  
    public void run( )  
    {  
        Scanner sc = new Scanner(System.in);  
        int i,n,p,count,flag;  
        System.out.println("Enter the number of prime terms you  
want!");  
        n=sc.nextInt();  
        System.out.println("First "+n+" prime numbers are :-");  
        p=2;  
        i=1;  
        while(i<=n)  
        {  
            flag=1;  
            for(count=2;count<=p-1;count++)  
            {  
                if(p%count==0)  
                {
```

```
        flag=0;
        break;
    }
}
if(flag==1)
{
    System.out.print(p+" ");
    i++;
}
p++;
}
}
//System.out.println("Exiting from Thread B ...");
}
```

```
public class Demonstration_111
{
    public static void main(String args[]) {
        ThreadA a = new ThreadA();
        ThreadB b = new ThreadB();
        a.start();
        b.start();
    }
}
```

```
        System.out.println("... Multithreading is over");
    }
}
```

## OUTPUT

```
D:\javab>javac Demonstration_111.java
D:\javab>java Demonstration_111
... Multithreading is over
5 * 1 = 5
5 * 2 = 10
5 * 3 = 15
5 * 4 = 20
5 * 5 = 25
5 * 6 = 30
5 * 7 = 35
5 * 8 = 40
5 * 9 = 45
5 * 10 = 50
Exiting from Thread A ...
Enter the number of prime terms you want!
4
First 4 prime numbers are :-
2 3 5 7
D:\javab>
```

**21. Define 2 classes; one for generating Fibonacci numbers and other for displaying even numbers in a given range. Implement using threads. (Runnable Interface)**

```
public class Mythread {
    public static void main(String[] args) {
        Runnable r = new Runnable1 ();
        Thread t = new Thread(r);
        t.start();

        Runnable r2 = new Runnable2();
        Thread t2 = new Thread(r2);
        t2.start();
    }
}
```

```
}  
}
```


```
class Runnable2 implements Runnable{  
    public void run(){  
        for(int i=0;i<11;i++){  
            if(i%2 == 1)  
                System.out.println(i);  
        }  
    }  
}
```

```
class Runnable1 implements Runnable{  
    public void run(){  
        int n1=0,n2=1,n3,i,count=10;  
        System.out.print(n1+" "+n2);//printing 0 and 1  
        for(i=2;i<count;++i)//loop starts from 2 because 0 and 1 are  
        already printed  
        {  
            n3=n1+n2;  
            System.out.print(" "+n3);  
            n1=n2;
```



```
n2=n3;
}
}
}
```

## OUTPUT

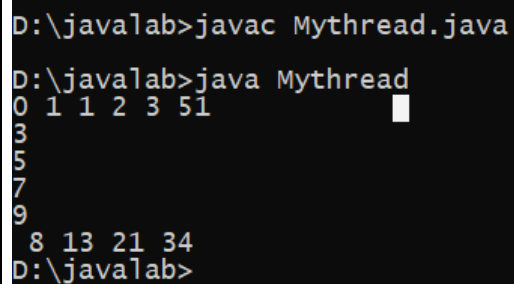

```
D:\java1ab>javac Mythread.java
D:\java1ab>java Mythread
0 1 1 2 3 5 1
3
5
7
9
8 13 21 34
D:\java1ab>
```

## 22.Program to draw Circle, Rectangle, Line in Applet.

```
import java.awt.*;
import java.applet.*;
public class circle extends Applet
{
    public void paint(Graphics g)
    {
        g.setColor(Color.red);
        g.fillOval(80,70,150,150);
        g.drawOval(80,70,150,150);
        g.setColor(Color.BLACK);
    }
}
```

```
}
```

```
<html>
```

```
<head>
```

```
</head>
```

```
<body>
```

```
<div align="center">
```


```
<applet code="circle.class"width="800"height="500">
```

```
</applet>
```

```
</div>
```

```
</body>
```

```
</html>
```



```
import java.awt.*;
import java.applet.*;

public class rectapplet extends Applet
{
    public void paint(Graphics g)
    {
        g.setColor(Color.YELLOW);
        g.fillRect(50,100,180,80);
        g.setColor(Color.BLACK);
        g.drawRect(50,100,180,80);
    }
}

<html>
<head>
</head>
<body>
<div align="center">
<applet code="rectapplet.class"width="800"height="500">
</applet>
```

</div>

</body>

</html>



### **23.Program to find maximum of three numbers using AWT.**

```
import java.awt.*;
```

```
import java.applet.*;
```

```
import java.awt.event.*;
```

```
public class findlarge extends Applet implements  
ActionListener
```

```
{
```

```
    TextField t1,t2,t3,t4;
```

```
    Button b1;
```

```
    public void init()
```

```
{
```

```
t1=new TextField(15);  
t1.setBounds(100,25,50,20);  
t2=new TextField(15);  
t2.setBounds(100,25,50,20);  
t3=new TextField(15);  
t3.setBounds(100,25,50,20);  
t4=new TextField("Ans");  
t4.setBounds(175,50,50,20);  
b1= new Button("Find");  
b1.setBounds(175,65,50,40);  
add(t1);  
add(t2);  
add(t3);  
add(t4);  
add(b1);  
b1.addActionListener(this);  
}  
public void actionPerformed(ActionEvent e)  
{  
    int i,j,k;
```

```
i=Integer.parseInt(t1.getText());
j=Integer.parseInt(t2.getText());
k=Integer.parseInt(t3.getText());
if(i<j)
{
    if(j<k)
        t4.setText(""+k);
    else
        t4.setText(""+j);
}
else
    t4.setText(""+i);
}
}
```

```
<html>
<head>
</head>
<body>
<div align="center">
<applet code="findlarge.class" width="800" height="500">
```

</applet>

</div>

</body>

</html>

## OUTPUT



A screenshot of a Java applet interface. It features a light gray horizontal bar at the top. Below this bar, there are four text input fields arranged horizontally. The first three fields contain the numbers '134', '121', and '123' respectively. The fourth field contains '134'. To the right of these fields is a button labeled 'Find' with a dotted border.

**24. Find the percentage of marks obtained by a student in 5 subjects. Display a happy face if he secures above 50% or a sad face if otherwise.**

```
import java.awt.*;
```

```
import java.awt.event.*;
```

```
import java.applet.*;
```

```
public class marks extends Applet implements  
ActionListener {
```

```
public int per =0;
```

```
Label l1 = new Label("enter Marks of Subject 1: ");
```

```
Label l2 = new Label("enter Marks of Subject 2: ");
```

```
Label l3 = new Label("enter Marks of Subject 3: ");
```

```
Label l4 = new Label("enter Marks of Subject 4: ");
```

```
Label l5 = new Label("enter Marks of Subject 5: ");
```

```
Label l6 = new Label("Total Percentage: ");
```

```
TextField t1 = new TextField(10);
```

```
TextField t2 = new TextField(10);
```

```
TextField t3 = new TextField(10);
```

```
TextField t4 = new TextField(10);
```

```
TextField t5 = new TextField(10);
```

```
TextField t6 = new TextField(10);
```

```
Button b1 = new Button("CALCULATE PERCENTAGE");
```

```
public marks()
```

```
{
```

```
l1.setBounds(50, 100, 280, 20);
```

```
l2.setBounds(50, 150, 280, 20);
```

```
l3.setBounds(50, 200, 280, 20);
```

```
l4.setBounds(50, 250, 280, 20);
```

```
l5.setBounds(50, 300, 280, 20);
```

```
l6.setBounds(50, 350, 280, 20);
```



```
t1.setBounds(200, 100, 300, 20);
```

```
t2.setBounds(200, 150, 300, 20);
```

```
t3.setBounds(200, 200, 300, 20);
```

```
t4.setBounds(200, 250, 300, 20);
```

```
t5.setBounds(200, 300, 300, 20);
```

```
t6.setBounds(200, 350, 300, 20);
```

```
b1.setBounds(200,400, 200, 20);
```

```
GridLayout g1 = new GridLayout(20, 2, 5, 5);
```

```
setLayout(g1);
```

```
add(l1);
```

```
add(t1);
```

```
add(l2);
```

```
add(t2);
```

```
add(l3);
```

```
add(t3);
```

```
add(l4);
```

```
add(t4);
```

```
add(l5);
```

```
add(t5);
add(l6);
add(t6);
add(b1);
b1.addActionListener(this);
}
@Override
public void actionPerformed(ActionEvent e) {
// TODO Auto-generated method stub
int m1 = Integer.parseInt(t1.getText());
int m2= Integer.parseInt(t2.getText());
int m3= Integer.parseInt(t3.getText());
int m4= Integer.parseInt(t4.getText());
int m5= Integer.parseInt(t5.getText());

if(e.getSource()==b1)
{
int add=m1+m2+m3+m4+m5;
per=add/5;
t6.setText(String.valueOf(per)+" %");
```

```
repaint();  
}  
}  
  
public void paint(Graphics g)  
{  
    if(per>=50)  
    {  
        g.setColor(Color.yellow);  
        g.drawOval(100, 700, 150, 150);  
        g.fillOval(100, 700, 150, 150);  
        g.setColor(Color.BLACK);  
        g.fillOval(120, 740, 15, 15);  
        g.fillOval(170, 740, 15, 15);  
        g.drawArc(130, 800, 50, 20, 180, 180);  
    }  
    else if(per>0 && per<50)  
    {  
        g.setColor(Color.yellow);  
        g.drawOval(100, 700, 150, 150);  
        g.fillOval(100, 700, 150, 150);  
    }  
}
```

```
g.setColor(Color.BLACK);
g.fillOval(120, 740, 15, 15);
g.fillOval(170, 740, 15, 15);
g.drawArc(130,820,50,20,0,180);
}
}
public static void main(String args[]) {
    new marks();
}
}
<html>
<head></head>
<body><div align="center">
<applet code="marks.class"width="1000"height="1000">
</applet></div>
</body>
</html>
```

## OUTPUT

Applet Viewer: marks.class

Applet

enter Marks of Subject 1:

44

enter Marks of Subject 2:

45

enter Marks of Subject 3:

46

enter Marks of Subject 4:

47

enter Marks of Subject 5:

49

Total Percentage:

46 %

CALCULATE PERCENTAGE



Applet Viewer: marks.class

Applet

enter Marks of Subject 1:

56

enter Marks of Subject 2:

55

enter Marks of Subject 3:

75

enter Marks of Subject 4:

95

enter Marks of Subject 5:

95

Total Percentage:

75 %

CALCULATE PERCENTAGE



**25.Using 2D graphics commands in an Applet, construct a house. On mouse click event, change the color of the door from blue to red.**

```
import java.applet.*;
import java.awt.*;
import java.util.*;
import java.awt.event.*;

public class house extends Applet implements
MouseListener,Runnable
{
    private Color textColor = Color.BLUE;

    public void paint(Graphics g)
    { int [] x = {150, 300, 225};
    int [] y = {150, 150, 25};
    g.drawRect(150, 150, 150, 200); //House
    g.drawRect(200, 200, 50, 150);
    g.setColor(Color.blue);
    g.setColor(textColor);
    g.fillRect(200, 200, 50, 150); // Door
    g.setColor(Color.black);
    g.fillPolygon(x, y, 3); // Roof
```

```
}  
  
public void init()  
{  
    this.setSize(200,200);  
    addMouseListener(this);  
}  
  
public void run()  
{  
    while(true)  
    {  
        repaint();  
        try  
        {  
            Thread.sleep(17);  
        }  
        catch (InterruptedException e)  
        {  
            e.printStackTrace();  
        }  
    }  
}
```

```
    }  
}  
public void mouseClicked(MouseEvent e)  
{  
    int x=e.getX(),y=e.getY();  
    if(x>=60 && x<=120 && y>=80 && y<=95)  
        textColor=Color.BLUE;  
    else  
        textColor=Color.RED;  
    repaint();  
    System.out.println("Mouse Position: X= "+x+"Y"+y);  
}  
public void mousePressed(MouseEvent e){}  
public void mouseReleased(MouseEvent e){}  
public void mouseEntered(MouseEvent e){}  
public void mouseExited(MouseEvent e){}  
}
```


```
<html><head></head>  
<body><div align="center">
```




```
<applet code="house.class"width="800"height="500">  
</applet></div>  
</body></html>
```

## OUTPUT

Applet



Applet Viewer: house.class  
Applet

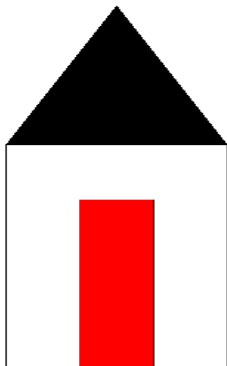

## 26. Implement a simple calculator using AWT components.

```
import java.awt.*;  
import java.awt.event.*;
```

class calc implements ActionListener

{

Frame f=new Frame();

Label l1=new Label("enter number ");

Label l2=new Label("enter number ");

Label l3=new Label("result");

TextField t1=new TextField();

TextField t2=new TextField();

TextField t3=new TextField();

Button b1=new Button("ADD");

Button b2=new Button("SUB");

Button b3=new Button("MUL");

Button b4=new Button("DIV");

calc() {

l1.setBounds(50,100,100,20);

l2.setBounds(50,150,100,20);

l3.setBounds(50,200,100,20);

t1.setBounds(200,100,100,20);

t2.setBounds(200,150,100,20);

t3.setBounds(200,200,100,20);

```
b1.setBounds(50,250,50,20);
b2.setBounds(110,250,50,20);
b3.setBounds(170,250,50,20);
b4.setBounds(230,250,50,20);

f.add(l1);
f.add(l2);
f.add(t1);
f.add(t2);
f.add(t3);
f.add(b1);
f.add(b2);
f.add(b3);
f.add(b4);

b1.addActionListener(this);
b2.addActionListener(this);
b3.addActionListener(this);
b4.addActionListener(this);

f.setLayout(null);
f.setVisible(true);
f.setSize(500,500); }
```

```
public void actionPerformed(ActionEvent e){  
    int i=Integer.parseInt(t1.getText());  
    int j=Integer.parseInt(t2.getText());  
    if(e.getSource()==b1) {  
        t3.setText(String.valueOf(i+j)); }  
    if(e.getSource()==b2) {  
        t3.setText(String.valueOf(i-j)); }  
    if(e.getSource()==b3)  
    {  
        t3.setText(String.valueOf(i*j));  
    }  
    if(e.getSource()==b4)  
    {  
        t3.setText(String.valueOf(i/j)); }  
    }  
    public static void main(String args[]) {  
        new calc();  
    }  
}
```

## OUTPUT

enter number 3

enter number 2

6

ADD SUB MUL DIV

enter number 10

enter number 2

5

ADD SUB MUL DIV

**27. Develop a program that has a Choice component which contains the names of shapes such as rectangle, triangle, square and circle. Draw the corresponding shapes for given parameters as per user's choice.**

```
import java.applet.*;
import java.awt.*;
import java.awt.Graphics;
import java.awt.event.*;

public class figchoice extends Applet implements
ItemListener {

    Choice ch;
```

```
int x1 []= {50,120,220,20};  
int y1 []= {50,120,20,20};  
int n=4;  
int Selection;  
public void init()  
{  
    ch = new Choice();  
    ch.addItem("Select a Shape");  
    ch.addItem("Rectangle");  
    ch.addItem("Triangle");  
    ch.addItem("Square");  
    ch.addItem("Circle");  
    add(ch);  
    ch.addItemListener(this);  
}  
public void itemStateChanged (ItemEvent e)  
{  
    Selection = ch.getSelectedIndex();  
    repaint();  
}
```


```
public void paint(Graphics g)
{
    super.paint(g);
    if (Selection == 1)
    {   g.drawRect(50,50,100,150);   }
    if (Selection == 2)
    {   g.drawPolygon(x1,y1,n);   }
    if (Selection == 3)
    {   g.drawRect(50,50,100,100);   }
    if (Selection == 4)
    {
        g.drawOval(70,30,100,100);
    } } }
<html><head>
</head>
<body>
<div align="center">
<applet code="figchoice.class"width="800"height="500">
</applet>
</div>
```

&lt;/body&gt;

&lt;/html&gt;

**OUTPUT**

Applet



Triangle ▾

Applet



Square ▾

Applet



Circle ▾

Applet



Rectangle ▾




**28. Develop a program to handle all window events**

```
import java.awt.*;
import java.awt.event.WindowEvent;
import java.awt.event.WindowListener;
public class winexamp extends Frame implements
WindowListener
{
winexamp()
{
addWindowListener(this);
setSize(400,400);
setLayout(null);
setVisible(true);
}
public static void main(String args[])
{
new winexamp();
}
public void windowActivated(WindowEvent arg0)
{
System.out.println("Window Activated");
}
public void windowClosed(WindowEvent args0)
{
System.out.println("Window closed");
}
public void windowClosing(WindowEvent arg0)
{
System.out.println("Window closing");
}
public void windowDeactivated(WindowEvent arg0)
{

```

```
System.out.println("Window DEActivated");  
}  
public void windowDeiconified(WindowEvent arg0)  
{  
System.out.println("Window Deiconified");  
}  
public void windowIconified(WindowEvent arg0)  
{  
System.out.println("Window iconified");  
}  
public void windowOpened(WindowEvent arg0)  
{  
System.out.println("Window opened");  
}  
}
```

## OUTPUT

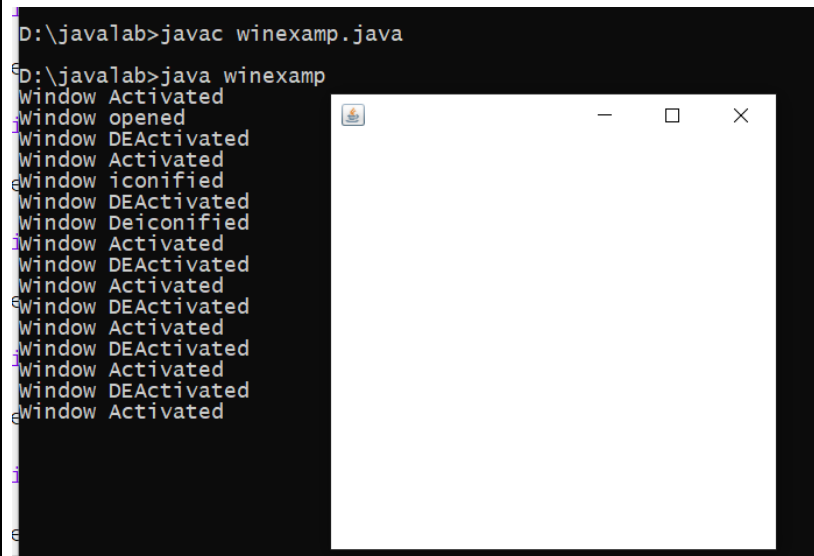

```
D:\javallab>javac winexamp.java  
D:\javallab>java winexamp  
Window Activated  
Window opened  
Window DEActivated  
Window Activated  
Window iconified  
Window DEActivated  
Window Deiconified  
Window Activated  
Window DEActivated  
Window Activated  
Window DEActivated  
Window Activated  
Window DEActivated  
Window Activated  
Window DEActivated  
Window Activated  
Window DEActivated  
Window Activated
```

## 29. Develop a program to handle all mouse events


```
import java.awt.*;
```

```
import java.awt.event.*;

public class mousexamp12 extends Frame implements
MouseListener
{
    mousexamp12()
    {
        addMouseListener(this);
        setSize(400,400);
        setLayout(null);
        setVisible(true);
    }
    public void mouseClicked(MouseEvent e)
    {
        Graphics g=getGraphics();
        g.setColor(Color.blue);
        g.fillOval(e.getX(),e.getY(),30,30);
    }
    public void mouseEntered(MouseEvent e)
    {
    }
    public void mouseExited(MouseEvent e)
    {
    }
    public void mousePressed(MouseEvent e)
```

```
{  
}  
public void mouseReleased(MouseEvent e){  
}  
public static void main(String args[])  
{  
    new mousexamp12();  
}  
}
```

## OUTPUT

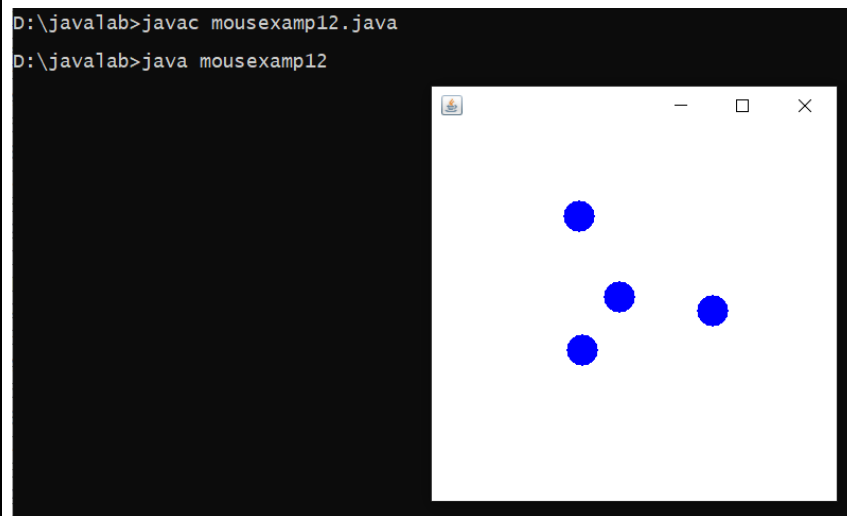


## 30. Develop a program to handle Key events.

```
import java.awt.*;  
import java.awt.event.*;  
public class keyexamp extends Frame implements  
KeyListener
```

```
{
Label l;
TextArea a;
keyexamp()
{
l=new Label();
l.setBounds(20,50,200,20);
a=new TextArea();
a.setBounds(20,80,300,300);
a.addKeyListener(this);
add(l);
add(a);
setSize(400,400);
setLayout(null);
setVisible(true);
}
public void keyPressed(KeyEvent e)
{
}
public void keyReleased(KeyEvent e)
{
String t=a.getText();
String w[]=t.split("\\s");
```

```
l.setText("Words="+w.length+" Characters="+t.length());  
}  
public void keyTyped(KeyEvent e)  
{  
public static void main(String args[])  
{  
new keyexamp();  
}  
}
```

## OUTPUT

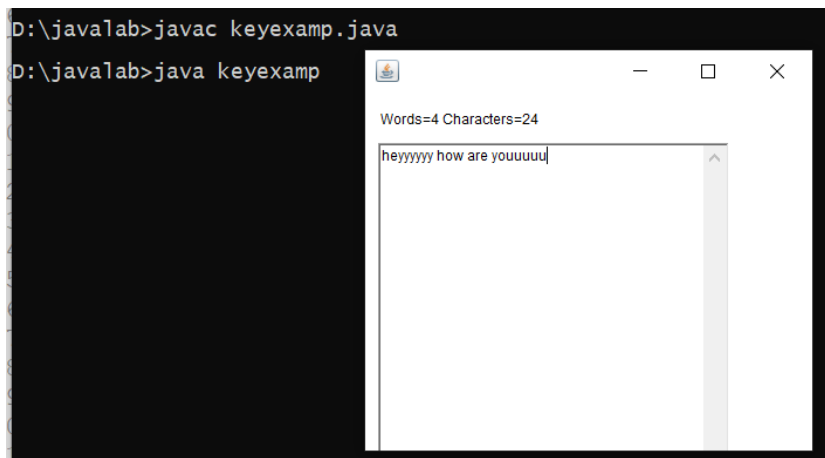

## 31.Producer/Consumer using ITC

```
import java.util.*;  
class Q  
{
```

```
int n;
boolean statusFlag=false;
synchronized void put(int n)
{
try
{
while(statusFlag)
{
wait();
}
}
catch(InterruptedException e){}
this.n=n;
System.out.println("Put :"+n);
statusFlag=true;
notify();
}
synchronized int get()
{
try{
```

```
while(!statusFlag)
{
wait();
}
}
catch(InterruptedException e){}
statusFlag=false;
System.out.println("Got :"+n);
notify();
return n;
}
}
class Producer implements Runnable
{
Q q;
Producer(Q q)
{
this.q=q;
new Thread(this, "Producer").start();
}
```



```
public void run()
```

```
{
```

```
int i=0;
```

```
while(true)
```

```
{
```

```
q.put(i++);
```

```
}
```

```
}
```

```
}
```

```
class Consumer implements Runnable
```

```
{
```

```
Q q;
```

```
Consumer(Q q)
```

```
{
```

```
this.q=q;
```

```
new Thread(this,"Consumer").start();
```

```
}
```


```
public void run()
```

```
{
```

```
while(true)
```

```
{  
q.get();  
}  
}  
}  
public class D  
{  
public static void main(String[] args)  
{  
Q q=new Q();  
Producer p=new Producer(q);  
Consumer c=new Consumer(q);  
}  
}
```

## OUTPUT

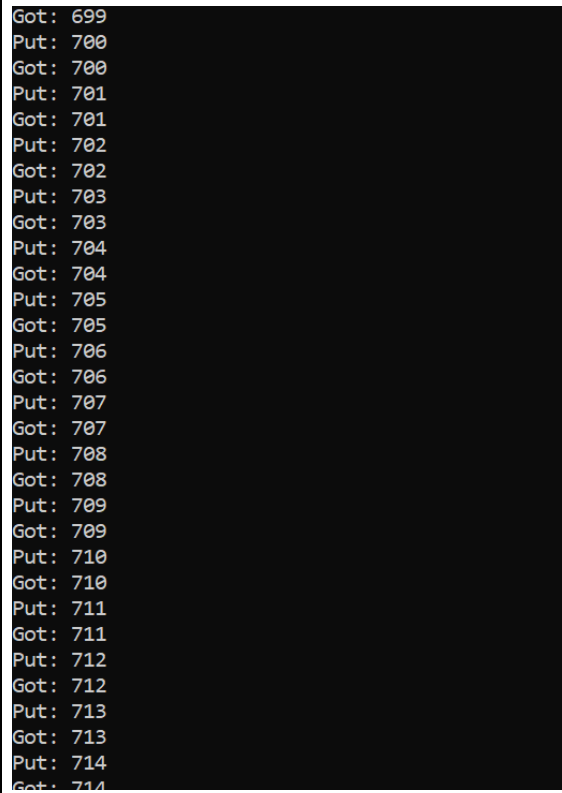

```
Got: 699
Put: 700
Got: 700
Put: 701
Got: 701
Put: 702
Got: 702
Put: 703
Got: 703
Put: 704
Got: 704
Put: 705
Got: 705
Put: 706
Got: 706
Put: 707
Got: 707
Put: 708
Got: 708
Put: 709
Got: 709
Put: 710
Got: 710
Put: 711
Got: 711
Put: 712
Got: 712
Put: 713
Got: 713
Put: 714
Got: 714
```

### **32. Program to create a generic stack and do the Push and Pop operations.**

```
public class StackAsLinkedList {
    StackNode root;

    static class StackNode {
        int data;
        StackNode next;
        StackNode(int data) { this.data = data; }
    }
}
```

```
public boolean isEmpty()
{
    if (root == null) {
        return true;
    }
    else
        return false;
}
```

```
public void push(int data)
{
    StackNode newNode = new StackNode(data);

    if (root == null) {
        root = newNode;
    }
    else {
        StackNode temp = root;
        root = newNode;
        newNode.next = temp;
    }
}
```

```
    }  
    System.out.println(data + " pushed to stack");  
}
```

```
public int pop()  
{  
    int popped = Integer.MIN_VALUE;  
    if (root == null) {  
        System.out.println("Stack is Empty");  
    }  
    else {  
        popped = root.data;  
        root = root.next;  
    }  
    return popped;  
}
```

```
public int peek()  
{  
    if (root == null) {
```

```
        System.out.println("Stack is empty");
        return Integer.MIN_VALUE;
    }
    else {
        return root.data;
    }
}


// Driver code
public static void main(String[] args)
{

    StackAsLinkedList sll = new StackAsLinkedList();
    sll.push(10);
    sll.push(20);
    sll.push(30);

    System.out.println(sll.pop()
        + " popped from stack");
}
```

```
        System.out.println("Top element is " + sll.peek());  
    }  
}
```

## OUTPUT

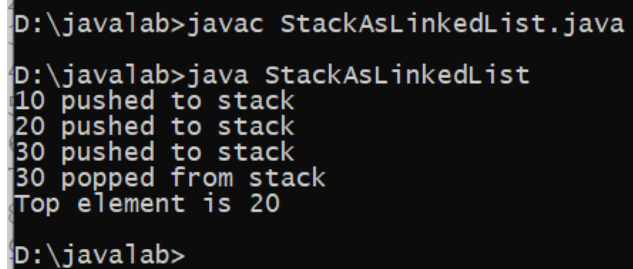

```
D:\javab>javac StackAsLinkedList.java  
D:\javab>java StackAsLinkedList  
10 pushed to stack  
20 pushed to stack  
30 pushed to stack  
30 popped from stack  
Top element is 20  
D:\javab>
```

### 33.Using generic method perform Bubble sort.

```
public class BubbleSort {  
    static void bubbleSort(int[] arr) {  
        int n = arr.length;  
        int temp = 0;  
        for(int i = 0; i < n; i++) {  
            for(int j=1; j < (n-i); j++) {  
                if(arr[j-1] > arr[j]) {  
                    temp = arr[j-1];  
                    arr[j-1] = arr[j];  
                    arr[j] = temp;  
                }  
            }  
        }  
    }  
}
```

```
    }  
    }  
}  
  
public static void main(String[] args) {  
    int arr[] = { 1, 6, -2, 6, -4, 8, 5, -7, -9, 4 };  
    System.out.println("Array Before Bubble Sort");  
    for(int i = 0; i < arr.length; i++) {  
        System.out.print(arr[i] + " ");  
    }  
    System.out.println();  
    bubbleSort(arr);  
    System.out.println("Array After Bubble Sort");  
    for(int i = 0; i < arr.length; i++) {  
        System.out.print(arr[i] + " ");  
    }  
}  
}
```

## OUTPUT



```
D:\java1ab>javac BubbleSort.java
D:\java1ab>java BubbleSort
Array Before Bubble Sort
1 6 -2 6 -4 8 5 -7 -9 4
Array After Bubble Sort
-9 -7 -4 -2 1 4 5 6 6 8
D:\java1ab>
```

### **34.Program to demonstrate the creation of queue object using the PriorityQueue class**

```
import java.util.*;

class PriorityQueue1{

public static void main(String args[]){

PriorityQueue<String> queue=new PriorityQueue<String>();

queue.add("Amit");

queue.add("Vijay");

queue.add("Karan");

queue.add("Jai");

queue.add("Rahul");

System.out.println("head:"+queue.element());

System.out.println("head:"+queue.peek());


System.out.println("iterating the queue elements:");

Iterator itr=queue.iterator();

while(itr.hasNext()){
```

```
System.out.println(itr.next());  
}  
queue.remove();  
queue.poll();  
System.out.println("after removing two elements:");  
Iterator<String> itr2=queue.iterator();  
while(itr2.hasNext()){  
System.out.println(itr2.next());  
}  
}  
}
```

## OUTPUT

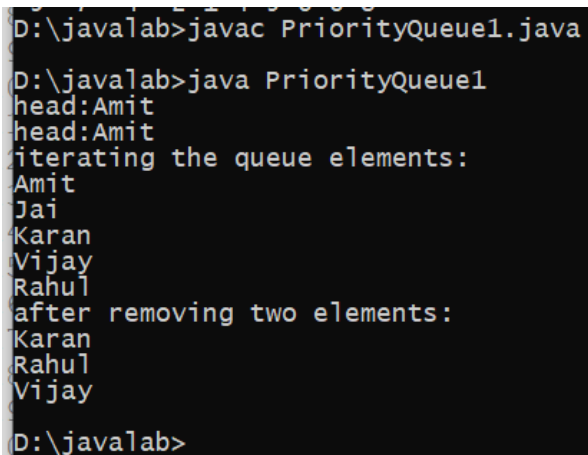

```
D:\javab>javac PriorityQueue1.java  
D:\javab>java PriorityQueue1  
head:Amit  
head:Amit  
iterating the queue elements:  
Amit  
Jai  
Karan  
Vijay  
Rahul  
after removing two elements:  
Karan  
Rahul  
Vijay  
D:\javab>
```

## 35.Program to remove all the elements from a linked list

```
import java.util.*;

public class removelink
{
    public static void main(String[] args)
    {
        // create an empty linked list
        LinkedList<String> l_list = new LinkedList<String>();

        // use add() method to add values in the linked list
        l_list.add("violet");
        l_list.add("Green");
        l_list.add("Black");
        l_list.add("Pink");
        l_list.add("blue");

        // print the list
        System.out.println("The Original linked list: " + l_list);
        // Removing all the elements from the linked list
        l_list.clear();
        System.out.println("The New linked list: " + l_list);
    }
}
```

```
}
```

## OUTPUT

```
D:\javab>javac removelink.java
D:\javab>java removelink
The Original linked list: [violet, Green, Black, Pink, blue]
The New linked list: []
D:\javab>
```

### 36.program to demonstrate the addition and deletion of elements in dequeue

```
import java.util.*;

public class deque
{
    public static void main(String[] args)
    {
        Deque<String> deque = new LinkedList<String>();
        // We can add elements to the queue
        // in various ways
        // Add at the last
        deque.add("Element 1 (Tail)");
        // Add at the first
        deque.addFirst("Element 2 (Head)");
        // Add at the last
```

```
deque.addLast("Element 3 (Tail)");  
// Add at the first  
deque.push("Element 4 (Head)");  
// Add at the last  
deque.offer("Element 5 (Tail)");  
// Add at the first  
deque.offerFirst("Element 6 (Head)");  
System.out.println(deque + "\n");  
// We can remove the first element  
// or the last element.  
deque.removeFirst();  
deque.removeLast();  
System.out.println("Deque after removing " + "first and last: "  
+ deque);  
}  
}
```

## OUTPUT

```
D:\javab>javac deque.java  
D:\javab>java deque  
[Element 6 (Head), Element 4 (Head), Element 2 (Head), Element 1 (Tail), Element 3 (Tail), Element 5 (Tail)]  
Deque after removing first and last: [Element 4 (Head), Element 2 (Head), Element 1 (Tail), Element 3 (Tail)]  
D:\javab>
```

**37.Maintain a list of Strings using ArrayList from collection framework, perform built-in operations.**

```
import java.util.*;

class arrayjava{

public static void main(String args[]){

    ArrayList<String> alist=new ArrayList<String>();

    alist.add("appu");
    alist.add("ammu");
    alist.add("minnu");    alist.add("thomu");
    alist.add("pinky");    alist.add("Tom");

    //displaying elements


    System.out.println(alist);

    //Adding "appu" at the fourth position alist.add(3, "appu");

    //displaying elements

    System.out.println(alist);

} }
```

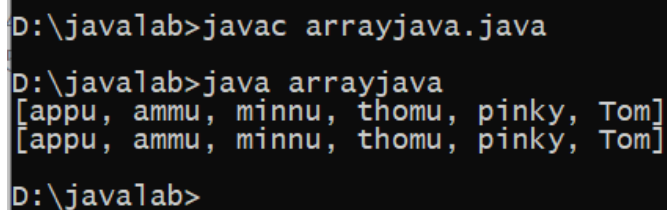**OUTPUT**

```
D:\java1ab>javac arrayjava.java
D:\java1ab>java arrayjava
[appu, ammu, minnu, thomu, pinky, Tom]
[appu, ammu, minnu, thomu, pinky, Tom]
D:\java1ab>
```

### 38.Program to demonstrate the working of map interface by adding ,removing,changing.

```
import java.util.*;

class HashMapDemo {

    public static void main(String args[])    {

        Map<String, Integer> hm  = new HashMap<String,
Integer>();

        hm.put("Anu", new Integer(1));
        hm.put("sinu", new Integer(2));
        hm.put("Jinu", new Integer(3));

        // Traversing through the map
        for (Map.Entry<String, Integer> me : hm.entrySet()) {

            System.out.print(me.getKey() + ":");

            System.out.println(me.getValue());    }

        }

    }
```

### OUTPUT

```
D:\java1ab>javac HashMapDemo.java
D:\java1ab>java HashMapDemo
Jinu:3
sinu:2
Anu:1
D:\java1ab>
```

**39.program to convert hash map to tree map.**

```
import java.util.*;
import java.util.stream.*;
public class HT
{
    public static void main(String args[])
    {
        Map<String, String> map = new HashMap<>();
        map.put("1", "One");
        map.put("2", "Two");
        map.put("3", "Three");
        map.put("4", "Four");
        map.put("5", "Five");
        map.put("6", "Six");
        map.put("7", "Seven");
        map.put("8", "Eight");
        map.put("9", "Nine");
        System.out.println("HashMap = " + map);
        Map<String, String> treeMap = new TreeMap<>();
        treeMap.putAll(map);
```



```
        System.out.println("TreeMap (HashMap to TreeMap) " +  
treeMap);  
    }  
}
```

## OUTPUT

```
D:\java1ab>javac HT.java  
D:\java1ab>java HT  
HashMap = {1=One, 2=Two, 3=Three, 4=Four, 5=Five, 6=Six, 7=Seven, 8=Eight, 9=Nine}  
TreeMap (HashMap to TreeMap) {1=One, 2=Two, 3=Three, 4=Four, 5=Five, 6=Six, 7=Seven, 8=Eight, 9=Nine}  
D:\java1ab>
```

## 40. Program to list the sub directories and files in a given directory and also search for a file name.

```
import java.io.File;  
import java.util.*;  
import java.io.*;  
public class p1 {  
    public static final String RED="\033[0;31m";  
    public static final String RESET="\033[0m";  
    static void RecursivePrint(File[] arr, int index, int level,  
String search  
for) {  
        // exit condition  
        if (index == arr.length)  
            return;  
        // space for internal level  
        for (int i = 0; i < level; i++)
```

```
System.out.print("\t");

if(arr[index].getName().toLowerCase().contains(searchfor))
    System.out.print(RED);
else
    System.out.print(RESET);
// for files
if (arr[index].isFile())
    System.out.println(arr[index].getName());
else if (arr[index].isDirectory()) {
    System.out.println "[" + arr[index].getName() + "];
    RecursivePrint(arr[index].listFiles(), 0, level + 1,
searchfor);
}
RecursivePrint(arr, ++index, level, searchfor);
}

public static void main(String[] args) {
    Scanner scan = new Scanner(System.in);
    System.out.println("Enter the directory path");
    String maindirpath = scan.nextLine();
    System.out.println("Enter the file/directory name to
search");
    String searchfor = scan.nextLine();
    File maindir = new File(maindirpath);
    if (maindir.exists() && maindir.isDirectory()) {
        File arr[] = maindir.listFiles();
```

```

System.out.println("#####
#####
###");
System.out.println("Files from main directory" + maindir);

System.out.println("#####
#####
###");
RecursivePrint(arr, 0, 0, searchfor.toLowerCase()); //
array,index
,level,search
}
}
}

```

## OUTPUT

```

D:\java_lab>java p1
Enter the directory path
D:\java_lab\neww
Enter the file/directory name to search
ArrayListex.java
#####
Files from main directoryD:\java_lab\neww
#####
←[0mArrayListex.class
←[0;31mArrayListex.java

```

**41. Write a program to write to a file, then read from the file and display the contents on the console.**

```


import java.io.FileReader;
import java.io.FileWriter;
import java.io.IOException;

```

```
import java.io.*;
import java.util.*;
import java.io.File;
class read {
    public static void main(String[] args) {
        String var = "";
        Scanner scan = new Scanner(System.in);
        System.out.println("Enter the text to create file : type
exit to stop"
);
        while (!var.endsWith("exit\n"))
            var = var + scan.nextLine()+"\n";
        try {
            File file = new File("output.txt");
            FileWriter fw = new FileWriter(file);
            fw.write(var);
            fw.close();
            System.out.println("Reading File content");
            FileReader fr = new FileReader("output.txt");
            String str = "";
            int i;
            while ((i = fr.read()) != -1) {
                // Storing every character in the string
                str += (char) i;
            }
            System.out.println(str);
            fr.close();
        } catch (IOException e) {
```

```
        System.out.println("There are some exception");  
    }  
}  
}
```

## OUTPUT

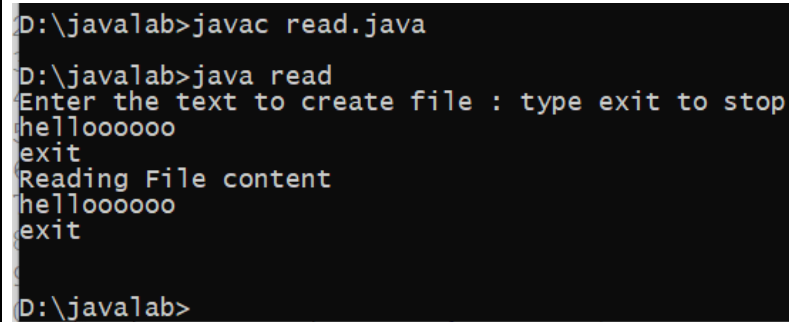


```
D:\javab>javac read.java  
D:\javab>java read  
Enter the text to create file : type exit to stop  
helloooooo  
exit  
Reading File content  
helloooooo  
exit  
D:\javab>
```

## 42. Write a program to copy one file to another


Pre-requisite

Create a text file with content where the java program is running for reading

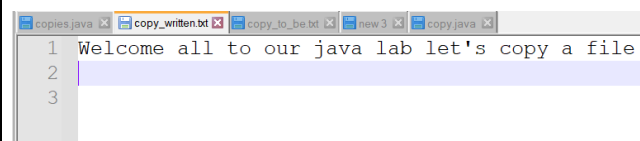

```
1 Welcome all to our java lab let's copy a file  
2  
3
```

And have another file to copy

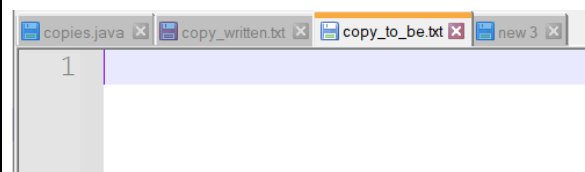


```
1
```

```
import java.io.FileReader;  
import java.io.FileWriter;  
import java.io.IOException;
```


```
import java.io.*;
import java.util.*;
import java.io.File;
public class copy {
    public static void main(String[] args) {
        Scanner scan=new Scanner(System.in);
        System.out.println("Enter the source File Name");
        String source=scan.nextLine();
        try {
            FileReader fr=new FileReader(source);
            String str = "";
            int i;
            System.out.println("Reading from file "+source);
            while ((i = fr.read()) != -1) {
                // Storing every character in the string
                str += (char) i;
            }
            System.out.println(str);
            System.out.println("\nEnter the filename to copy");
            String destination=scan.nextLine();
```

```
File file=new File(destination);  
FileWriter fw = new FileWriter(file);  
fw.write(str);  
fr.close();  
fw.close();  
  
System.out.println("Copied from "+source+" to  
"+destination+ " Successfully..!");  
} catch (Exception e) {  
//TODO: handle exception  
System.out.println("Exception Occured");  
}  
}  
}
```

## OUTPUT

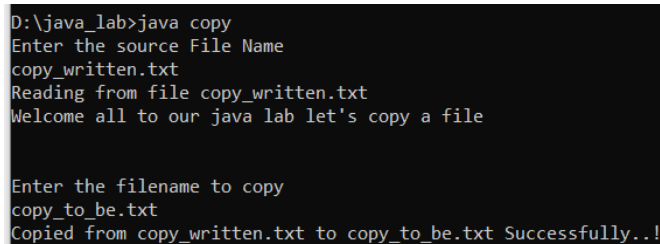

```
D:\java_lab>java copy  
Enter the source File Name  
copy_written.txt  
Reading from file copy_written.txt  
Welcome all to our java lab let's copy a file  
  
Enter the filename to copy  
copy_to_be.txt  
Copied from copy_written.txt to copy_to_be.txt Successfully..!
```

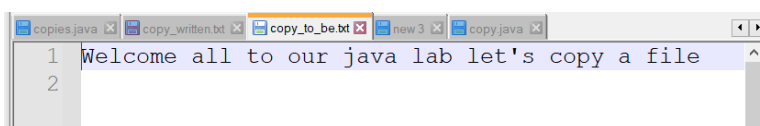


```
1 Welcome all to our java lab let's copy a file  
2
```

### 43. Write a program that reads from a file having integers. Copy even

numbers and odd numbers to separate files

Pre-requisite

Create a text file with content of numbers where the java program is running for reading numbers

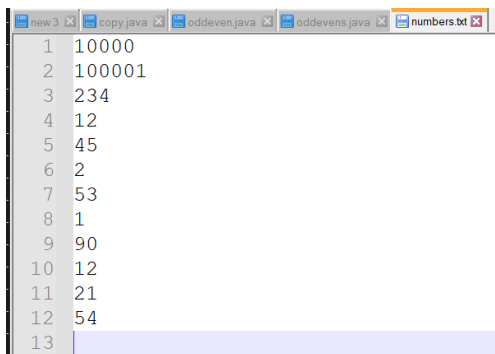

The screenshot shows a text editor with a tab labeled 'numbers.txt'. The file contains the following numbers, each on a new line:

| Line Number | Content |
|-------------|---------|
| 1           | 10000   |
| 2           | 100001  |
| 3           | 234     |
| 4           | 12      |
| 5           | 45      |
| 6           | 2       |
| 7           | 53      |
| 8           | 1       |
| 9           | 90      |
| 10          | 12      |
| 11          | 21      |
| 12          | 54      |
| 13          |         |

```
import java.io.FileReader;
```

```
import java.io.*;
```

```
import ja
```

```
public class oddevens {
```

```
    public static void main(String[] args) {
```

```
        try{
```

```
            FileReader fr=new FileReader("number.txt");
```

```
            BufferedReader br=new BufferedReader(fr);
```


```
            File file1=new File("oddnumbers.txt");
```




```
        FileWriter fw1=new FileWriter(file1);  
        File file2=new File("evennumbers.txt");  
        FileWriter fw2=new FileWriter(file2);  
        String num;  
        while((num=br.readLine())!=null){  
            if(Integer.parseInt(num)%2==0){  
                fw2.write(num+"\n");  
            } else {  
                fw1.write(num+"\n");  
            }  
        }  
        fw1.close();  
        fw2.close();  
    }catch(Exception e){  
        System.out.println("error");  
    }  
}  
}
```

## OUTPUT

```
D:\java_lab>javac oddeven.java
D:\java_lab>java oddeven
```

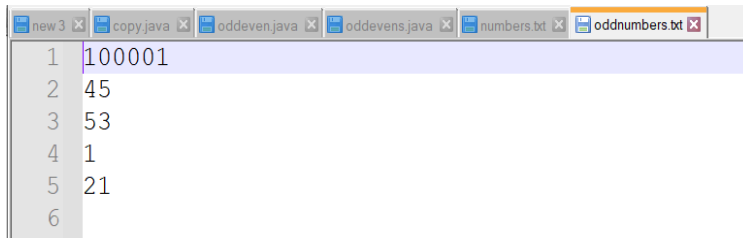

```
1 100001
2 45
3 53
4 1
5 21
6 6
```

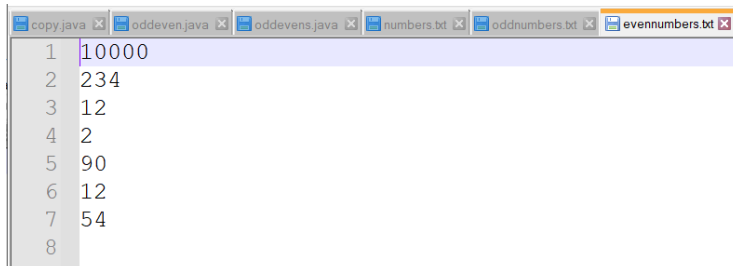

```
1 10000
2 234
3 12
4 2
5 90
6 12
7 54
8
```

## 44. Client server communication using Socket – TCP/IP

### PROGRAM

#### Server

```
import java.io.*;
import java.net.*;

public class MyServer {
    public static void main(String[] args) {
        try{
            ServerSocket ss=new ServerSocket(6666);
            Socket s=ss.accept(); //establishes connection
```

```
DataInputStream dis=new  
DataInputStream(s.getInputStream());  
String str=(String)dis.readUTF();  
System.out.println("message= "+str);  
ss.close();  
}catch(Exception e) { System.out.println(e);}  
}  
}
```

## Client

```
import java.io.*;  
import java.net.*;  
public class MyClient {  
public static void main(String[] args) {  
try{  
Socket s=new Socket("localhost",6666);  
DataOutputStream dout=new  
DataOutputStream(s.getOutputStream());  
dout.writeUTF("Hello Server"); // Writes a string to the  
underlying output stream using modified UTF-8 encoding
```

```
dout.flush();  
dout.close();  
s.close();  
}catch(Exception e){System.out.println(e);}  
}  
}
```

## OUTPUT

```
D:\java_lab>javac MyServer.java
```

```
D:\java_lab>java MyServer  
message= Hello Server
```

```
D:\java_lab>javac MyClient.java
```

```
D:\java_lab>java MyClient
```