Group 3

UFound

Endpoints and Functions Planning

Spring 26 COMPSCI 320

Group 3

Manager: Zainub Waqas

Members: Jenny Duong, James Pinkham, Saim Naushad, Sonya Ivkovic, Shraddha Venkatesh Sabbavarapu

Tech Stack

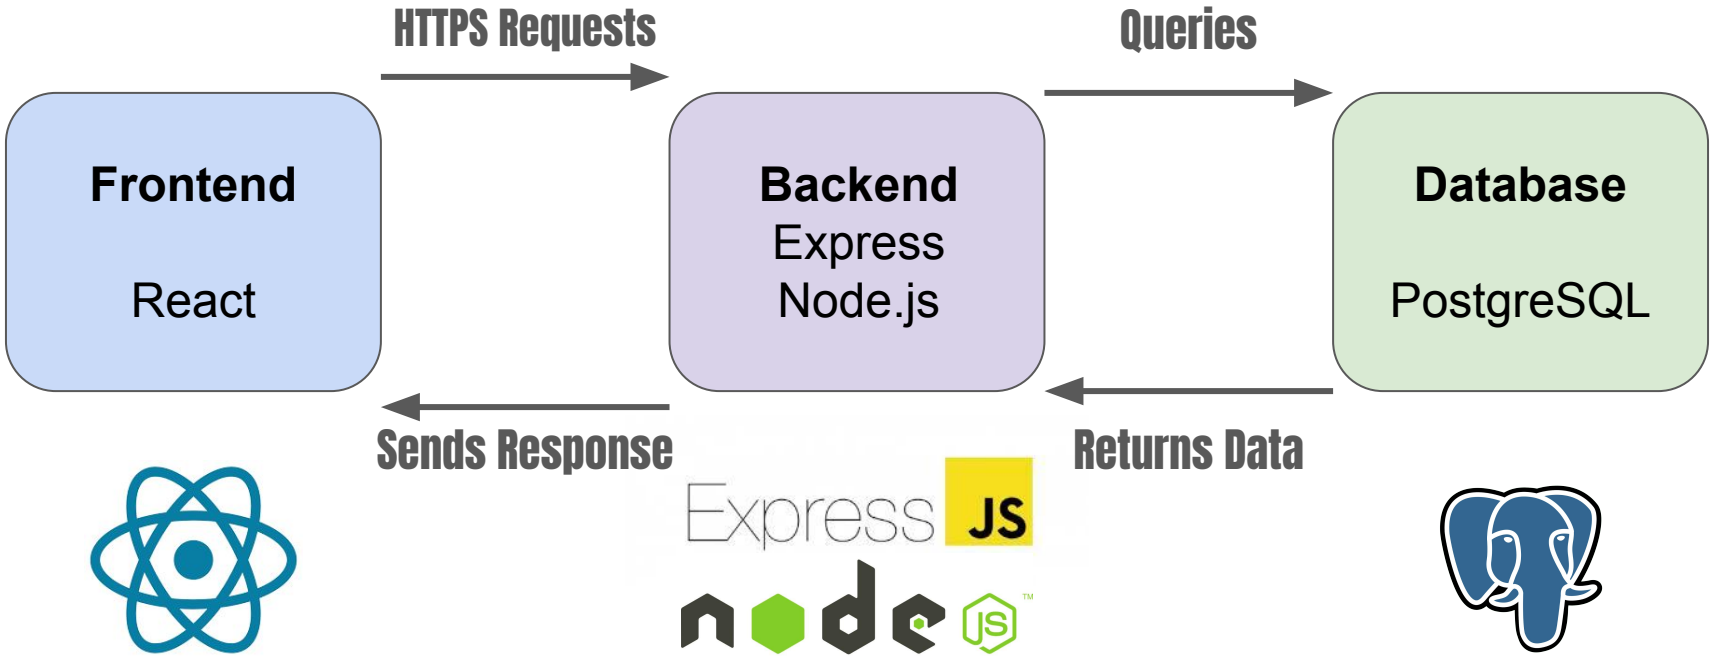
HTTPS Requests
Queries
Frontend
React
Backend
Express
Node.js
Database
PostgreSQL
Sends Response
Returns Data
Express JS
node JS

Functions & Endpoints

localhost/home

UFound Home page

Log in

Create Report

View Reports

View Map

localhost/login{:email, password}
localhost/login/resetpassword{:email}

Login

Home

log_in(user: string, password: string) : boolean	User log in to account
log_in_check(): boolean	Check status if user logged in

Enter email address:

Password:

Don't have an account? Sign up!

Submit Login

Login implementation:

- Use supabase/firebase for encryption of sensitive user data

localhost/signup{:email, password, confirmpassword}

Sign Up

Home

Log in

create_account(email: string, password: string, confirmPassword: string): boolean	Create acct with user/email & password and check if it already exists

Enter email address:

Password:

Confirm password:

Submit Sign up

localhost/dash

Dash

Log Out

Create Report

View Reports

View Map

localhost/createreport/{:lost_or_found, latitude, longitude, category, description }

Create Report

Home

Log Out

make_report(reportInfo: Report): void	Add all item tags Add item to database
check_similar_reports(tags: string[]): Report[]	Read list of reports already made
confirm_submission(): string	Shows that you have submitted your report successfully then go back to home page

Upload Image/ text

View Reports

View Map

resolve_report (id: int): void	Remove item from database when resolved

localhost/viewreports/filter{: ...criteria}

View Reports

Home

Log Out

filter_category(...criteria: string[]): Report[]	Resolved Status Category Location Color Type



Resolved Status Category
Location Color Type

Enter to search

Create Report

View Map

localhost/mapview
localhost/map/addpin
localhost/map/droppin

Map

Home

Log Out

add_pin(coords: { lat: int, long: int}): void	When lost/found report made, add coordinates
get_pin_info(id: int): PinInfo Or Report?	When you click on the map and reports from that radius load
remove_pin(id: int): void	Remove pin when report is resolved

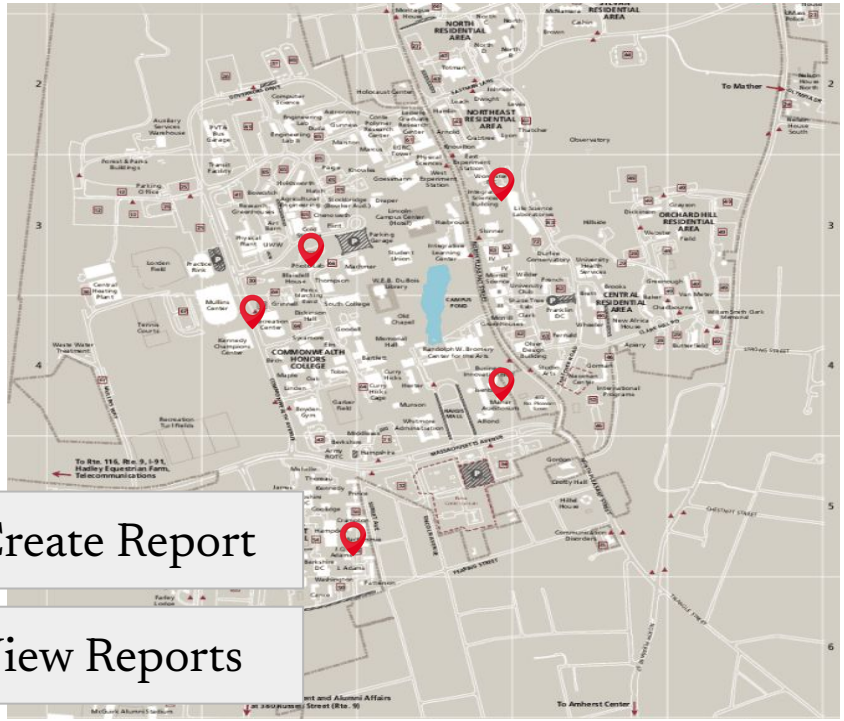

Create Report

View Reports

Testing

Using mock() for testing individual functions prior to integration testing of multiple functions

Testing **adding a report (item) to the items table**:

- User enters information for a new report on the localhost/createreport webpage
- Clicking submit accesses endpoint: *localhost/createreport/submitconfirm*
    - Call: make_report(reportInfo: Report): void and confirm_submission(): string
- We can verify that information was stored in the items table:

    By querying the table in DESC id order, so the most recent report is at the top.

    View and check that it is the same info.

Testing **filter_category**(*args: string[]): Report[]

- Call filter_category(*args: [“found”, “blue”, “water bottle”]) by accessing *localhost/checkreports/filter/{:“found”, “blue”, “water bottle”}*
- The browser should display a page with any associated reports with “found”, “blue”, and “water bottle” tag

Testing **create_account(email: string, password: string, confirmPassword: string): boolean**

- Accessing *localhost/signup{: "sivkovic@umass.edu", "123456", "123456"}* by calling create_account(email: "sivkovic@umass.edu", password: "123456", confirmPassword: "123456")
    - Function returns true if there doesn't exist an account with that email yet
    - False otherwise or if passwords don't match
- Access *localhost/login*
    - User enters their login and password
    - Calls log_in(user: "sivkovic@umass.edu", password: "123456")
        - Returns true log if action completed
- Access endpoint *localhost/auth{:id}*
    - Calls log_in_check()
        - Returns true if logged in correctly, before accessing protected pages

Any questions?