Group 3

# UFound

## Endpoints and Functions Planning

Spring 26 COMPSCI 320

# Group 3

**Manager**: Zainub Waqas

**Members**: Jenny Duong, James Pinkham, Saim Naushad, Sonya Ivkovic, Shraddha Venkatesh Sabbavarapu

# Tech Stack

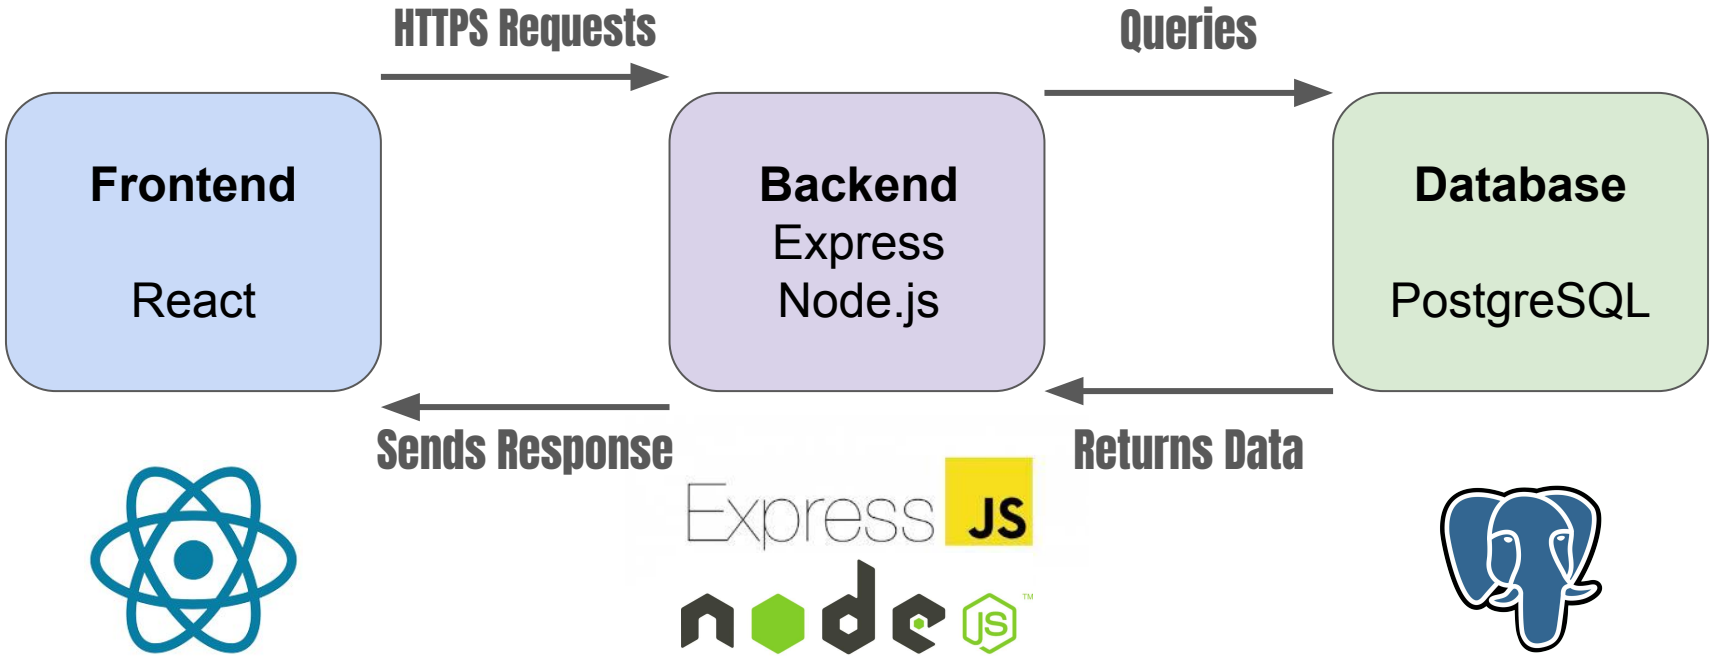
HTTPS Requests
Queries
Frontend
React
Backend
Express
Node.js
Database
PostgreSQL
Sends Response
Returns Data
Express JS
node JS

# Functions & Endpoints

localhost/home

# UFound Home page

Log in

Create Report

View Reports

View Map

localhost/login{:email, password}
localhost/login/resetpassword{:email}

# Login

Home

| | |
|---|---|
| log_in(user: string, password: string) : boolean | User log in to account |
| log_in_check(): boolean | Check status if user logged in |

Enter email address:

Password:

Don’t have an account? Sign up!

Submit Login

localhost/signup{:email, password, confirmpassword}

# Sign Up

Home

Log in

| | |
|---|---|
| create_account(email: string, password: string, confirmPassword: string): boolean | Create acct with user/email & password<br>and check if it already exists |

Enter email address:

Password:

Confirm password:

Submit Sign up

localhost/dash

# Dash

Log Out

Create Report

View Reports

View Map

localhost/createreport/{:lost_or_found, latitude, longitude, category, *description }

# Create Report

Home

Log Out

| | |
|---|---|
| make_report(reportInfo: Report): void | Add all item tags<br>Add item to database |
| check_similar_reports(tags: string[]): Report[] | Read list of reports already made |
| confirm_submission(): string | Shows that you have submitted your report successfully then go back to home page |

Upload Image/ text

View Reports

View Map

| | |
|---|---|
| resolve_report (id: int): void | Remove item from database when resolved |

localhost/viewreports/filter{:*criteria}

# View Reports

Home

Log Out

| | |
|---|---|
| filter_category(qargs: string[] ): Report[] | Resolved Status<br>Category<br>Location<br>Color<br>Type |



Resolved Status Category
Location Color Type

Enter to search

Create Report

View Map

localhost/mapview
localhost/map/addpin
localhost/map/droppin

# Map

Home

Log Out

| | |
|---|---|
| add_pin(coords: { lat: int, long: int}): void | When lost/found report made, add coordinates |
| get_pin_info(id: int): PinInfo<br>Or<br>Report? | When you click on the map and reports from that radius load |
| remove_pin(id: int): void | Remove pin when report is resolved |

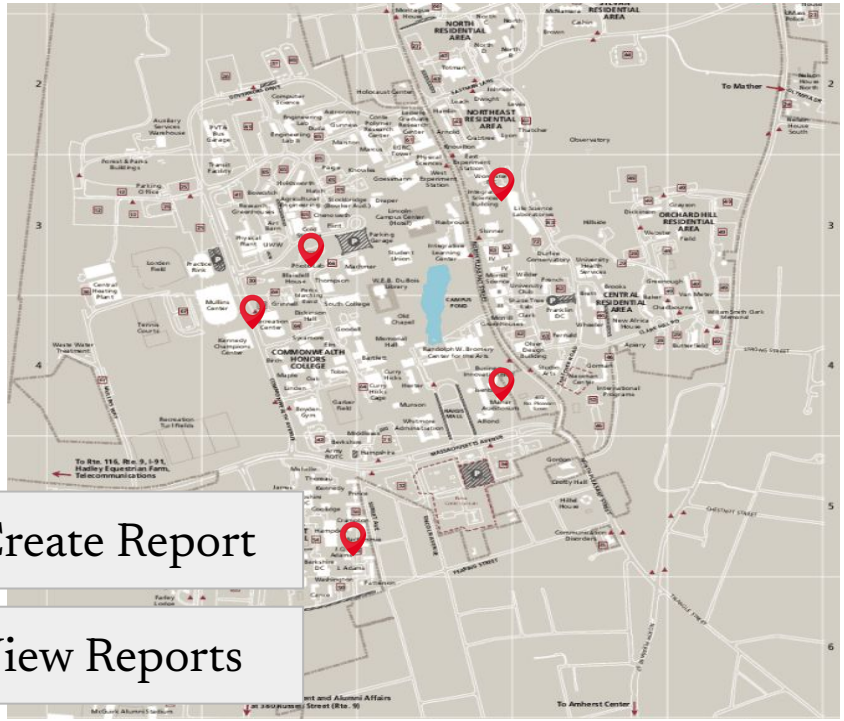


Create Report

View Reports

# Testing

## Testing **adding a report (item) to the items table**:

- User enters information for a new report on the localhost/createreport webpage
- Clicking submit accesses endpoint: *localhost/createreport/submitconfirm*
    - Call: make_report(reportInfo: Report): void and confirm_submission(): string
- We can verify that information was stored in the items table:

    By querying the table in DESC id order, so the most recent report is at the top.

    View and check that it is the same info.

# Testing **filter_category**(*args: string[] ): Report[]

- Call filter_category(*args: [“found”, “blue”, “water bottle”]) by accessing *localhost/checkreports/filter/{:“found”, “blue”, “water bottle”}*
- The browser should display a page with any associated reports with “found”, “blue”, and “water bottle” tag

# Testing **create_account(email: string, password: string, confirmPassword: string): boolean**

- Accessing *localhost/signup{: "sivkovic@umass.edu", "123456", "123456"}* by calling create_account(email: "sivkovic@umass.edu", password: "123456", confirmPassword: "123456")
  - Function returns true if there doesn't exist an account with that email yet
  - False otherwise or if passwords don't match
- Access *localhost/login*
  - User enters their login and password
  - Calls log_in(user: "sivkovic@umass.edu", password: "123456")
    - Returns true log if action completed
- Access endpoint *localhost/auth{:id}*
  - Calls log_in_check()
    - Returns true if logged in correctly, before accessing protected pages

# Any questions?