



# 1. ADVANCED WEB DESIGN

## Index:

---

- Introduction to HTML5
- Forms in HTML5
- Cascading Style sheets
- Lists in HTML5
- Inserting video, audio
- Image map in HTML5
- Inline Frame
- Website Hosting

1

**From:**

**Mrs. Shilpa Prashant Kate (IT Teacher)**  
**S.B.Patil college of Science & Commerce, Ravet**



# WEB COMPONENTS

- ❖ **Webpage** : A simple text file created using HTML.
- ❖ **Website** : A collection of interlinked web pages containing text, images, audio and videos. For Example, [www.ebalbharati.in](http://www.ebalbharati.in)
- ❖ **Web Browser** : A web browser is a software used to view web pages or websites available on the internet For Example Internet Explorer, Google chrome.
- ❖ **Web Server** : A Web server is an application or a computer that sends webpages over the internet using the HTTP protocol. For Example Apache, nginx, IIS, etc..
- ❖ **URL(Uniform Resource Locator)** : It is an address of a web page on the internet.
- ❖ **HTTP** : HTTP (HyperText Transfer Protocol) is a protocol used by WWW for client server communication.
- ❖ **HTML** : Hyper Text Markup language



# INTRODUCTION TO HTML5

- HTML5 is the latest and most enhanced version of HTML
- It makes your website layout clearer to both website designers and users
- Browsers support 's features of HTML5 : Google Chrome, Mozilla Firefox, Microsoft Edge, Safari, Opera and Apple.



# BASIC STRUCTURE OF HTML5

- **<html> and </html>** : indicates that the document is an html file.
- **<head> and </head>** : It includes <Title> within it, the text within <head> is not displayed on the webpage. This is used for search engine optimization.
- **<title> and </title>** : The content within this displayed on the title bar.
- **<body> and </body>** : This tag includes all content which is to be developed in the web browser. Most of the tags are included in this tag.



# BASIC STRUCTURE OF HTML5

- **An attribute** : An attribute defines a property for an element, consists of an attribute/value, and appears within the element's start tag.

```
<!Doctype html>
```

```
<html>
```

```
<head>
```

```
<title> First Page </title>
```

```
</head>
```

```
<body bgcolor = green >
```

attribute value of attribute

This is my first web page

```
</body>
```

```
</html>
```

Execute Here



**<header>**

Defines a header for a document section.

**<nav>**

Defines a container for navigation links.

**<section>**

Defines a section in a document

**<article>**

Defines an independent self-contained article.

**<aside>**

Defines content apart from the content (like a sidebar).

**<footer>**

Defines a footer for a document or a section.



## FORMS IN HTML5

- Forms in HTML is used to accept user input.
- Form controls are used to collect different kinds of user inputs, such as contact details like name, address, single or multiple options from group of options, as well as clearing and submitting data etc.

### Attributes used with form element and Input element.

- **Name** : It specifies a name to a form.
- **Action** : The action attribute specifies the path where the form is to be submitted.
- **Method** : The method attribute specifies get or post method to be used when submitting the form data. Method of form are GET or POST.

i) **GET method** : GET method will pass the values via URL ,Passed values will be seen in Address bar.

ii) **POST Method** :POST method will pass the values via HTTP request.

Passed values not seen in Address bar. So it is a secure method to submit sensitive



## FORMS IN HTML5

| Input type                               | Description                                        |
|------------------------------------------|----------------------------------------------------|
| <code>&lt;input type="color"&gt;</code>  | Defines a color picker                             |
| <code>&lt;input type="number"&gt;</code> | Defines a field for entering a number              |
| <code>&lt;input type="url"&gt;</code>    | Defines a field for entering a URL.                |
| <code>&lt;input type="image"&gt;</code>  | Defines an image as a submit button.               |
| <code>&lt;input type="date"&gt;</code>   | Defines a date picker with the year, month and day |
| <code>&lt;input type="email"&gt;</code>  | Defines a field for an e-mail address              |

[Click to execute](#)





PIMPRI CHINCHWAD EDUCATION TRUST'S  
**S.B.PATIL COLLEGE OF**  
**Science and Commerce, Ravet**



<form >

<h1>Some form elements</h1>

Select your favorite color <input type="color" >

<br>

Enter your phone Number <input type="Number" >

<br>

<label for="homepage">Add your homepage:</label>

<input type="url" id="homepage" name="homepage">

<br>

<input type="image" src="happy.jpg" alt="Submit" width="100" height="100">

<br>

<label for="birthday">Birthday:</label>

<input type="date" id="birthday" name="birthday">

<br>

<label for="email">Enter your email:</label>

<input type="email" id="email" name="email">

<br>

<input type="submit" value="submit">

</form>

## Some form elements

Select your favorite color



Enter your phone Number

6909090909

Add your homepage:

http://www.gmail.comx



Birthday:

06 / 17 / 2020

Enter your email:

spk@gmail.com

submit



| Input type                    | Description                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------|
| <input type="month">          | Defines a month and year control in format is "YYYY-MM"                                |
| <input type="range">          | Define a range control. Default range is 0 to 100.                                     |
| <input type="datetime-local"> | Defines a date picker that includes the year, month, day and time.                     |
| <input type="time">           | Defines a control for entering a time.                                                 |
| <input type="week">           | Defines a week and year control.                                                       |
| <input type="search">         | Defines a text field for entering a search string like a site search or Google search. |
| <input type="file">           | Defines a file-select field and a "Browse" button for file uploads.                    |
| <input type="tel">            | Used to define input fields that should contain a telephone number.                    |



## Input Restrictions

- A list of some common input restrictions is given below, few of which can be used for validation purpose.

| Attribute        | Description                                                                                                                                                 |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| disabled         | Specifies that an input field should be disabled.                                                                                                           |
| max              | Specifies the maximum value for an input field.                                                                                                             |
| min              | Specifies the minimum value for an input field.                                                                                                             |
| pattern          | Specifies a regular expression to check the input values.                                                                                                   |
| read only        | Specifies that an input field is read only (cannot be changed).                                                                                             |
| placeholder      | This acts as a temporary label showing the purpose of a text field without requiring a label tag.                                                           |
| required         | Specifies that an input field is required (must be filled out).                                                                                             |
| autocomplete     | Specifies whether a form or input field should have autocomplete On or Off.                                                                                 |
| autofocus        | Specifies that the input field should automatically get focus when the page loads.                                                                          |
| height and width | Specifies the height and width of an <code>&lt;input type="image"&gt;</code>                                                                                |
| multiple         | Specifies that the user is allowed to enter more than one value in the <code>&lt;input&gt;</code> element. This works with input types like email and file. |



- Some other useful attributes used with `<input>` are-
- 1. **id** : This is used to identify the html element uniquely through the document object model.
- 2. **class**: It is used to apply CSS style to the individual input element.



## 1.3 <meta> tag

- The meta tag is a tag in html that **describes some aspects of contents of a webpage.**
- The HTML <meta> tag is used by search engines to search information that is provided with the webpage.
- This is empty tag (singular tag) which carries information within its attributes.
- The <meta> tag is placed between the <head> and </head> tags.
- Metadata will not be displayed on the webpage.



**PIMPRI CHINCHWAD EDUCATION TRUST'S**  
**S.B.PATIL COLLEGE OF**  
**Science and Commerce, Ravet**



| Attribute  | Values                                                                                                                                                                                                                                                                                               | Description                                                                                                                                                                                                                                                                 |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Name       | The value of the name attribute can be related to any of the following- i) Author ii) Description iii) Keywords iv) copyright e.g. <meta name = "author" >                                                                                                                                           | Specifies the Name of the meta-data like the author, keywords or description.                                                                                                                                                                                               |
| Content    | It can have any textual matter related to the name as in eg.<br>i.<meta name = "author" content = "Balbharti"><br>ii.<meta name = "description" content = "Advance web designing"><br>iii.<meta name = "keywords" content = "html5, learn html5, list in html 5">                                    | Here content of author is balbharati. Here the value for content attribute specifies name of the topic advance web designing.<br>Here the values for content attribute are given as keywords like html5 , learn html5 etc.                                                  |
| Charset    | UTF-8, Big5<br>e.g<br><meta charset="UTF-8"><br><meta charset="Big5">                                                                                                                                                                                                                                | Specifies the character encoding used by the document, This is called a character encoding declaration. UTF-8 For Indian characters Big5 – for Chinese characters                                                                                                           |
| http-equiv | refresh , set-cookie, content-type, expires,<br>e.g. <meta http-equiv="refresh"content="5"><br><meta http-equiv="set-cookies"><br><meta http-equiv="content-type"content="text/html"charset="Big5"><br><meta http-equiv="expires" content="userid=pqr; expires=Wednesday, 8-feb-2018 23:59:59 GMT;"> | Used for http response message headers.<br>Here the page will get refresh after every 5 seconds.<br>The browser sends the cookies back to the server.<br>Specifies the character encoding for the document<br>Here page session will get expire at specified date and time. |



```
<!DOCTYPE html>
<html>
<head>
<title>meta tag examples</title>
<meta name = "authors" content = "Balbharti">
<meta name = "description" content = "Advance web designing">
<meta name = "keywords" content = "html5, learn html5, list in html5">
<meta name="copyright" content= " copyright Balbharti All right Reserve">
</head>
<body>
    <p> Welcome to HTML5
    </p>
</body>
</html>
```




## 1.4 Cascading Style Sheets (CSS) in HTML5

- CSS stands for Cascading Style Sheets.
- CSS describes how HTML elements are to be displayed on screen, paper, or in other media.
- It can control the layout of multiple web pages all at once.
- CSS allows you to control the look and feel of several pages by changing a single source.
- A CSS rule set contains
  - a selector and
  - a declaration block.





## CSS Syntax

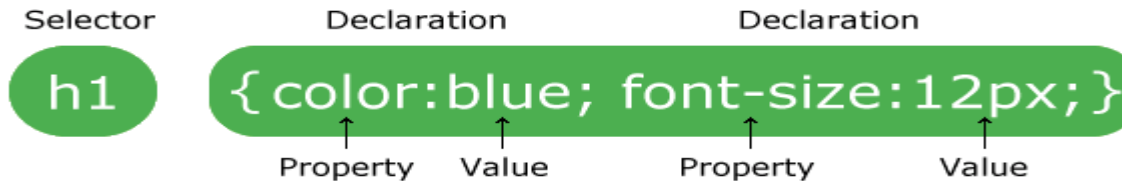

- **selector** points to the HTML element you want to style.
- **declaration block** contains one or more declarations separated by semicolons. Declaration blocks are surrounded by curly braces.
- **Declaration** includes a CSS property name and a value, separated by a colon.

**Property** : is a type of **attribute of HTML element**. It could be color, border etc.

**Value** : **Values are assigned to CSS properties**. In the above example, value "blue" is assigned to color property.

**Selector{Property1: value1; Property2: value2}**



## CSS Syntax

Selector

h1

Declaration

{color:blue; font-size:12px;}

Declaration

Property

Value

Property

Value

```
body {  
    background-color: lightblue;  
}  
  
h1 {  
    color: white;  
    text-align: center;  
}  
  
p {  
    font-family: verdana;  
    font-size: 20px;  
}
```



PIMPRI CHINCHWAD EDUCATION TRUST'S  
**S.B.PATIL COLLEGE OF**  
**Science and Commerce, Ravet**



| Property         | Use                                                                                                                              | Value                                                     | Example                                                     |
|------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------|
| Color            | Changes the color of the text                                                                                                    | Color name                                                | h1 {color: maroon}                                          |
| Background-color | To set the background color in your webpage                                                                                      | Color name                                                | body {background-color: yellow}                             |
| Font-weight      | Used to bold text                                                                                                                | bold or 100, 200...900                                    | p {font-weight: 300}                                        |
| Font-style       | Used to italicize text                                                                                                           | Italic, oblique or normal                                 | p {font-style: italic}                                      |
| Text-decoration  | This property is used to add<br>1. strike-through marks<br>2. underline<br>3. overstrike<br>4. to remove underlines from links   | 1. line-through<br>2. underline<br>3. overline<br>4. none | p {text-decoration: underline}<br>a {text-decoration: none} |
| Text-align       | This property is used to control the horizontal alignment of any block-level text that are paragraphs, tables and other elements | left, right, center or justify                            | h1 {text-align: center}                                     |
| Font-family      | This is used to control the fonts                                                                                                | Font name                                                 | p {font-family: arial}                                      |



PIMPRI CHINCHWAD EDUCATION TRUST'S  
**S.B.PATIL COLLEGE OF**  
**Science and Commerce, Ravet**



| Property         | Use                                                                                                 | Value                                                         | Example                                        |
|------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------|------------------------------------------------|
| Font-size        | This property allows you to control the size of the font                                            | px, in, mm, cm, pt                                            | p {font-size:10px}                             |
| Letter-spacing   | This helps in controlling the horizontal spacing between characters of text                         | px, in, mm, cm, pt                                            | h1 {letter-spacing: 5pt}                       |
| Padding          | This property is used when you want to add padding (blank spaces) around the content of an element. | Pixel                                                         | h1 {padding:30px}                              |
| Border           | This property adds a border to a webpage element                                                    | Solid, double, groove, ridge, inset, outset, dotted or dashed | h1 {border:green}                              |
| Background-image | To set an image as the background of your webpage                                                   | url("X")<br>where X is the path of image file                 | body {background-image: url('background.jpg')} |
| Margin-Left      | Sets margin area on the left side of the element.                                                   | px,pt,cm etc.                                                 | h1 {margin-left;10px}                          |



## Types of CSS

There are three methods of implementing styling

**1. Inline CSS :-** It uses the style attribute in the HTML start tag. Inline CSS is used to apply CSS on a single line or element.

**For example :** `<p style="color:blue">Hello CSS</p>`

**2.Embedded stylesheet or internal CSS :** This is used to apply CSS on a single document or page. It can affect all the elements of the page. It is written inside the style tag within head section of html.**For example :** `<style> h1{color: Red;}</style>`

**3. External CSS:** The external style sheet is generally used when you want to make changes on multiple pages. **It uses the <link> tag on every page and the <link> tag should be put inside the head section.** The **external css file** should not contain any HTML tags ,open with any text editor it **saved with .css extension.**

**For example : Style.css**

```
h1{color:navy;margin-left:20px}  
<link rel="stylesheet" href="style.css">
```



**1. Inline CSS :-** It uses the style attribute in the HTML start tag. Inline CSS is used to apply CSS on a single line or element.

**For example :** `<p style="color: blue">Hello CSS</p>`

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<h1 style="color:blue;  
border: 2px solid black;  
text-align:center;">
```

A Blue Heading

```
</h1>
```

```
<p style="color:red;">A red paragraph.</p>
```

```
</body>
```

```
</html>
```

OUTPUT

A Blue Heading

A red paragraph.




## Internal CSS

It is written inside the style tag within head section of html.

**For example :** `<style> h1{color: Red;}</style>`

```
<!DOCTYPE html>
<html>
<Head>
<style> h1{color:blue;
        border: 2px solid black;
        text-align:center;}
        p{ color:red; }
</style>
</head>
<body>
<h1> A Blue Heading </h1>
<p> A red paragraph.</p>
</body>
</html>
```

## OUTPUT

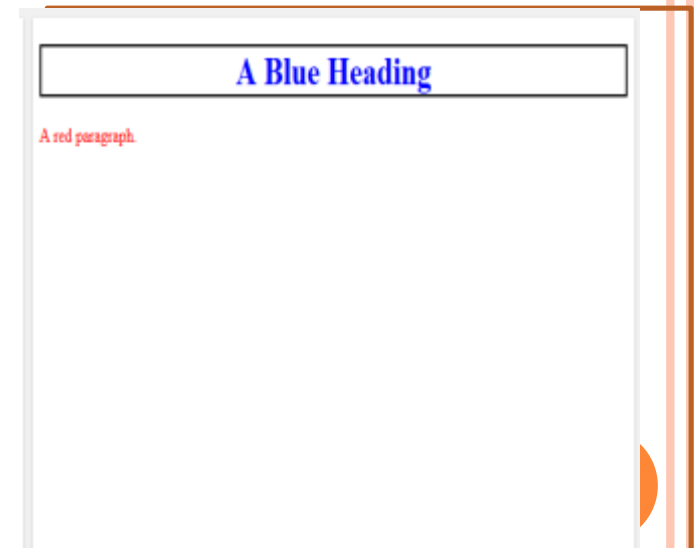



# External Style Sheet

## Example:

Create a html file save as, External.html

```
<!DOCTYPE html>
<html>
  <head>
    <link rel="stylesheet" type="text/css"
      href="external.css">
  </head>
  <body>
    <h1> LCCT </h1>
    <h2 > Hello..!!</h2>
    <p> Welcome to IEI..</p>
    <p> Lampang, Thailand..</p>
  </body>
</html>
```

Create a CSS file save as, external.css

```
h1 {color:sienna;}
h2 {color:blue;}
p {color:red;}
```

## OUTPUT:

**LCCT**

**Hello..!!**

Welcome to IEI..

Lampang, Thailand..






## CSS Id Selector

- The Id selector selects the id attribute of an HTML element to select a specific element.
- An id is always unique within the page so it is unique element. It is written with the hash character(#), followed by the id name.

```
<!DOCTYPE html>
<html>
<head>
<style>
#para1{text-align: center; color: blue}
</style>
</head>
<body>
<p id="para1">Hello Students</p>
<p>This paragraph will not be
affected.</p>
</body>
</html>
```

## OUTPUT

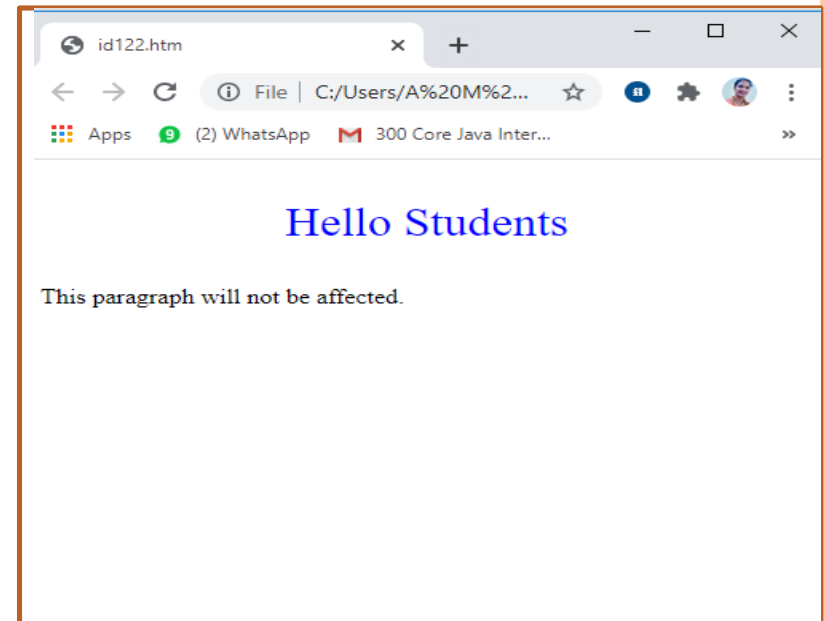




## CSS Class Selector

- The class selector selects HTML elements with a specific class attribute.
- It is used with a period character '.' (full stop symbol) followed by the class name.
- The Class selector is used when you want to change a group of elements within your HTML page. The class name should not start with number.

```
<!DOCTYPE html>
<html>
<head>
<style>
.intro{text-align:center;color:blue}
</style></head>
<body>
<h1 class="intro">This heading is blue
and center-aligned.</h1>
<p class="intro">This paragraph
is blue and center-aligned.</p>
</body>
</html>
```

## OUTPUT





## Class Selector for specific element


To specify only one specific HTML element should be affected then you should use the element name with class selector.

```
<!DOCTYPE html>
<html>
<head> <style>
p.intro {text-align: center;color: blue}
</style> </head>
<body>
<b

# 


```

## OUTPUT

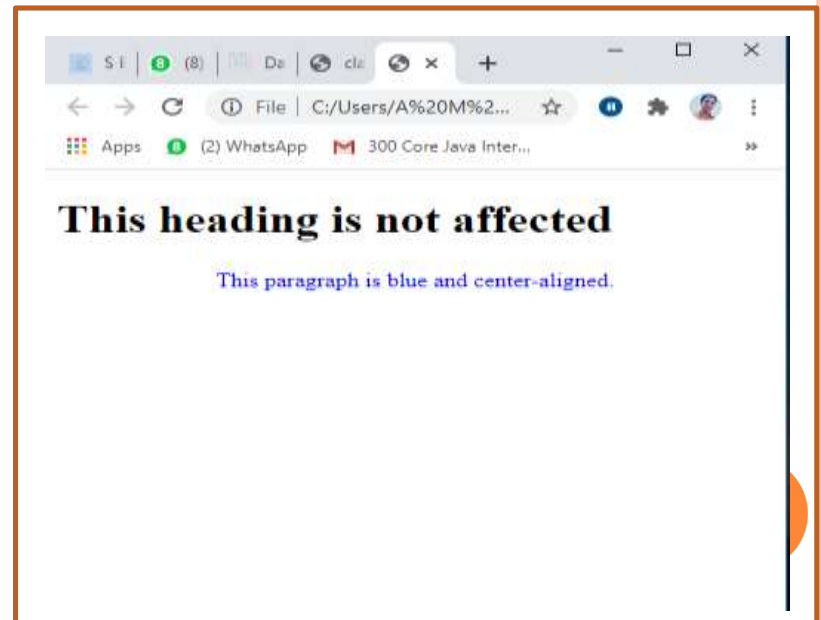



## Universal Selector

The universal selector is used as a wildcard character. It selects all the elements on the Webpages.

```
<!DOCTYPE html>
<html>
<head> <style>
* { color: green; font-size: 20px;}
</style> </head>
<body>
```

This css style will be applied on  
Entire Page

```
<h2>This css is applied to Heading 2</h2>
```


```
<p id="para1">it is applied to first  
paragraph</p>
```

```
<p>Also to second paragraph !</p>
```

```
</body>
```

```
</html>
```

## OUTPUT

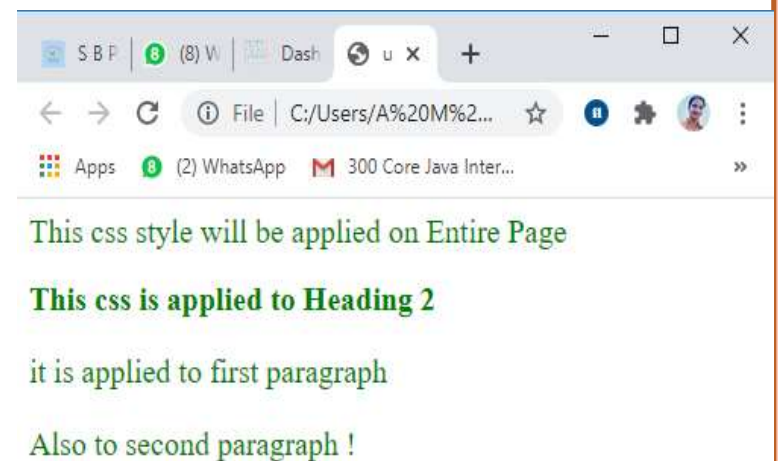




## Group Selector

- The grouping selector is used to select all the elements with the same style definitions. It is used to minimize the code.
- Commas are used to separate each selector in grouping.

**H1,h2,p{ text-align:center;color:blue}**

```
<!DOCTYPE html>
<html>
<head>
<style>
h1,h2,p{text-align: center; color: blue}
</style>
</head>
<body>
<h1> Hello Heading 1</h1>
<h2> Hello Heading2(In smaller font)</h2>
<p> This is a paragraph.</p>
</body>
</html>
```

## OUTPUT

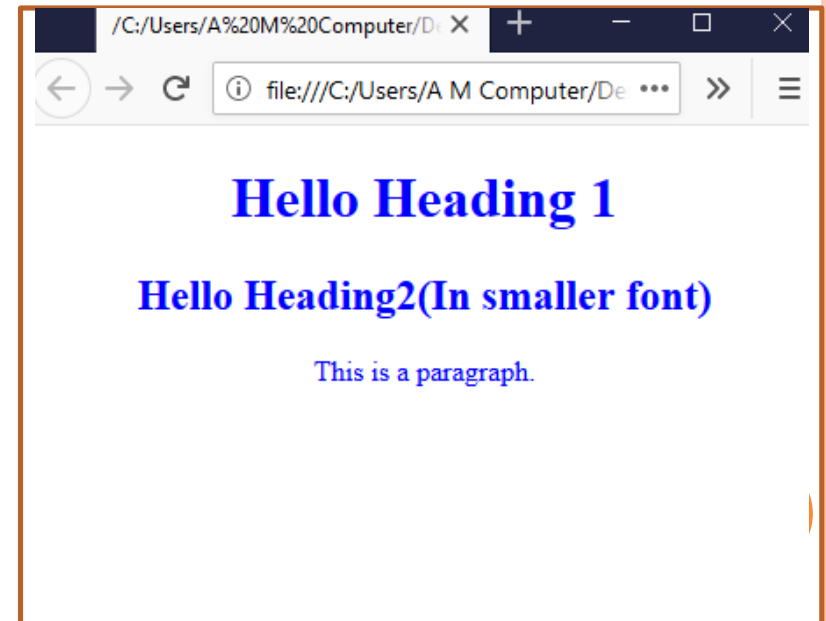



## Positioning in CSS

- CSS helps to position the HTML elements.
- The **position** property is used to set position for an element.
- The element can be positioned using the top, bottom, left and right properties.

### Syntax :

***Selector{ position:value; top:value; left:value; bottom:value; right:value }***

Where **values** in positions are **static, fixed, absolute, relative** and values of top, bottom, left, right are in pixels

**There are four types of positioning in CSS:-**

1. Static Positioning
2. Fixed Positioning
3. Relative Positioning
4. Absolute Positioning




## Positioning in CSS

- **Static Positioning** This is a by- default position for HTML elements. It is not affected by the top, bottom, left and right properties.
- **Fixed Positioning** : This property helps to put the text fixed on the browser. The **FIXED property forces an element into a fixed position relative to the browser window.** The fixed element will not move, even when the page is scrolled.

### OUTPUT

```
<!DOCTYPE html>
<html>
<head><style> p.fixed{position: fixed; top: 50px;
right: 5px; color: blue}
</style></head>
<body>
<p>This is paragraph 1</p>
<p>This is paragraph 2</p>
<p>This is paragraph 3</p>
<p class="fixed">This is fixed positioned text.</p>
</body></html>
```

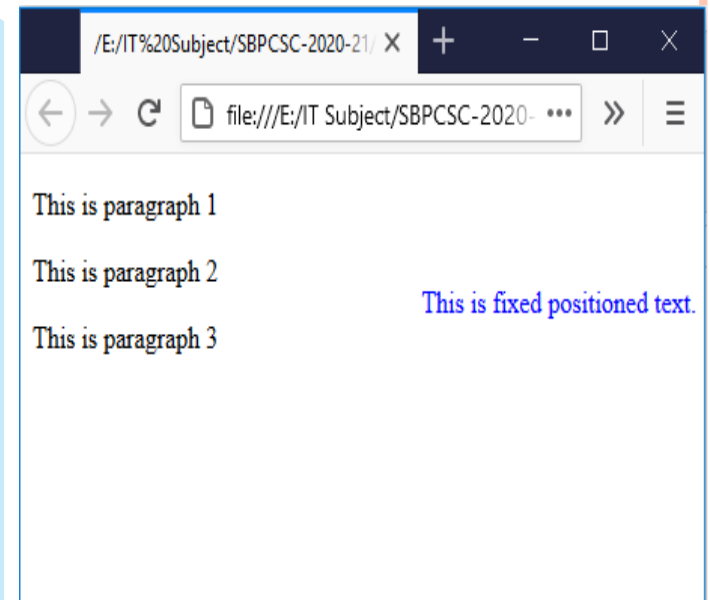




## Positioning in CSS

- Relative Positioning** : The relative positioning property is used **to set the element relative to its normal position.**
- Absolute Positioning** : This property **sets an element in a specific location** and it is not affected by the flow of the page. This property positions the element at the specified **coordinates relative to your screen top-left corner.**

```
<!DOCTYPE html>
<html>
<head>
<style>
    .first{position: relative;top:-10px; right:-10px;}
    h2{position: absolute; left:100px;top:150px}
</style>
<body>
<b1 class="first">This is heading 1</h1>
<h2>This is heading 2</h2>
</body>
</html>
```

### OUTPUT

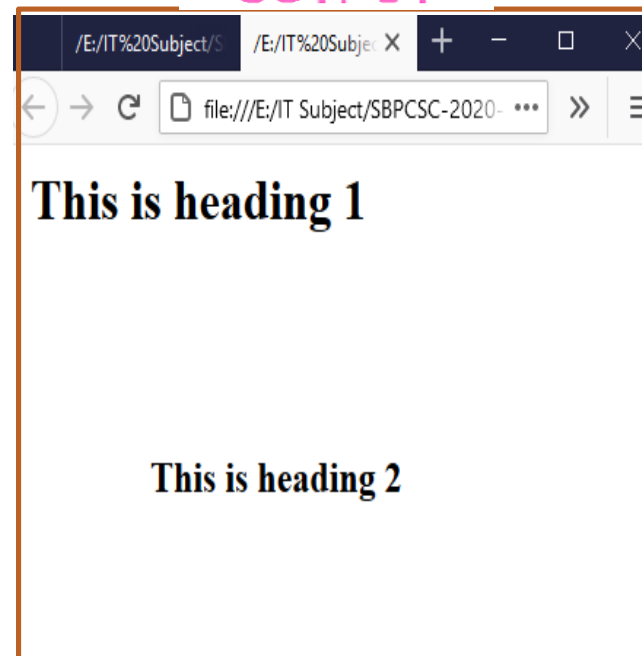






# Float Property in CSS

- Float is a CSS property **written in CSS file or directly in the style of an element. The float property defines the flow of content.**
- Following are the types of floating properties :
  - float : left :** This keeps the element float on left side of the container
  - float : right :** This keeps the element float on right side of container
  - float : none :** This is default property i.e. this shows the element as it is.

```
<!DOCTYPE html>
<html><head>
<title>Float Example</title>
<style>
    .float-left{float:left;font-size:20px;background-color:gold}
    .float-right{float: right;
                  font-size:20px;background-color:gold}
</style></head><body>
<h2 class="float-left">Balbharati</h2>
<p>This text rearranges itself to flow around the element that is floated
left.</p>
<h2 class="float-right">Balbharati</h2>
<p>This text rearranges itself to flow around the element that is floated
right. </p>
</body>
</html>
```

## OUTPUT

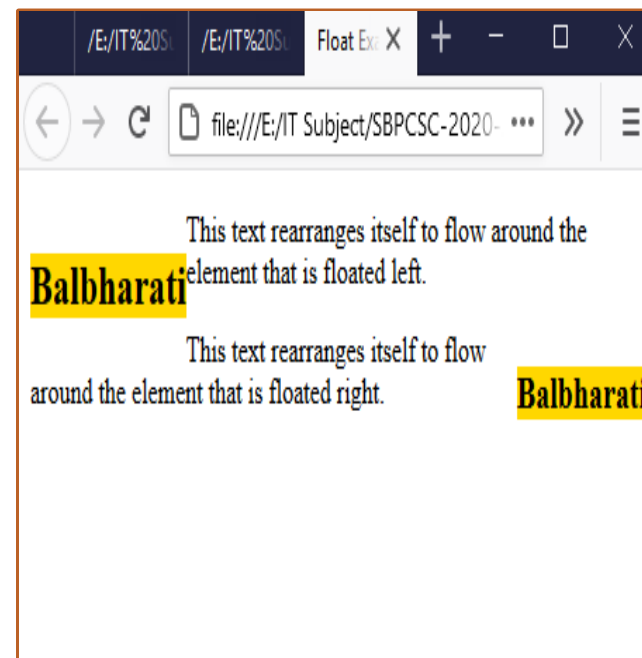



## Display property

- The Display property in CSS defines **how the components (div, hyperlink, heading, etc) are going to be placed on the web page.**
- It **specifies how the element is displayed.** this property is used to define the display of different parts of a web page.

Syntax :

***Display : value;***

Where values are :


- **Inline :** It is used to display an element as an inline element.
- **Block :** It is used to display an element as an block element. It starts on a new line, and takes up the whole width of the browser window.
- **Block-inline :** This value is very similar to inline element but the difference is that you are able to set the width and height.
- **None :** The element is completely removed.



## Display property

```
<!DOCTYPE html>
<html>
<head>
<style>
  p {
    display: inline;
  }
</style>
</head>
<body>
<p>welcome to balbharti</p>
<p>Javascript</p>
<p>HTML5</p>
<p>CSS</p></body></html>
```

### OUTPUT

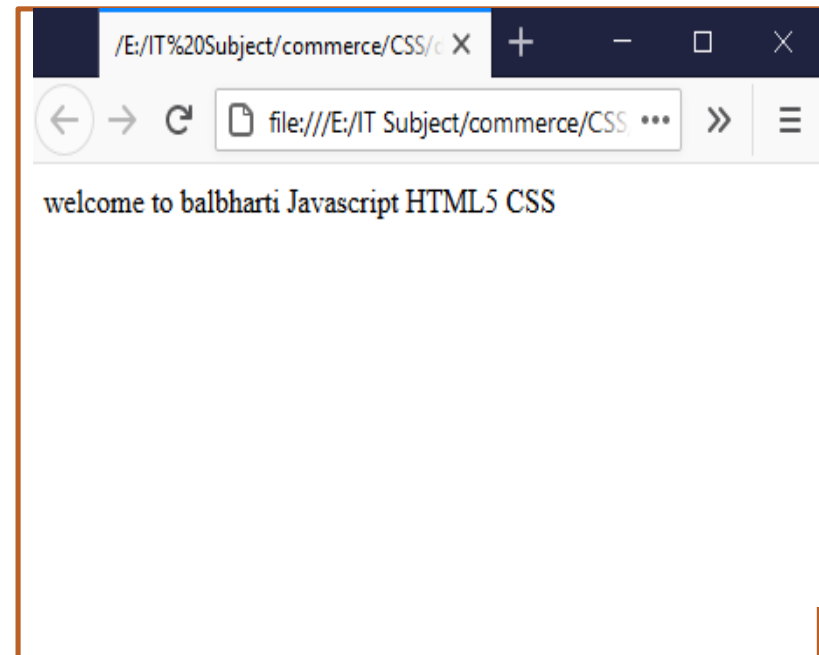




## Display property

```
<!DOCTYPE html>
<html lang="en">
<head>
<title>Example of CSS display</title>
<style type="text/css">
a {
display : block; background-color:orange;
}
</style>
</head>
<body>
<p>
<a href="https://www.ebalbharti.in" >
Visit balbharti</a>
<br>
</p></body>
</html>
```

### OUTPUT

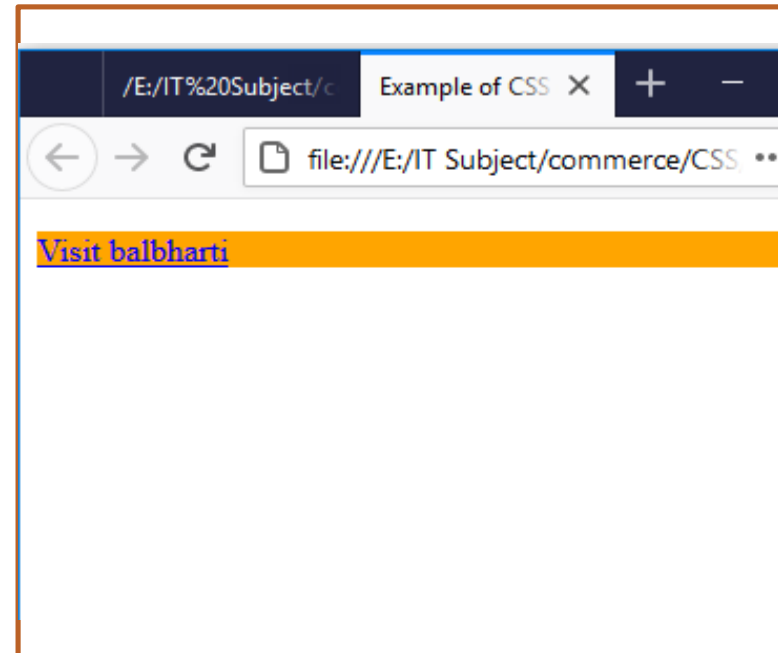



## Ordered list or numbered list

- The `<ol>` tag defines an ordered list. An ordered list can be numerical or alphabetical.

| Attribute | Values              | Description                                                                             |
|-----------|---------------------|-----------------------------------------------------------------------------------------|
| Type      | "1"<br>/"a"/"I"/"i" | 1 is default value and other values specify the numbering type for the used items.      |
| Reversed  | Reversed            | This attribute specifies that the items of the list are specified in the reverse order. |
| Start     | Number              | Specifies the starting number of the first item in an ordered list.                     |



## Ordered list or numbered list

- The `<ol>` tag defines an ordered list. An ordered list can be numerical or alphabetical.

```
<!DOCTYPE html>
<html>
<body>
<h3>List of Topics in reverse sequence</h3>
<ol reversed>
<li> Basics of IT </li>
<li> HTML 5 </li>
<li> PostgreSQL </li>
</ol>
</body>
</html>
```

## OUTPUT

---

### List of Topics in reverse sequence

3. Basics of IT
2. HTML 5
1. PostgreSQL



## Ordered list or numbered list

- The `<ol>` tag defines an ordered list. An ordered list can be numerical or alphabetical.

```
<!DOCTYPE html>
<html><body>
<h3>List of Topics</h3>
<ol>
<li> Basics of IT</li>
<li> HTML 5 </li>
<li> PostgreSQL </li>
</ol>
<h3>List of Topics start with series 50</h3>
<ol start="50">
<li> Basics of IT</li>
<li> HTML 5 </li>
<li> PostgreSQL </li>
</ol></body></html>
```

## OUTPUT

### List of Topics

1. Basics of IT
2. HTML 5
3. PostgreSQL

### List of Topics start with series 50

50. Basics of IT
51. HTML 5
52. PostgreSQL



## 1.6 Unordered list or bulleted list

- An unordered list created using the
- `<ul>` tag, and each list item starts with the `<li>` tag. The list items in unordered lists are marked with bullets (small black circles), by default.

```
<!DOCTYPE html>
<html>
<head>
<title>Example of HTML Unordered List</title>
</head>
<body>
<h3>HTML Unordered List</h3>
<ul>
<li>Basics of IT</li>
<li>HTML 5</li>
<li>PostgreSQL</li>
</ul></body></html>
```

### OUTPUT

#### **HTML Unordered List**

- Basics of IT
- HTML 5
- PostgreSQL





## 1.6 Unordered list or bulleted list

| Attribute                                                                                                                                                               | Values                                                                                                                                                                                                                                                                                                              | Description                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type = disc/<br>circle/square<br>(use style (css)<br>instead of type<br>attribute in<br>HTML5.<br>Type attribute is<br>supported by<br>previous<br>versions of<br>HTML) | style="list-style-type:disc" e.g<br><ul style="list-style-type:disc;"><br>style="list-style-type:circle"<br>e.g<br><ul style="list-style-type:circle"><br>style="list-style-type:square"<br>e.g<br><ul style="list-style-type:square"><br>style="list-style-type:none"<br>e.g<br><ul style="list-style-type:none;"> | Sets the list item marker to a<br>bullet (default)<br><br>Sets the list item marker to a<br>circle<br><br>Sets the list item marker to a<br>square<br><br>The list items will not be<br>marked |

**Note :** HTML5 does not support bullets, circle and square value of type attribute instead you use CSS style.



## 1.6 Unordered list or bulleted list

- An unordered list created using the
- `<ul>` tag, and each list item starts with the `<li>` tag. The list items in unordered lists are marked with bullets (small black circles), by default.

```
<!DOCTYPE html>
<html>
<head>
<title>Example of HTML Unordered List</title>
</head>
<body>
<h3>HTML Unordered List</h3>
<ul>
<li>Basics of IT</li>
<li>HTML 5</li>
<li>PostgreSQL</li>
</ul></body></html>
```

### OUTPUT

#### **HTML Unordered List**

- Basics of IT
- HTML 5
- PostgreSQL



## 1.7 Definition list

- To define a definition list <dl> tag is used. You can create items in definition list with the <dt> and <dd> tags. The <dt> tag is used to define the term whereas the <dd> tag is used to define the term's definition.

```
<!DOCTYPE html>
<html>
<head>
<title>definition List</title>
</head>
<body>
<h3>Example of HTML definition List</h3>
<dl>
<dt><b>Web</b></dt>
<dd>The part of the Internet that contains websites and
web pages</dd>
<dt><b>HTML</b></dt>
<dd>A markup language for creating web pages</dd>
<dt><b>CSS</b></dt>
<dd>A technology to make HTML look better</dd>
</dl>
</body>
</html>
```

## OUTPUT

### Example of HTML definition List

#### Web

The part of the Internet that contains websites and web pages

#### HTML

A markup language for creating web pages

#### CSS

A technology to make HTML look better




## 1.7 Nested list

List within another list either order list or unordered list is called nested list.

### Examples : Single level nested list

```
<!DOCTYPE html>
<html >
<head>
<title>Example of HTML nested list</ title>
</head>
<body>
<h3>HTML Nested List</h3>
<ol>
<li>Introduction to IT</li>
<li>Introduction to DBMS</li>
<ul style="list-style-type:circle">
<li>Definition of DBMS</li>
<li>applications of DBMS</li>
<li>Advantages of DBMS</li>
</ul>
<li>Postgresql</li>
</ol>
</body>
</html>
```

### OUTPUT

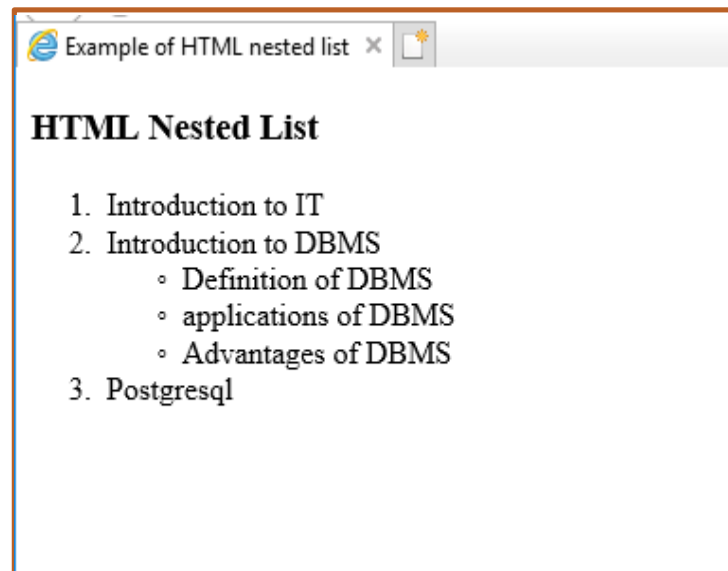



## 1.7 Nested list

### Examples : Multilevel nested list

```
<!DOCTYPE html>
<html >
<head>
<title>nested list</title>
</head>
<body>
<h3> Multi-level list Nested List</h3>
<ul>
<li>Daily computing</li>
<li>Web design</li>
<ol>
<li>html 5</li>
<li>hyperlink</li>
<li>Inserting Images</li>
</ol>
<li>Javascript</li>
<ul style="list-style-type:circle">
<li>conditional structure</li>
<ul style="list-style-type:square">
<li>If statment</li>
<li>If else statement</li>
<li>case statement</li>
</ul>
<li>loop statement</li>
</ul>
</ul>
</body>
</html>
```

### OUTPUT

#### Multi-level list Nested List

- Daily computing
- Web design
  1. html 5
  2. hyperlink
  3. Inserting Images
- Javascript
  - conditional structure
    - If statment
    - If else statement
    - case statement
  - loop statement



# THANK YOU