Cucumber Report

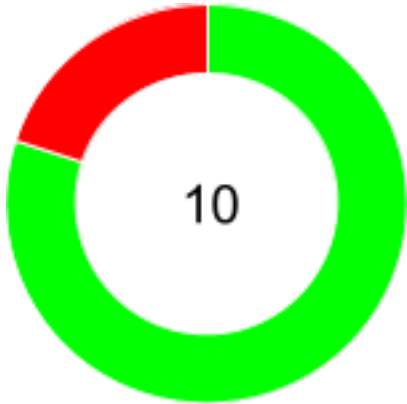| Start : May 26, 11:43:27.518 p.m.	End : May 26, 11:43:45.174 p.m.	Duration : 17.656 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 2 SKIPPED - 0	PASSED - 8 FAILED - 2 SKIPPED - 0

Features: 1

Scenarios: 2

Steps: 10

Pass % — Features: 0 %

Pass % — Scenarios: 0 %

Pass % — Steps: 80 %

Feature		Scenario				Step			
Name	**Duration**	**T**	**P**	**F**	**S**	**T**	**P**	**F**	**S**
Login Functionality of Linkedin using tags	*17.656 s*	*2*	*0*	*2*	*0*	*10*	*8*	*2*	*0*

#	Feature Name	Scenario Name
1	*Login Functionality of Linkedin using tags*	*user enter valid credentials and login to gmail2*
2		*user enter valid credentials and login to gmail3*

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Smoke	2	0	2	0	1	0	1	0
@Regression	1	0	1	0	1	0	1	0
@Important	2	0	2	0	1	0	1	0

#	Feature Name	T	P	F	S	Duration
1	Login Functionality of Linkedin using tags	2	0	2	0	17.656 s
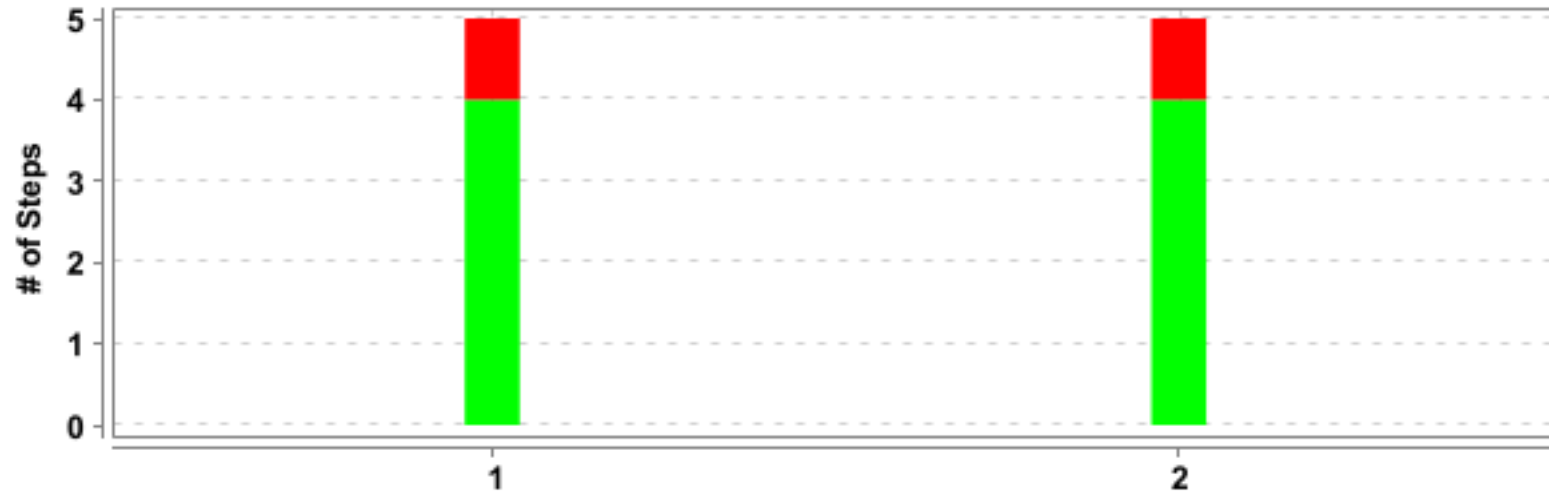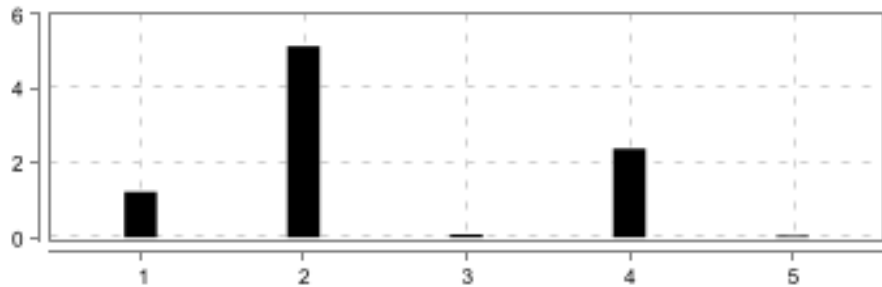
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login Functionality of Linkedin using tags	user enter valid credentials and login to gmail2	5	4	1	0	9.198 s
2		user enter valid credentials and login to gmail3	5	4	1	0	8.444 s

Login Functionality of Linkedin using tags

FAILED	DURATION - 17.656 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0	Steps Total - 10 Pass - 8 Fail - 2 Skip - 0
/ 11:43:27.518 p.m. // 11:43:45.174 p.m. /			

user enter valid credentials and login to gmail2

FAILED	DURATION - 9.198 s	Steps Total - 5 Pass - 4 Fail - 1 Skip - 0
/ 11:43:27.523 p.m. // 11:43:36.721 p.m. /		
Login Functionality of Linkedin using tags		
@Smoke @Regression @Important		

#	Step / Hook Details	Status	Duration
1	Given User need to be on Linkedin Login page	PASSED	1.222 s
2	When User enter valid "soodpallavi1994@gmail.com" username	PASSED	5.140 s
3	And User enter valid "Quality@123" password	PASSED	0.078 s
4	And User clicks on Login button	PASSED	2.381 s
5	Then User should be logged in dislaying logged in username in application	FAILED	0.044 s

	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//div[@class='t-16 t-black t-bold']"} (Session info: chrome=113.0.5672.127) For documentation on this error, please visit: https://selenium.dev/exceptions/ #no_such_element Build info: version: '4.9.1', revision: 'eb2032df7f' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [efdf23ae72e542958d856ef1d740117d, findElement {using=xpath, value=//div[@class='t-16 t-black t-bold']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 113.0.5672.127, chrome: {chromedriverVersion: 113.0.5672.63 (0e1a4471d5ae..., userDataDir: C:\Users\14379\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:61186}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:61186/devtoo..., se:cdpVersion: 113.0.5672.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: efdf23ae72e542958d856ef1d740117d
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at com.basic.TagsSD.TagsStepDef.User_should_be_logged_in_dislaying_logged_in_username_in_application(TagsStepDef.java:57) at ?.User should be logged in dislaying logged in username in application(file:///C:/Users/14379/eclipse-cucumberworkspace/CucumberProject/src/test/resources/com/basic/TagsFF/Tags.feature:22) * Not displayable characters are replaced by '?'.		

user enter valid credentials and login to gmail3

FAILED	DURATION - 8.444 s
/ 11:43:36.730 p.m. // 11:43:45.174 p.m. /	
Login Functionality of Linkedin using tags	
@Smoke @Important	

Steps
Total - 5
Pass - 4
Fail - 1
Skip - 0

#	Step / Hook Details	Status	Duration
1	Given User need to be on Linkedin Login page	PASSED	1.464 s
2	When User enter valid "soodpallavi1994@gmail.com" username	PASSED	5.142 s
3	And User enter valid "Quality@123" password	PASSED	0.085 s
4	And User clicks on Login button	PASSED	1.344 s
5	Then User should be logged in dislaying logged in username in application	FAILED	0.040 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//div[@class='t-16 t-black t-bold']"} (Session info: chrome=113.0.5672.127) For documentation on this error, please visit: https://selenium.dev/exceptions/		

#	Step / Hook Details	Status	Duration

	#no_such_element Build info: version: '4.9.1', revision: 'eb2032df7f' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.6' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [e528d5764282100e341ee6b2d98cb14f, findElement {using=xpath, value=//div[@class='t-16 t-black t-bold']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 113.0.5672.127, chrome: {chromedriverVersion: 113.0.5672.63 (0e1a4471d5ae..., userDataDir: C:\Users\14379\AppData\Loca...}, goog:chromeOptions: {debuggerAddress: localhost:61231}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:61231/devtoo..., se:cdpVersion: 113.0.5672.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: e528d5764282100e341ee6b2d98cb14f
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	  at com.basic.TagsSD.TagsStepDef.User_should_be_logged_in_dislaying_logged_in_username_in_application(TagsStepDef.java:57)
	  at ?.User should be logged in dislaying logged in username in application(file:///C:/Users/14379/eclipse-cucumberworkspace/CucumberProject/src/test/resources/com/basic/TagsFF/Tags.feature:31)
	* Not displayable characters are replaced by '?'.		