

Session 3: DML Operations Trainer Coverage: Insert, Update, Delete records. WHERE and LIMIT usage. Example: Insert 5 sample users and edit their data. Pending

Tasks

- 1) Create a SQL table called Restaurants with columns: id (INT, auto-increment), name (VARCHAR), cuisine (VARCHAR), rating (DECIMAL), and city (VARCHAR). Insert 5 sample restaurants into the table, each with a different cuisine and rating.

QUERY:



The screenshot shows a SQL query editor with a toolbar at the top containing icons for Structure, SQL, Search, Query, and Export. Below the toolbar is a text box that says "Run SQL query/queries on database my database:". The main area contains the following SQL code:

```
1 CREATE TABLE RESTAURANT (  
2     Id INT PRIMARY KEY AUTO_INCREMENT,  
3     Name VARCHAR(50),  
4     cuisine VARCHAR(20),  
5     rating Decimal(10,2),  
6     city varchar(20)  
7 );
```



The screenshot shows a SQL query editor with a toolbar at the top containing icons for Browse, Structure, SQL, Search, Insert, and Export. Below the toolbar is a text box that says "Run SQL query/queries on table my database.restaurant:". The main area contains the following SQL code:

```
1 INSERT INTO Restaurants (name, cuisine, rating, city)  
2 VALUES  
3 ('Spice Garden', 'Indian', 4.5, 'Mumbai'),  
4 ('Pasta Palace', 'Italian', 4.2, 'Delhi'),  
5 ('Sushi World', 'Japanese', 4.7, 'Pune'),  
6 ('Taco House', 'Mexican', 4.1, 'Ahmedabad'),  
7 ('Dragon Wok', 'Chinese', 4.6, 'Bangalore');
```

Output:

☐ Proming | [Edit table](#)


☐ Show all | Number of rows: 25 v | Filter rows:

Extra options

←T→		Id	Name	cuisine	rating	city		
☐	 Edit	 Copy	 Delete	1	Spice Garden	Indian	4.50	Mumbai
☐	 Edit	 Copy	 Delete	2	Pasta Palace	Italian	4.20	Delhi
☐	 Edit	 Copy	 Delete	3	Sushi World	Japanese	4.70	Pune
☐	 Edit	 Copy	 Delete	4	Taco House	Mexican	4.10	Ahmedabad
☐	 Edit	 Copy	 Delete	5	Dragon Wok	Chinese	4.60	Bangalore

2) Write a SQL UPDATE statement to change the rating of the restaurant named 'Spice Villa' to 4.7 in the Restaurants table.

Query;

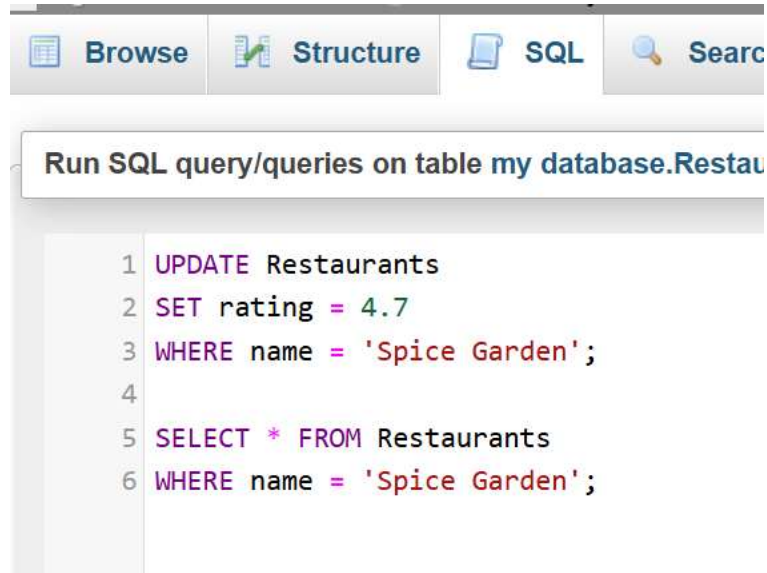

The screenshot shows a database management interface with tabs for 'Browse', 'Structure', 'SQL', and 'Search'. Below the tabs, a text box says 'Run SQL query/queries on table my database.Restau'. In the SQL editor, the following queries are entered:

```
1 UPDATE Restaurants
2 SET rating = 4.7
3 WHERE name = 'Spice Garden';
4
5 SELECT * FROM Restaurants
6 WHERE name = 'Spice Garden';
```

Output:




The screenshot shows a table view with a toolbar at the top containing 'Show all', 'Number of rows: 25', and 'Filter rows: Search this table'. Below the toolbar is an 'Extra options' button. The table has columns: Id, Name, cuisine, rating, and city. The first row shows the restaurant 'Spice Garden' with a rating of 4.70 and location Mumbai. Below the table are navigation icons.

	Id	Name	cuisine	rating	city
☐ Edit Copy Delete	1	Spice Garden	Indian	4.70	Mumbai

3) Delete all restaurants from the Restaurants table where the rating is less than 3.5 using a SQL DELETE statement.

Query:

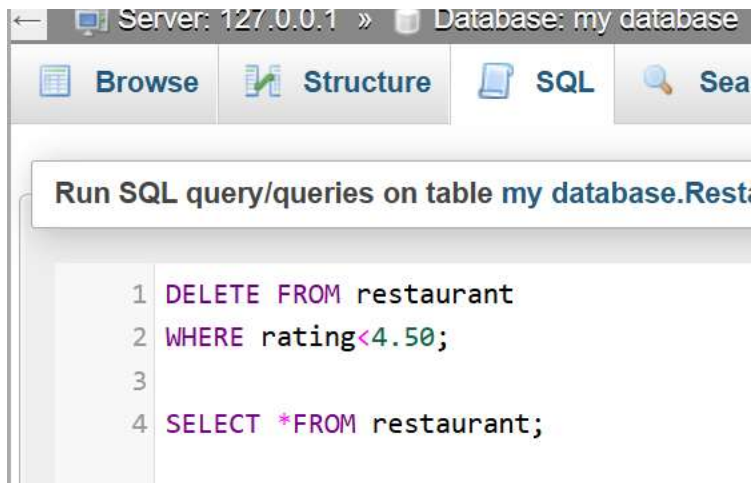

The screenshot shows a database management interface with a tab labeled 'Server: 127.0.0.1 » Database: my database'. Below the tabs (Browse, Structure, SQL, Search), there is a text area for running SQL queries on the table 'my database.Restaurant'. The query entered is:

```
1 DELETE FROM restaurant
2 WHERE rating<4.50;
3
4 SELECT *FROM restaurant;
```

Output:



The screenshot shows the output of the SQL query in a table view. At the top, there are controls for 'Show all', 'Number of rows: 25', and a 'Filter rows' search box. Below these is an 'Extra options' button. The table has columns: Id, Name, cuisine, rating, and city. Each row has a checkbox, an 'Edit' button, a 'Copy' button, and a 'Delete' button. The data shown is:

	Id	Name	cuisine	rating	city
☐	1	Spice Garden	Indian	4.70	Mumbai
☐	3	Sushi World	Japanese	4.70	Pune
☐	5	Dragon Wok	Chinese	4.60	Bangalore

- 4) Use a SELECT query with WHERE and LIMIT to fetch the top 2 restaurants in the city 'Ahmedabad' with a rating above 4.0 from the Restaurants table.

Hint: Combine WHERE for city and rating, and LIMIT to restrict the number of results.

Query:

```
1 SELECT*
2 FROM restaurant
3 WHERE city='mumbai'
4 AND rating=4.70
5 LIMIT 2;
```

Output:

✓ Showing rows 0 - 0 (1 total, Query took 0.0002 seconds.)

SELECT* FROM restaurant WHERE city='mumbai' AND rating=4.70 LIMIT 2;

Extra options

← T →

▼

	Id	Name	cuisine	rating	city
☐	1	Spice Garden	Indian	4.70	Mumbai

 Edit  Copy  Delete