


Session 2: SQL Basics & Commands
Trainer Coverage: SQL syntax rules.
DDL commands: CREATE, ALTER, DROP.
Creating basic users and expenses tables.
Demo: Execute commands in MySQL CLI / Workbench.

Tasks:

- 1) Open MySQL Workbench or CLI and write a CREATE TABLE statement to create a table called 'restaurants' with columns: id (INT, primary key, auto-increment), name (VARCHAR(100)), location (VARCHAR(100)), and rating (DECIMAL(2,1)).

Query:

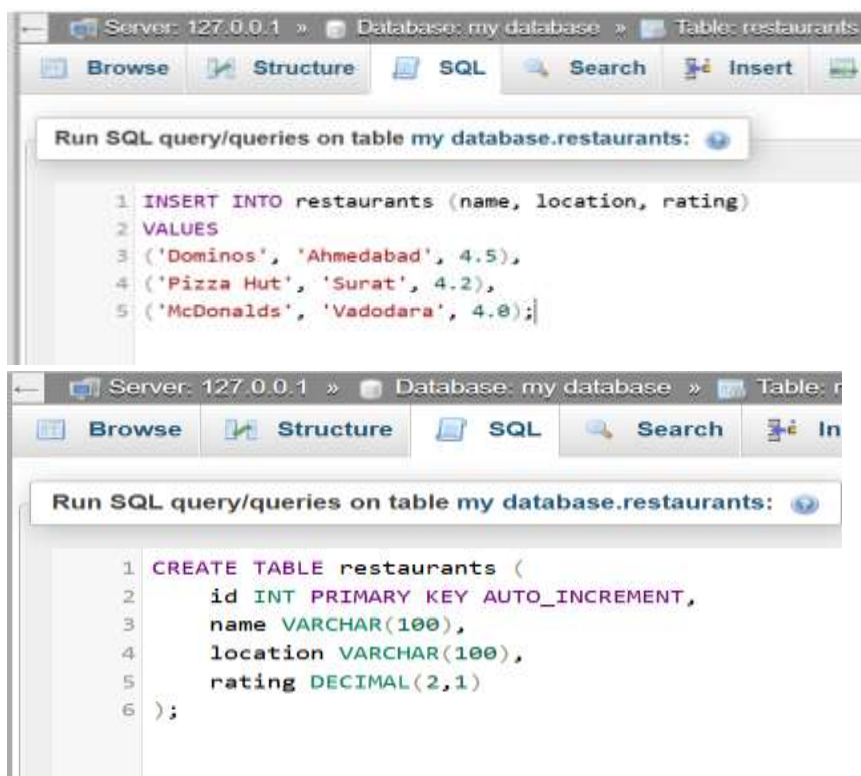

The image displays two screenshots of the MySQL Workbench interface. The top screenshot shows an SQL query window with the following code:

```
1 INSERT INTO restaurants (name, location, rating)
2 VALUES
3 ('Dominos', 'Ahmedabad', 4.5),
4 ('Pizza Hut', 'Surat', 4.2),
5 ('McDonalds', 'Vadodara', 4.0);
```

The bottom screenshot shows the same interface with a different SQL query:

```
1 CREATE TABLE restaurants (
2     id INT PRIMARY KEY AUTO_INCREMENT,
3     name VARCHAR(100),
4     location VARCHAR(100),
5     rating DECIMAL(2,1)
6 );
```



Output:

☐ Show all | Number of rows: 25 | Filter rows: Search this tabl


Extra options

				id	name	location	rating
☐	Edit	Copy	Delete	1	Dominos	Ahmedabad	4.5
☐	Edit	Copy	Delete	2	Pizza Hut	Surat	4.2
☐	Edit	Copy	Delete	3	McDonalds	Vadodara	4.0

- 2) Use the ALTER TABLE command in MySQL to add a new column 'average_cost' (INT) to your 'restaurants' table.

Hint: Remember to specify the data type when adding a new column.

Query:

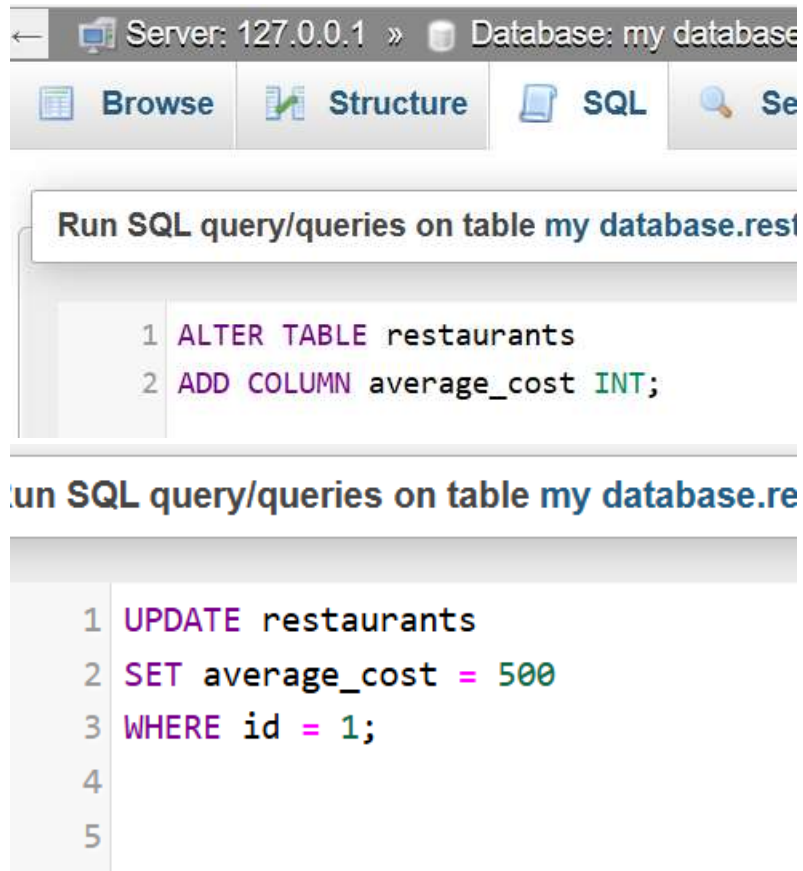

The screenshot shows a MySQL client window with the title bar 'Server: 127.0.0.1 » Database: my database'. The interface includes tabs for 'Browse', 'Structure', 'SQL', and 'Se'. Below the tabs, there are two text areas for running SQL queries on the table 'my database.restaurants'. The first text area contains the query to add a new column 'average_cost' of type 'INT' to the 'restaurants' table. The second text area contains the query to update the 'average_cost' of the restaurant with 'id = 1' to 500.

```
1 ALTER TABLE restaurants
2 ADD COLUMN average_cost INT;
```

```
1 UPDATE restaurants
2 SET average_cost = 500
3 WHERE id = 1;
4
5
```

Output:

☐ Show all

Number of rows: 25

Filter rows:



Sort

Extra options

		id	name	location	rating	average_cost	
☐	 Edit	 Copy	 Delete	1 Dominos	Ahmedabad	4.5	NULL
☐	 Edit	 Copy	 Delete	2 Pizza Hut	Surat	4.2	500
☐	 Edit	 Copy	 Delete	3 McDonalds	Vadodara	4.0	NULL
	☐ Check all	With selected:	 Edit	 Copy	 Delete	 Export	

- 3) Write a SQL statement to DROP the 'restaurants' table you created earlier. Double-check your command before running it to avoid accidental data loss.

Query:

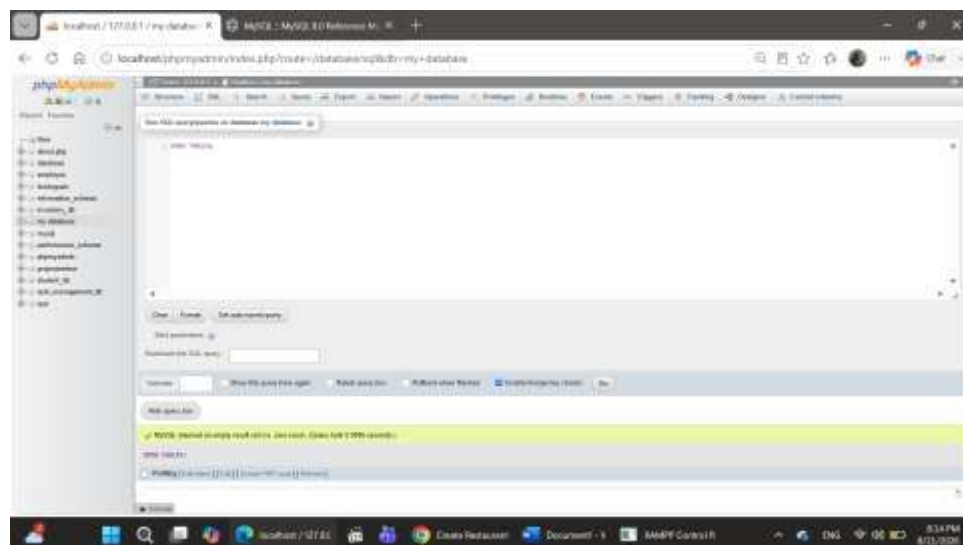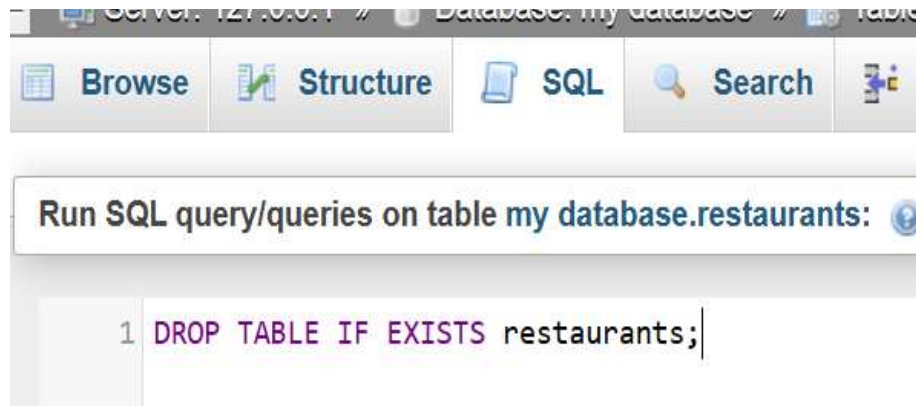


- 4) Create a new table called 'playlists' for a music app like Spotify, with columns: playlist_id (INT, primary key, auto-increment), title (VARCHAR(50)), created_by (VARCHAR(50)), and created_at (DATE).

Query:



The screenshot shows a database client window with the title bar 'Server: 127.0.0.1 » Database: my database'. The interface includes tabs for 'Structure', 'SQL', 'Search', and 'Query'. A prompt 'Run SQL query/queries on database my database:' is visible. The SQL editor contains the following code:

```
1 CREATE TABLE Playlist(  
2   playlist_id int not null AUTO_INCREMENT,  
3   title varchar (100),  
4   created_by varchar (100),  
5   created_at date,  
6   PRIMARY KEY(playlist_id)  
7 );
```

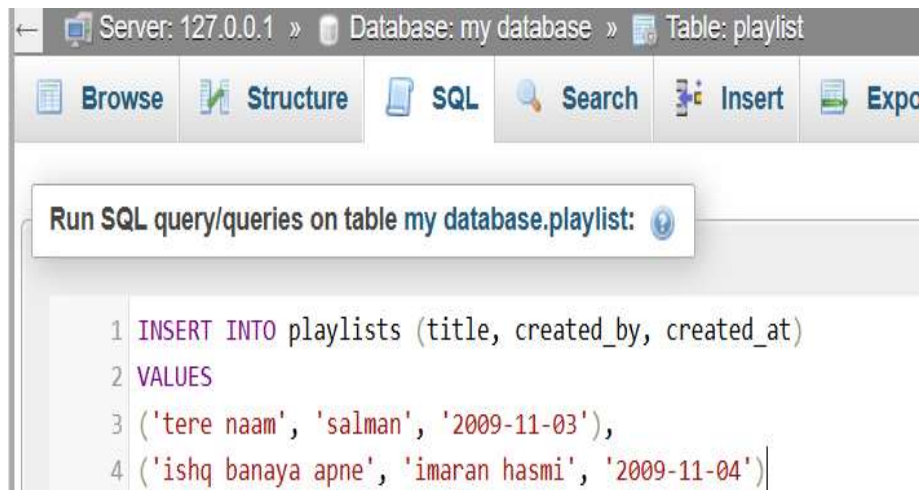

The screenshot shows the same database client window, but the title bar now includes 'Table: playlist'. The tabs include 'Browse', 'Structure', 'SQL', 'Search', 'Insert', and 'Export'. A prompt 'Run SQL query/queries on table my database.playlist:' is visible. The SQL editor contains the following code:

```
1 INSERT INTO playlists (title, created_by, created_at)  
2 VALUES  
3 ('tere naam', 'salman', '2009-11-03'),  
4 ('ishq banaya apne', 'imaran hasmi', '2009-11-04');
```

OUTPUT:



The screenshot shows a database management interface. At the top, a SQL query is entered: `SELECT * FROM `playlist` WHERE 1;`. Below the query bar, there are several action buttons: `Profiling`, `Edit inline`, `Edit`, `Explain SQL`, `Create PHP code`, and `Refresh`. Below these buttons, there are controls for displaying the results: a checkbox for `Show all`, a `Number of rows` dropdown set to `25`, and a `Filter rows` search box with the placeholder text `Search this table`. Below the controls, there is an `Extra options` button. The results are displayed in a table with the following columns: `playlist_id`, `title`, `created_by`, and `created_at`. The table contains two rows of data.

	playlist_id	title	created_by	created_at
☐ Edit Copy Delete	1	tere naam	salman	2009-11-03
☐ Edit Copy Delete	2	ishq banya apne	imaran hasmii	2009-11-04