P123 — Whole-job logical tokens and task outcomes

All 4 development tasks × all 3 methods; no outcome-based selection

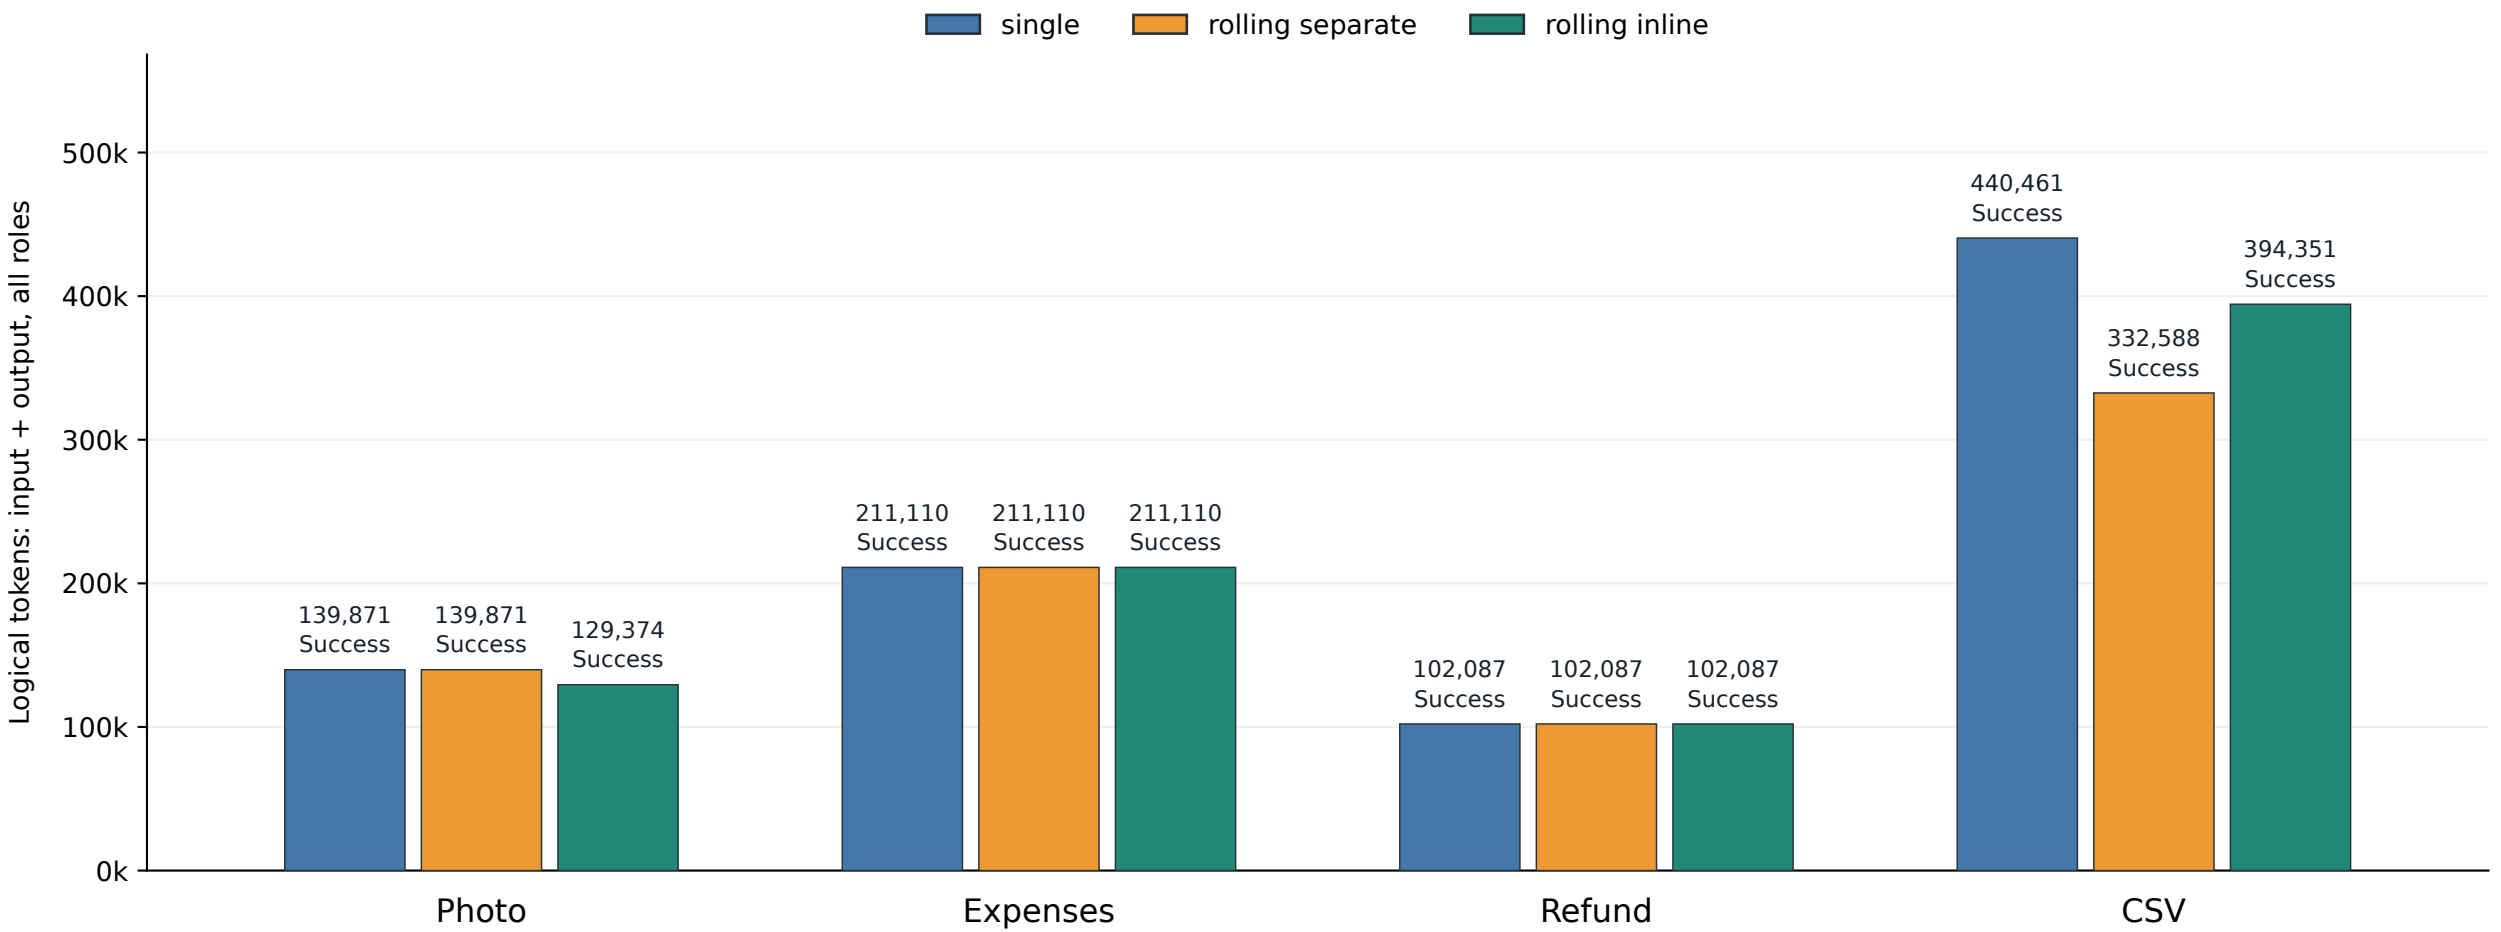

Tokens include task, summary, failure, and recovery work. Bars show the recorded known subtotal; incomplete usage is never an exact total.
Outcome labels are audited official results. Lower tokens on a failed task do not establish a quality-preserving saving.
One fixed development run per task and method; no uncertainty interval, general quality guarantee, or novelty claim.