P136 — Whole-job cost and official outcome

All six conditions: one known CSV task × two fixed seeds × three modes. Failed work and paid actor/focus included.

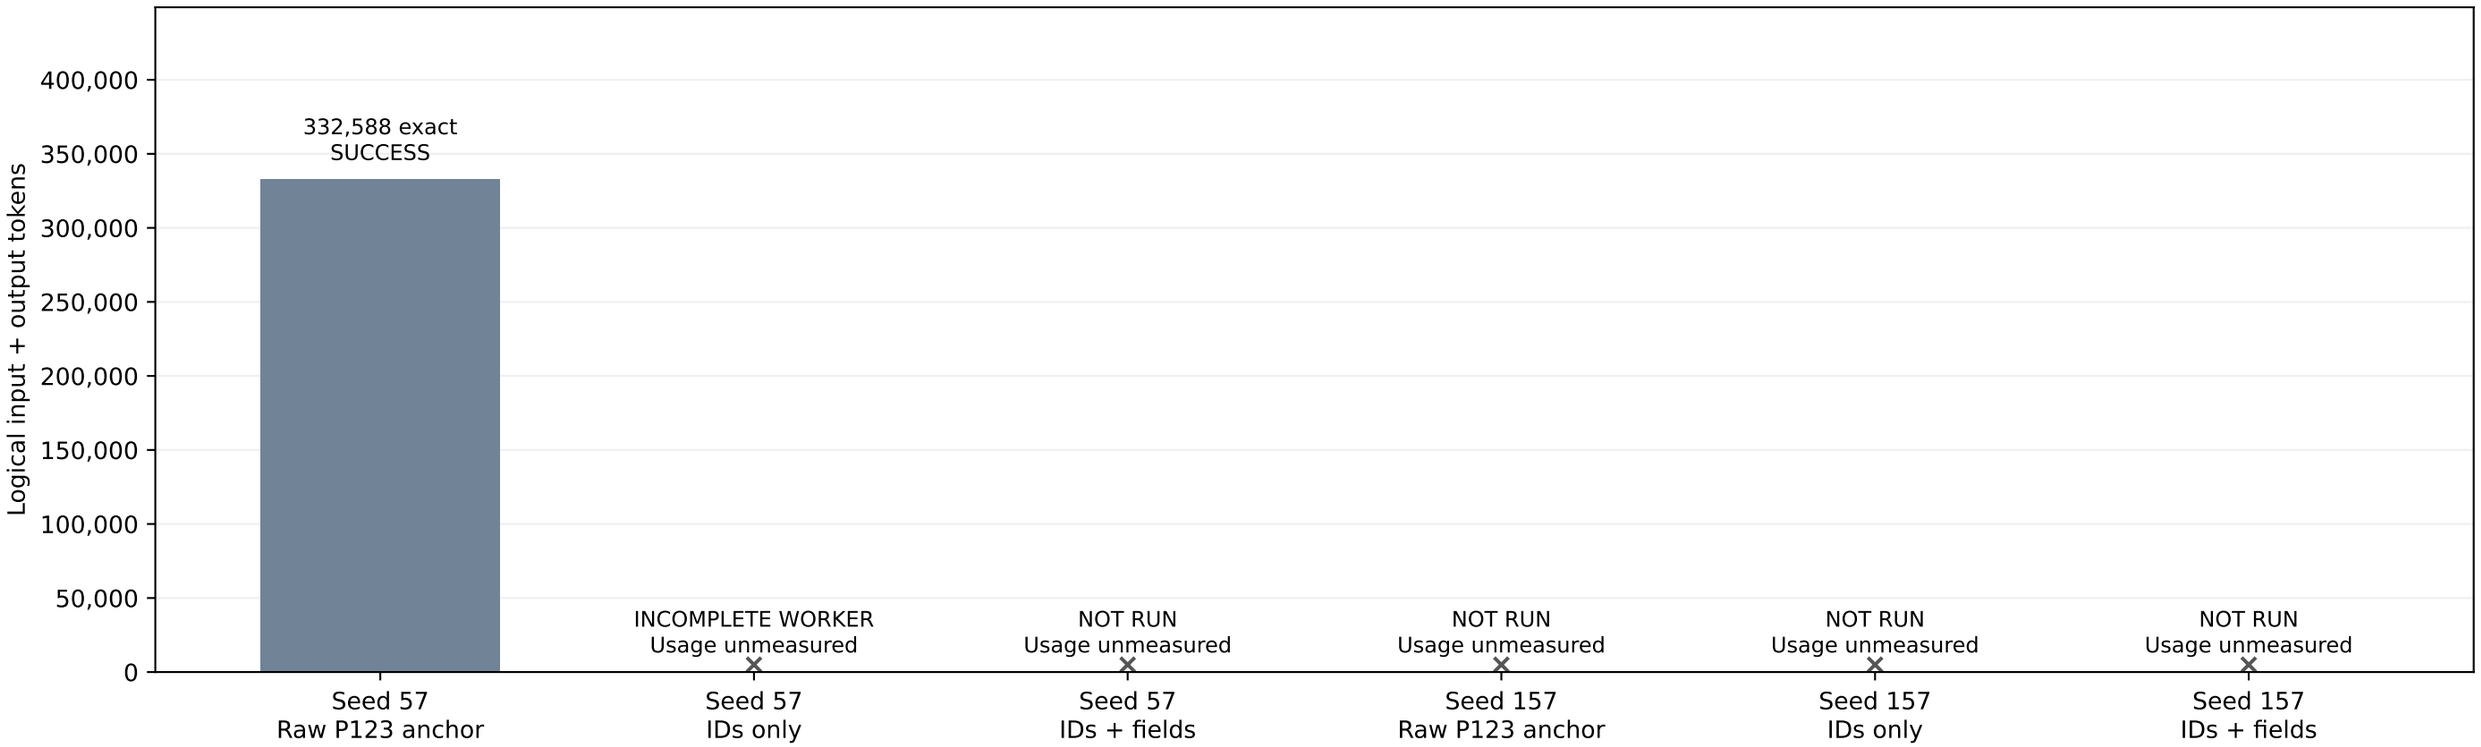

Comparison	All 2 pairs: Δ tokens	Common successes	Common-success Δ	Gain/loss/both failed/not evaluated
PRIMARY: fields − IDs	unmeasured	unmeasured	unmeasured	0/0/0/2
ANCHOR: fields − raw	unmeasured	unmeasured	unmeasured	0/0/0/2

Fixed development gate: False. Negative differences mean fewer tokens, not automatically better quality.
Hatching = known subtotal plus unmeasured usage; × = usage unmeasured. No condition is omitted. Cached input is not subtracted.
Common-success costs exclude quality gains, losses and both-failed pairs; these outcomes remain in the all-pair comparison.
Comparison-table 'unmeasured' also includes conservative fixed-gate null aggregates with some known components.
One known task and two seeds do not establish general quality preservation or technical novelty.