P132 — ordinary checkpoint inventory utility

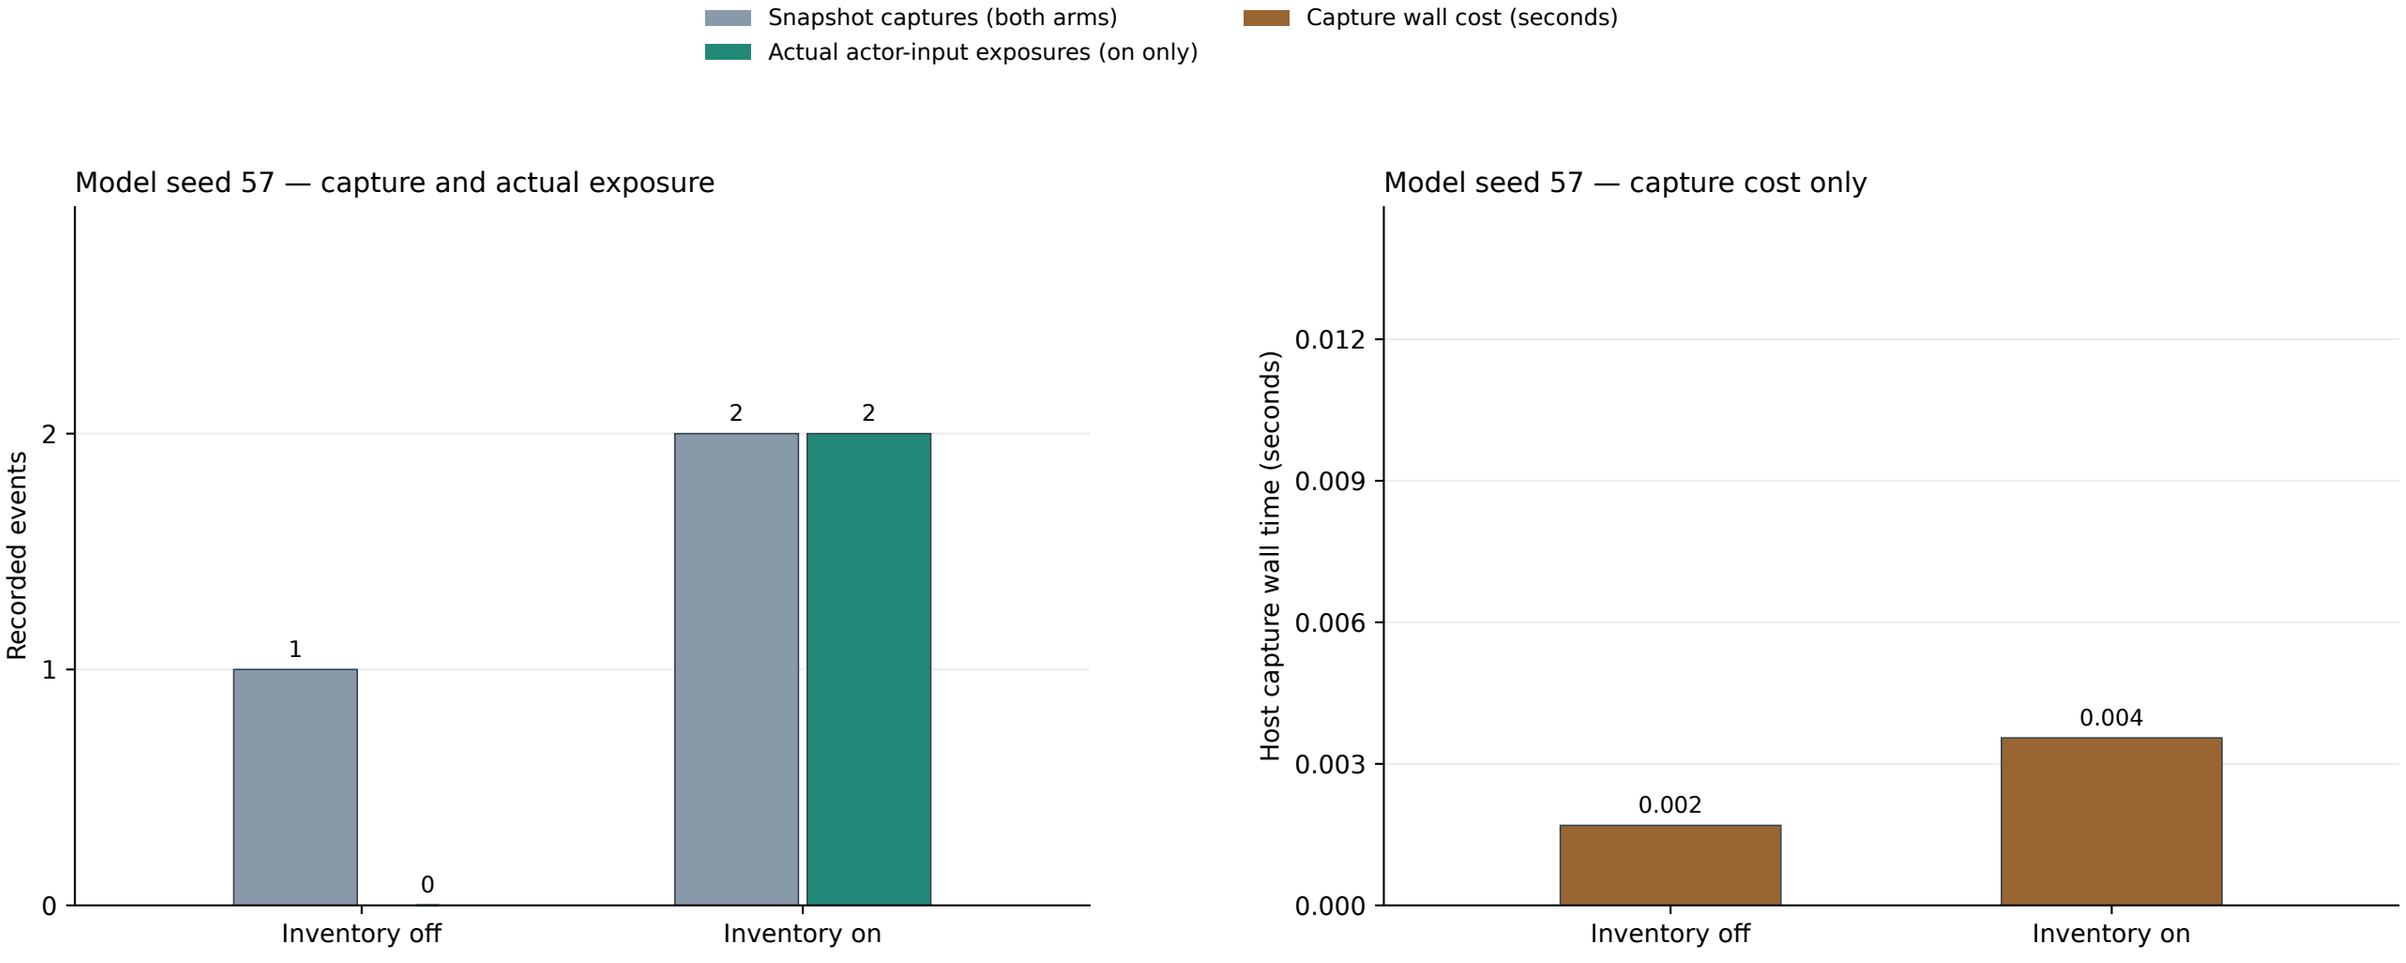

Every accepted checkpoint requests a snapshot in both arms. Only on adds the bounded inventory to the next dispatched actor input, once.
Capture without a later actor dispatch is not exposure. Counts are events, not extra model calls or token savings. Focus/raw history stays unchanged.
Capture time is a measured host cost inside task wall time, shown separately from counts; overlapping durations must not be added.
Unknown accounting uses an open triangle at the known subtotal; missing measurements use NA. Names/types/container lengths only; no values or scalar lengths.
Trusted capture records supply metadata; archived program state is not re-executed. Bytes are not converted to tokens. One known task, one seed; no novelty claim.