
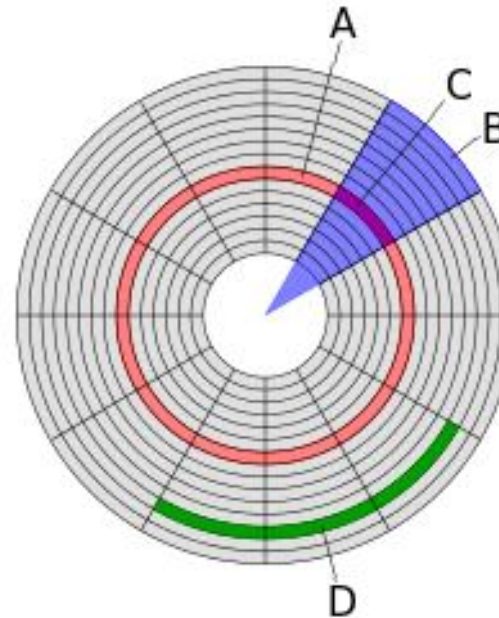


하드 디스크

하드 디스크 구조

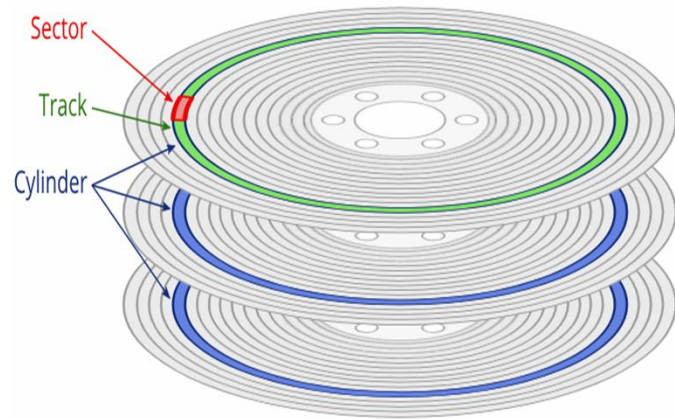

트랙 (A)	섹터 단위의 모음. 원심 전체가 트랙이 됨
섹터 (B)	하드디스크의 물리적인 최소 단위 (512byte)
트랙 섹터 (C)	같은 구역에 있는 섹터의 집합
클러스터 (D)	섹터 단위를 묶어 놓은 데이터의 입출력 단위 기본 4096byte


Disk Partition

MBR	Primary Partition 1	Primary Partition 2	Primary Partition 3	Primary Partition 4
-----	---------------------	---------------------	---------------------	---------------------


MBR	Primary Partition 1	Primary Partition 2	Primary Partition 3	Extended Partition (Logical Partition)
-----	---------------------	---------------------	---------------------	--

- 파티션

- Primary 파티션 4개 또는 Primary 파티션 3개와 1개의 확장 파티션
- 확장 파티션은 하나의 물리디스크에 하나만 설정할 수 있으며 논리 파티션은 제한되지 않음

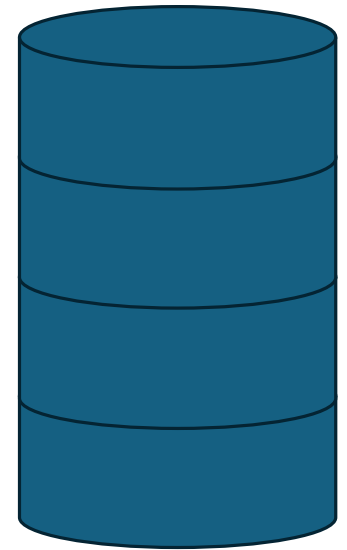


MBR(Master Boot Record) 구성

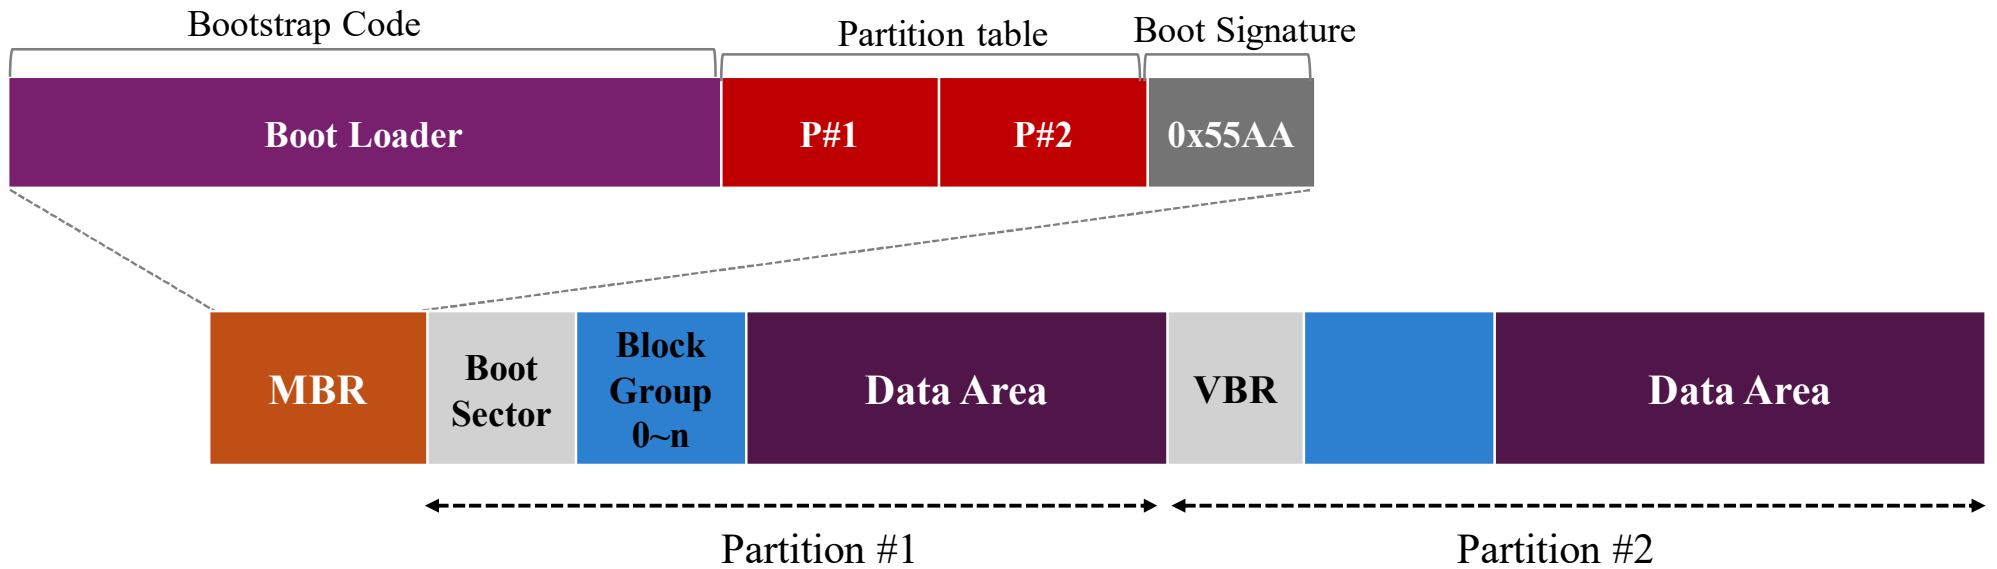

하드 디스크 추가

1단계. 하드 디스크 추가(SCSI)

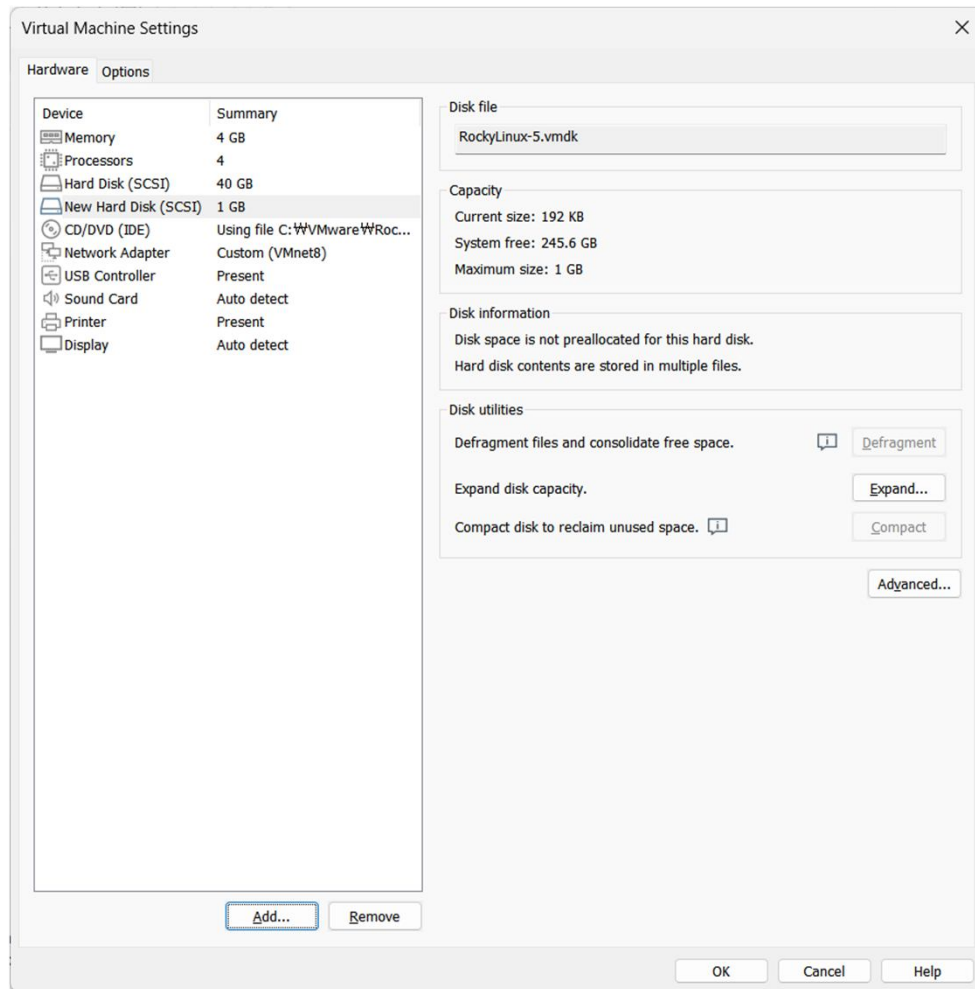

- 재부팅 없이 추가된 하드 디스크 인식시키는 방법

```
#echo "- - -" > /sys/class/scsi_host/host0/scan
```

```
#ls /dev/sd*
```

```
#fdisk -l
```

2단계. 파티션 나누기

```
#ls /dev/sd*
```

```
#fdisk -l
```

```
#fdisk /dev/sdb
```

```
command : n
```

```
select : p
```

```
Partition number(1~4) : 1
```

```
First sector :
```

```
Last sector : +100M
```

```
Command : t
```

```
Hex code : 83
```

```
Command : p
```

```
Command : w
```

```
#ls /dev/sd*
```

```
#fdisk -l
```

Device	Boot	Start	End	Sectors	Size	Id	Type
/dev/sdb1		2048	206847	204800	100M	83	Linux
/dev/sdb2		206848	821247	614400	300M	83	Linux
/dev/sdb3		821248	1230847	409600	200M	83	Linux
/dev/sdb4		1230848	1230948	101	50.5K	83	Linux

```
Command (m for help): w
```

```
The partition table has been altered.
```

```
Calling ioctl() to re-read partition table.
```

```
Syncing disks.
```

```
[root@localhost ~]# fdisk /dev/sdb
```

```
Welcome to fdisk (util-linux 2.37.4).
```

```
Changes will remain in memory only, until you decide to write them.
```

```
Be careful before using the write command.
```

```
Command (m for help): n
```

```
To create more partitions, first replace a primary with an extended partition.
```

/dev/sdb 파티션 나누기

(sdb1(100MB), sdb2(300M), sdb3(200M), sdb4(100M))

- 확장 파티션 만들기 (4번 파티션 삭제 후 4번 파티션을 확장 파티션으로 지정)

Command : d

Partition number(1~4) : 4

Command : n

Select : e

First sector :

Last sector :

Command : p

Command : w

#fdisk -l

***주파티션은 5개 이상 만들 수 없음**

```
Command (m for help): d
Partition number (1-4, default 4): 4

Partition 4 has been deleted.

Command (m for help): n
Partition type
   p   primary (3 primary, 0 extended, 1 free)
   e   extended (container for logical partitions)
Select (default e): e

Selected partition 4
First sector (1230848-2097151, default 1230848):
Last sector, +/-sectors or +/-size{K,M,G,T,P} (1230848-2097151, default 2097151):

Created a new partition 4 of type 'Extended' and of size 423 MiB.
```

```
Command (m for help): p
Disk /dev/sdb: 1 GiB, 1073741824 bytes, 2097152 sectors
Disk model: VMware Virtual S
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: dos
Disk identifier: 0x983edd17
```

Device	Boot	Start	End	Sectors	Size	Id	Type
/dev/sdb1		2048	206847	204800	100M	83	Linux
/dev/sdb2		206848	821247	614400	300M	83	Linux
/dev/sdb3		821248	1230847	409600	200M	83	Linux
/dev/sdb4		1230848	2097151	866304	423M	5	Extended

- 확장 파티션 나누기

#fdisk /dev/sdb

Command : n

First sector :

Last sector : + 100M

Command : p

Command : w

```
[root@localhost ~]# fdisk /dev/sdb

Welcome to fdisk (util-linux 2.37.4).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.

Command (m for help): n
All primary partitions are in use.
Adding logical partition 5
First sector (1232896-2097151, default 1232896):
Last sector, +/-sectors or +/-size{K,M,G,T,P} (1232896-2097151, default 2097151): +100M

Created a new partition 5 of type 'Linux' and of size 100 MiB.
```

```
Command (m for help): p
Disk /dev/sdb: 1 GiB, 1073741824 bytes, 2097152 sectors
Disk model: VMware Virtual S
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: dos
Disk identifier: 0x983edd17
```

Device	Boot	Start	End	Sectors	Size	Id	Type
/dev/sdb1		2048	206847	204800	100M	83	Linux
/dev/sdb2		206848	821247	614400	300M	83	Linux
/dev/sdb3		821248	1230847	409600	200M	83	Linux
/dev/sdb4		1230848	2097151	866304	423M	5	Extended
/dev/sdb5		1232896	1437695	204800	100M	83	Linux

#df -Th

```
[root@localhost ~]# df -Th
Filesystem      Type      Size  Used Avail Use% Mounted on
devtmpfs        devtmpfs  4.0M   0    4.0M   0% /dev
tmpfs           tmpfs     1.9G   0    1.9G   0% /dev/shm
tmpfs           tmpfs     777M   9.7M  768M   2% /run
/dev/mapper/rl-root xfs       36G    5.8G   30G   17% /
/dev/sda1       xfs       960M   273M   688M   29% /boot
tmpfs           tmpfs     389M   104K   389M   1% /run/user/1000
/dev/sr0        iso9660   11G    11G     0  100% /run/media/gildong/Rocky-9-4-x86_64-dvd
```

3단계. 파일 시스템 생성

- 파티션에 파일 시스템 생성
#mkfs.ext4 -v /dev/sdb1

```
[root@localhost ~]# mkfs.ext4 -v /dev/sdb1
mke2fs 1.46.5 (30-Dec-2021)
fs_types for mke2fs.conf resolution: 'ext4', 'small'
/dev/sdb1 contains a ext2 file system
    last mounted on Tue Dec  3 07:14:35 2024
Proceed anyway? (y,N) y
Filesystem label=
OS type: Linux
Block size=1024 (log=0)
Fragment size=1024 (log=0)
Stride=0 blocks, Stripe width=0 blocks
25584 inodes, 102400 blocks
5120 blocks (5.00%) reserved for the super user
First data block=1
Maximum filesystem blocks=33685504
13 block groups
8192 blocks per group, 8192 fragments per group
1968 inodes per group
Filesystem UUID: e2630f76-3f3b-4694-9a5f-591e647d5f30
Superblock backups stored on blocks:
    8193, 24577, 40961, 57345, 73729
```

4단계. Mount 하기

- 파티션에 파일 시스템 생성

```
#mkdir /sbdisk
```

```
#cd /sbdisk
```

```
touch aaa bbb ccc
```

```
#cd ..
```

```
#mount /dev/sdb1 /sbdisk
```

```
#cd /sbdisk
```

```
#ls
```


```
#dh -h
```

- Mount 해지

```
#umount /dev/sdb1
```

Mount

특정 디렉터리와 특정 장치를 연결시켜 주는 작업
형식) mount [옵션] [장치] [마운트포인트]

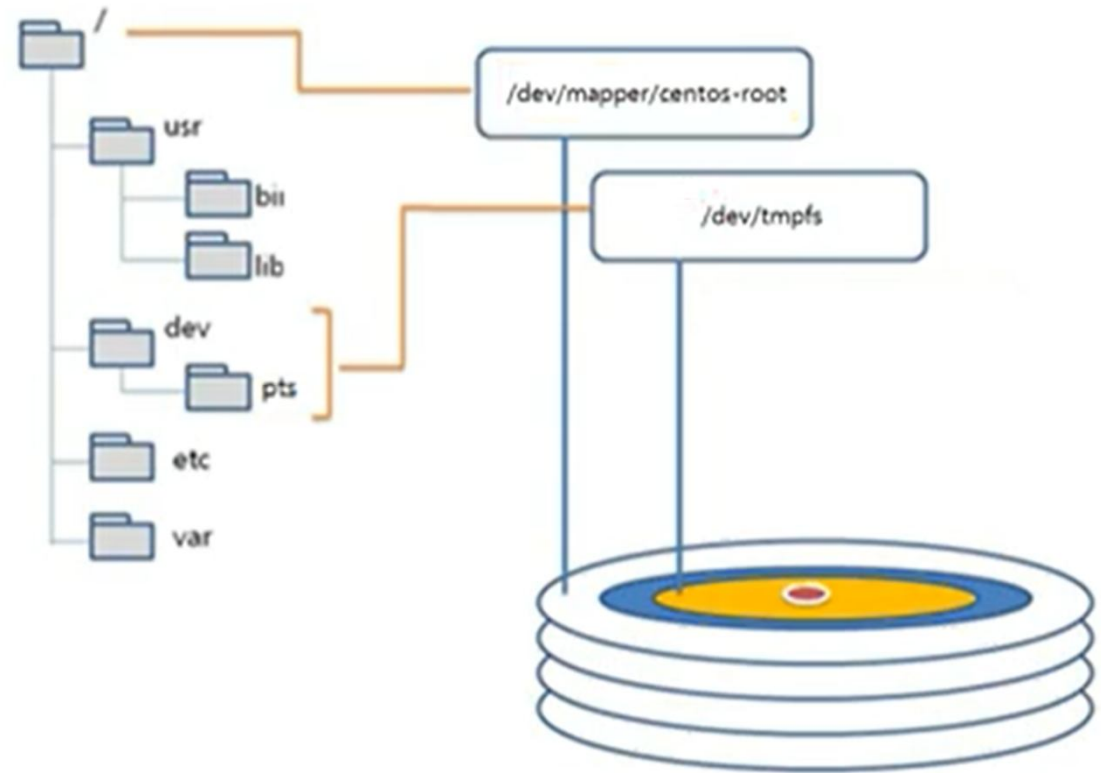

#mkdir /DISK

#cd /DISK

#touch aaa bbb ccc

#mount /dev/sdb1 /DISK

#cd /DISK

#ls

```
[root@localhost ~]# mkdir /DISK
[root@localhost ~]# cd /DISK
[root@localhost DISK]# touch aaa
[root@localhost DISK]# touch bbb
[root@localhost DISK]# ls
aaa  bbb
[root@localhost ~]# mount /dev/sdb1 /DISK
[root@localhost ~]# cd /DISK
[root@localhost DISK]# ls
lost+found
[root@localhost DISK]#
```

5단계. 자동 마운트 설정

```
#nano /etc/fstab
```

```
/dev/sdb1    /sbdisk ext4    defaults    0 0
```

파일 /etc/fstab

- 자동 마운트 설정 파일

```
[root@localhost ~]# cat /etc/fstab
#
# /etc/fstab
# Created by anaconda on Wed Nov 27 18:40:42 2024
#
# Accessible filesystems, by reference, are maintained under '/dev/disk/'.
# See man pages fstab(5), findfs(8), mount(8) and/or blkid(8) for more info.
#
# After editing this file, run 'systemctl daemon-reload' to update systemd
# units generated from this file.
#
/dev/mapper/rl-root    /                    xfs     defaults        0 0
UUID=ca1050f0-a2c8-4acc-8b13-54b02df95289 /boot                xfs     defaults        0 0
/dev/mapper/rl-swap    none                 swap    defaults        0 0
```

[파일시스템 장치] [마운트 포인트] [파일시스템 종류] [옵션] [덤프] [파일체크옵션]

Superblock 손상 시 발생하는 문제

```
#mkdir /TEST
```

```
#cd /TEST
```

```
#touch aaa
```

```
#dd if=/dev/zero of=/TEST/aaa bs=512 count=20
```

512*20=10KB 파일을 생성해서 /TEST에 생성시킴

```
#umount /dev/sdb1
```

```
#dd if=/dev/zero of=/dev/sdb1 bs=512 count=32
```

512*32=16,384(superblock 크기), Superblock에 0값으로 채움

```
#mount /dev/sdb1 /sbdisk
```

Superblock 복원

fsck -b [백업블록번호] [복구할 장치]


#fsck -b 8193 -fy /dev/sdb1

#mount /dev/sdb1 /sbdisk


*dumpe2fs /dev/sdb1

```
[root@localhost ~]# mkfs.ext4 -v /dev/sdb1
mke2fs 1.46.5 (30-Dec-2021)
fs_types for mke2fs.conf resolution: 'ext4', 'small'
/dev/sdb1 contains a ext2 file system
        last mounted on Tue Dec  3 07:14:35 2024
Proceed anyway? (y,N) y
Filesystem label=
OS type: Linux
Block size=1024 (log=0)
Fragment size=1024 (log=0)
Stride=0 blocks, Stripe width=0 blocks
25584 inodes, 102400 blocks
5120 blocks (5.00%) reserved for the super user
First data block=1
Maximum filesystem blocks=33685504
13 block groups
8192 blocks per group, 8192 fragments per group
1968 inodes per group
Filesystem UUID: e2630f76-3f3b-4694-9a5f-591e647d5f30
Superblock backups stored on blocks:
    8193, 24577, 40961, 57345, 73729
```

LVM(Logical Volume Manager)

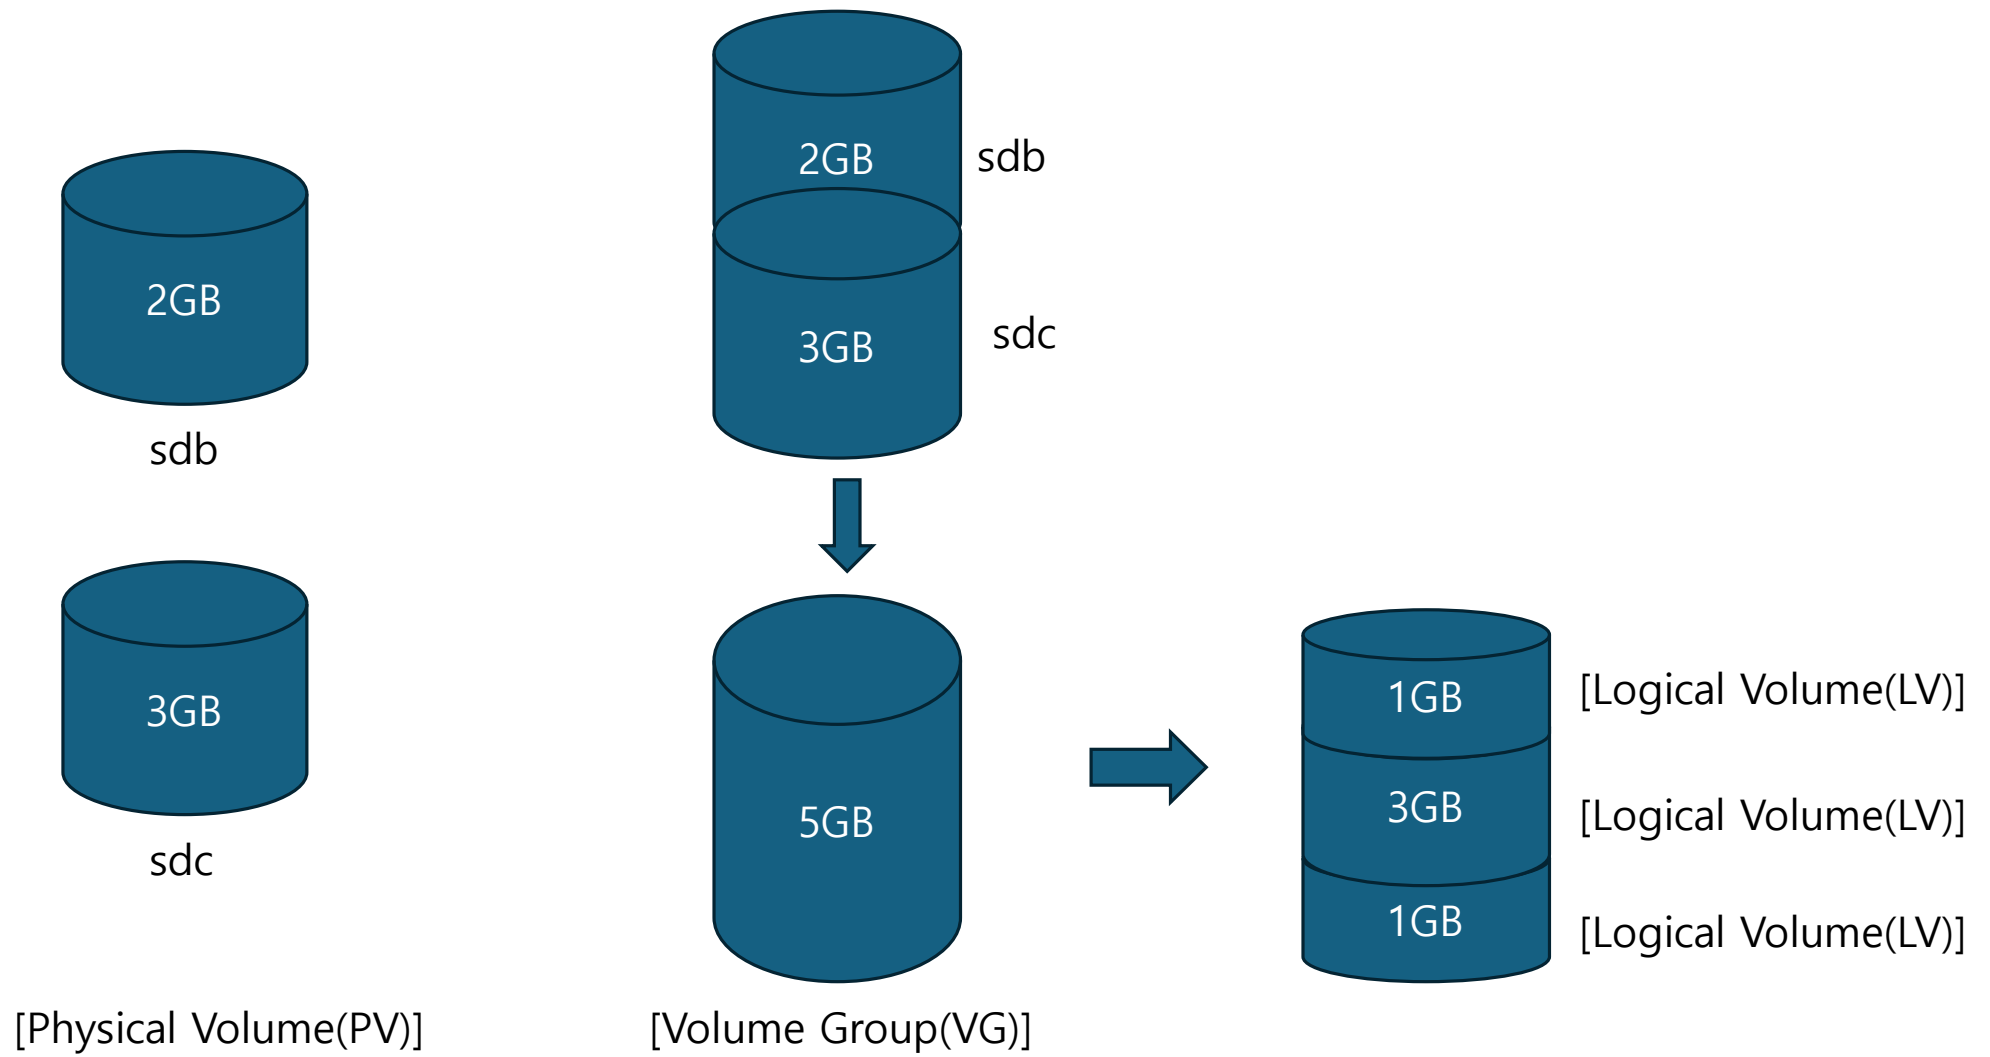

① 하드 디스크 추가 (SCSI)

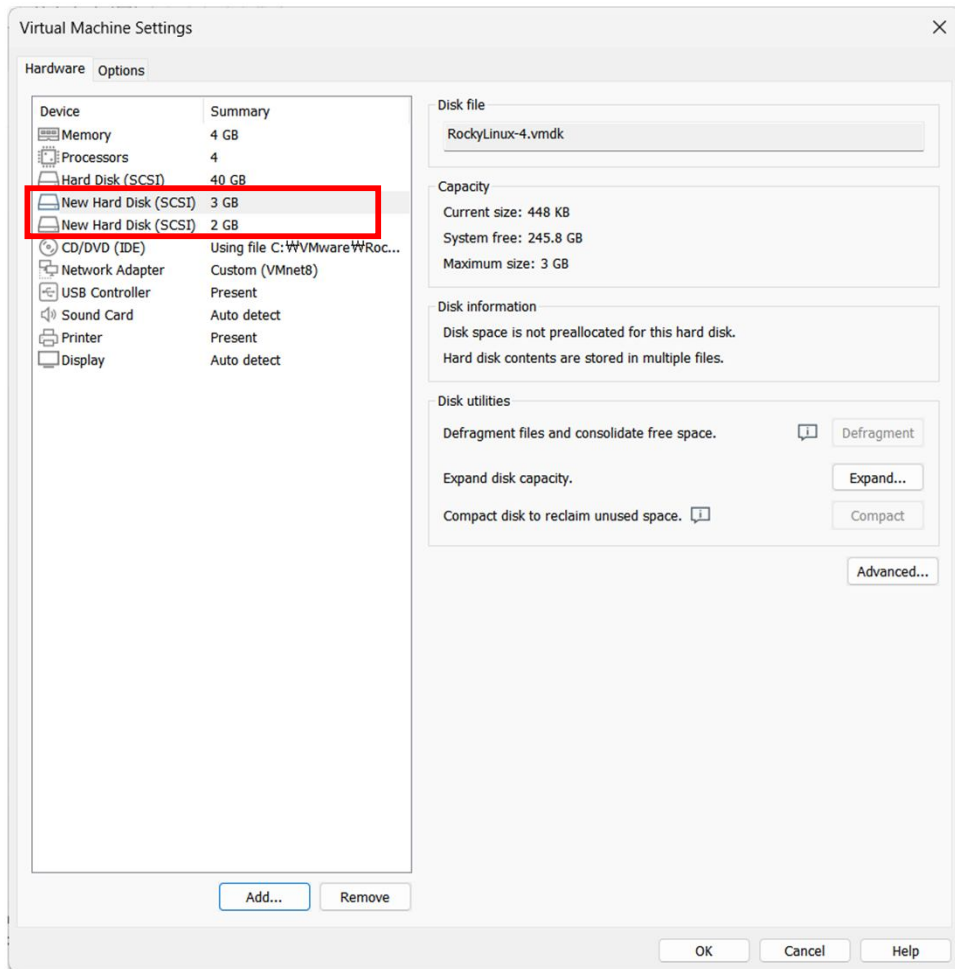

- 재부팅 없이 추가된 하드 디스크 인식시키는 방법

```
#echo "- - -" > /sys/class/scsi_host/host0/scan
```

```
#ls /dev/sd*
```

```
#fdisk -l
```

② 하드 디스크 파티션 나누기 (파일 시스템 LVM 지정)

```
[root@localhost ~]# fdisk /dev/sdb

Welcome to fdisk (util-linux 2.37.4).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.

Device does not contain a recognized partition table.
Created a new DOS disklabel with disk identifier 0xd34f3a5e.

Command (m for help): n
Partition type
   p   primary (0 primary, 0 extended, 4 free)
   e   extended (container for logical partitions)
Select (default p): p
Partition number (1-4, default 1): 1
First sector (2048-4194303, default 2048):
Last sector, +/-sectors or +/-size{K,M,G,T,P} (2048-4194303, default 4194303):

Created a new partition 1 of type 'Linux' and of size 2 GiB.

Command (m for help): t
Selected partition 1
Hex code or alias (type L to list all): 8e
Changed type of partition 'Linux' to 'Linux LVM'.
```

- /dev/sdb와 /dev/sdc 파티션 나누기

#fdisk /dev/sdb

command : n

select : p

Patition number(1~4) : 1

First sector :

Last sector :

Command : t

Hex code : 8e

Command : p

Command : w


#ls /dev/sd*

#fdisk -l

③ Physical Volume 만들기



/dev/sdb1




/dev/sdc1

```
#pvcreate /dev/sdb1
```

```
#pvcreate /dev/sdc1
```

```
[root@localhost ~]# pvcreate /dev/sdb1
WARNING: adding device /dev/sdb1 with idname /dev/sdb1 which is already used for missing device.
Physical volume "/dev/sdb1" successfully created.
[root@localhost ~]#
[root@localhost ~]# pvcreate /dev/sdc1
WARNING: adding device /dev/sdc1 with idname /dev/sdc1 which is already used for missing device.
Physical volume "/dev/sdc1" successfully created.
```

④ Volume Group 만들기

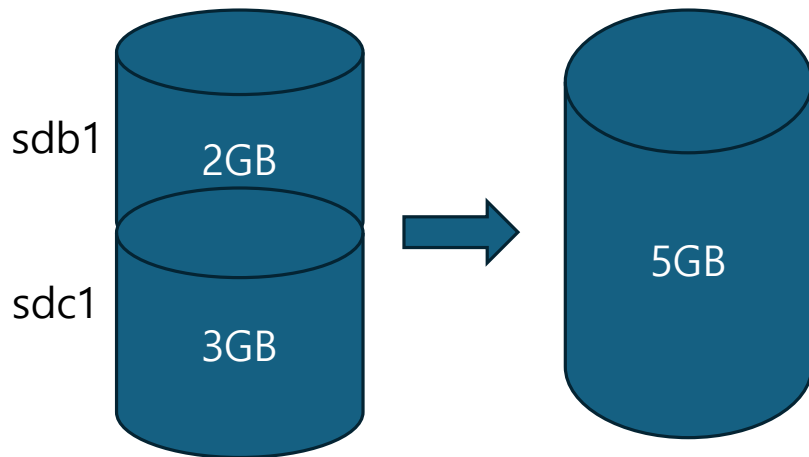


```
#vgcreate myVG /dev/sdb1 /dev/sdc1
```

```
[root@localhost ~]# vgcreate myVG /dev/sdb1 /dev/sdc1  
Volume group "myVG" successfully created
```

```
#vgdisplay
```

```
[root@localhost ~]# vgdisplay  
--- Volume group ---  
VG Name                myVG  
System ID                 
Format                 lvm2  
Metadata Areas         2  
Metadata Sequence No   1  
VG Access               read/write  
VG Status               resizable  
MAX LV                  0  
Cur LV                  0  
Open LV                  0  
Max PV                  0  
Cur PV                  2  
Act PV                  2  
VG Size                 4.99 GiB  
PE Size                 4.00 MiB  
Total PE                1278  
Alloc PE / Size         0 / 0  
Free PE / Size          1278 / 4.99 GiB  
VG UUID                 Tv8uC-0uTR-Y6uS-7JIj-SnQR-ezNX-sadBAr
```


⑤ Logical Volume 만들기

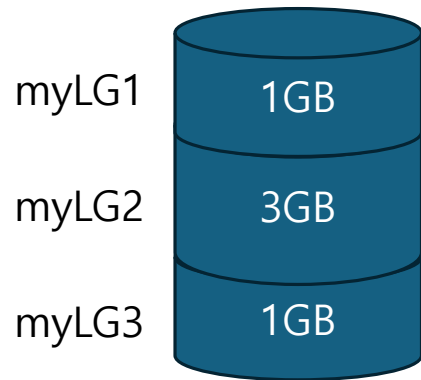

```
#lvcreate --size 1G --name mLG1 myVG
```

```
#lvcreate --size 3G --name mLG2 myVG
```

```
#lvcreate --extents 100%FREE --name mLG3 myVG
```

```
[root@localhost ~]# lvcreate --size 1G --name myLG1 myVG
Logical volume "myLG1" created.
[root@localhost ~]# lvcreate --size 3G --name myLG2 myVG
Logical volume "myLG2" created.
[root@localhost ~]# lvcreate --extent 100%FREE --name myLG3 myVG
Logical volume "myLG3" created.
```

```
#fdisk -l
```


```
#ls /dev/my*
```

```
Disk /dev/mapper/myVG-myLG1: 1 GiB, 1073741824 bytes, 2097152 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/mapper/myVG-myLG2: 3 GiB, 3221225472 bytes, 6291456 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/mapper/myVG-myLG3: 1016 MiB, 1065353216 bytes, 2080768 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
[root@localhost ~]# ls /dev/my*
myLG1  myLG2  myLG3
```

⑥ 파일 시스템 생성

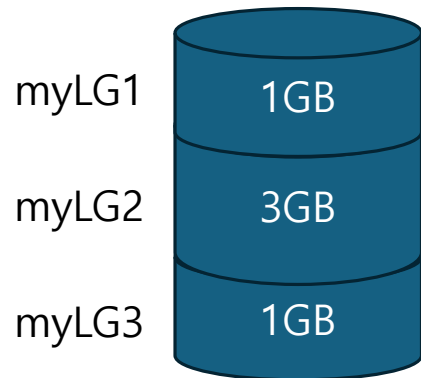

```
#mkfs.ext4 /dev/myVG/myLG1
```

```
#mkfs.ext4 /dev/myVG/myLG2
```

```
#mkfs.ext4 /dev/myVG/myLG3
```

```
[root@localhost ~]# mkfs.ext4 /dev/myVG/myLG1
mke2fs 1.46.5 (30-Dec-2021)
Creating filesystem with 262144 4k blocks and 65536 inodes
Filesystem UUID: 2a11762e-0d9c-4aeb-8d29-a4da5bc27c8b
Superblock backups stored on blocks:
    32768, 98304, 163840, 229376


Allocating group tables: done
Writing inode tables: done
Creating journal (8192 blocks): done
Writing superblocks and filesystem accounting information: done
```

⑦ mount

myLG1 → /lvm1

myLG2 → /lvm2

myLG3 → /lvm3

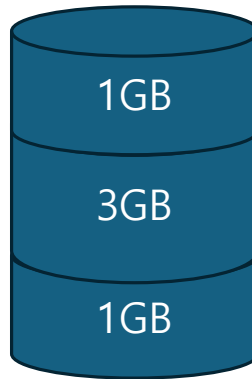

```
#mkdir /lvm1 /lvm2 /lvm3
```

```
#mount /dev/myVG/myLG1 /lvm1
```

```
#mount /dev/myVG/myLG2 /lvm2
```

```
#mount /dev/myVG/myLG3 /lvm3
```

```
[root@localhost ~]# mkdir /lvm1 /lvm2 /lvm3
[root@localhost ~]# mount /dev/myVG/myLG1 /lvm1
[root@localhost ~]# mount /dev/myVG/myLG2 /lvm2
[root@localhost ~]# mount /dev/myVG/myLG3 /lvm3
```

#df

```
[root@localhost ~]# df
Filesystem            1K-blocks    Used Available Use% Mounted on
devtmpfs                4096         0      4096    0% /dev
tmpfs                 1988408         0   1988408    0% /dev/shm
tmpfs                  795364     9912    785452    2% /run
/dev/mapper/rl-root   36716544  6028860  30687684   17% /
/dev/sda1              983040    279152    703888   29% /boot
tmpfs                  397680        104    397576    1% /run/user/1000
/dev/sr0             10660236 10660236         0  100% /run/media/gildong/Rocky-9-4-x86_64-dvd
/dev/mapper/myVG-myLG1    996780         24    927944    1% /lvm1
/dev/mapper/myVG-myLG2   3021608         24   2847916    1% /lvm2
/dev/mapper/myVG-myLG3   1005120         24    936696    1% /lvm3
```

⑦ /etc/fstab에 등록

- 부팅 시 자동으로 myVG 1~3 장치가 /lvm1~3에 마운트 되도록 설정

```
#nano /etc/fstab
```

```
/dev/myVG/myLG1    /lvm1  ext4  defaults 0 0
```

```
/dev/myVG/myLG2    /lvm2  ext4  defaults 0 0
```

```
/dev/myVG/myLG3    /lvm3  ext4  defaults 0 0
```

```
[root@localhost ~]# cat /etc/fstab
#
# /etc/fstab
# Created by anaconda on Wed Nov 27 18:40:42 2024
#
# Accessible filesystems, by reference, are maintained under '/dev/disk/'.
# See man pages fstab(5), findfs(8), mount(8) and/or blkid(8) for more info.
#
# After editing this file, run 'systemctl daemon-reload' to update systemd
# units generated from this file.
#
/dev/mapper/rl-root    /                    xfs      defaults        0 0
UUID=ca1050f0-a2c8-4acc-8b13-54b02df95289 /boot               xfs      defaults        0 0
/dev/mapper/rl-swap    none                swap     defaults        0 0
/dev/myVG/myLG1        /lvm1               ext4     defaults        0 0
/dev/myVG/myLG2        /lvm2               ext4     defaults        0 0
/dev/myVG/myLG3        /lvm3               ext4     defaults        0 0
```