

실습 1. Port Scan Attack Detection Rule



Stealth XMas Scan


`nmap -sX 192.168.10.20`

Port Scan Attack Detection Rule 예제

```
alert tcp 192.168.10.10 any -> 192.168.10.20 any  
      (msg:"Xmas Port Scan Detection";flags:UPF;sid:3000003;)
```

- | | |
|--|--------------------|
| 단계 1] nano /etc/snort/local.rules | # Rule 생성 |
| 단계 2] snort -T -c /etc/snort/snort.conf | # Rule 테스트 및 오류 검사 |
| 단계 3] snort -l eth0 -c /etc/snort/snort.conf | # Rule 을 인터페이스에 적용 |
|
<공격자 Kali> nmap -sX 192.168.10.20 | |
| 단계4] tail -f /var/log/snort/snort.alert.fast | # 탐지 로그 확인 |

실습 2. Password Cracking Attack Detection Rule

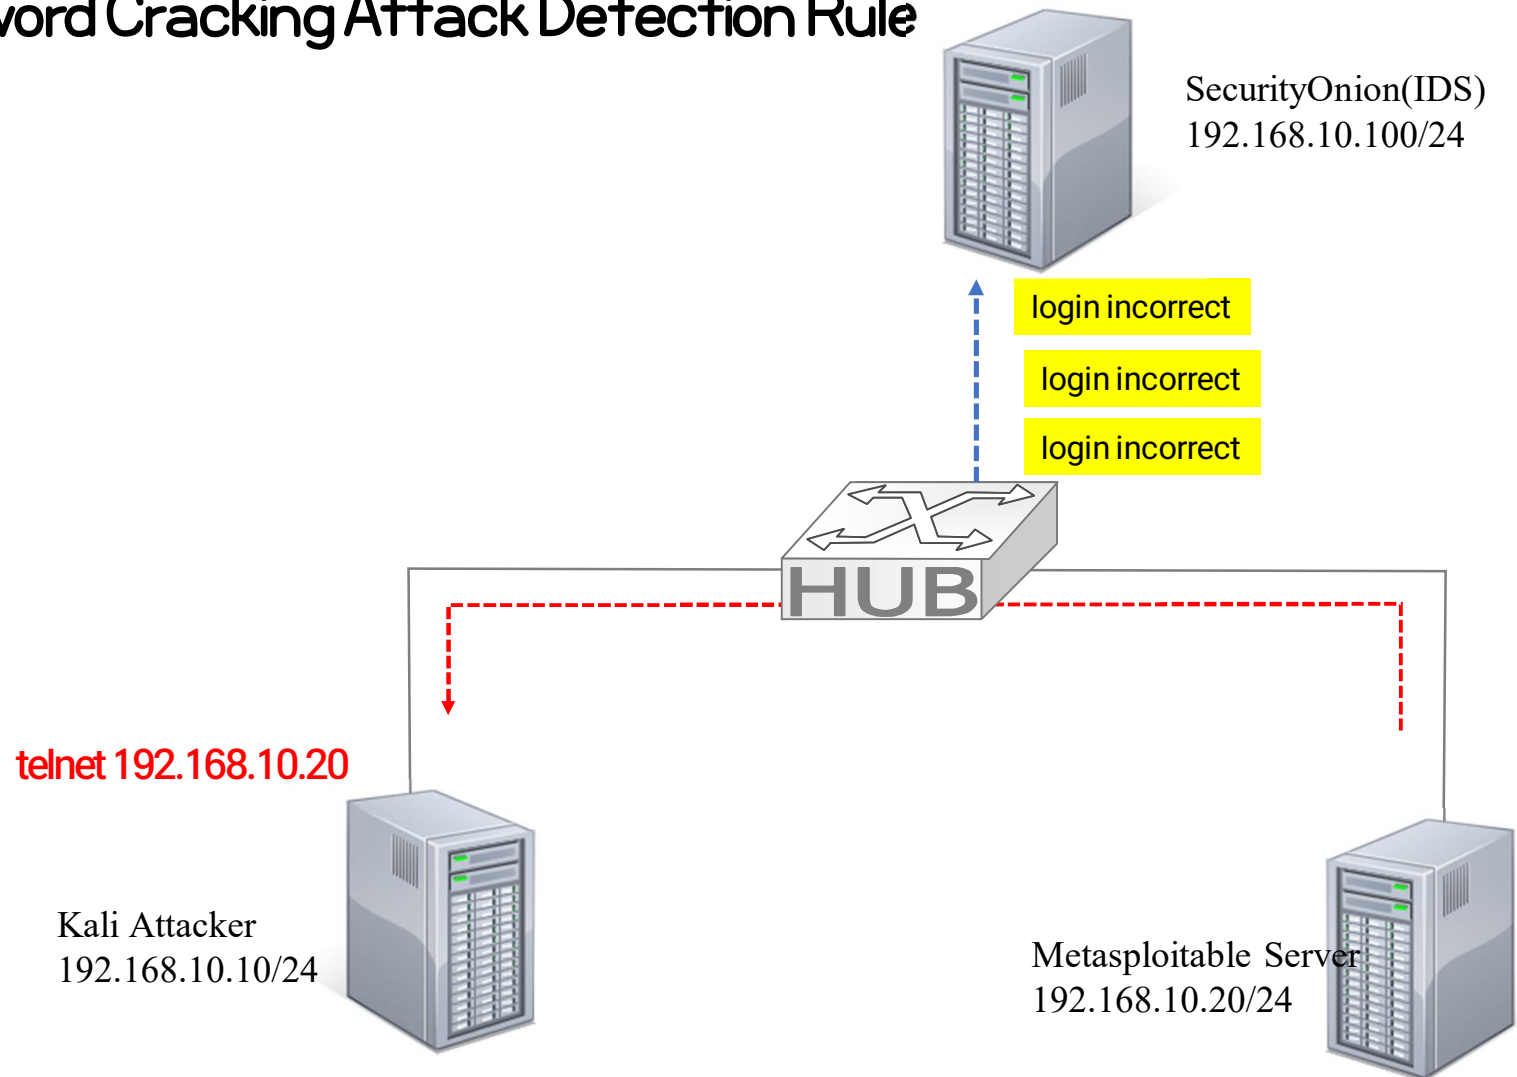

Password Cracking Attack Detection Rule 예제

```
alert tcp 192.168.10.20 23 -> any any
```

```
(msg: "Telnet Fail"; content: "login incorrect"; nocase; id:3000004;)
```

```
alert tcp 192.168.10.20 23 -> 192.168.10.10 any
```

```
( msg: "Telnet Attack";
```

```
  content: "login incorrect"; nocase;
```

```
  threshold: type both, track by _src, count 3, seconds 20;
```

```
  sid:3000004;)
```

Password Cracking Attack Detection Rule 예제

단계 1] nano /etc/snort/local.rules

Rule 생성

단계 2] snort -T -c /etc/snort/snort.conf

Rule 테스트 및 오류 검사

단계 3] snort -l eth0 -c /etc/snort/snort.conf


Rule 을 인터페이스에 적용

<공격자 Kali> **telnet 192.168.10.20**

단계4] tail -f /var/log/snort/snort.alert.fast

탐지 로그 확인

실습 3. SYN Flooding Attack Detection Rule

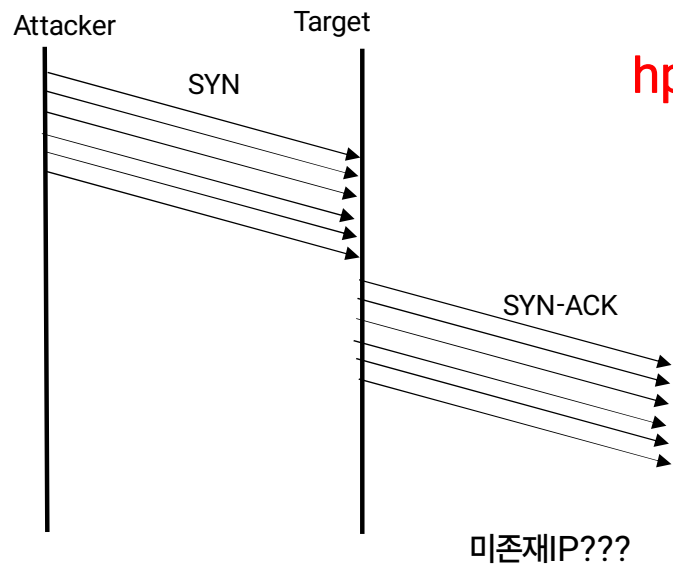

`hping3 --rand-source 192.168.10.20 -p 80 -S --flood`

SYN Flooding Attack Detection Rule 예제

```
alert tcp any any -> 192.168.10.0/24 80
```

```
(msg:"TCP SYN Flooding Attack";
```

```
  flags:S;
```

```
  threshold:type threshold, track by _src, count 2, seconds 10;
```

```
  sid:3000005;)
```

SYN Flooding Attack Detection Rule 예제

단계 1] nano /etc/snort/local.rules

Rule 생성

단계 2] snort -T -c /etc/snort/snort.conf

Rule 테스트 및 오류 검사

단계 3] snort -l eth0 -c /etc/snort/snort.conf

Rule 을 인터페이스에 적용

<공격자 Kali> hping3 --rand-source 192.168.10.20 -p 80 -S --flood

단계4] tail -f /var/log/snort/snort.alert.fast

탐지 로그 확인