


Ubuntu 24.04 환경 설정


1 네트워크 설정

- Settings > network

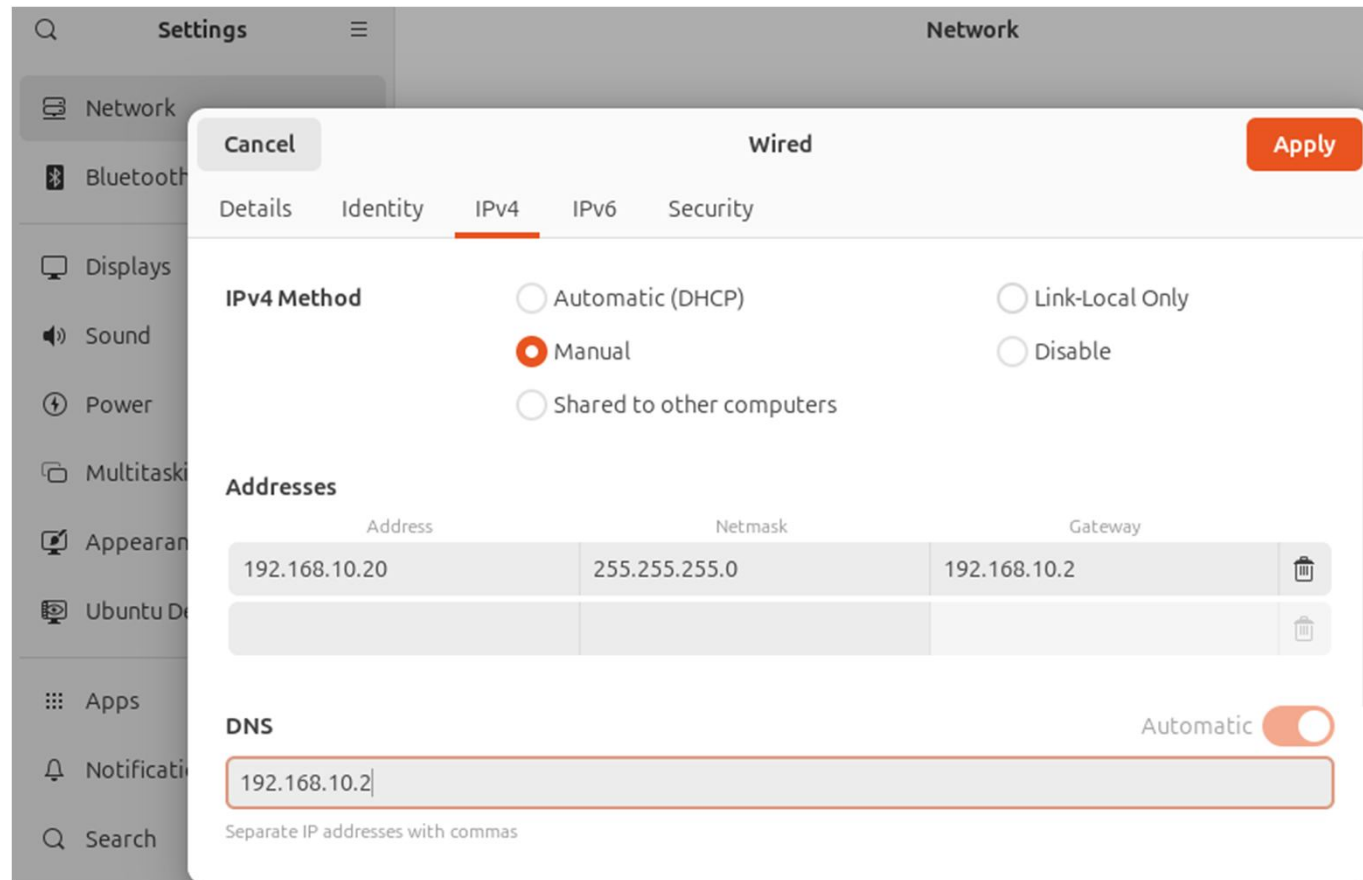


② 빈 화면(screen blank) 비활성화

- Settings > Power

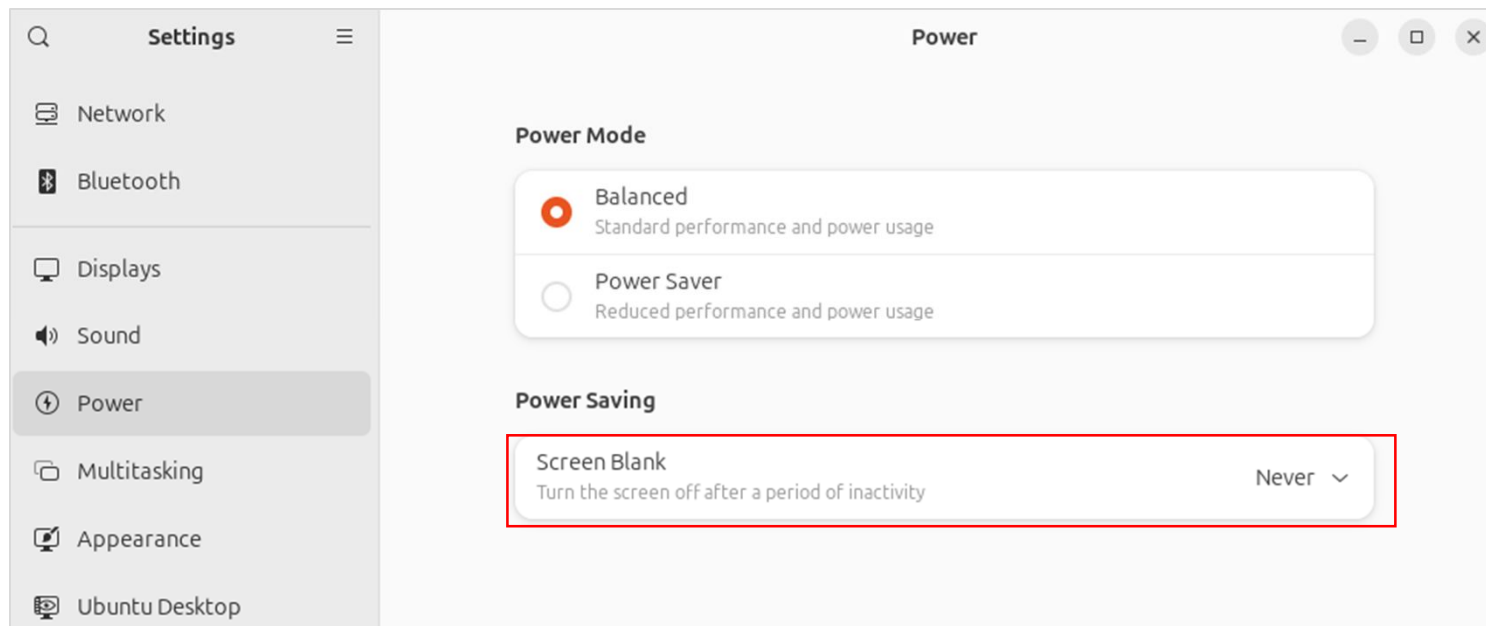


③ 화면 잠금(screen lock) 비활성화

- Settings > Privacy & Security

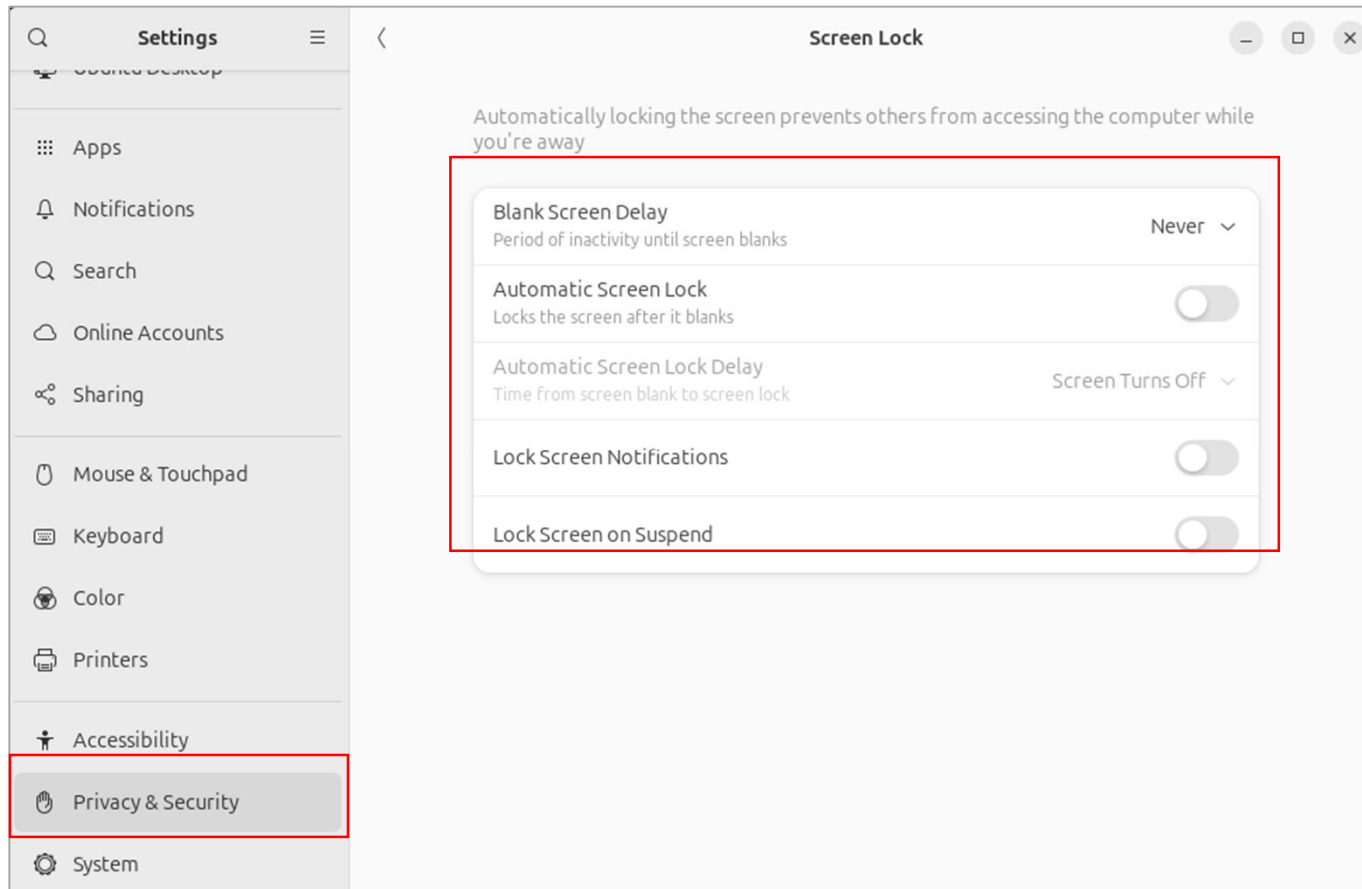

④ 소프트웨어 업데이트 기능 비활성화

- Software & Updates

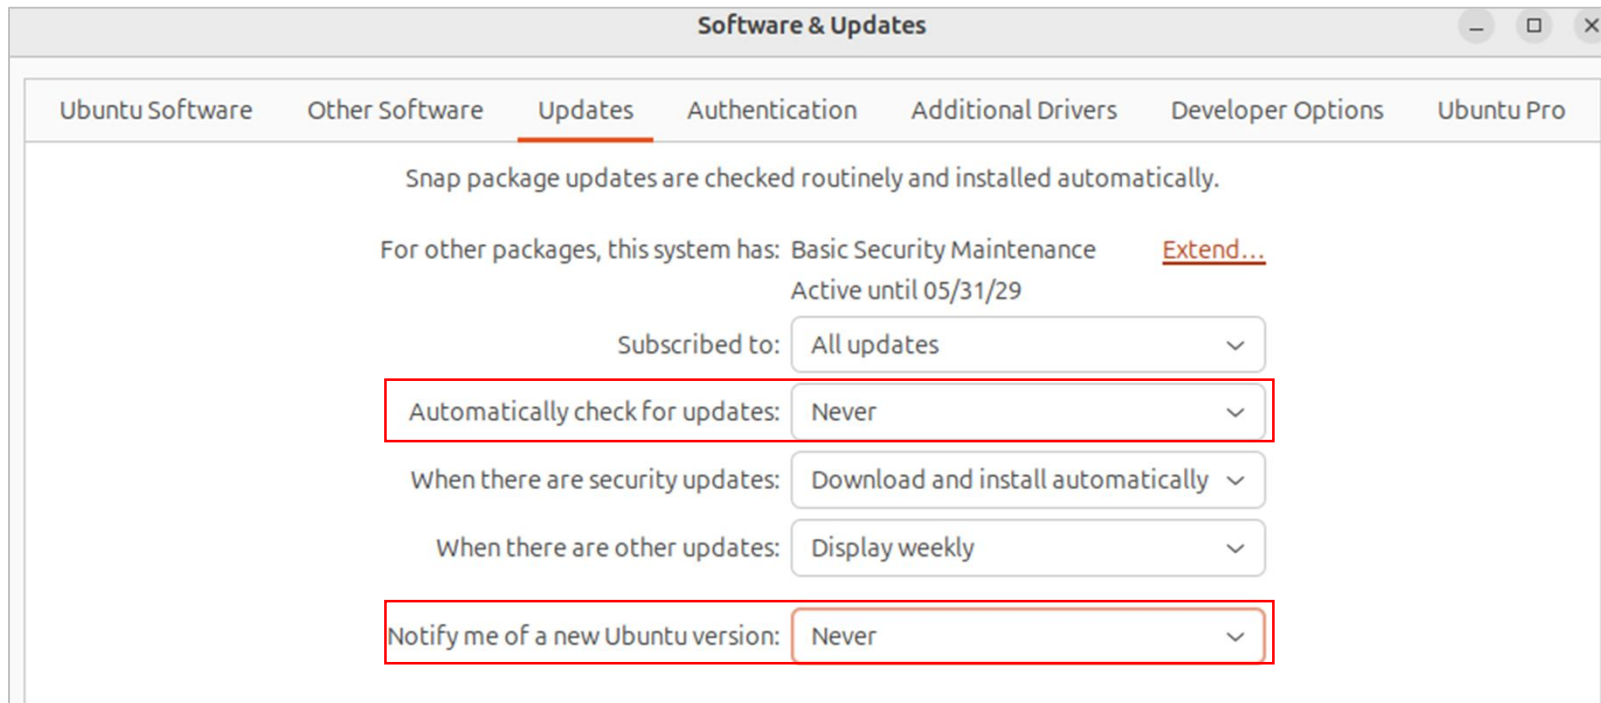

⑤ 패키지 업데이트


#cat /etc/apt/sources.list.d/ubuntu.sources

```
root@splunk:/etc/apt/sources.list.d# ls
ubuntu.sources  ubuntu.sources.curtin.orig
root@splunk:/etc/apt/sources.list.d# cat ubuntu.sources
Types: deb
URIs: http://archive.ubuntu.com/ubuntu/
Suites: noble noble-updates noble-backports
Components: main restricted universe multiverse
Signed-By: /usr/share/keyrings/ubuntu-archive-keyring.gpg

Types: deb
URIs: http://security.ubuntu.com/ubuntu/
Suites: noble-security
Components: main restricted universe multiverse
Signed-By: /usr/share/keyrings/ubuntu-archive-keyring.gpg
root@splunk:/etc/apt/sources.list.d#
```

#apt update

- Main : 우분투에서 공식적으로 지원하는 무료소프트웨어
- Universe : 우분투에서 지원하지 않은 무료 소프트웨어
- Multiverse : 우분투에서 지원하지 않은 유료 소프트웨어
- Restricted : 우분투에서 공식적으로 지원하는 유료소프트웨어

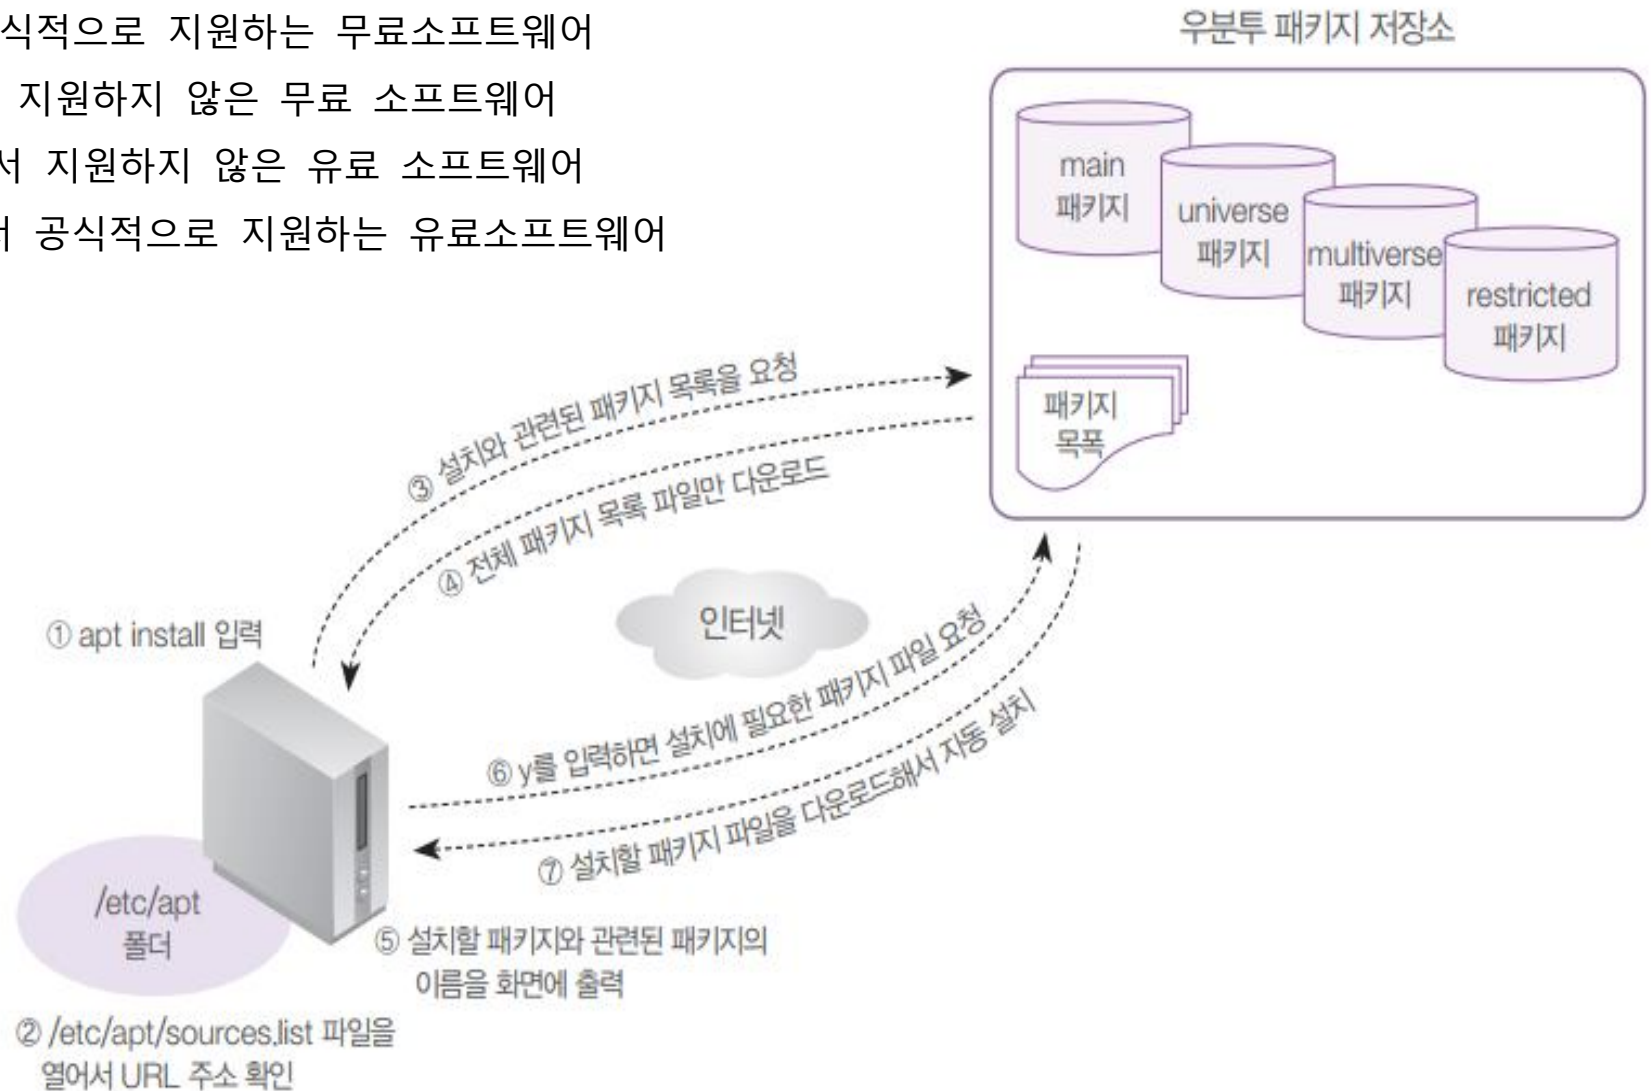

⑥ 네트워크 툴 설치

#apt install -y net-tools

```
root@splunk:/# apt install -y net-tools
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following NEW packages will be installed:
  net-tools
0 upgraded, 1 newly installed, 0 to remove and 194 not upgra
Need to get 204 kB of archives.
After this operation, 811 kB of additional disk space will b
Get:1 http://archive.ubuntu.com/ubuntu noble/main amd64 net-
Fetched 204 kB in 2s (87.3 kB/s)
Selecting previously unselected package net-tools.
(Reading database ... 161234 files and directories currently
Preparing to unpack .../net-tools_2.10-0.1ubuntu4_amd64.deb
Unpacking net-tools (2.10-0.1ubuntu4) ...
Setting up net-tools (2.10-0.1ubuntu4) ...
Processing triggers for man-db (2.12.0-4build2) ...
```

#ifconfig

```
root@splunk:/# ifconfig
ens33: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
    inet 192.168.10.10  netmask 255.255.255.0  broadcast 192.168.10.255
    ether 00:0c:29:0a:aa:90  txqueuelen 1000  (Ethernet)
    RX packets 24909  bytes 36537031 (36.5 MB)
    RX errors 0  dropped 0  overruns 0  frame 0
    TX packets 2366  bytes 195972 (195.9 KB)
    TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0
```


7 SSH 설치

```
#apt install -y openssh-server
```

```
#nano /etc/ssh/sshd_config
```

Port 22

```
#systemctl restart ssh
```

```
#systemctl status ssh
```

```
#ufw allow 22/tcp
```

```
#ufw status
```

```
root@zeekids:~# cat /etc/ssh/sshd_config

# This is the sshd server system-wide configuration file.
# sshd_config(5) for more information.

# This sshd was compiled with PATH=/usr/local/sbin:/usr/local/bin:/usr/bin:/usr/sbin

# The strategy used for options in the default sshd_config file is to allow OpenSSH to specify options with their default values where possible, but leave them commented. Uncommented options specify values for the default configuration.

Include /etc/ssh/sshd_config.d/*.conf
```

Port 22

```
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::
```

```
root@zeekids:~# ufw status
```

Status: active

To	Action	From
--	-----	----
22/tcp	ALLOW	Anywhere
22/tcp (v6)	ALLOW	Anywhere (v6)

