Rsyslog Installation

1) [Splunkserver] rsyslog server installation

2) [ZeekIDS]rsyslog client installation

3) [WebServer] rsyslog client installation

4) [Win10] rsyslog client installation

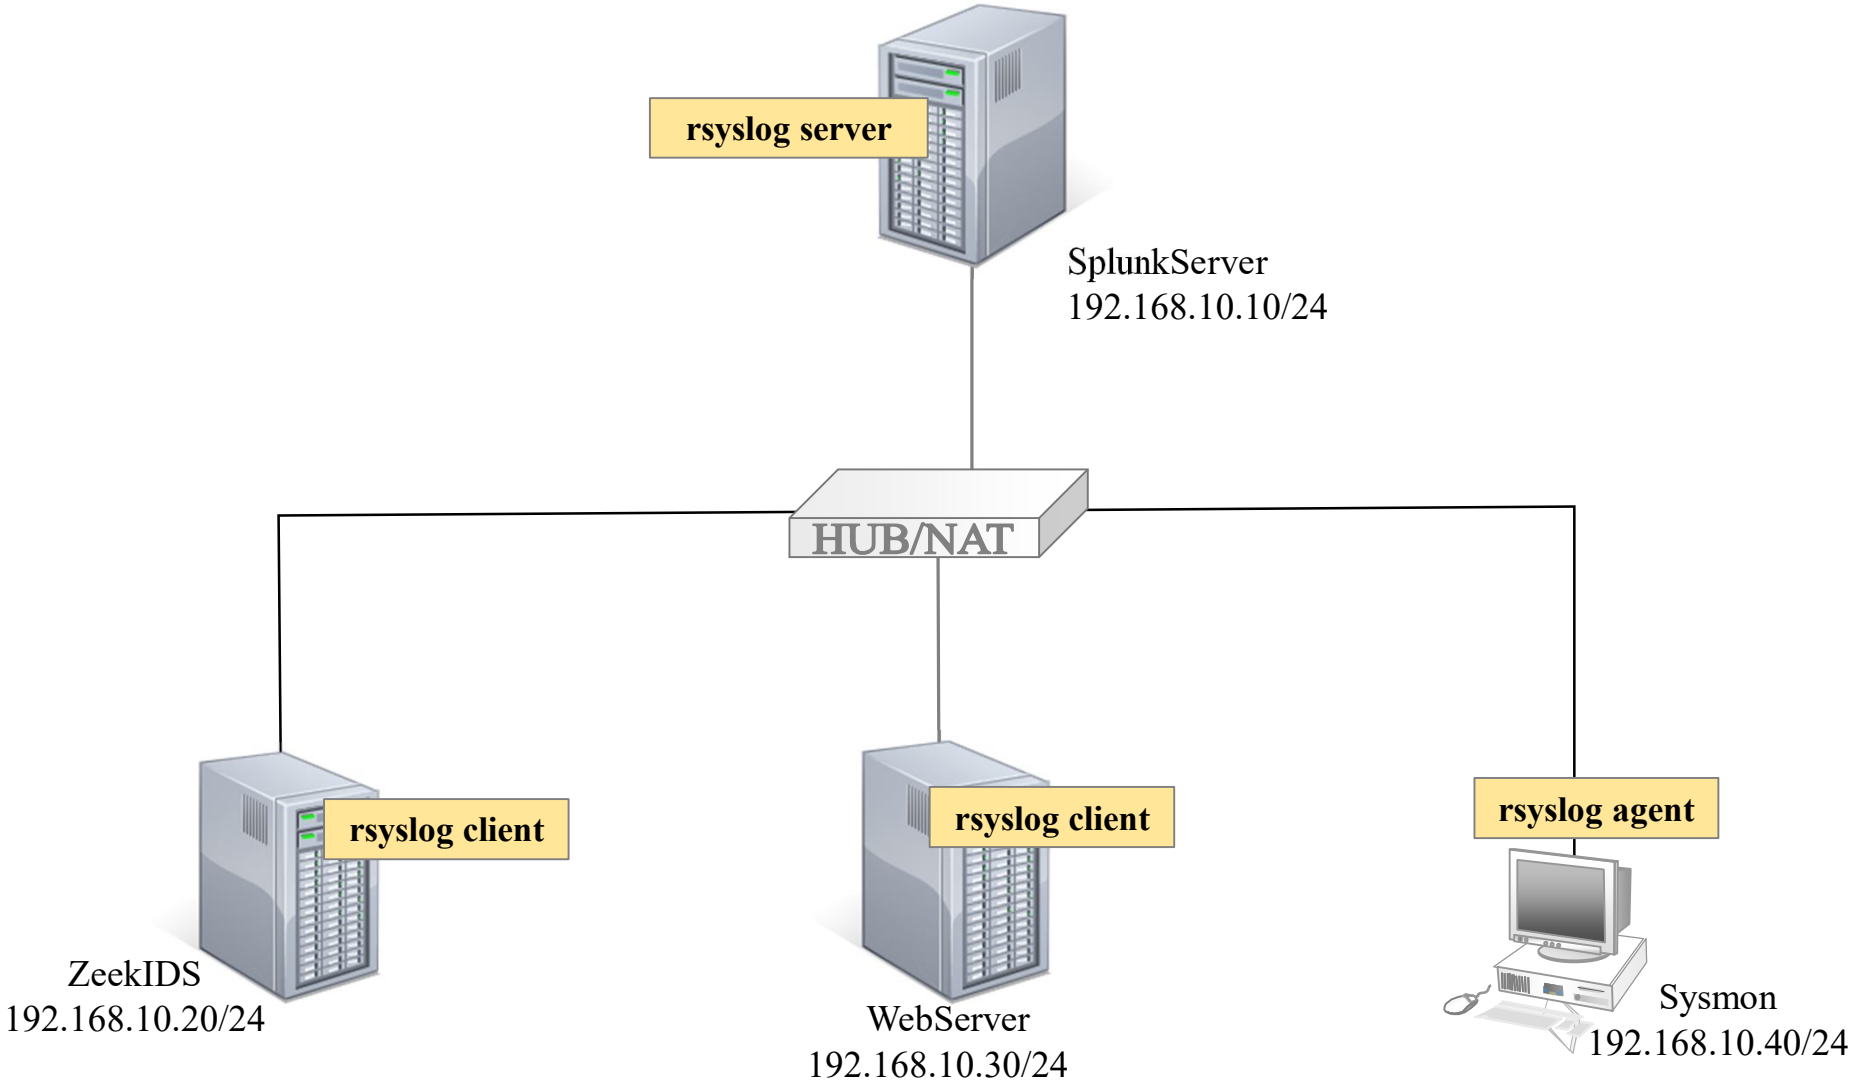
rsyslog server
SplunkServer
192.168.10.10/24
HUB/NAT
rsyslog client
ZeekIDS
192.168.10.20/24
rsyslog client
WebServer
192.168.10.30/24
rsyslog agent
Sysmon
192.168.10.40/24

1) [Splunkserver] rsyslog server installation

```
#apt-get install –y rsyslog

#nano /etc/rsyslog.config

#ufw allow 514/tcp

#ufw reload

#systemctl restart rsyslog
```

#apt-get install –y rsyslog

#nano /etc/rsyslog.config

```
root@splunk-server:/# apt-get install -y rsyslog
패키지 목록을 읽는 중입니다... 완료
의존성 트리를 만드는 중입니다
상태 정보를 읽는 중입니다... 완료
패키지 rsyslog는 이미 최신 버전입니다 (8.2001.0-1ubuntu1).
rsyslog 패키지는 수동설치로 지정합니다.
0개 업그레이드, 0개 새로 설치, 0개 제거 및 0개 업그레이드 안 함.
root@splunk-server:/#
```

#nano /etc/rsyslog.config

```
root@splunk-server:/# cat /etc/rsyslog.conf
# /etc/rsyslog.conf configuration file for rsyslog
#
# For more information install rsyslog-doc and see
# /usr/share/doc/rsyslog-doc/html/configuration/index.html
#
# Default logging rules can be found in /etc/rsyslog.d/50-default.conf


#################
#### MODULES ####
#################

module(load="imuxsock") # provides support for local system logging
#module(load="immark")  # provides --MARK-- message capability

# provides UDP syslog reception
module(load="imudp")
input(type="imudp" port="514")

# provides TCP syslog reception
module(load="imtcp")
input(type="imtcp" port="514")
```

#nano /etc/rsyslog.config

```
root@splunk-server:/# tail /etc/rsyslog.conf
#
$WorkDirectory /var/spool/rsyslog

#
# Include all config files in /etc/rsyslog.d/
#
$IncludeConfig /etc/rsyslog.d/*.conf

$template remote-incoming-logs, "/var/log/192.168.10.0/client.log
*.*?remote-incoming-logs
root@splunk-server:/#
```

$template remote-incoming-logs,"/var/log/%HOSTNAME%/%PROGRAMNAME%.log"

클라이언트호스트 생성된 로그 파일명

**.* ?remote-incoming-logs*

```
$template remote-incoming-logs, "/var/log/192.168.10.0/client.log
*.*?remote-incoming-logs
```

#ufw allow 514/tcp

#ufw reload

```
root@splunk-server:/# ufw allow 514/tcp
규칙이 추가되었습니다
규칙이 추가되었습니다 (v6)
root@splunk-server:/# ufw allow 514/udp
규칙이 추가되었습니다
규칙이 추가되었습니다 (v6)
root@splunk-server:/# ufw status
상태: 활성

목적                        동작         출발
--                          --           --
123/udp                     ALLOW        Anywhere
514/tcp                     ALLOW        Anywhere
514/udp                     ALLOW        Anywhere
123/udp (v6)                ALLOW        Anywhere (v6)
514/tcp (v6)                ALLOW        Anywhere (v6)
514/udp (v6)                ALLOW        Anywhere (v6)

root@splunk-server:/#
```

#systemctl restart rsyslog

#systemctl status rsyslog

```
root@splunk-server:/# systemctl restart rsyslog
root@splunk-server:/# systemctl status syslog
●rsyslog.service - System Logging Service
     Loaded: loaded (/lib/systemd/system/rsyslog.service; enabled; vendor preset: enabled)
     Active: active (running) since Sun 2022-08-07 00:24:25 KST; 5s ago
TriggeredBy: ●syslog.socket
       Docs: man:rsyslogd(8)
             https://www.rsyslog.com/doc/
   Main PID: 4941 (rsyslogd)
      Tasks: 10 (limit: 9420)
     Memory: 1.4M
     CGroup: /system.slice/rsyslog.service
             └─4941 /usr/sbin/rsyslogd -n -iNONE

 8월 07 00:24:25 splunk-server systemd[1]: Starting System Logging Service...
 8월 07 00:24:25 splunk-server rsyslogd[4941]: imuxsock: Acquired UNIX socket '/run/systemd/journal/syslog' (fd 3) from >
 8월 07 00:24:25 splunk-server rsyslogd[4941]: rsyslogd's groupid changed to 110
 8월 07 00:24:25 splunk-server systemd[1]: Started System Logging Service.
 8월 07 00:24:25 splunk-server rsyslogd[4941]: rsyslogd's userid changed to 104
 8월 07 00:24:25 splunk-server rsyslogd[4941]: [origin software="rsyslogd" swVersion="8.2001.0" x-pid="4941" x-info="htt>
lines 1-18/18 (END)
```

#cd /var/log/192.168.10.0

```
root@splunk-server:/var/log# ls -l
합계 4248
drwxr-xr-x  2 syslog            syslog            4096  8월  7 01:10 192.168.10.0
-rw-r--r--  1 root              root             21158  7월 30 11:24 alternatives.log
```

```
root@splunk-server:/var/log/192.168.10.0# pwd
/var/log/192.168.10.0
root@splunk-server:/var/log/192.168.10.0# ls
client.log
root@splunk-server:/var/log/192.168.10.0# tail client.log
Aug  7 01:11:36 localhost journal[3031]: failed to get featured apps: no apps to show
Aug  7 01:11:36 localhost journal[3031]: not handling error failed for action refine: failed to resolv
Aug  7 01:11:36 localhost PackageKit[2926]: resolve transaction /101_cdadcbeb from uid 0 finished wit
Aug  7 01:11:36 localhost journal[3031]: Only 0 apps for popular list, hiding
Aug  7 01:11:36 localhost journal[3031]: not handling error failed for action refine: failed to resolv
Aug  7 01:11:37 localhost PackageKit[2926]: get-updates transaction /102_cbdbcccb from uid 0 finished
Aug  7 01:12:31 splunk-server ntpd[4033]: Soliciting pool server 2620:2d:4000:1::3f
Aug  7 01:13:38 splunk-server ntpd[4033]: Soliciting pool server 2620:2d:4000:1::41
Aug  7 01:14:44 splunk-server ntpd[4033]: Soliciting pool server 2620:2d:4000:1::41
Aug  7 01:15:50 splunk-server ntpd[4033]: Soliciting pool server 2620:2d:4000:1::3f
root@splunk-server:/var/log/192.168.10.0#
```

2) [ZeekIDS] rsyslog client installation

#apt-get install –y rsyslog

#nano /etc/rsyslog.conf

```
*.notice        @@192.168.10.10:514
```

시스템에서 발생하는 모든 종류의 로그를 192.168.10.11:514로 TCP를 이용해서 전송

#systemctl status rsyslog

#systemctl restart rsyslog

#apt-get install –y rsyslog

```
root@zeek-IDS:~#
root@zeek-IDS:~# dpkg -l rsyslog
희망상태=알수없음(U)/설치(I)/지우기(R)/깨끗이(P)/고정(H)
| 상태=아님(N)/설치(I)/설정(C)/풀림(U)/절반설정(F)/일부설치(H)/트리거대기(W)/
| /    트리거밀림(T)
|/ 오류?=(없음)/다시설치필요(R) (상태, 오류가 대문자=불량)
||/ 이름           버전              Architecture 설명
+++-==============-=================-============-======================================
ii  rsyslog        8.2001.0-1ubuntu1 amd64        reliable system and kernel logging daemon
root@zeek-IDS:~#
```

#nano /etc/rsyslog.conf

```
root@zeek-IDS:~# tail /etc/rsyslog.conf

#
# Include all config files in /etc/rsyslog.d/
#
$IncludeConfig /etc/rsyslog.d/*.conf

*.notice        @@192.168.10.10:514



root@zeek-IDS:~#
```

3) [WebServer] rsyslog client installation

```
#rpm –qa | grep rsyslog

#gedit /etc/rsyslog.conf

# systemctl restart rsyslog
```

#apt-get install –y rsyslog

```
[root@localhost ~]# rpm -qa | grep rsyslog
rsyslog-gnutls-8.37.0-9.el8.x86_64
rsyslog-8.37.0-9.el8.x86_64
rsyslog-relp-8.37.0-9.el8.x86_64
rsyslog-gssapi-8.37.0-9.el8.x86_64
```

#nano /etc/rsyslog.conf

```
[root@localhost ~]# tail -15 /etc/rsyslog.conf

*.notice                                                @@192.168.10.10:514

# ### sample forwarding rule ###
#action(type="omfwd"
# An on-disk queue is created for this action. If the remote host is
```

*.notice @@192.168.10.10:514

#systemctl restart rsyslog

#systemctl status rssylog

#systemctl enable rsyslog

```
[root@localhost ~]# systemctl restart rsyslog
[root@localhost ~]# systemctl status rsyslog
● rsyslog.service - System Logging Service
   Loaded: loaded (/usr/lib/systemd/system/rsyslog.service; enabled; vendor preset: enabled)
   Active: active (running) since Sun 2022-08-07 00:44:54 KST; 10s ago
     Docs: man:rsyslogd(8)
           http://www.rsyslog.com/doc/
 Main PID: 3972 (rsyslogd)
    Tasks: 3 (limit: 24877)
   Memory: 1.2M
   CGroup: /system.slice/rsyslog.service
           └─3972 /usr/sbin/rsyslogd -n

[root@localhost ~]# systemctl enable rsyslog
```

4) [Win10] rsyslog client installation

https://www.rsyslog.com/windows-agent/

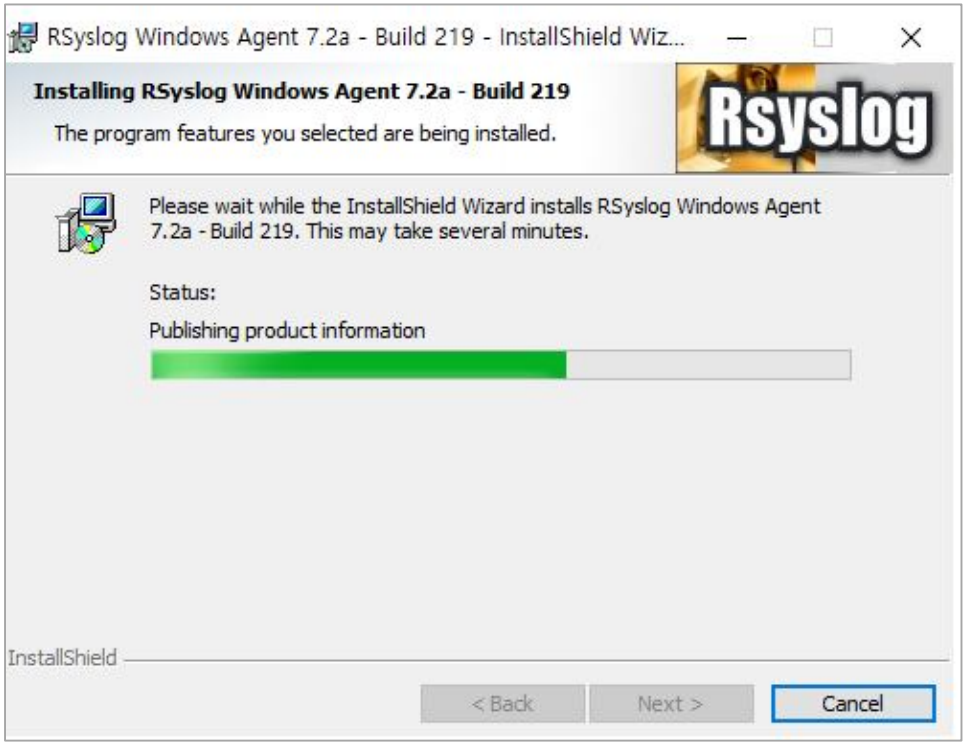

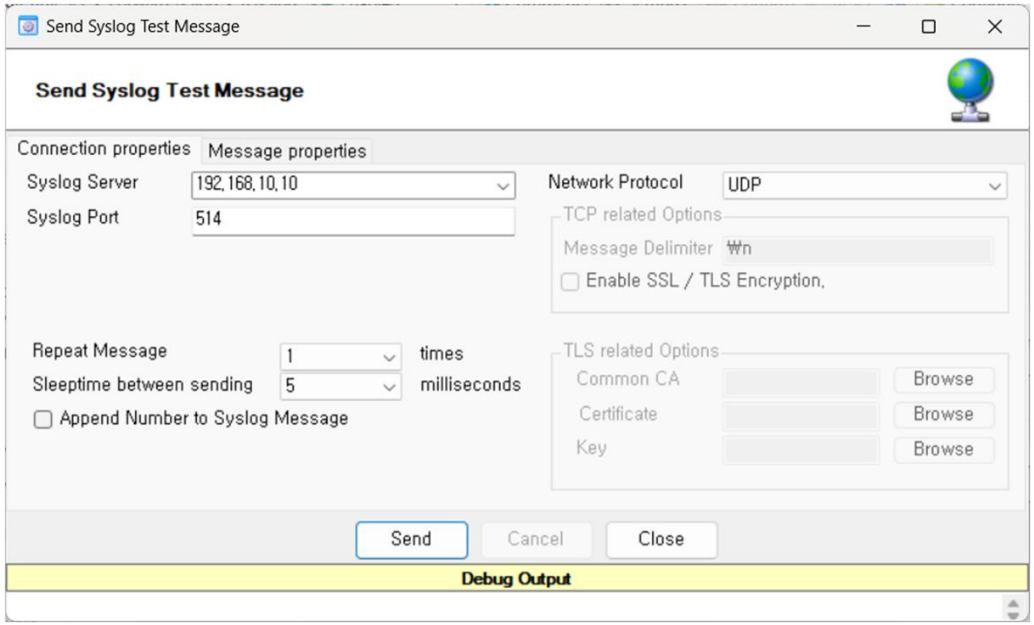

Rsyslog Windows Agent

RSyslog Windows Agent Configuration Client

File Tools Help

Save Reset Changes Quit Verify Configuration Connect Localhost Start Stop Restart Up Down DebugLog

- Service Events
- General
  - License
  - General
  - Debug
  - Engine
  - Queue Manager
- Services
  - Event Log Monitor V2
- RuleSets
  - Default RuleSet
    - ForwardSyslog
      - Filters
      - Actions
        - Rsyslog

RuleSets > Default RuleSet > ForwardSyslog > Rsyslog | Enabled | Comments | Settings | Confirm | Reset | Configure for...

Protocol Type: TCP (Persistent connection)

Syslog Target Options | Syslog Message Options | Network related Options | SSL/TLS related Options | Action Queue Options

Syslog Send mode

(●) Use single syslog server with optional backup server

Syslog Receiver Options

Syslog Server: 192.168.10.10

Syslog Port: 514

[ ] Use this backup syslog server if first one fails.

Backup Syslog Server:

Backup Syslog Port: 514

( ) Use round robin (multiple syslog servers)

Amount of messages send to each syslog server before load balancing: 1000

Syslog Servers

	Syslog Server	Syslog Port
*	*Enter value for Syslog Server*	*Enter numvalue for Syslog Port*

Status: Trial period, days left 30

Connected To: localhost