# Zeek Installation

1) [Ubuntu Zeek] Zeek Installation

2) [zeek & Splunk server] scp installation

3) Zeek Log 필드

# Zeek

- 네트워크 침입탐지시스템(NIDS)
  - Bro 또는 프로토콜 분석
  - 네트워크를 모니터링 할 수 있는 오픈 소스 프로그램
- IP헤더와 TCP 헤더를 분석하여 로그 생성
- 응용 프로토콜의 헤더를 분석하여 로그 생성
  - FTP, HTTP, SMTP, X.509 ..

# Zeek 설치 방법

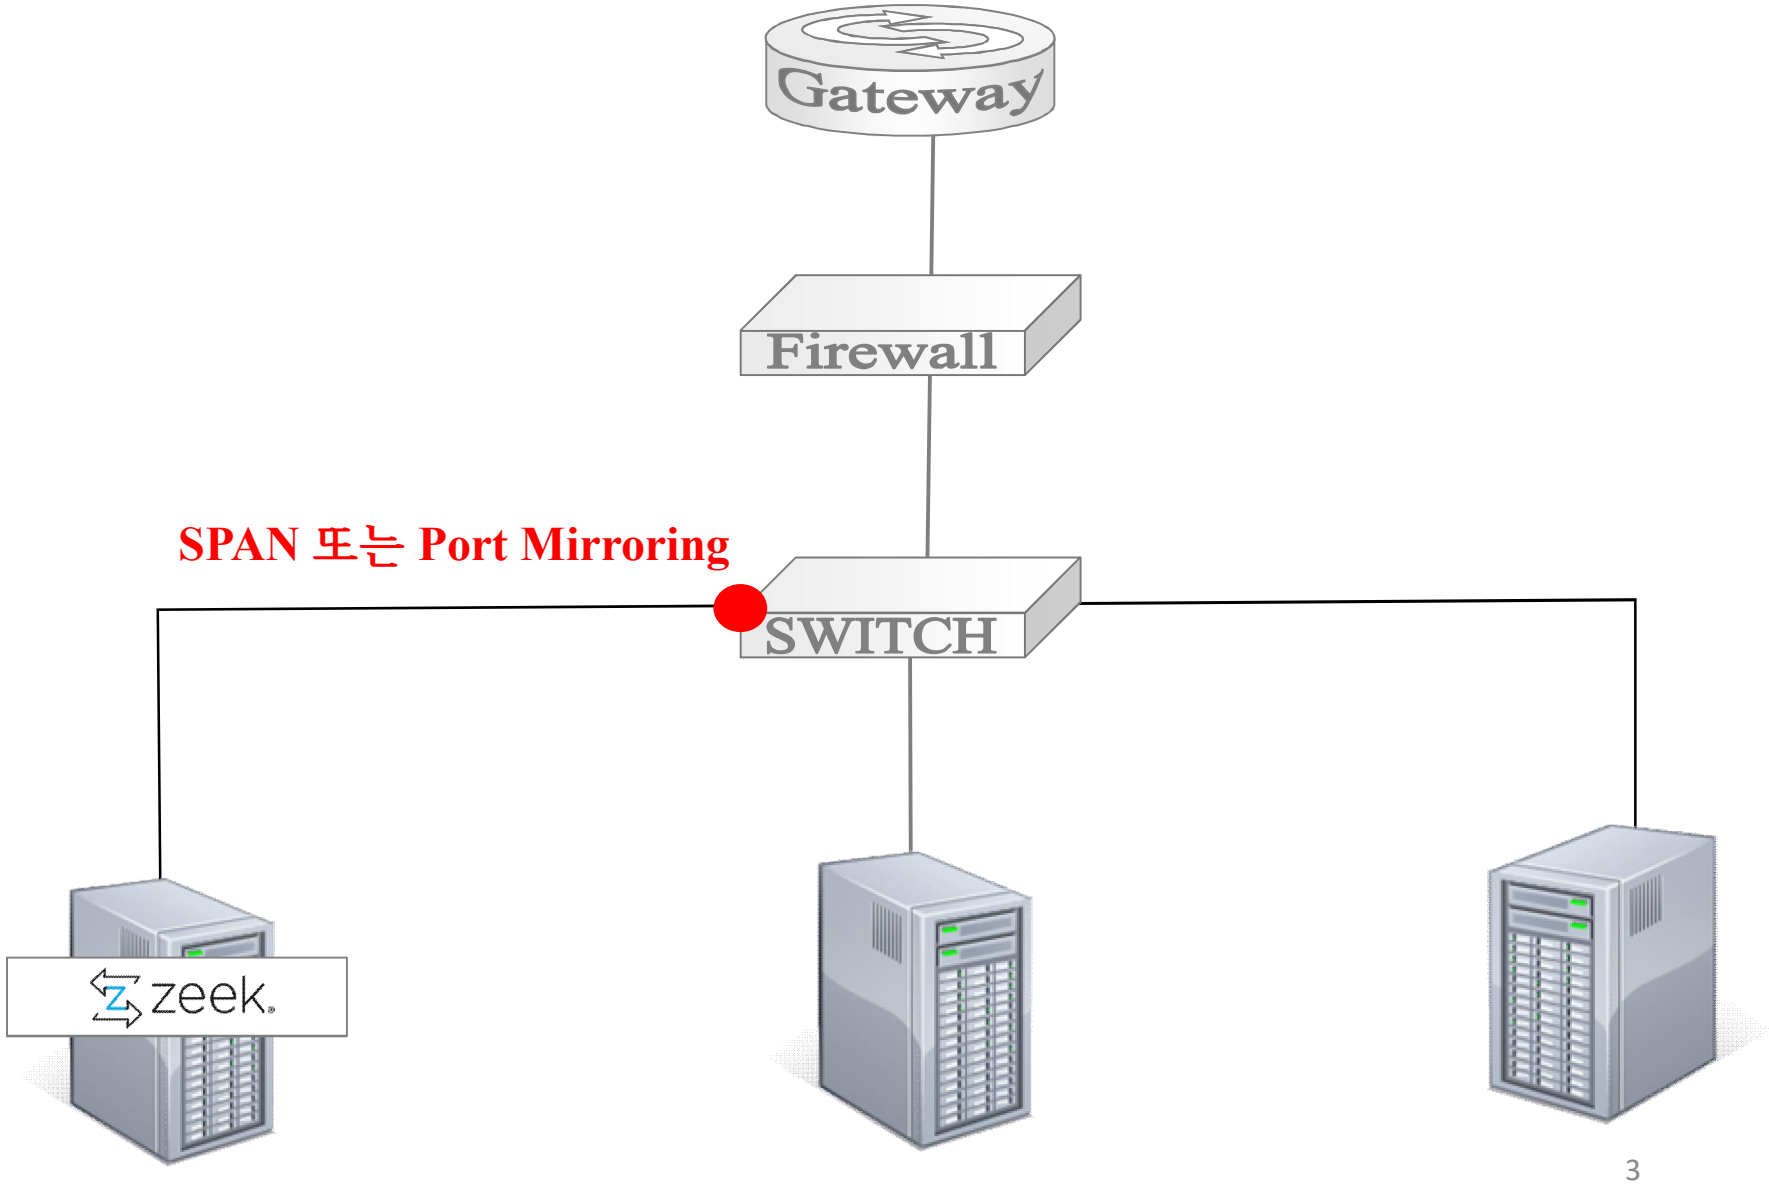

# Zeek 설치 방법

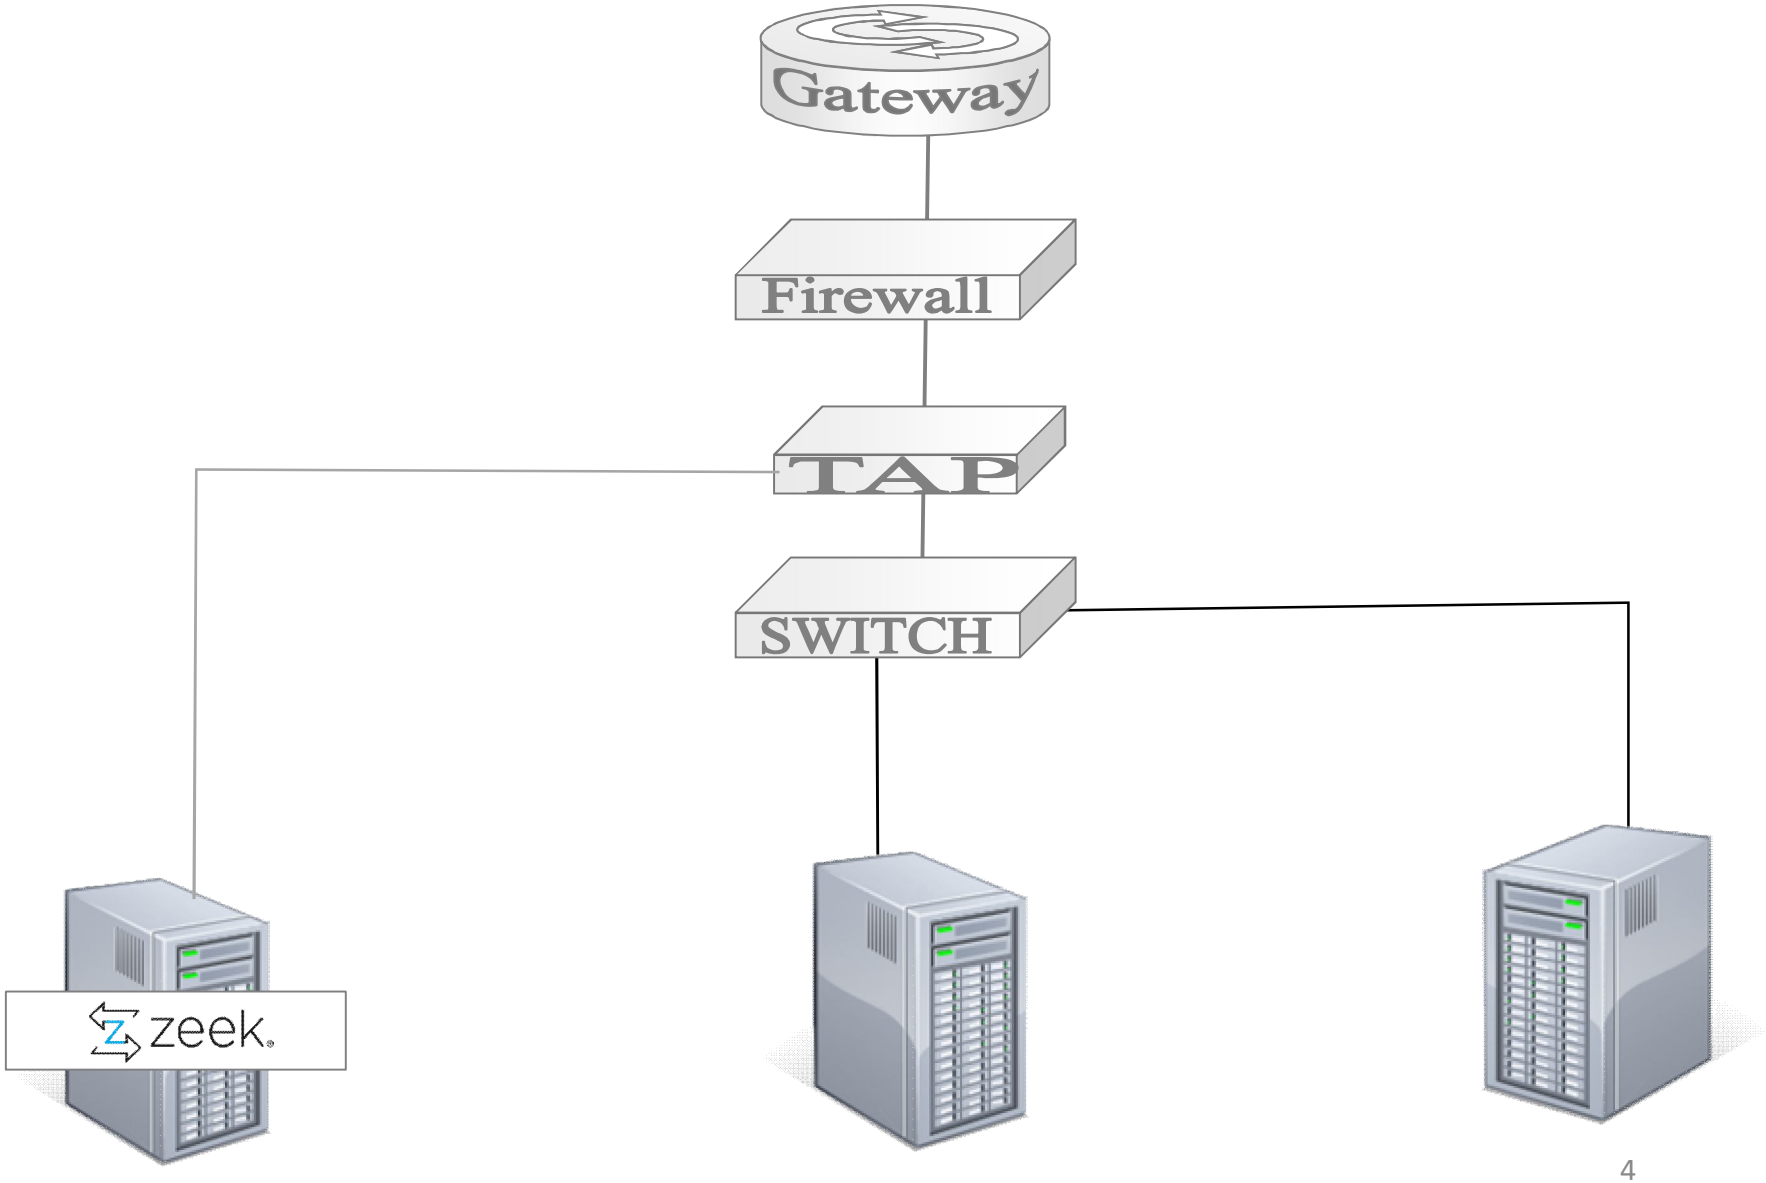

# Zeek 설치 환경

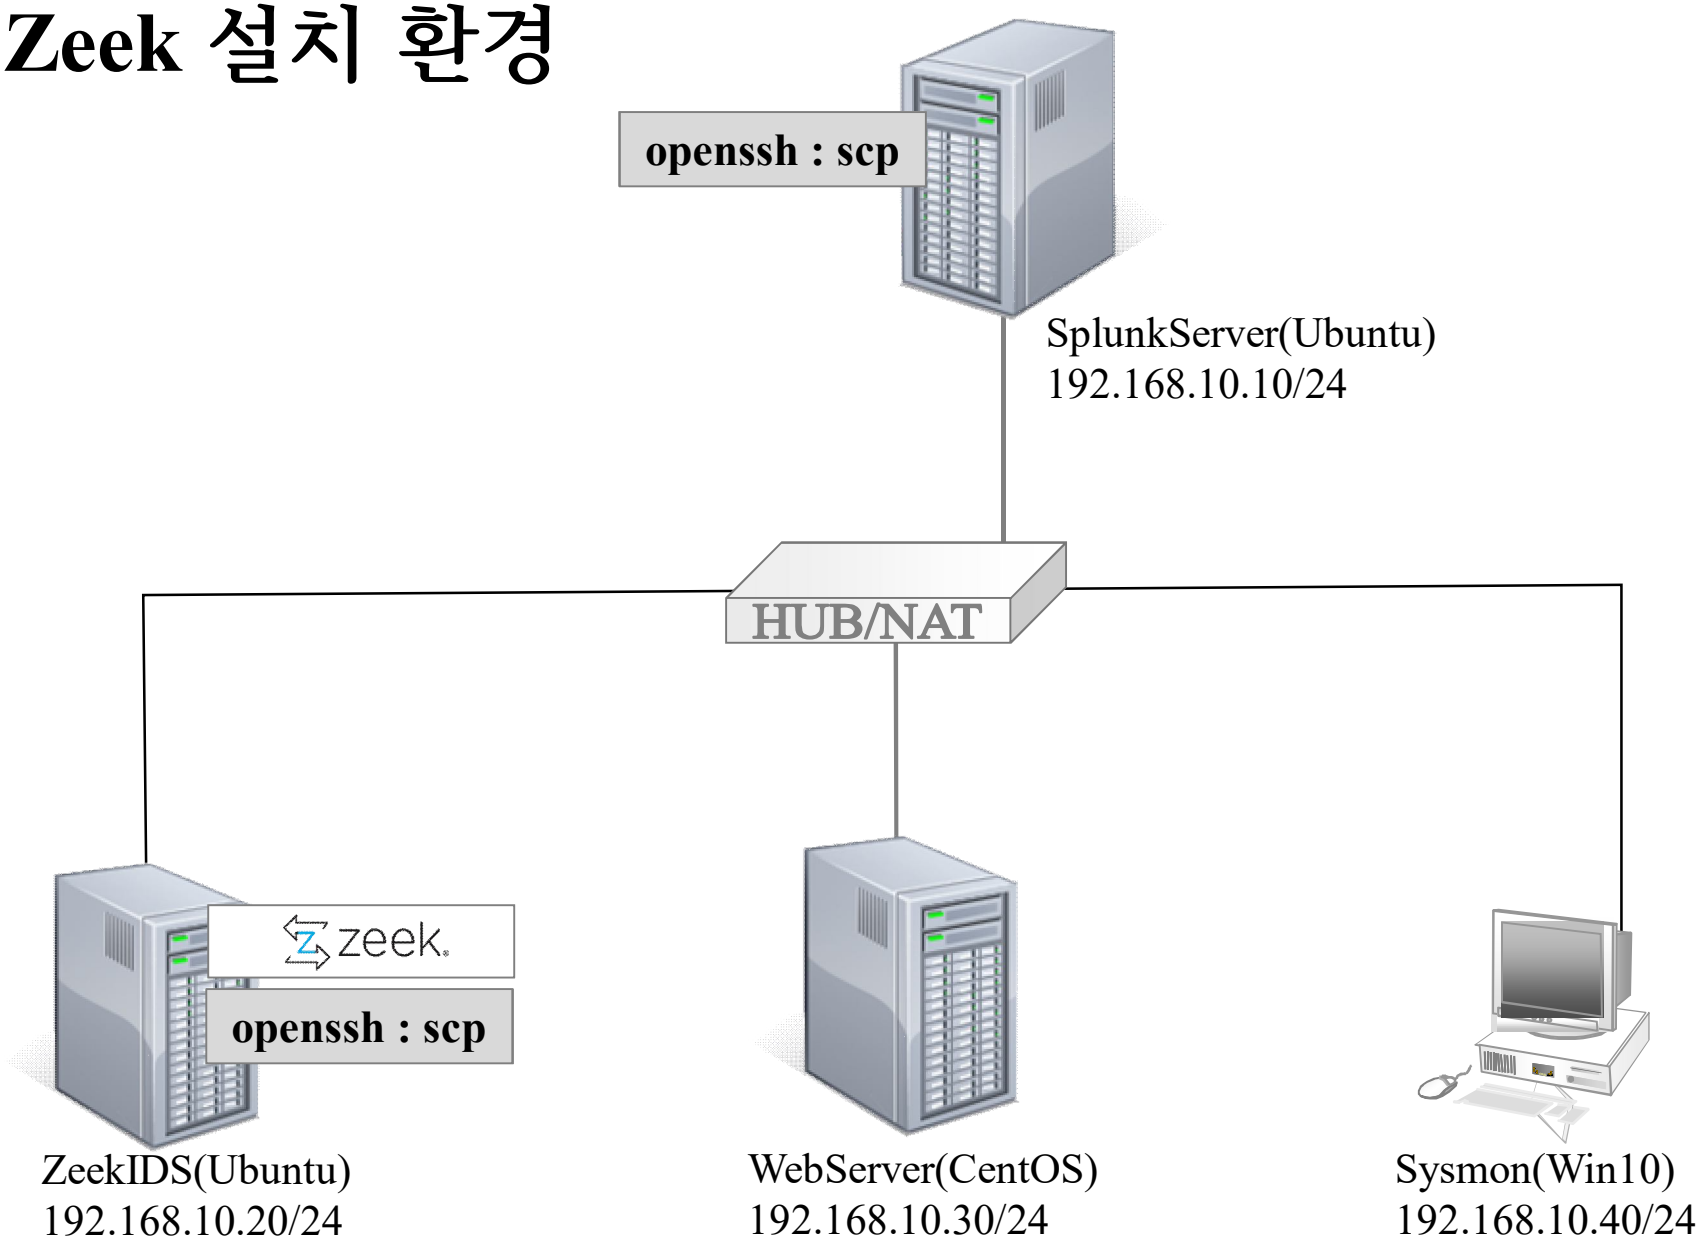
openssh : scp
SplunkServer(Ubuntu)
192.168.10.10/24
HUB/NAT
zeek
openssh : scp
ZeekIDS(Ubuntu)
192.168.10.20/24
WebServer(CentOS)
192.168.10.30/24
Sysmon(Win10)
192.168.10.40/24

# 1) [Ubuntu Zeek] Zeek Installation

## ❶ 설치 전 환경 설정

```
#apt update

#apt-get install curl gnupg2 wget –y

#curl -fsSL
https://download.opensuse.org/repositories/security:zeek/xUbuntu_20.04/Release.
key | gpg --dearmor | tee /etc/apt/trusted.gpg.d/security_zeek.gpg

#echo 'deb
http://download.opensuse.org/repositories/security:/zeek/xUbuntu_20.04/ /' | tee
/etc/apt/sources.list.d/security:zeek.list
```

# ❷ Zeek Installation

#apt update -y

#apt-get install zeek -y

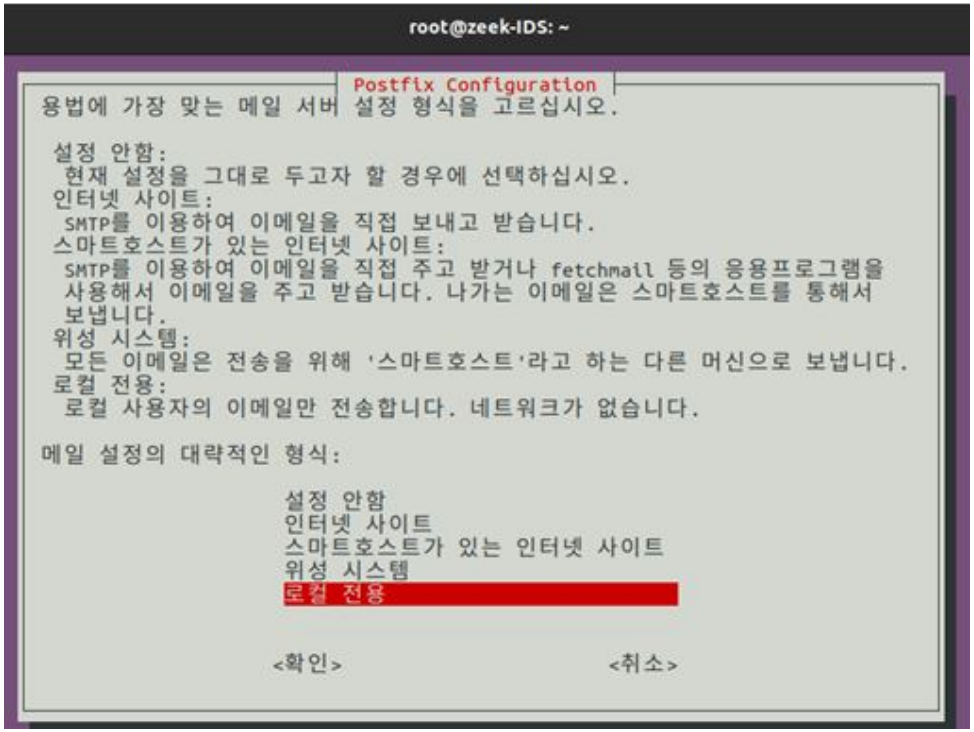


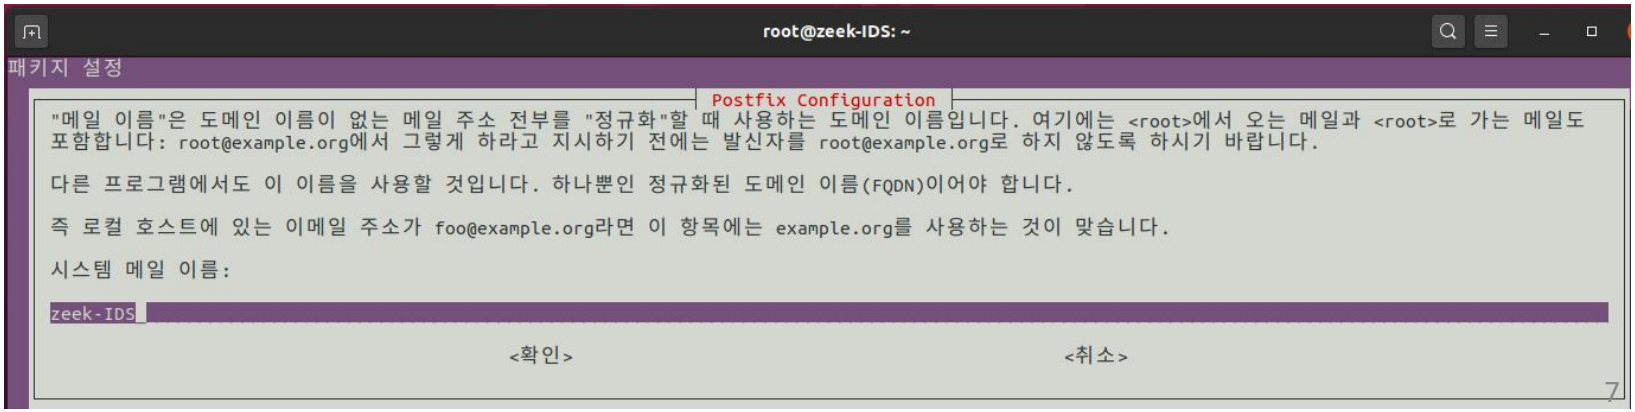

## ❸ PATH 설정

#echo "export PATH=$PATH:/opt/zeek/bin" >> ~/.bashrc

#source ~/.bashrc

#zeek --version

```
root@zeek-IDS:~# zeek --version
zeek version 5.0.0
root@zeek-IDS:~#
```

# ❹ Zeek Configuration

#cd /opt/zeek/etc

#cat /opt/zeek/etc/networks.cfg

```
root@zeek-IDS:/opt/zeek/etc# pwd
/opt/zeek/etc
root@zeek-IDS:/opt/zeek/etc# ls -l
합계 16
-rw-rw-r-- 1 root zeek  262  1월 29  2015 networks.cfg
-rw-rw-r-- 1 root zeek  651  1월 29  2015 node.cfg
-rw-rw-r-- 1 root zeek 3052  1월 29  2015 zeekctl.cfg
drwxr-xr-x 2 root zeek 4096  7월 30 14:14 zkg
root@zeek-IDS:/opt/zeek/etc# cat networks.cfg
# List of local networks in CIDR notation, optionally followed by a
# descriptive tag.
# For example, "10.0.0.0/8" or "fe80::/64" are valid prefixes.

10.0.0.0/8          Private IP space
172.16.0.0/12       Private IP space
192.168.0.0/16      Private IP space
```

#ifconfig

```
root@zeek-IDS:/opt/zeek/etc# ifconfig
ens33: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
        inet 192.168.10.12  netmask 255.255.255.0  broadcast 192.168.10.255
        inet6 fe80::ac48:a451:53cf:9cea  prefixlen 64  scopeid 0x20<link>
        ether 00:0c:29:d0:3a:96  txqueuelen 1000  (Ethernet)
        RX packets 61699  bytes 91719964 (91.7 MB)
        RX errors 0  dropped 0  overruns 0  frame 0
        TX packets 3675  bytes 250798 (250.7 KB)
        TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0
```

**#nano /opt/zeek/etc/node.cfg**

[zeek]

type=standalone

host=localhost

**interface=ens33**

```
  GNU nano 4.8                                                    node.cfg
# Example ZeekControl node configuration.
#
# This example has a standalone node ready to go except for possibly changing
# the sniffing interface.

# This is a complete standalone configuration.  Most likely you will
# only need to change the interface.
[zeek]
type=standalone
host=localhost
interface=ens33
```

## ❹ Zeek 활성화

#zeekctl check

#zeekctl deploy

#zeekctl status

#ls –l /opt/zeek/spool/zeek

```
root@zeek-IDS:/opt/zeek/etc#
root@zeek-IDS:/opt/zeek/etc# ls -l /opt/zeek/spool/zeek
합계 144
-rw-r--r-- 1 root zeek   252  7월 30 14:49 capture_loss.log
-rw-r--r-- 1 root zeek 23532  7월 30 14:58 conn.log
-rw-r--r-- 1 root zeek 22305  7월 30 14:58 dns.log
-rw-r--r-- 1 root zeek  2363  7월 30 14:55 http.log
-rw-r--r-- 1 root zeek   210  7월 30 14:49 known_hosts.log
-rw-r--r-- 1 root zeek   241  7월 30 14:48 known_services.log
-rw-r--r-- 1 root zeek 30777  7월 30 14:48 loaded_scripts.log
-rw-r--r-- 1 root zeek   763  7월 30 14:49 notice.log
-rw-r--r-- 1 root zeek   989  7월 30 14:52 ntp.log
-rw-r--r-- 1 root zeek   227  7월 30 14:48 packet_filter.log
-rw-r--r-- 1 root zeek   674  7월 30 14:48 reporter.log
-rw-r--r-- 1 root zeek   508  7월 30 14:55 software.log
-rw-r--r-- 1 root zeek  5886  7월 30 14:58 ssl.log
-rw-r--r-- 1 root zeek   888  7월 30 14:58 stats.log
-rw-r--r-- 1 root zeek    20  7월 30 14:48 stderr.log
-rw-r--r-- 1 root zeek   188  7월 30 14:48 stdout.log
-rw-r--r-- 1 root zeek   903  7월 30 14:54 weird.log
```

#tail /opt/zeek/spool/zeek/conn.log

```
root@zeek-IDS:/opt/zeek/etc# tail /opt/zeek/spool/zeek/conn.log
1659161491.671335       CJ9lye2SHkkcH4c9Q       192.168.10.1    65198   239.255.255.250 1900    udp     -       3.02985
6  700      0       S0      T       F       0       D       4       812     0       0       -
1659161491.686111       CHqNVR1cDyLwBRdFUj      192.168.10.1    65200   239.255.255.250 1900    udp     -       3.02997
9  700      0       S0      T       F       0       D       4       812     0       0       -
1659161544.850382       CmsBcA2VwUCJboRMm9      192.168.10.11   50552   192.168.10.2    53      udp     dns     0.00662
2  47       108     SF      T       T       0       Dd      1       75      1       136     -
1659161544.857948       CrJhuH2EM3k8EJqxWe      192.168.10.11   38605   192.168.10.2    53      udp     dns     0.00599
5  47       108     SF      T       T       0       Dd      1       75      1       136     -
1659161548.567765       C6waTA1ECI7D1dUtXd      192.168.10.11   52843   192.168.10.2    53      udp     dns     0.04779
6  37       101     SF      T       T       0       Dd      1       65      1       129     -
1659161548.568343       CQD9erMWE323xC8n6       192.168.10.11   53625   192.168.10.2    53      udp     dns     0.01165
3  37       111     SF      T       T       0       Dd      1       65      1       139     -
```

# 2) [zeek & Splunk server] scp installation

- SCP를 이용하기 위해서는 SSH 서비스가 활성화 되어있어야 함

#apt-get install –y openssh-server

#ufw allow 22/tcp

*scp [전송파일명] [서버계정명]@[전송받을 서버]:[전송받을 서버 디렉터리]

```
root@zeek-IDS:/opt/zeek/spool/zeek# scp conn.log splunk@192.168.10.11:/tmp
The authenticity of host '192.168.10.11 (192.168.10.11)' can't be established.
ECDSA key fingerprint is SHA256:Da7Ed6sOXjDNpogWae2zGXj87qM6QqVwlkwmLLDbjjw.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.10.11' (ECDSA) to the list of known hosts.
splunk@192.168.10.11's password:
conn.log                                      100%  169KB  35.5MB/s   00:00
root@zeek-IDS:/opt/zeek/spool/zeek#
```

# SCP를 이용해 Zeek log file을 Splunk Server 전송

#scp zeek.zip splunk@192.168.10.10:/tmp

```
root@zeek-IDS:/opt/zeek/spool/zeek# scp conn.log splunk@192.168.10.11:/tmp
The authenticity of host '192.168.10.11 (192.168.10.11)' can't be established.
ECDSA key fingerprint is SHA256:Da7Ed6sOXjDNpogWae2zGXj87qM6QqVwlkwmLLDbjjw.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '192.168.10.11' (ECDSA) to the list of known hosts.
splunk@192.168.10.11's password:
conn.log                                      100%  169KB  35.5MB/s   00:00
root@zeek-IDS:/opt/zeek/spool/zeek#
```

```
root@zeek-IDS:/opt/zeek/spool#
root@zeek-IDS:/opt/zeek/spool# scp zeek.zip splunk@192.168.10.10:/tmp
splunk@192.168.10.10's password:
zeek.zip                                      100%   37KB  13.5MB/s   00:00
root@zeek-IDS:/opt/zeek/spool#
```

```
root@splunk-server:/tmp# pwd
/tmp
root@splunk-server:/tmp# ls
VMwareDnD
config-err-8maNOl
ssh-9Lv56wA4ZbrB
systemd-private-927c2043b6f04cacb5228e779aba9644-ModemManager.service-giGbtg
systemd-private-927c2043b6f04cacb5228e779aba9644-colord.service-53jr5g
systemd-private-927c2043b6f04cacb5228e779aba9644-ntp.service-KYbMYg
systemd-private-927c2043b6f04cacb5228e779aba9644-switcheroo-control.service-CzFZHi
systemd-private-927c2043b6f04cacb5228e779aba9644-systemd-logind.service-dq6fvj
systemd-private-927c2043b6f04cacb5228e779aba9644-systemd-resolved.service-cZHy0g
systemd-private-927c2043b6f04cacb5228e779aba9644-upower.service-HUahBi
tracker-extract-files.1000
vmware-root_578-2730627869
zeek.zip
root@splunk-server:/tmp#
```

# 3) Zeek Log 필드

- HTTP 로그 필드
- DNS 로그 필드
- SSL 로그 필드

# Zeek HTTP 로그 필드

| 필드명 | 필드 설명 |
|---|---|
| id.orig_h | 송신지IP주소 |
| id.orig_p | 송신지 port번호 |
| id.resp_h | 수신지IP주소 |
| id.resp_p | 수신지 port번호 |
| method | 서비스 요청 방식 |
| host | 접근 도메인 |
| uri | 접근 상세주소 (도메인제외) |
| referrer | Host 접속시 경유주소 |
| version | HTTP 버전 |
| user-agent | 웹브라우저 정보 |

| 필드명 | 필드 설명 |
|---|---|
| request_body_len | 서버에게 전송하는 정보길이 |
| response_body_len | 사용자에게 전송하는 정보길이 |
| status_code | 상태코드 |
| status_msg | 상태 메시지 |
| tags | |
| Proxied | 프록시 접속 여부 |
| resp_fuids | 연결된 파일 ID |
| resp_mime_types | 전송 파일 mime type |

# Zeek DNS 로그 필드

| 필드명 | 필드 설명 |
|---|---|
| ts | 시간정보로 Unix시간으로 표시 |
| Uid | 로그에 할당된 ID |
| Id.orig_h | 송신지 IP주소 |
| Id.orig_p | 송신지 Port번호 |
| Id.resp_h | 수신지 IP 주소 |
| Id.resp_p | 수신지 Port 번호 |
| Protocol | 사용 프로토콜 |
| trans_id | 질의와 응답을 연결하는 ID |
| rtt | 응답시간 |
| query | 도메인질의내용<br>DNS 서버에 질의한 도메인 |

| 필드명 | 필드 설명 |
|---|---|
| qclass | 질의클래스 |
| qclass_name | 질의클래스 이름 |
| qtype | 질의형식 |
| qtype_name | 질의형식이름 |
| rcode | 답변코드 |
| rcode_name | 질의한 도메인의 응답코드 |
| AA | 인증서버답변여부 |
| TC | 전체질의가 잘렸는지 여부 |
| RD | 재귀질의 요청여부 |
| RA | 재귀질의 가능여부 |
| Z | 예약된 필드로 사용하지 않음 |
| Answers | DNS서버에서 반환한 답변내역 |
| TTLs | 도메인의 TTL값<br>질의 답변의 캐시보관기간<br>(3600초(1시간 기본)) |
| Reject | 질의가 거부됐는지 판단 |

# Zeek SSL 로그 필드

| 필드명 | 필드 설명 |
|---|---|
| ts | 시간정보 |
| Uid | 로그에 할당된 UID |
| id.orig_h | 송신지 IP주소 |
| id.orig_p | 송신지 Port번호 |
| id.resp_h | 수신지 IP 주소 |
| id.resp_p | 수신지 Port 번호 |
| version | SSL 사용버전 |
| cipher | 비밀성, 무결성 암호 알고리즘 명세 |
| server_name | 접속 서버 도메인 |
| established | 연결여부 |
| cert_chain_fuids | 인증서 UID<br>인증서를 구분할 수 있는 필드<br>x.509.log의 uid와 연결 |

# Zeek X.509 로그 필드

| 필드명 | 필드 설명 |
|---|---|
| Certificate.subject | 인증서 사용 주체 |
| Certificate.issuer | 인증서를 발행한 CA |
| Certificate.not_valid_before | 인증서 시작인 |
| Certificate.not_valid_after | 인증서 종료일 |