


20/10/20.

- docker network ls - display all type of network.
- docker network create some - to create network.
- docker network ls
- All network along with some.
- docker system (prune)
 - ↳ Ideal network it will remove.
- docker system prune
- docker system prune -a → It will remove all 'not active'
- docker run -d --name demo -p 8081:80 --network=gc-demonet customizing.

Types of Docker Volumes:

- 1) bind mount
- 2) volume
- 3) tmpfs mount - name launch pariter
 ela containers kum
 allocate agum.
 temporary
 file system

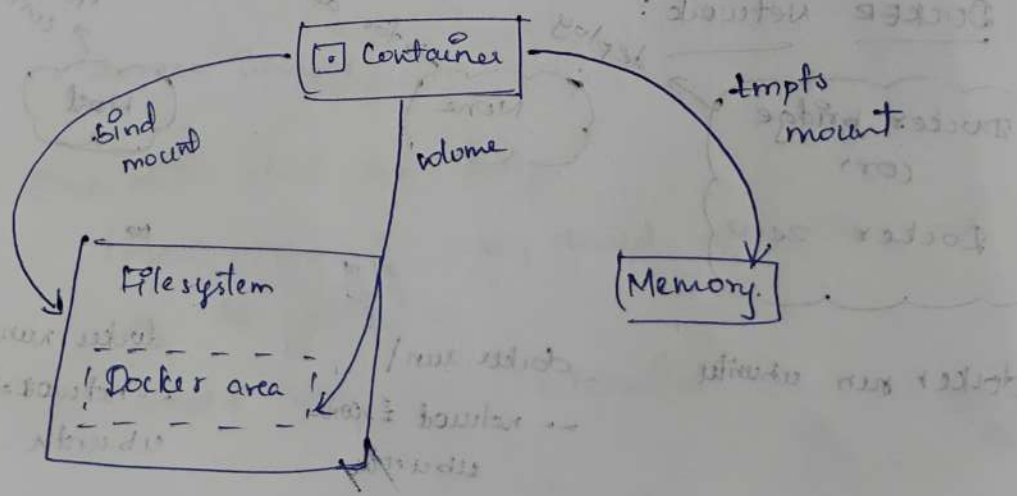

→ YAML - Identical for

Docker compose

Docker compose
run applicatio
for example:

Imagine
running a
a third
then run
a single




→ YAML - indentation error vacuum. key-value pairs + python.

Docker compose:

Docker compose makes it easier to configure and run applications made-up of multiple containers. for example:

Imagine being able to define three containers - one running a web app, another running postgres and a third running redis - all in one YAML file and then running those three connected containers with a single command.

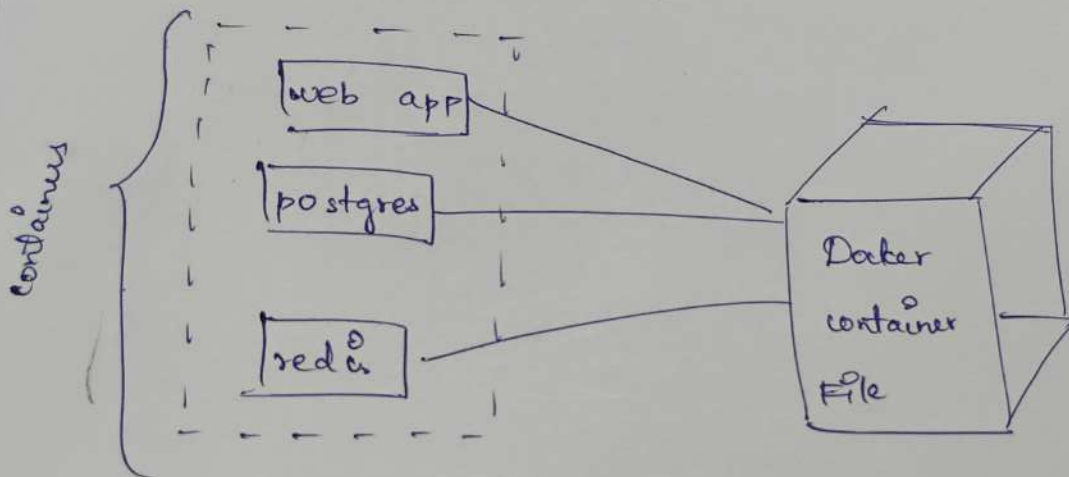

"You can run these 3 containers with a single command."

- docker compose version
- docker compose up - start the compose.
- docker compose down - stop the compose.
- docker compose ps - to list only running containers by compose.