


24/9/2026

DEVOPS

- Real life IT-Agile Methodology
- Scrum master - scrum meeting/stand up meet.
- Sprint, epic, marathon, storyline
- Automating Agile methodology - DevOps

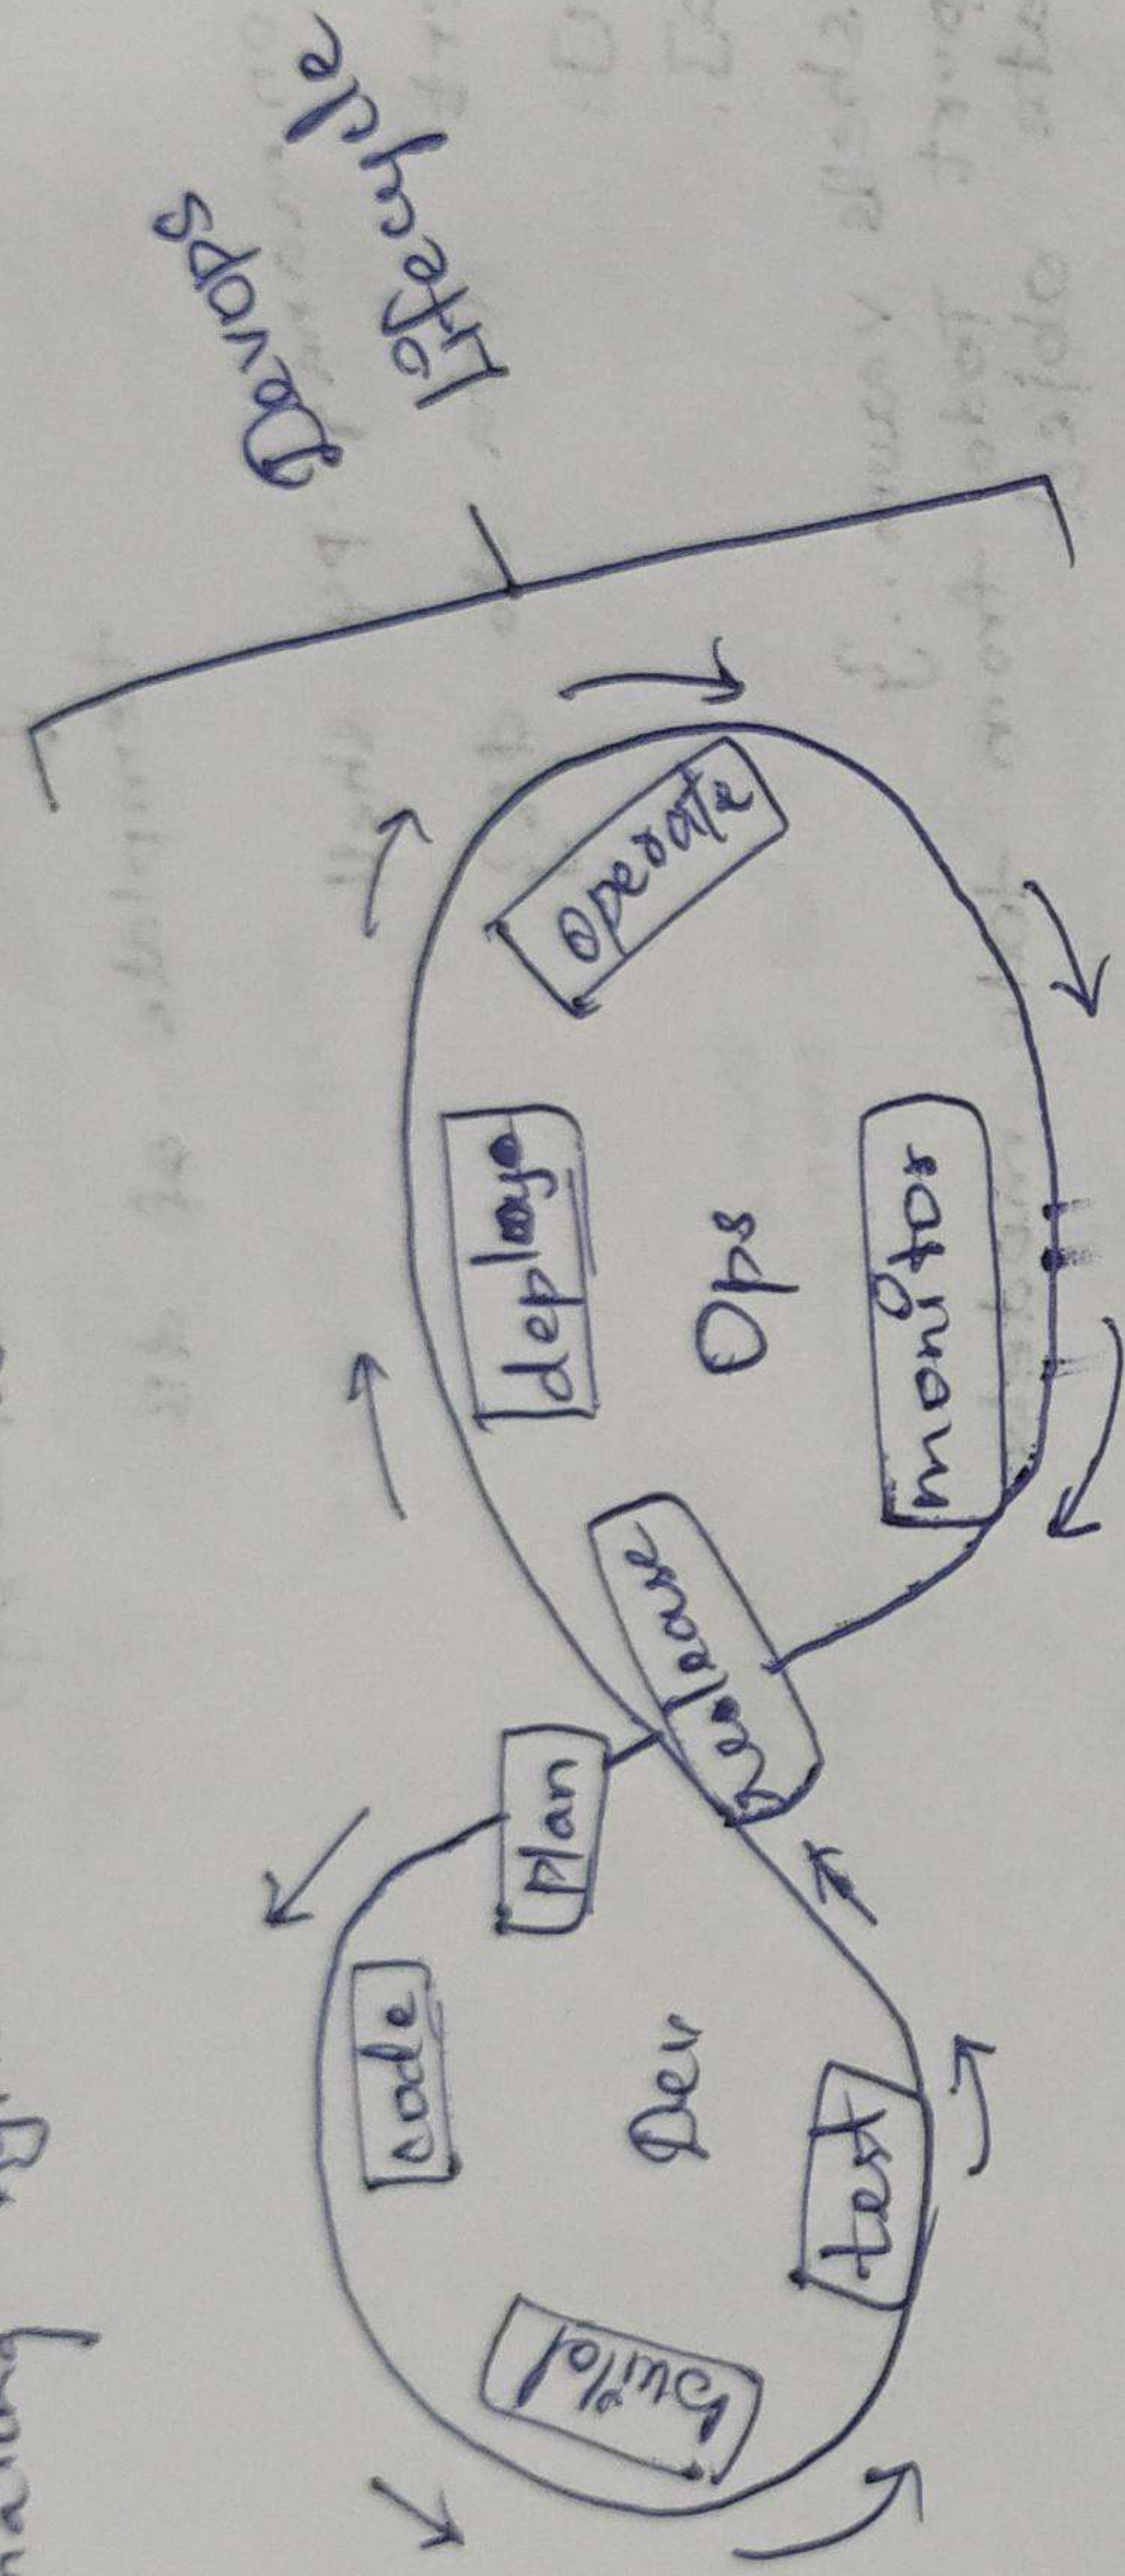

Product manager
Project manager

• JIRA - tool [Planning]

• SCM tools [Code]

→ Git

→ GitHub

→ GitLab

• Maven tool [build] → for java

• Portman, Selenium [test]
create container

• [deploy] Docker, AWS, Azure


• [operate] Kubernetes (manage container)

• [Release] Integration (Jenkins)

[monitor] Cloudwatch, Grafana

DEVOPS

- Real life IT-Agile Methodology
- Scrum master - scrum meeting/stand up meet.
- Sprint, epic, marathon, storyline
- Automating Agile methodology - DevOps

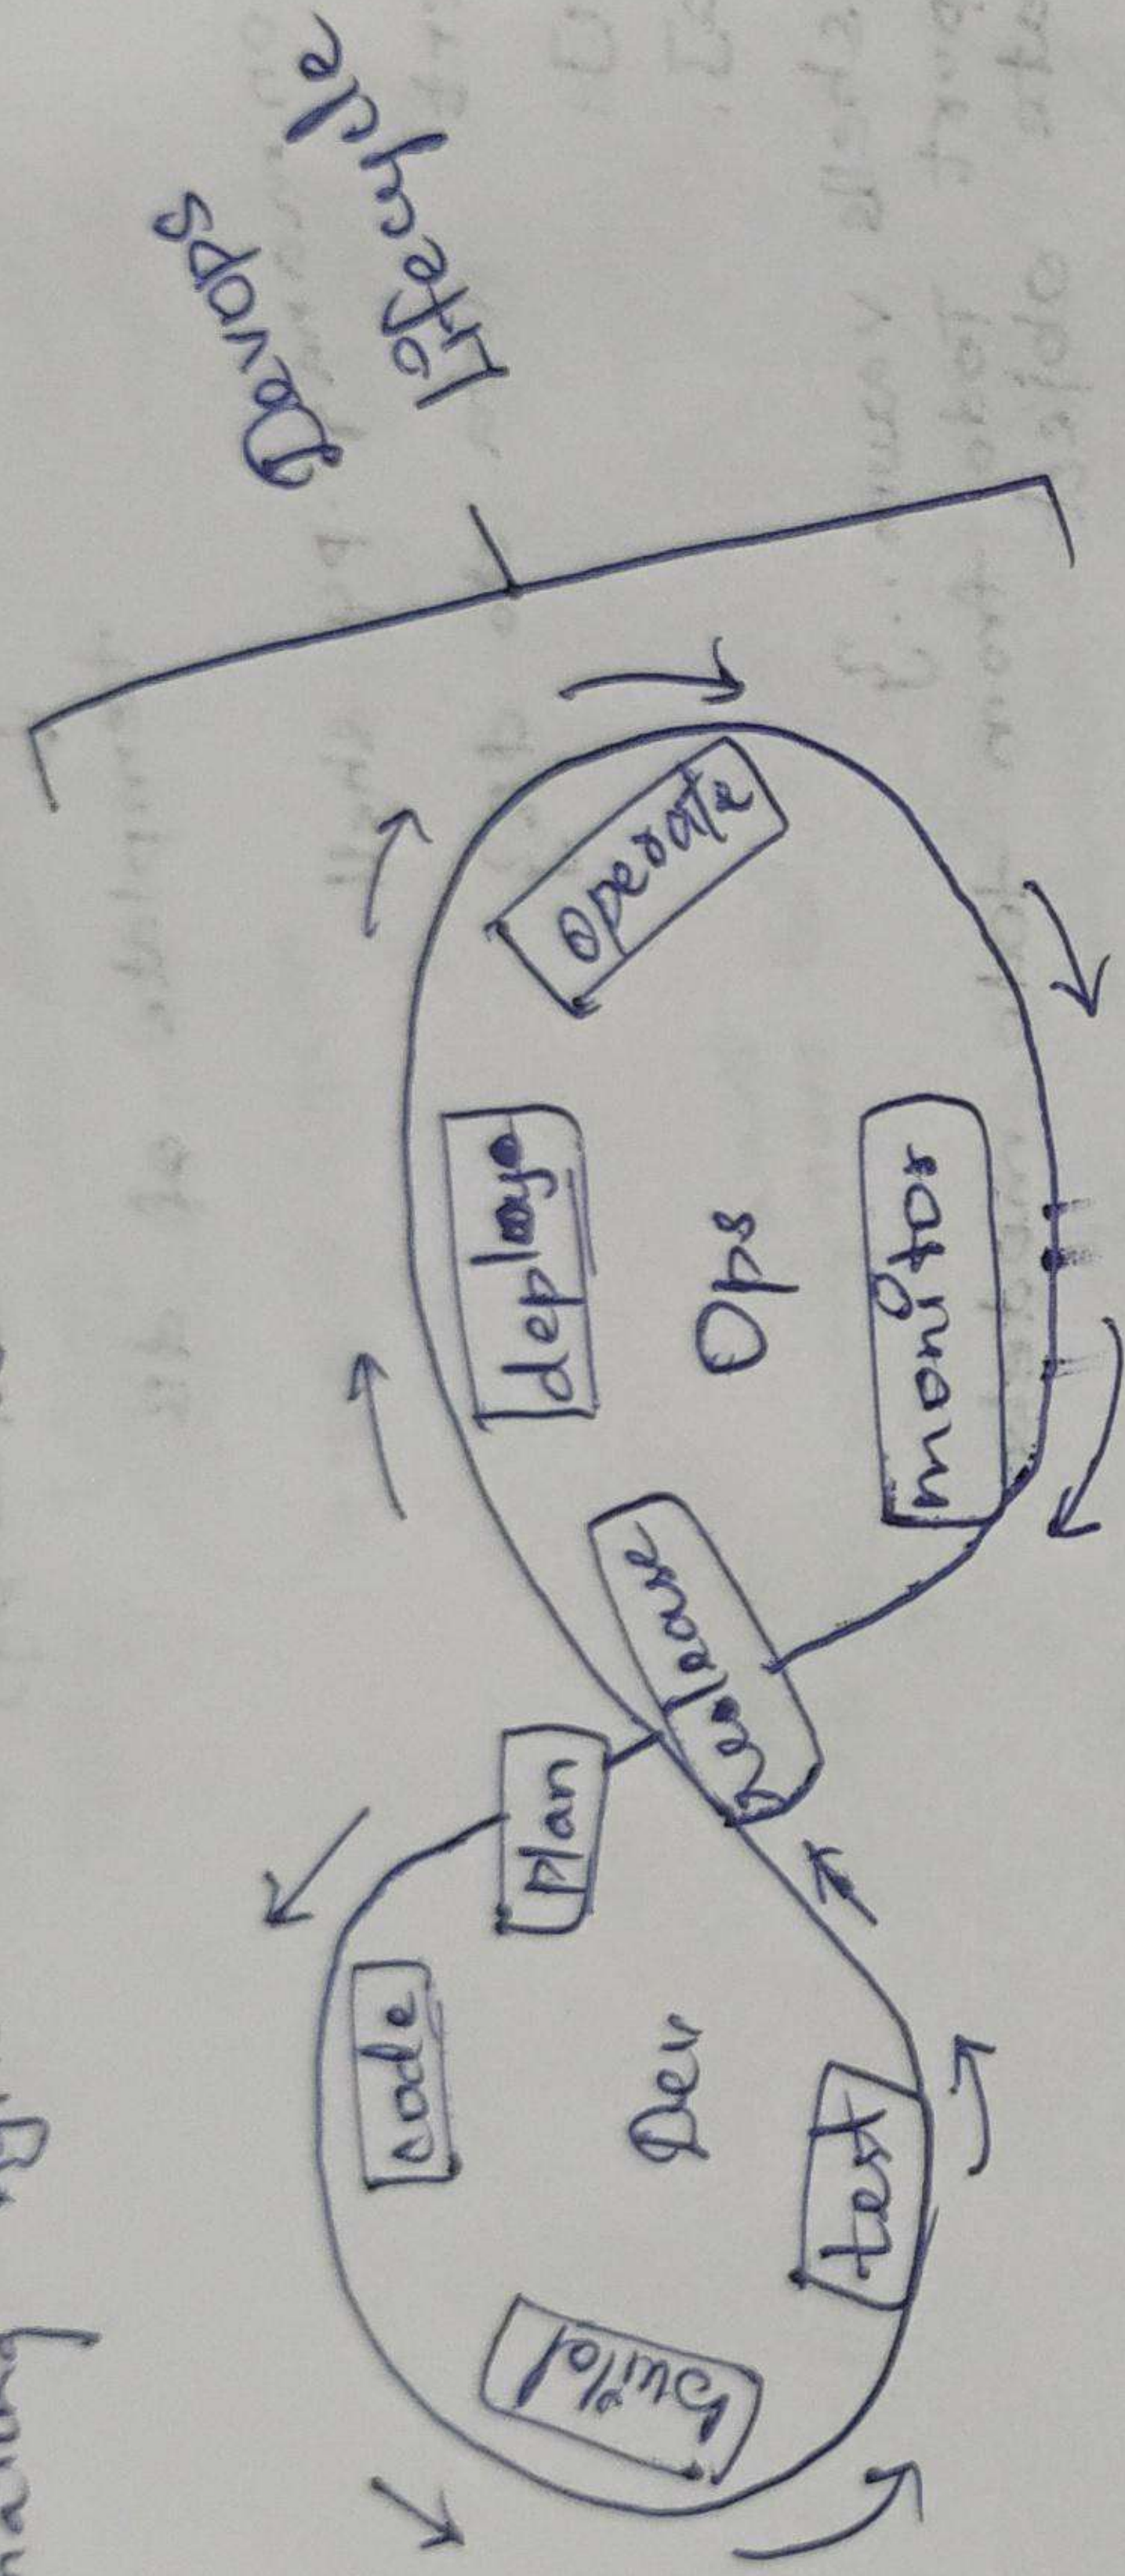

Product manager
Project manager

• JIRA - tool [Planning]

• SCM tools [Code]

→ Git

→ GitHub

→ GitLab

• Maven tool [build] → for java

• Portman, Selenium [test]
create container

• [deploy] Docker, AWS, Azure


• [operate] Kubernetes (manage container)

• [Release] Integration (Jenkins)

[monitor] Cloudwatch, Grafana


- DevOps is a software development methodology which improves the collaboration b/w developers and operations team using various automation tools. these automation tools are implemented using various stages which are a part of the DevOps Lifecycle.

DevOps Lifecycle:

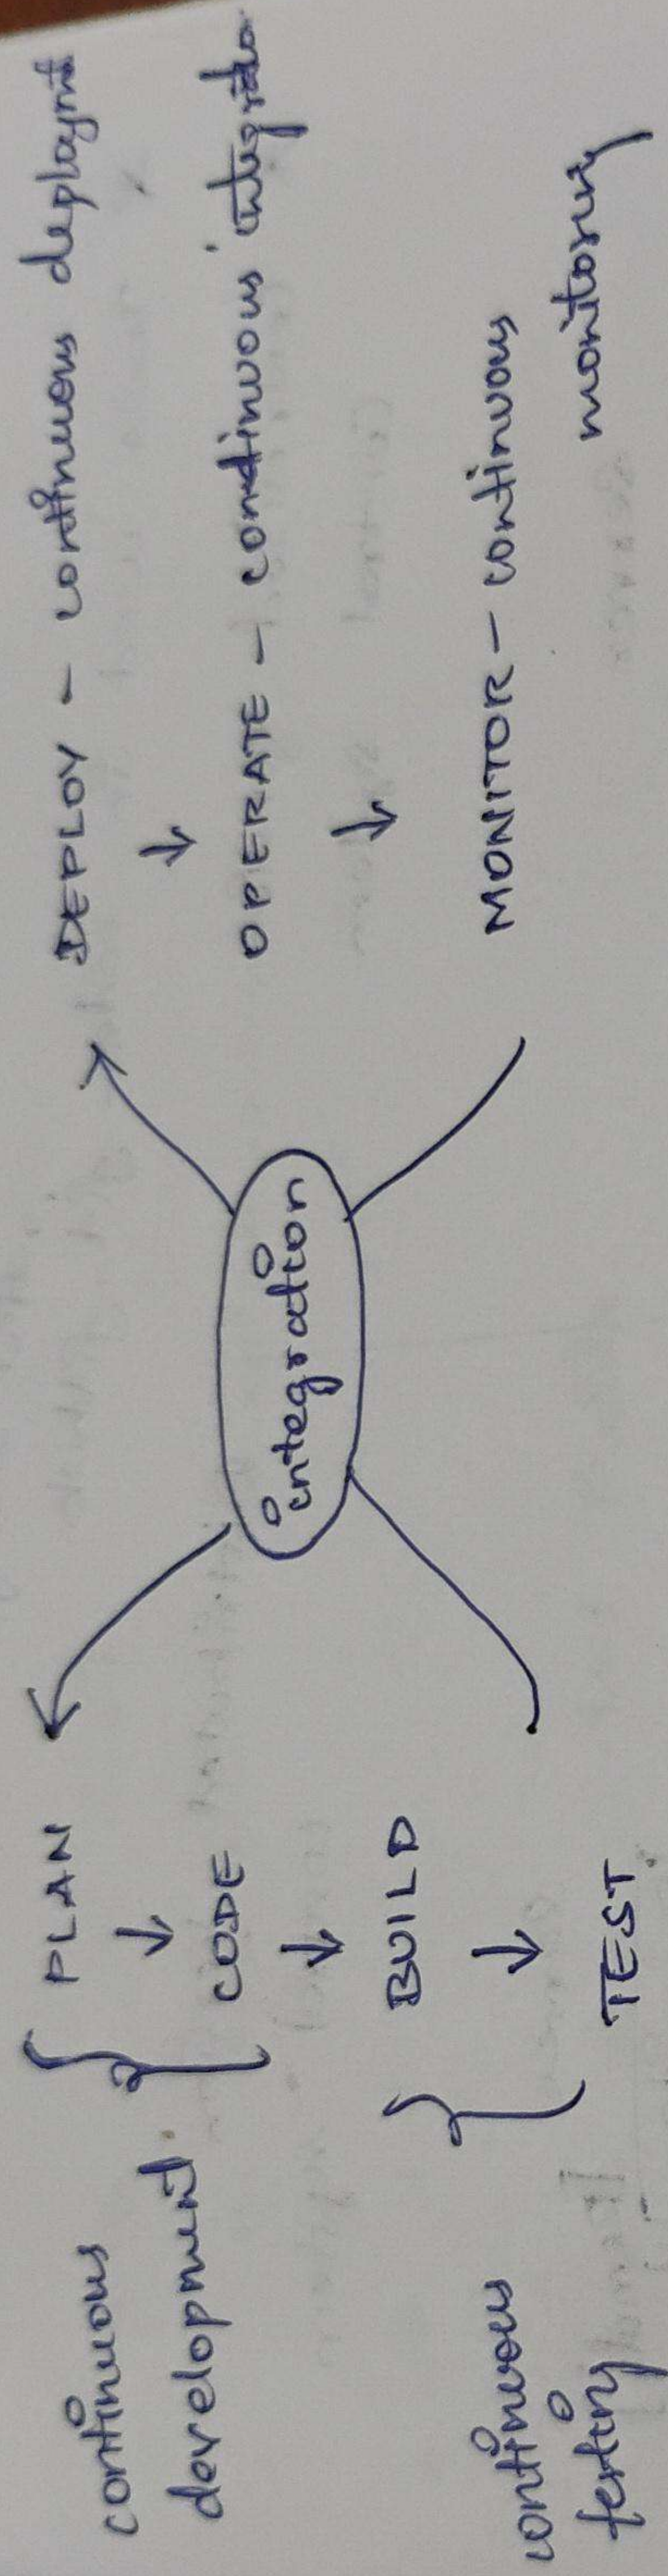

CI/CD Process:

Jenkins / Github Actions.

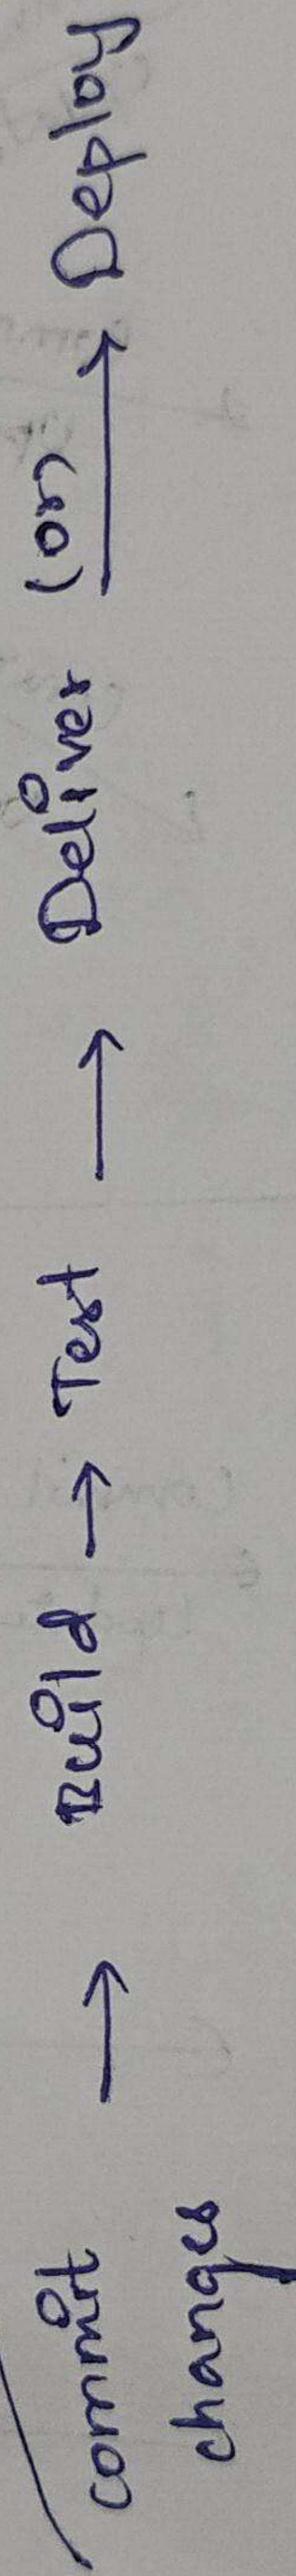

github

Ad

maven


Important Tools:

Docker

Kubernetes

Terraform

Automated CI/CD Pipeline

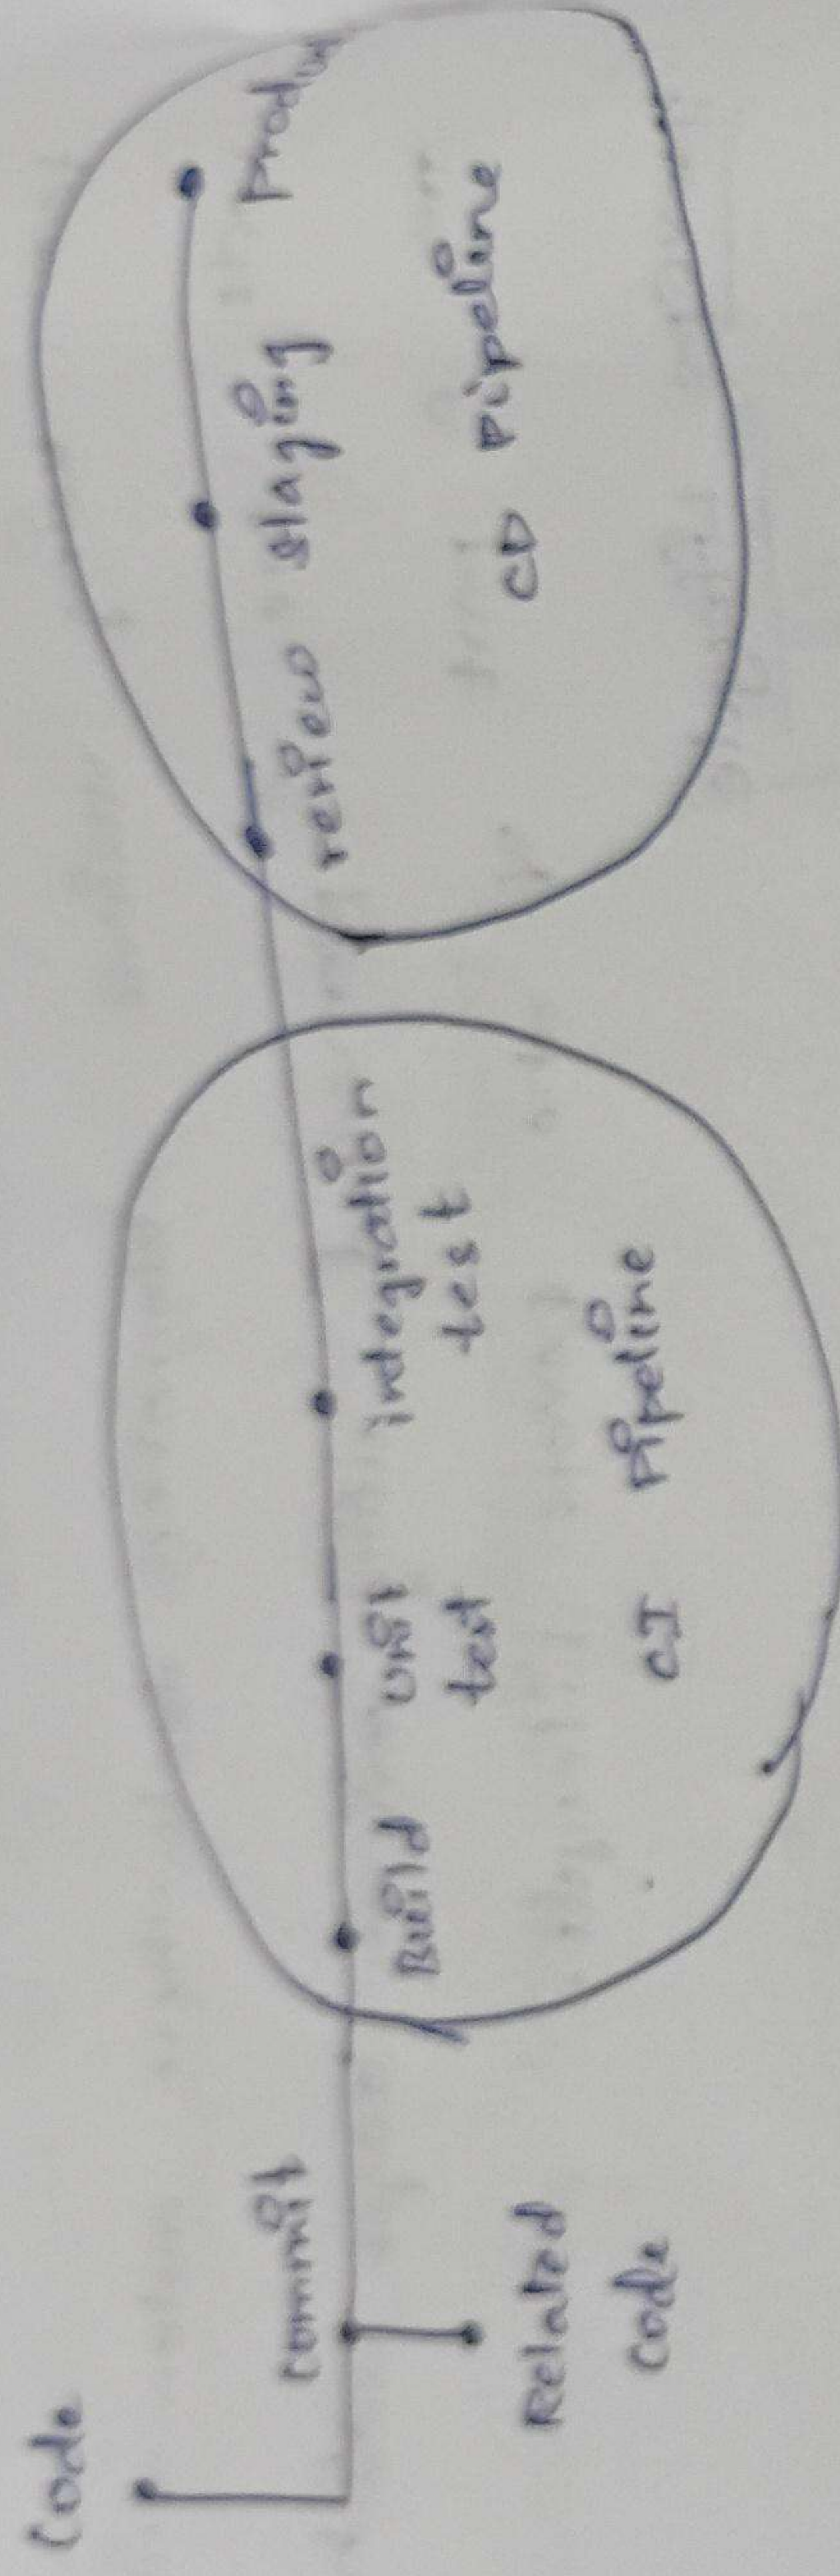


object storage

* Tools used in code - git, github.

* Centralized Version Control System

Distributed Version Control system.

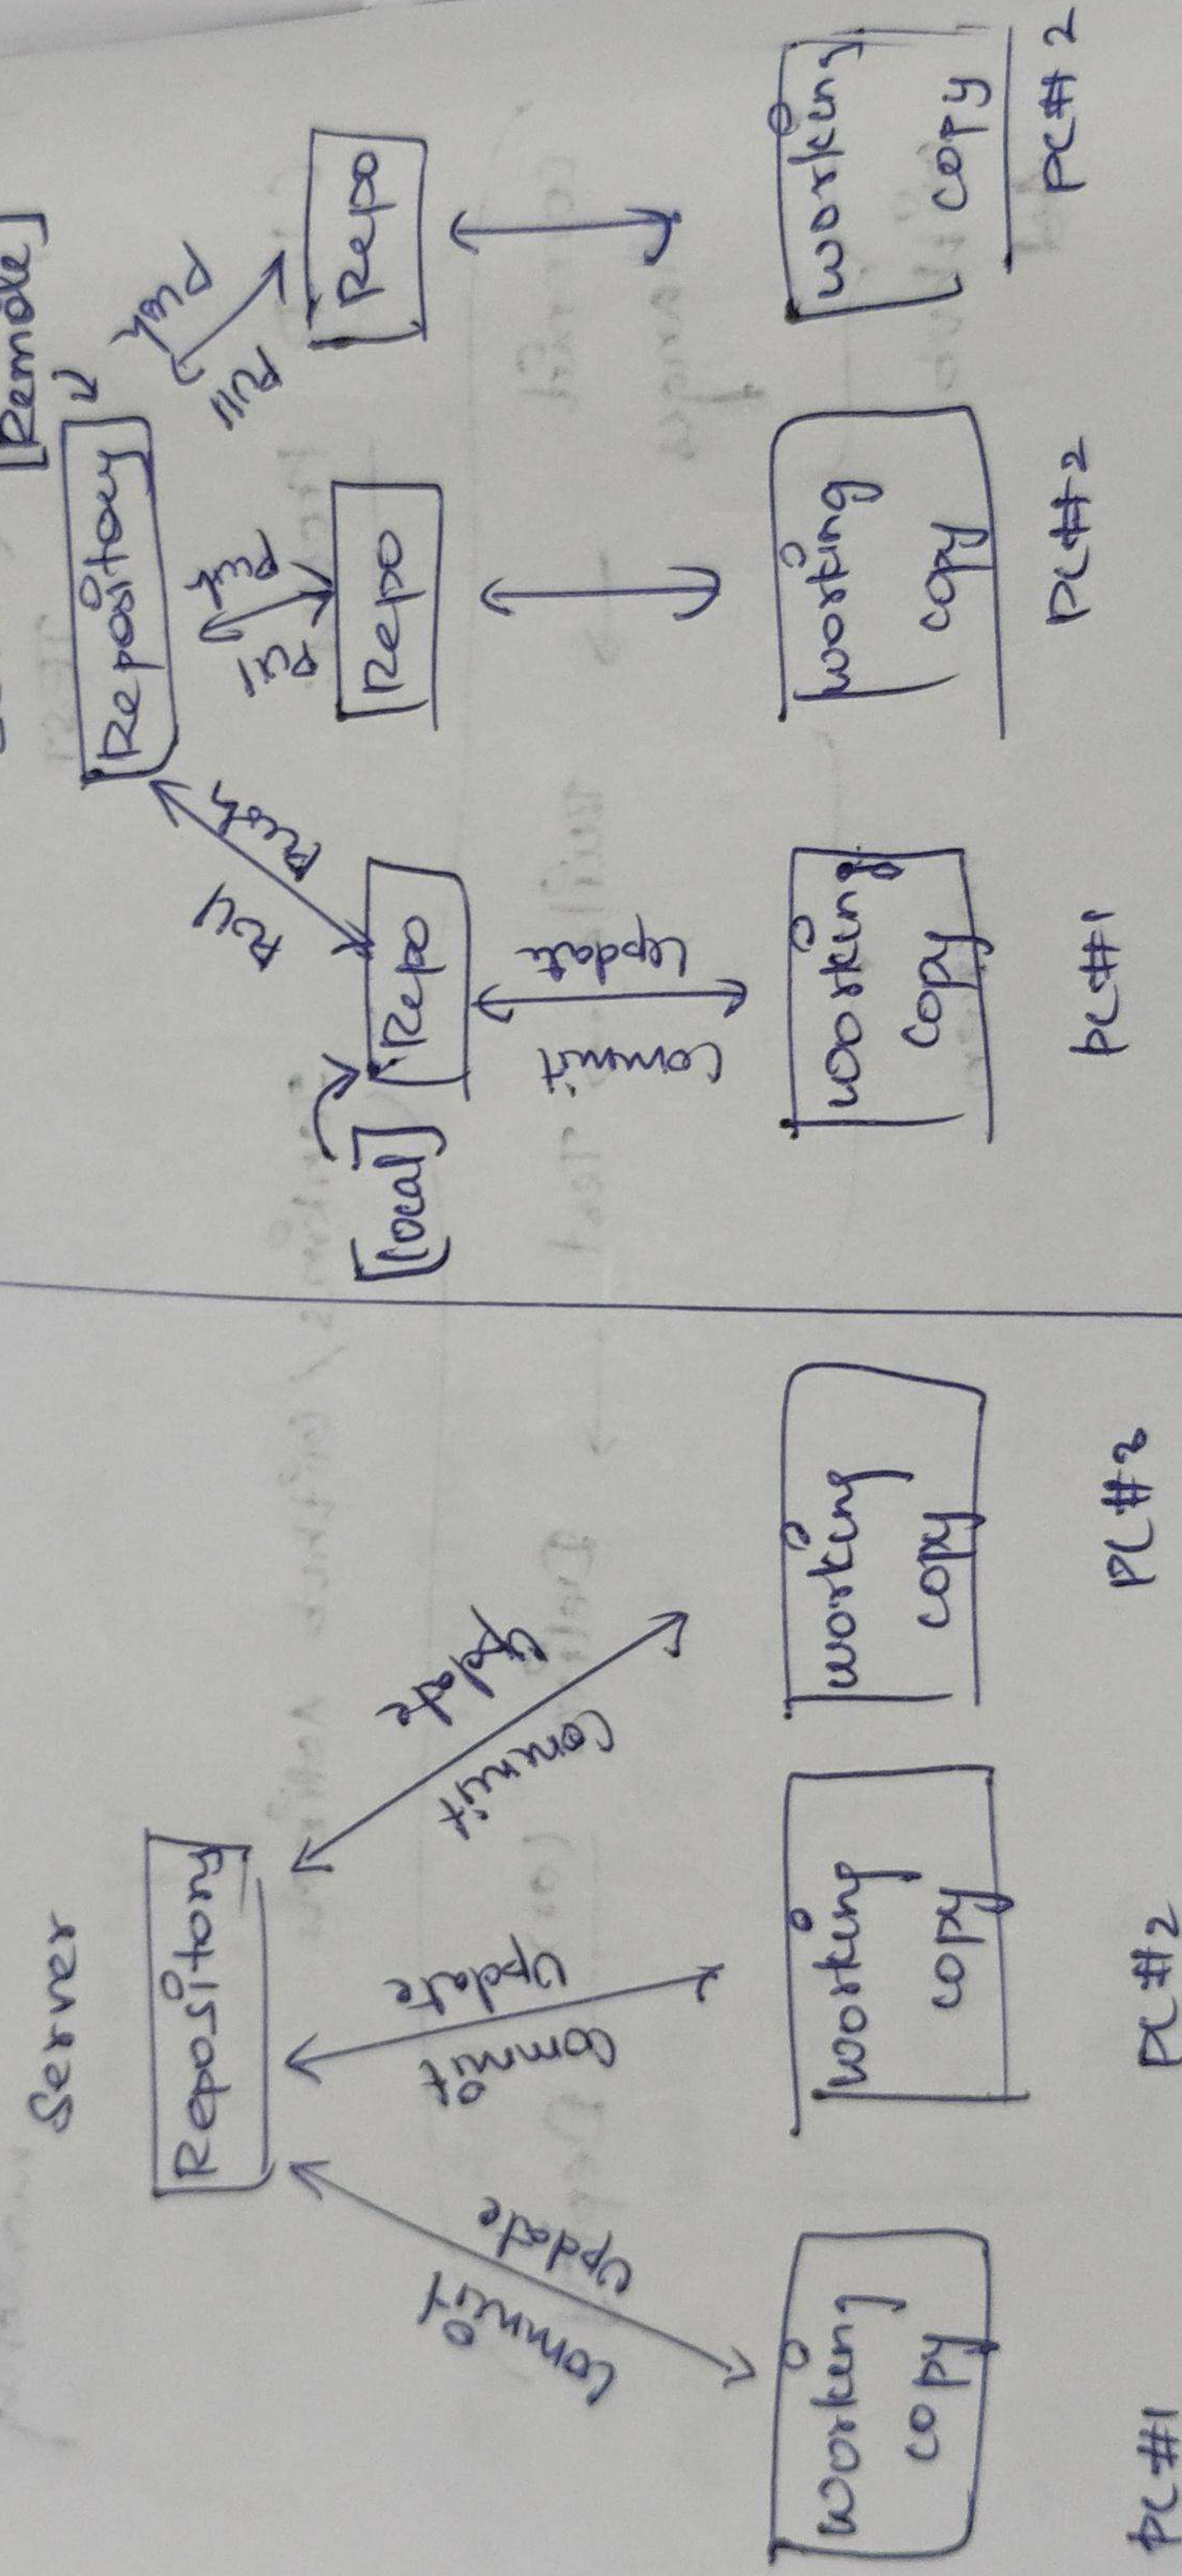

eg: working copy - photo

Repo - gallery

Main repo - Instagram.

* windows
* powershell
* Bash / Git
* mkdir -
* initiate
* v_o di
* eg: v_o di

* cat
* To
* To
* g

03
03

* Windows & Linux command use same, can use powershell.

* Bash / Git Bash - Linux.

* mkdir -p dev

* initiate git $\Rightarrow$ git init

* vi filename

eg: vi test.txt

text editing tool

to go to vi $\rightarrow$ i

to move from vi to outside $\rightarrow$ esc, i, w, enter

* cat test.txt

$\downarrow$
To see the content inside

* To exit without saving $\rightarrow$!

git config --global user.email "sornambigal1617@gmail.com"

* git config --global user.email "sornambigal1617@gmail.com"

to communicate with github.
(line & field) CRLF

* (carriage return) $\rightarrow$ [n] - new line

[0] - first line

|r + \n = end of file
closes full file.

* git status (what all to be tracked)

* git log (log of full)

* key files, passwords $\rightarrow$ put in git ignore in github.

• White Box testing:

Source code test pannuvanga (transparent)

• Black Box testing:

Internal logic -vaignathu.

can't see inside.

Give I/p and get o/p.

app oda functional test pannuvanga.

• Grey Box testing:

Both white & black box testing.

GitHub

• commit file to repo

git commit -m "..."

• git add file.txt (file added)

git add

• key generation

key-pair

To copy: clip < ~/.ssh/id-ed25519.pub

the one you give to github is public key

ssh-keygen.

• git branch -v main

- git pull origin main

• git push origin main

• ls

os/psd
git
done
→ want do
laptop do
customer
→ git
git that
→ Now
→ Only