

All the shapes of spaces: a census of 9-small 3-manifolds *

Sóstenes L. Lins and Lauro D. Lins

May 9, 2013

Abstract

In this work we present a complete (no misses, no duplicates) catalogue for closed, orientable and prime 3-manifolds induced by plane graphs with a bipartition of its edge set (blinks) up to 9 edges. Blinks form a universal encoding for such manifolds. We hope that this census becomes as useful for the study of concrete examples of 3-manifolds as the tables of knots are in the study of knots and links. Along the years we have made an issue in our computational work that it must be reproducible and independently checked by other researchers. Our software is available, but currently it lacks yet a good documentation and help is welcome to change this. An Wiki open source project is starting.

1 Introduction


In references [2], [3] and [4] we we define and show how a *blink*, that is, a plane graph with an arbitrary partition of its edges (here presented as colors black and gray) induces a well defined closed oriented 3-manifold. Moreover each such a manifold is induced by a blink (in fact, by infinite blinks). An *n-small* is a closed, orientable, and prime 3-manifold is a manifold induced by a blink with at most n edges. Relative to [3] the blinks of next theorem have receive two additions, the representative blinks $U[1563]$ and $U[2165]$. This is because the $hgqi$ -classes 9_{126} and 9_{199} of [3] split into two topological classes. The new content of the present work is to prove that the splittings indeed take place.

We observe that the blinks are enlarged in the appendix, showing them together with the corresponding blackboard framed links. The notation n_i attached to each blink below, is the name of its homeomorphism class, not merely its $hgqi$ -class, as in [3].

*2010 Mathematics Subject Classification: 57M25 and 57Q15 (primary), 57M27 and 57M15 (secondary)

This paper establishes the following theorem:

(1.1) Theorem. *Let M^3 be a closed, oriented and prime 3-manifold induced by a blink with at most 9 edges. Then M^3 is homeomorphic to exactly one of the 3-manifolds induced by the 489 blinks below. Moreover all of these are pairwise non-homeomorphic.*

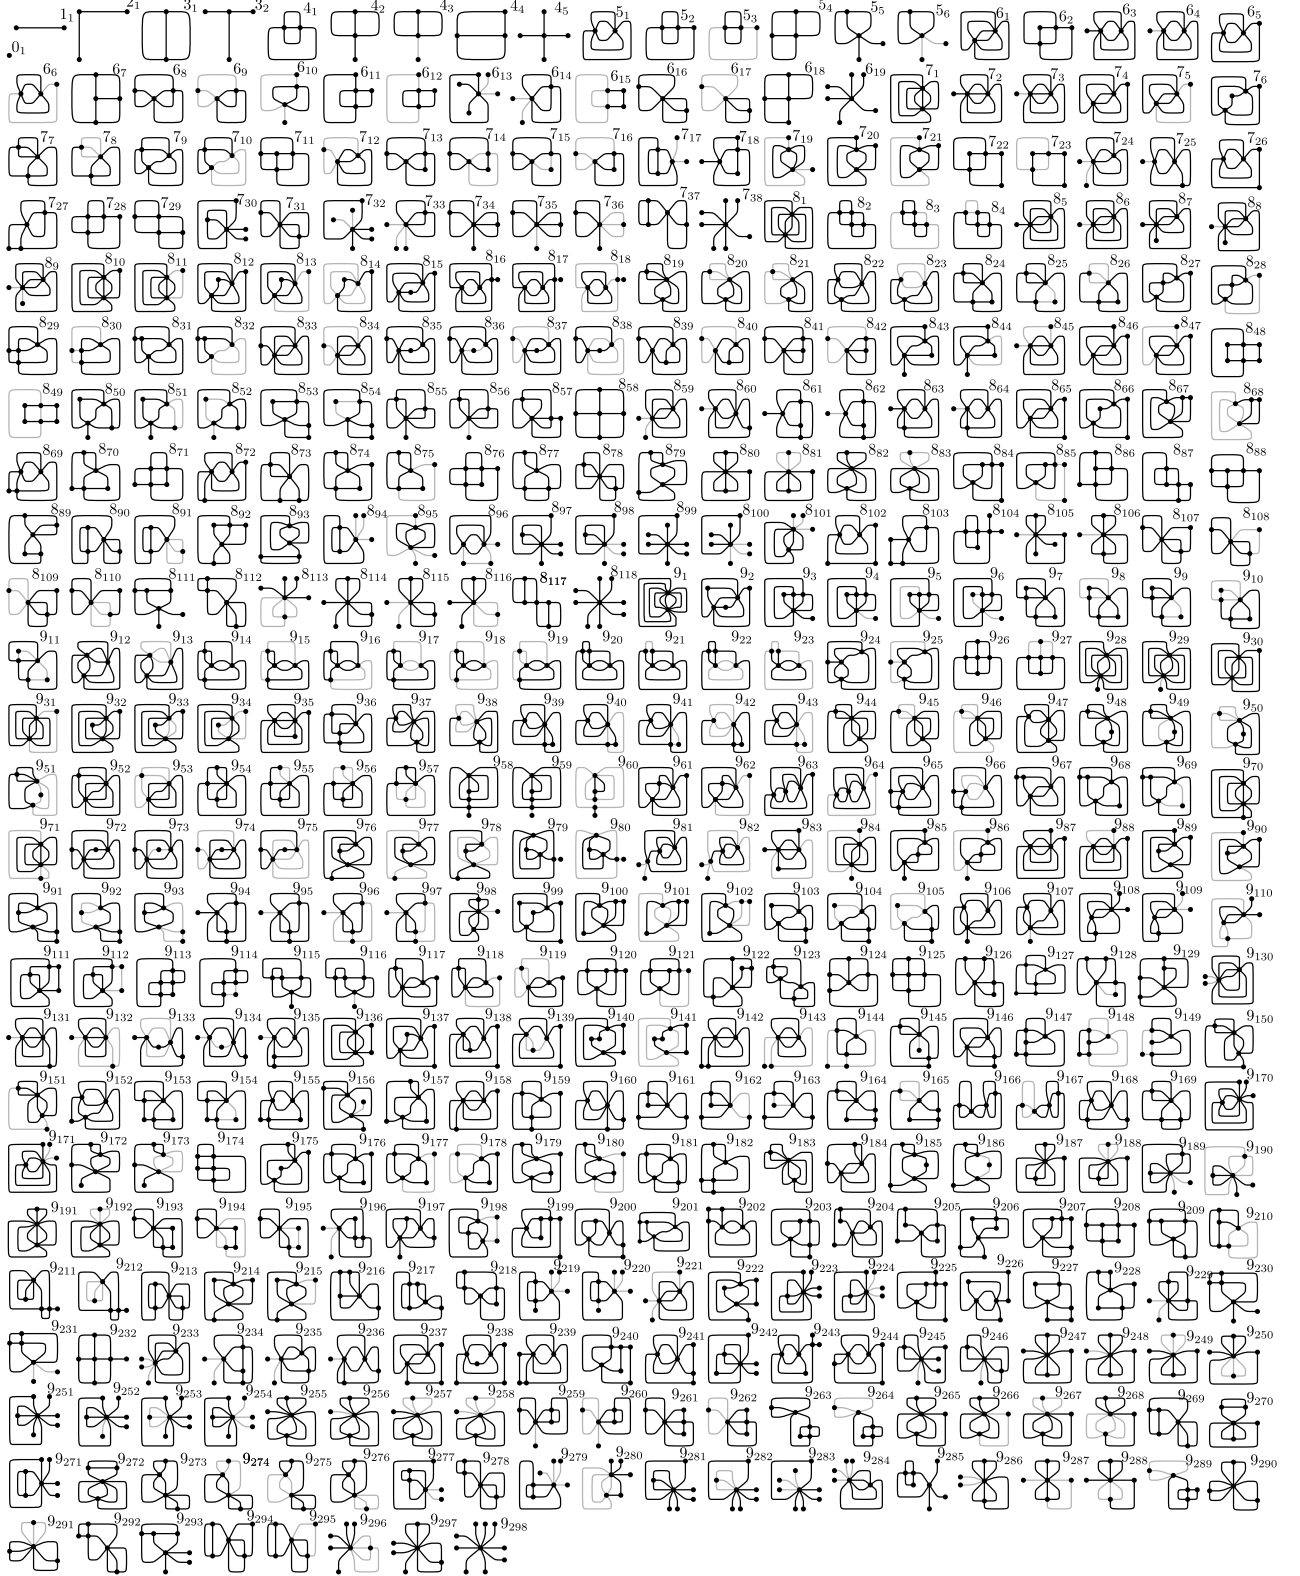

Proof. The proof follows from L.Lins' thesis and from the discussion about the lengths of the smallest

2 The resolution of the doubts left in L. Lins' thesis

The topological classification of the 9-small spaces was nearly completed in [3]. This work develops a theory for generating a distinguished set of blinks named U_n and indexed lexicographically, $U_n[i]$ is the i -th such blink. The relevance of U_n is that it misses no closed, orientable, prime and irreducible 3-manifold which is induced by a blink with n -edges.

The 3-manifolds of [3] are classified by homology and the quantum WRT_r -invariants $r = 3, \dots, u$, up to d decimal digits forming $hgqi_u^d$ -classes. Our algorithm for computing the WRT_r^d -invariants are based on the theory developed in [2].

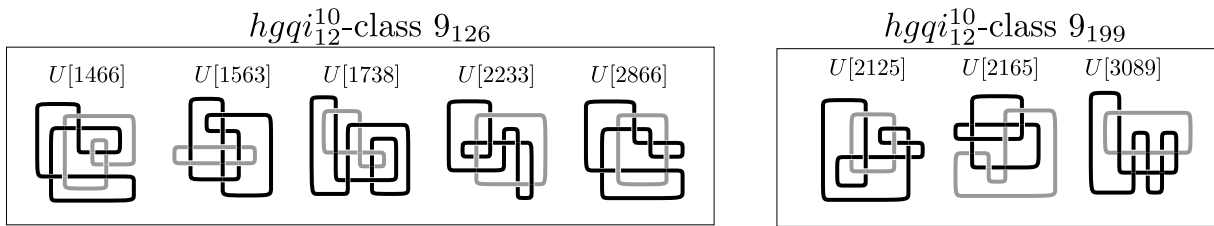


Figure 1: **Note's final challenge:** classify topologically 9_{126} and 9_{199} . Here, to classify has the following strict meaning: for each pair

After 6 years we have put our doubts as a Challenge to topologists and group algebraists, [5]. [6]


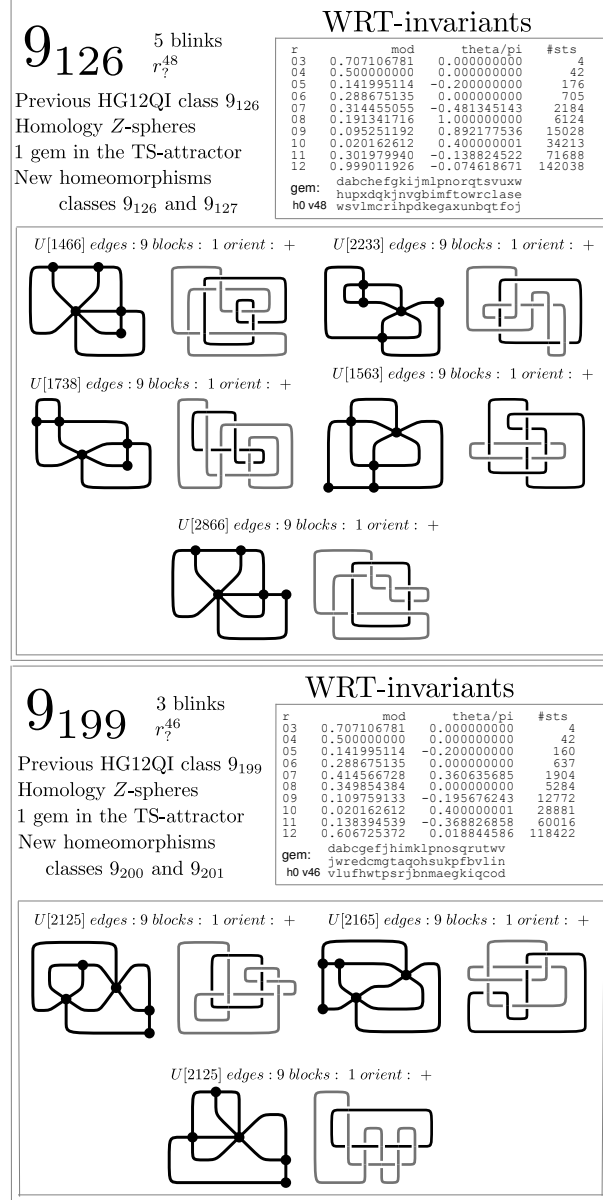



Figure 2: **Note's final challenge:** classify topologically 9₁₂₆ and 9₁₉₉. Here, to classify has the following strict meaning: for each pair

3 Appendix: census (no misses, no duplicates) of 9-small 3-manifolds


Part 1/4 in terms of blinks:

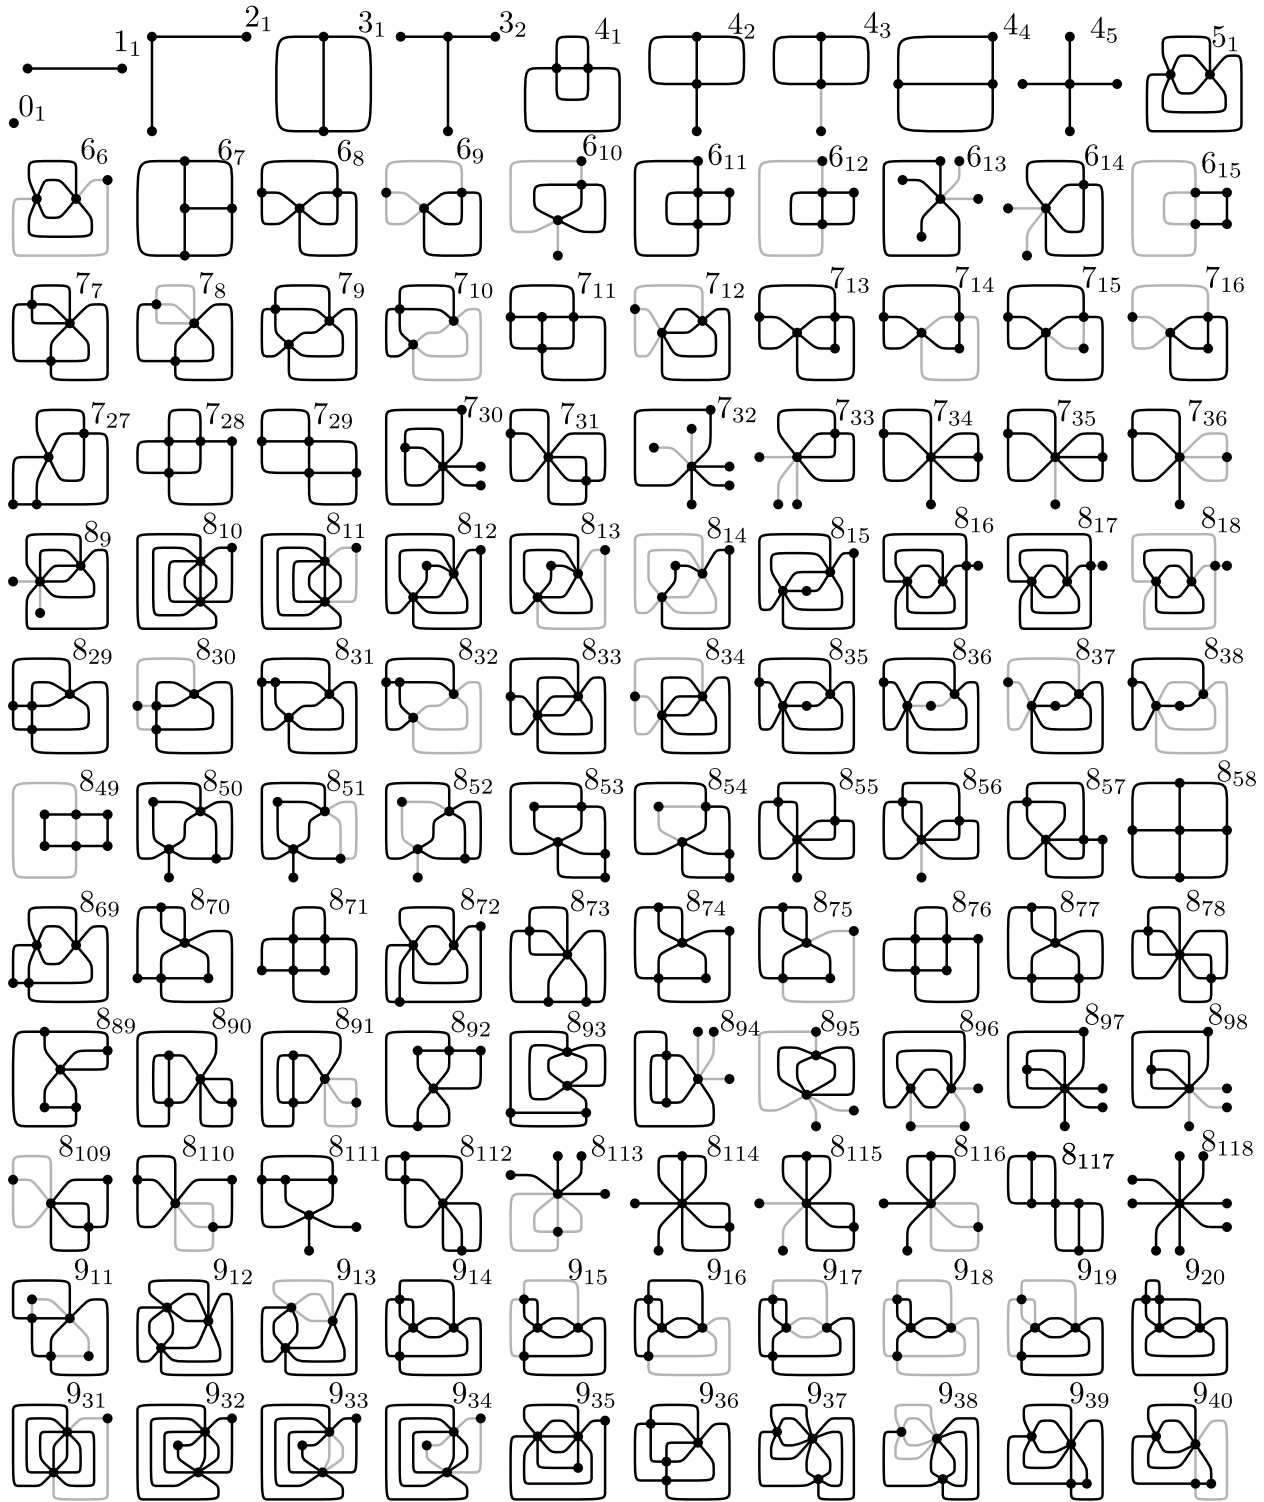


Part 1/4 in terms of blackboard framed links:

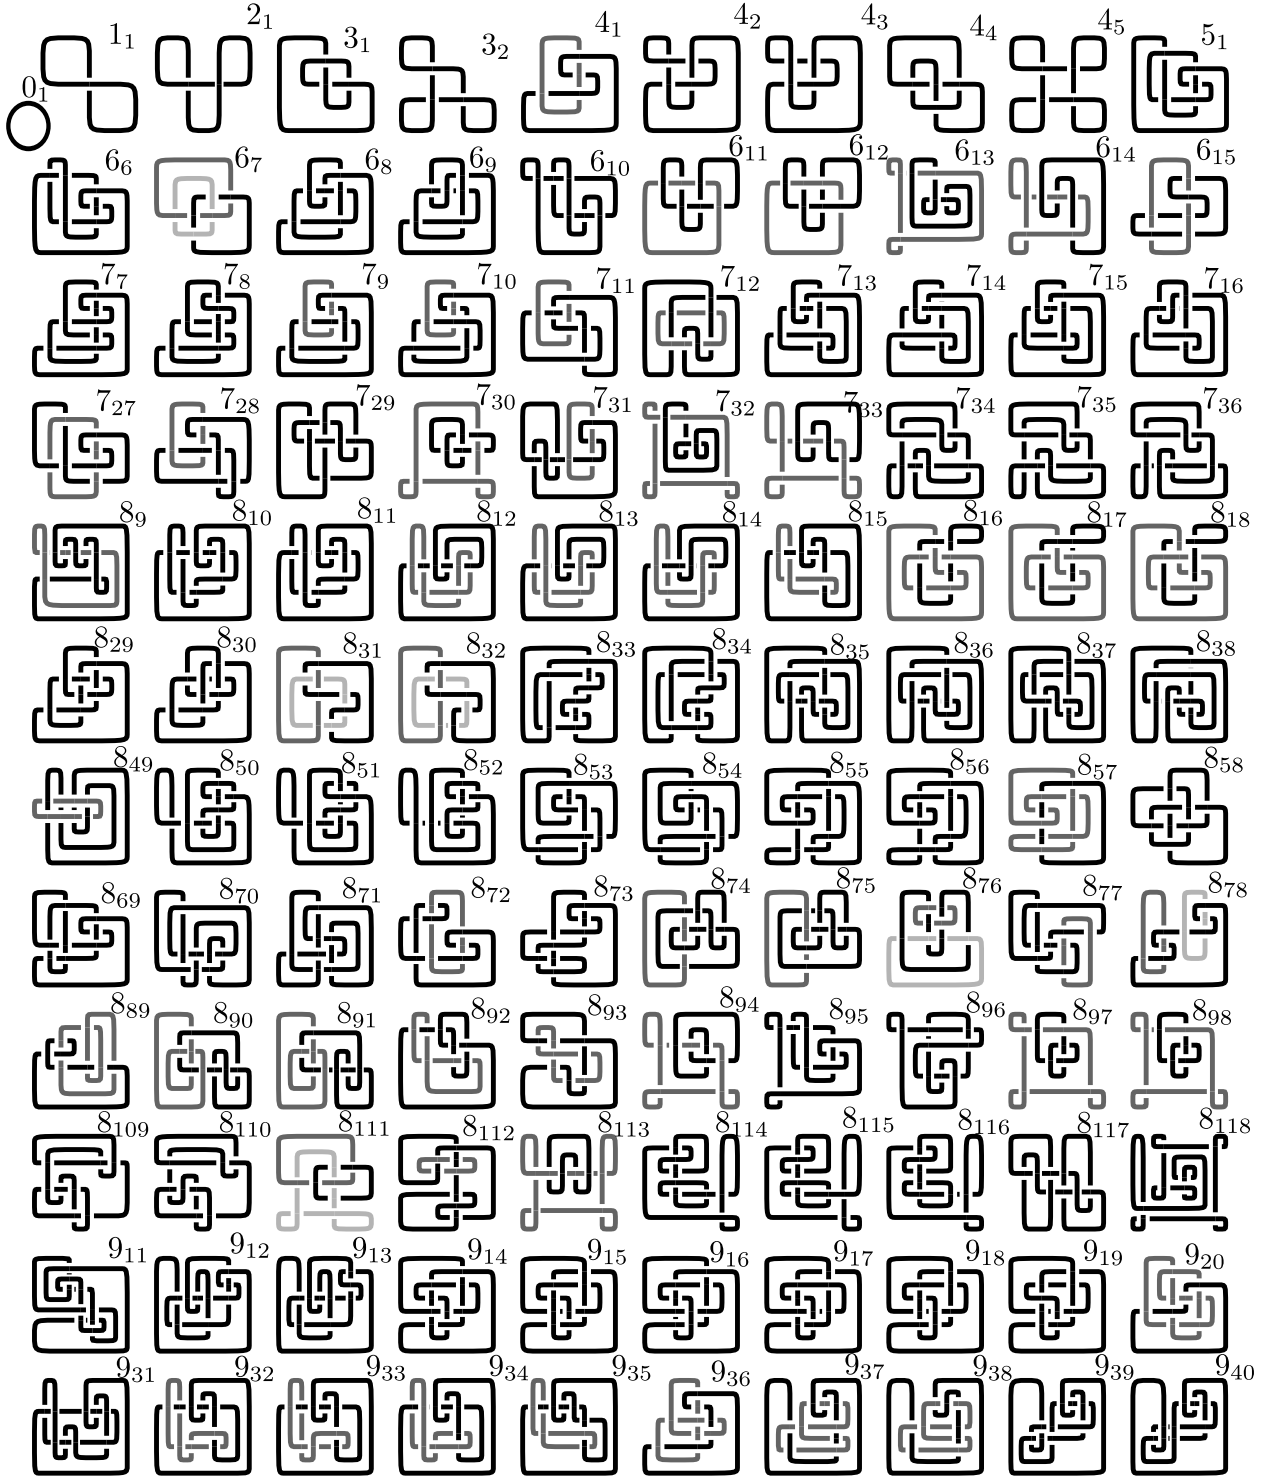


Part 2/4 in terms of blinks:

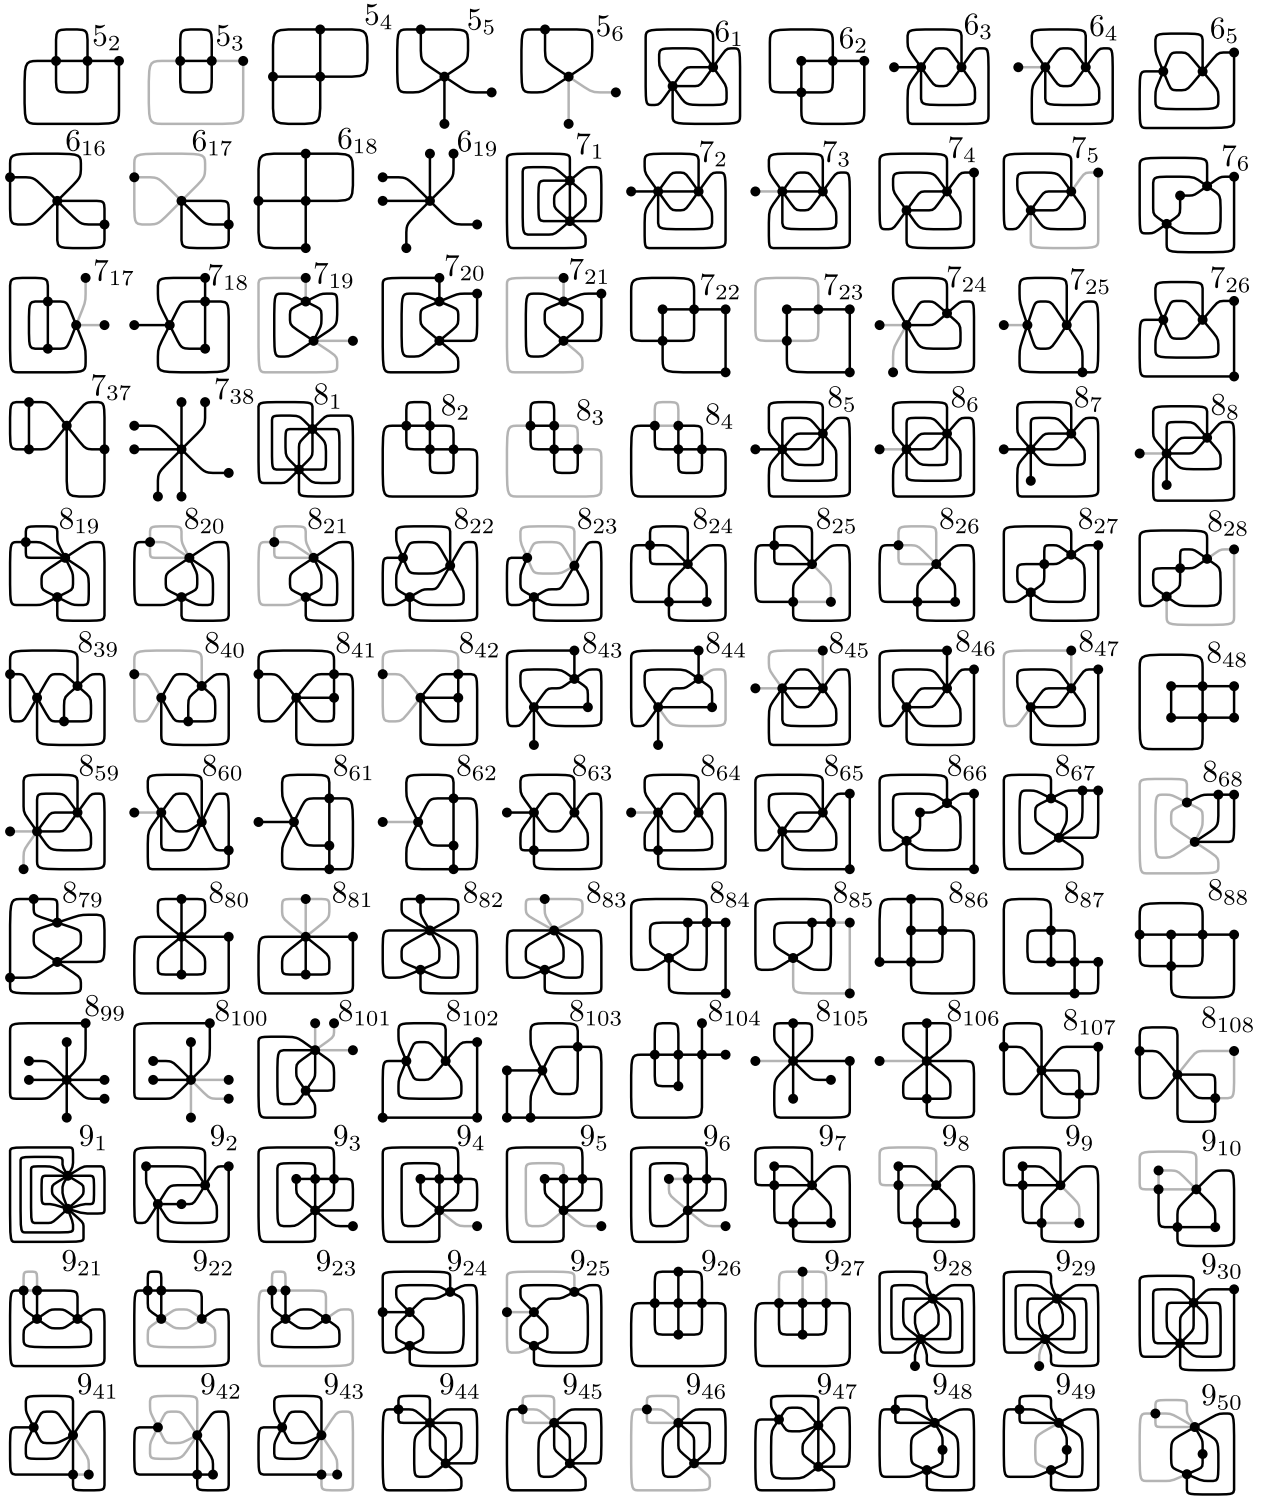


Part 2/4 in terms of blackboard framed links:

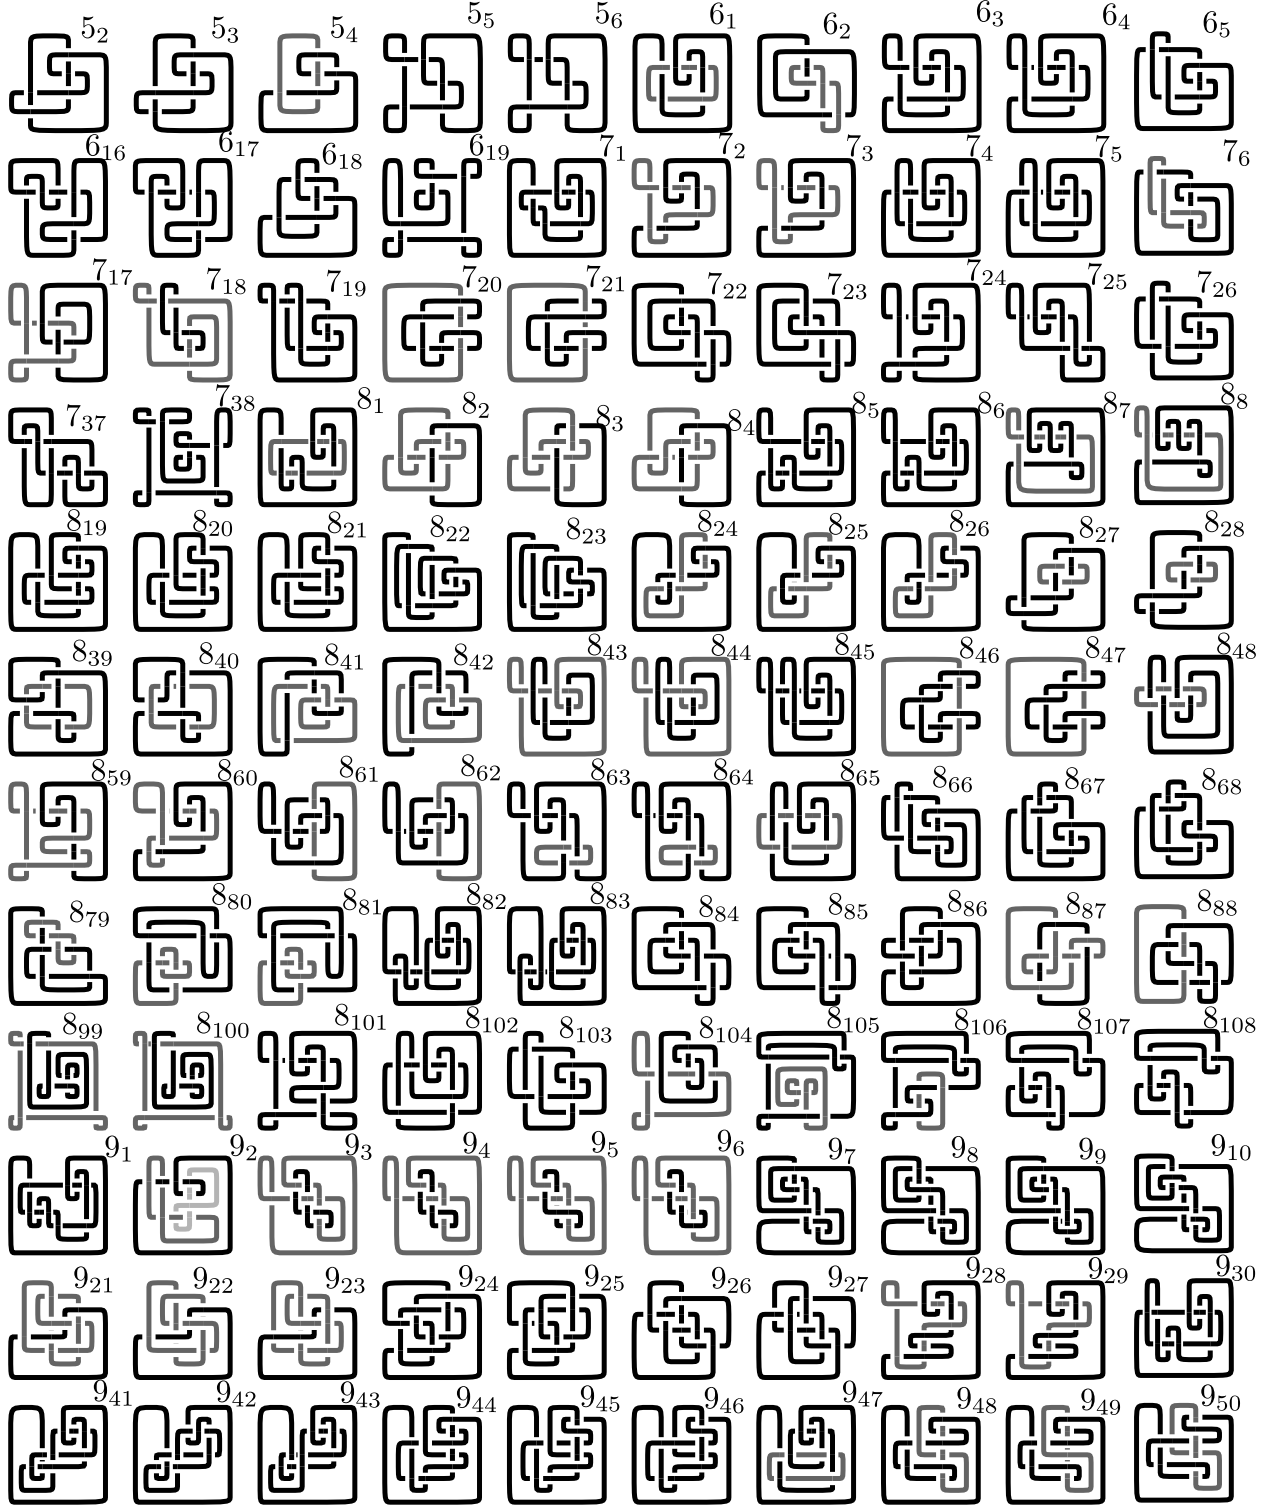


Part 3/4 in terms of blinks:

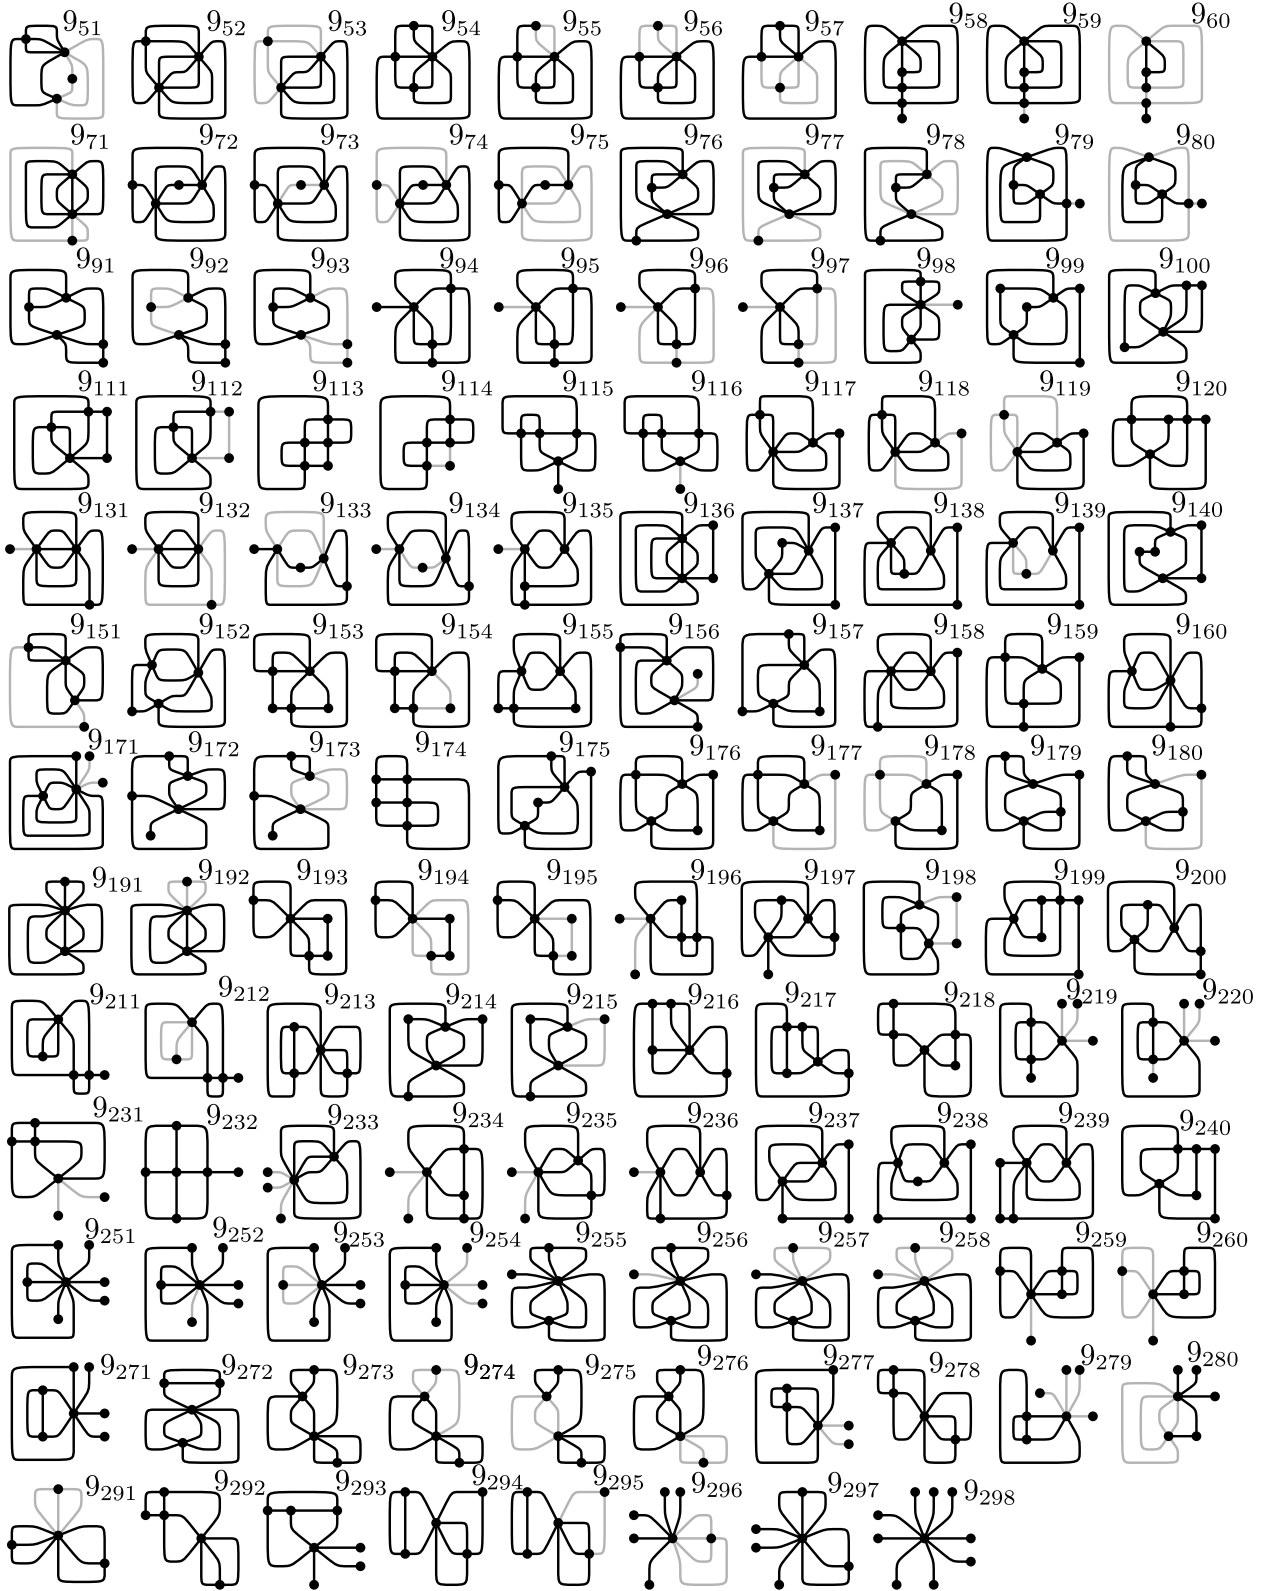


Part 3/4 in terms of blackboard framed links:

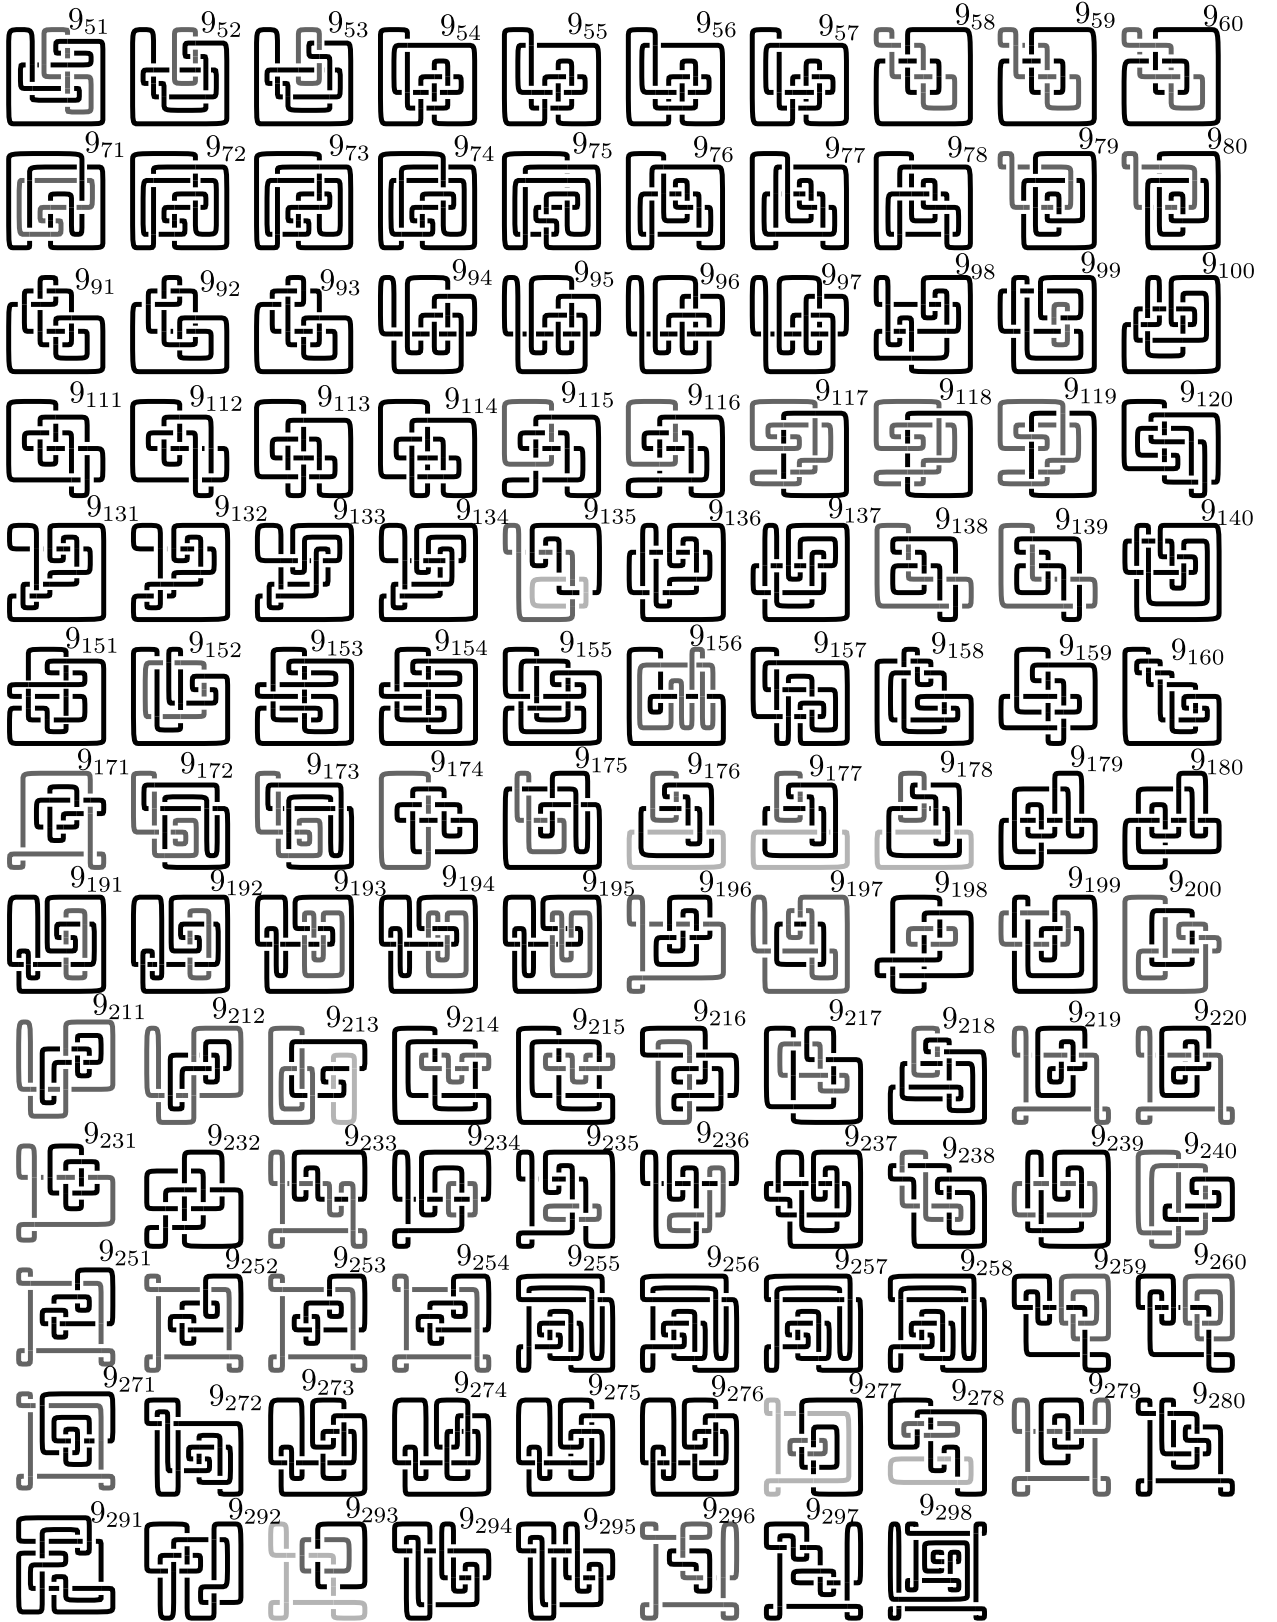

Part 4/4 in terms of blinks:

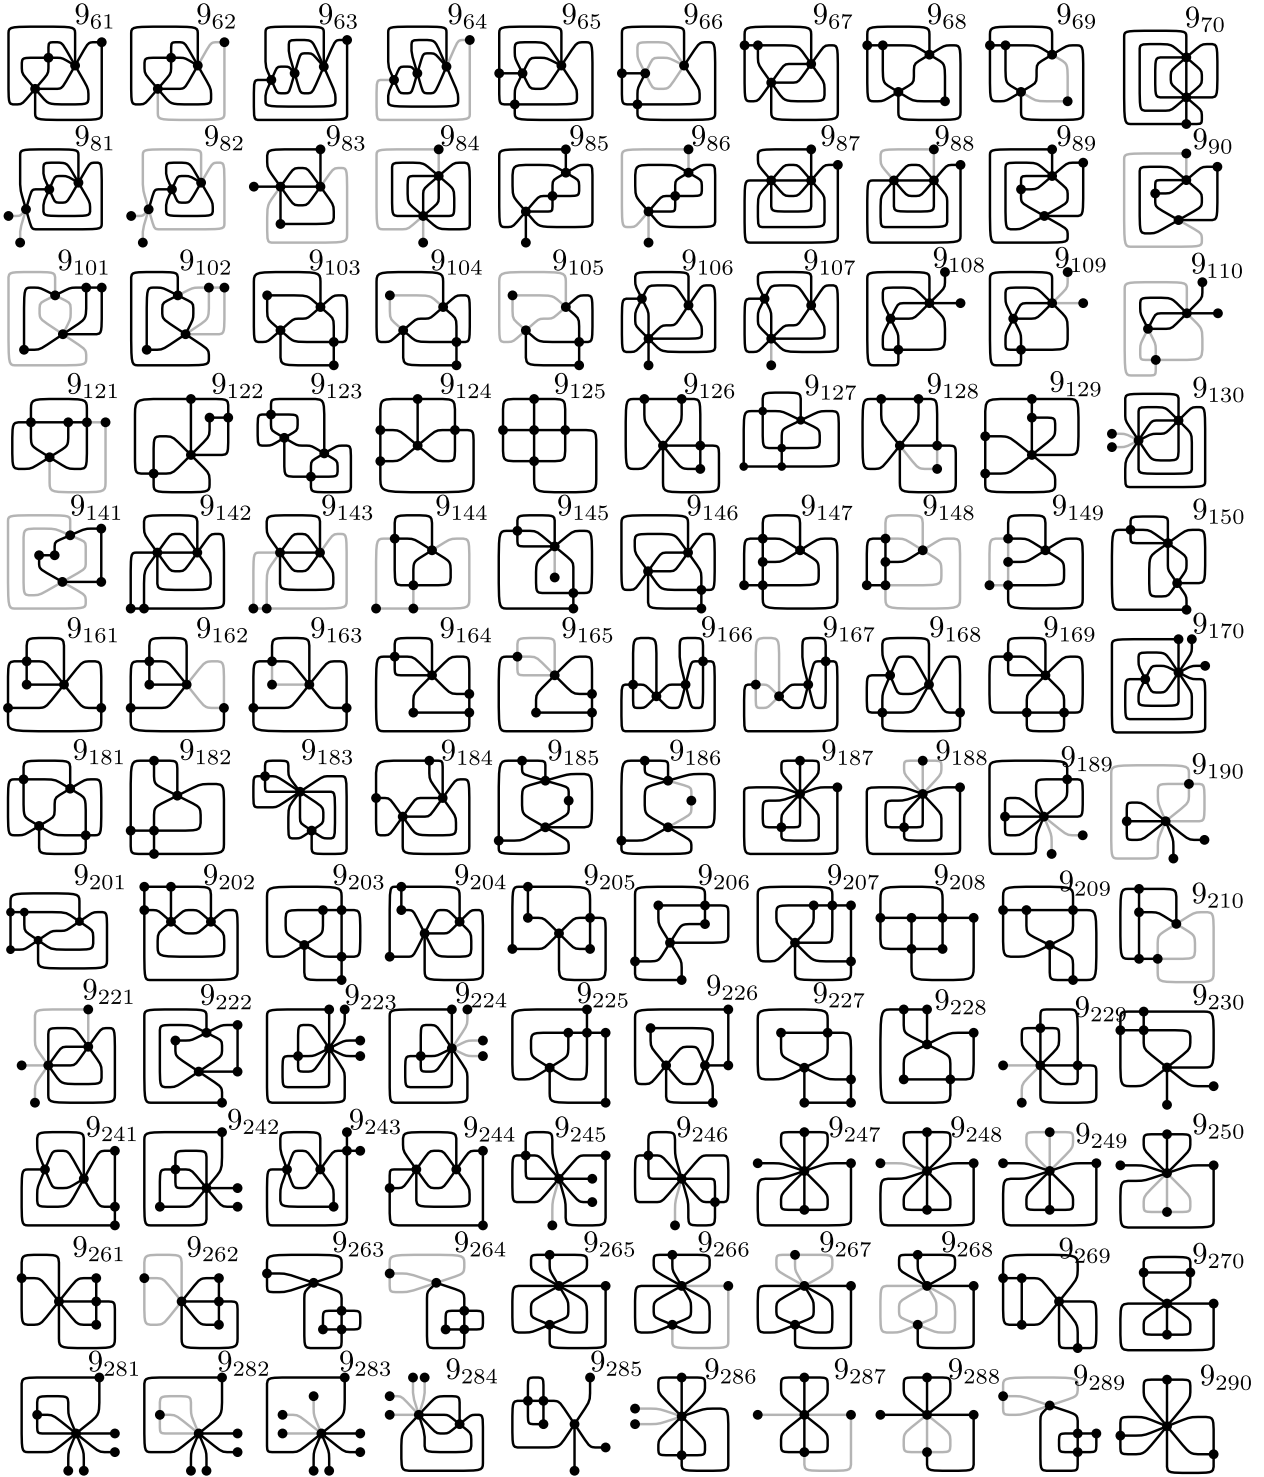

Part 4/4 in terms of blackboard framed links:

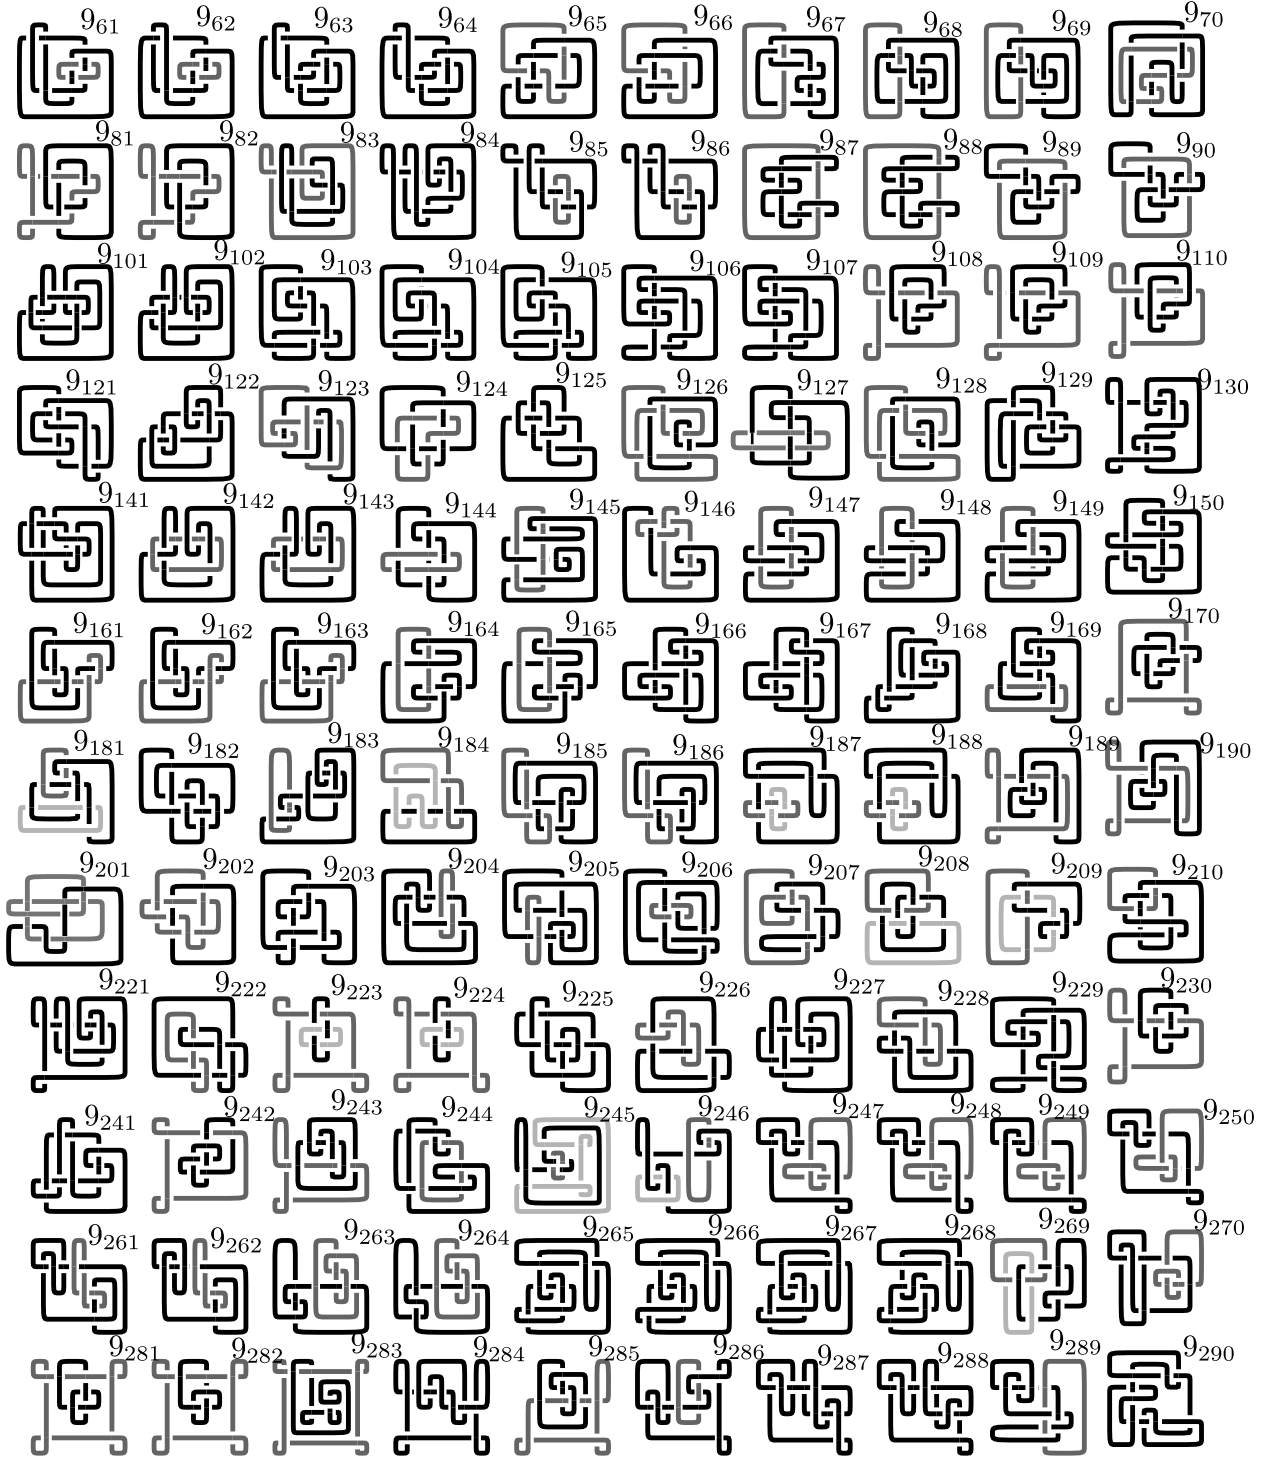

4 Definition of Gem

For completeness we briefly recall the basic definitions of gem theory, leading to its definition, [4]. A 4-graph G is a finite bipartite 4-regular graph whose edges are partitioned into 4 colors, 0,1,2, and 3, so that at each vertex there is an edge of each color, a proper edge-coloration, [1]. For each $i \in \{0, 1, 2, 3\}$, let E_i denote the set of i -colored edges of G . A $\{j, k\}$ -residue in a 4-graph G is a connected component of the subgraph induced by $E_j \cup E_k$. A 2-residue is a $\{j, k\}$ -residue, for some distinct colors j and k . A *gem* is a 4-graph G such that for each color i , $G \setminus E_i$ can be embedded in the plane such that the boundary of each face is a 2-residue. From a gem there exists a straightforward algorithm to obtain a closed orientable 3-manifold, in two different, dual ways. Every such a manifold is obtainable in this way. An unnecessary big gem is obtained from a triangulation T for a manifold by taking the dual of the barycentric subdivision of T . Here the colors corresponds to the dimensions. Doing simplifications in the gem completely destroys this correspondence.

5 Conclusion

A closed orientable 3-manifold is denoted n -small if it is induced by surgery on a blackboard framed link with at most n crossings. Our bet is that both pairs of 3-manifolds in the 2 first sections of this short note are not homeomorphic. This would mean that the 9-small manifolds are completely classified and that the combinatorial dynamics of Chapter 4 in [4] based on TS -moves which leads to a (small, in the case of hyperbolic 3-manifolds) number of minimal gems, named the *attractor of the 3-manifold* is successful. This induces an efficient algorithm which is capable of classifying topologically all the 3-manifolds given as a blackboard framed link with up to (so far) 9 crossings and maintains live the two Conjectures of page 15 of [4]: the TS - and u^n -moves yield an efficient algorithm to classify n -small 3-manifolds by explicitly displaying homeomorphisms, whenever they exist.

References

- [1] J.A. Bondy and U.S.R. Murty. *Graph theory with applications*. Macmillan London, 1976.
- [2] L.H. Kauffman and S. Lins. Temperley-Lieb Recoupling Theory and Invariants of 3-manifolds. *Annals of Mathematical Studies, Princeton University Press*, 134:1–296, 1994.
- [3] L.D. Lins. Blink: a language to view, recognize, classify and manipulate 3D-spaces. *Arxiv preprint math/0702057*, 2007.
- [4] S. Lins. *Gems, Computers, and Attractors for 3-Manifolds*. World Scientific, 1995.
- [5] S. L. Lins and L. D. Lins. A challenge to 3-manifold topologists and group algebraists. *arXiv:1213.5964v4 [math.GT]*, 2013.
- [6] J. Weeks. SnapPea: a computer program for creating and studying hyperbolic 3-manifolds, 2001.

Sóstenes L. Lins
Centro de Informática, UFPE
Av. Jornalista Anibal Fernandes s/n
Recife, PE 50740-560
Brazil
sostenes@cin.ufpe.br

Lauro D. Lins
AT&T Labs Research
180 Park Avenue
Florham Park, NJ 07932
USA
llins@research.att.com