

# QDE.

## A SYSTEM FOR COMPOSING REAL TIME COMPUTER GRAPHICS.

MTE7103 — MASTER THESIS

Major: Computer science  
Author: Sven Osterwalder<sup>1</sup>  
Advisor: Prof. Claude Fuhrer<sup>2</sup>  
Expert: Dr. Eric Dubuis<sup>3</sup>  
Date: N/A  
Version: N/A



This work is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License.



Berne University of Applied Sciences

<sup>1</sup> sven.osterwalder@students.bfh.ch

<sup>2</sup> claude.fuhrer@bfh.ch

<sup>3</sup> eric.dubuis@comet.ch



# *Abstract*

Provide correct abstract.

A highly optimized rendering algorithm based on ray tracing is presented. It outperforms the classical ray tracing methods and allows the rendering of ray traced scenes in real-time on the GPU. The classical approach for modelling scenes using triangulated meshes is replaced by mathematical descriptions based on signed distance functions. The effectiveness of the algorithm is demonstrated using a prototype application which renders a simple scene in real-time.

# *Contents*

<i>Introduction</i>	6
<i>Administrative aspects</i>	10
<i>Fundamentals</i>	13
<i>Methodologies</i>	22
<i>Implementation</i>	34
<i>Discussion and conclusion</i>	47
<i>Implementation</i>	49
<i>Editor</i>	52
<i>Scene graph</i>	60
<i>Logging</i>	83
<i>Node graph</i>	87
<i>Scene view</i>	100
<i>Nodes</i>	109

## List of Figures

1	Schedule of the project. The subtitle displays calendar weeks.	12
2	A mock up of the editor application showing its components. 1: Scene tree. 2: Node graph. 3: Parameter view. 4: Rendering view. 5: Time line.	15
3	Domain model of the editor component.	16
4	Domain model of the player component.	17
5	Class diagram of the editor component.	18
6	Class diagram of the player component.	19
7	The rendering equation as defined by James “Jim” Kajiya.	19
8	Illustration of the sphere tracing algorithm. Ray $e$ hits no objects until reaching the horizon. Rays $f, g$ and $h$ hit the solid <i>poly1</i> .	20
9	An abstract implementation of the sphere tracing algorithm. Algorithm in pseudo code, after [3][S. 531, Fig. 1]	21
10	The phong illumination model as defined by Phong Bui-Tuong. Note that the emissive term was left out intentionally as it is mainly used to achieve special effects.	21
11	Illustration showing the processes of <i>weaving</i> and <i>tangling</i> documents from a input document. [12]	23
12	Declaration of the node definition class.	26
13	Constructor of the node definition class. Note that the identifier is given by a corresponding parameter. Identifiers have to be generated when defining a node using an external file.	27
14	Head of the method that loads node definitions from external JSON files.	28
15	Check whether the path containing the node definition files exist or not.	28
16	When the directory containing the node definitions exists, files matching the pattern <i>*.node</i> are searched.	28
17	When files (possibly) containing node definition files are found, they are tried being loaded. When no such files are found, a warning message is being logged.	29
18	Loading and parsing of the node definitions found within the folder containing (possibly) node definition files. If a node definition cannot be loaded or parsed, <i>None</i> is being returned.	29

19	A view model, based on the domain model, for the node definition is being created. Both models are then stored internally and the signal, that a node definition was loaded is being emitted.	30
20	Output a warning when the path containing the node definition files does not exist.	31
21	Output a warning when no node definitions are being found.	31
22	Phases of the water fall methodology. [17, p. 16]	32
23	Phases of iterative development. [17, p. 16]	32
24	Iterations in the extreme programming methodology and phases of an iteration. [17, p. 18]	33
25	Components of the used pattern and their communication.	35
26	Qt's model/view pattern. [21]	36
27	The observer pattern. [18]	38
28	An example of an observer being registered to a signal.	38
29	An example of emitting a signal including a value.	39
30	An example of emitting a signal including a value and a reference to an object.	39
31	The implemented editor component.	40
32	Teh cap.	42
33	Teh cap 2.	43
34	Component diagram of the editor component.	44
35	Entity relationship diagram of the editor component.	45
36	Component diagram of the scene tree component.	45
37	Entity relationship diagram of the scene tree component.	46
38	Main entry point of the editor application.	
	Editor → Main entry point	54
39	Main application class of the editor application.	
	Editor → Application	54
40	Constructor of the editor application class.	
	Editor → Application → Constructor	55
41	Setting up the internals for the main application class.	
	Editor → Application → Constructor	55
42	Main window class of the editor application.	
	Editor → Main window	56
43	Definition of the do_close signal of the main window class.	
	Editor → Main window → Signals	56
44	Definition of methods for the main window class.	
	Editor → Main window → Methods	57

45 Setting up of components for the main application class.

Editor → Main application → Constructor 57

46 Set up of the editor main window and its signals from within the main application.

Editor → Main application → Constructor 58

47 Set up of the user interface of the editor's main window.

Editor → Main window → Methods 59

48 Definition of the scene model class, which acts as a base class for scene instances within the whole application.

Editor → Scene model 60

49 The constructor of the scene model.

Editor → Scene model → Constructor 61

50 Definition of the scene graph view model class, which corresponds to an entry within the scene graph.

Editor → Scene graph view model 61

51 The constructor of the scene graph view model.

Editor → Scene graph view model → Constructor 62

52 The scene graph controller, inheriting from `QAbstractItemModel`.

Editor → Scene graph controller 63

53 Constructor of the scene graph controller.

Editor → Scene graph controller → Constructor 63

54 A method to add the root node from within the scene graph controller.

Editor → Scene graph controller → Methods 64

55 The root node of the scene graph being added by the main application.

Editor → Main application → Constructor 65

56 Initialization of the header data and the root node of the scene graph.

Editor → Scene graph controller → Constructor 65

57 Implementation of `QAbstractItemModel`'s `index` method for the scene graph controller.

Editor → Scene graph controller → Methods 66



58 Implementation of QAbstractItemModel's parent method for the scene graph controller.

Editor → Scene graph controller → Methods 67

59 Implementation of QAbstractItemModel's columnCount method for the scene graph controller.

Editor → Scene graph controller → Methods 68

60 Implementation of QAbstractItemModel's rowCount method for the scene graph controller.

Editor → Scene graph controller → Methods 69

61 Implementation of QAbstractItemModel's data method for the scene graph controller.

Editor → Scene graph controller → Methods 70

62 Implementation of QAbstractItemModel's headerData method for the scene graph controller.

Editor → Scene graph controller → Methods 71

63 Scene graph view models hold references to the nodes they contain.

Editor → Scene graph view model → Constructor 71

64 The number of (graphical) nodes which a scene graph view model contains implemented as a property.

Editor → Scene graph view model → Methods 72

65 The scene graph controller gets initialized within the main application.

Editor → Main application → Constructor 72

66 Scene graph view, based on Qt's QTreeView.

Editor → Scene graph view 73

67 Constructor of the scene graph view.

Editor → Scene graph view → Constructor 73

68 The scene graph controller is being set as the scene graph view's model.

Editor → Main application → Constructor 73

69 Slot which is called when the selection within the scene graph view is changed.

Editor → Scene graph view → Slots 74

- 70 The setModel method, provided by QTreeView's interface, which is begin overwritten for being able to trigger the on\_tree\_item\_selected slot whenever the selection in the scene graph view has changed.

Editor → Scene graph view → Methods 75

- 71 The signal that is being emitted when a scene within the scene graph view was selected. Note that the signal includes the model index of the selected item.

Editor → Scene graph view → Signals 76

- 72 Signals that get emitted whenever a scene is added or removed.

Editor → Scene graph view → Signals 76

- 73 Introduction of an action for adding a new scene, which reacts upon the "A" key being pressed on the keyboard.

Editor → Scene graph view → Constructor 77

- 74 Introduction of an action for removing a new scene, which reacts upon the "delete" key being pressed on the keyboard.

Editor → Scene graph view → Constructor 77

- 75 Slots which emit themselves a signal whenever a scene is added from the scene graph or removed respectively.

Editor → Scene graph view → Slots 78

- 76 Slots to handle adding, removing and selecting of tree items within the scene graph. The slots take a model index as argument (coming from QAbstractItemModel). This is analogous to the scene graph view.

Editor → Scene graph controller → Slots 79

- 77 Method for adding new scenes in terms of a domain model as well as a scene graph view model.

Editor → Scene graph controller → Methods 80

- 78 Method for removing scenes. Note that this is mainly done by getting the object related to the given model index and setting the parent of that object to a nil object.

Editor → Scene graph controller → Methods 81

- 79 The scene graph view's signals for adding, removing and selecting a scene are connected to the corresponding slots from the scene graph controller. Or, in other words, the controller/data reacts to actions invoked by the user interface.

Editor → Main application → Constructor 81



- 80 Signals emitted by the scene graph controller, in terms of domain models, whenever a scene is added, removed or selected.

Editor → Scene graph controller → Signals 82

- 81 A method for setting up the logging, provided by the main application. If there exists an external configuration file for logging, this file is used for configuring the logging facility. Otherwise the standard configuration is used.

Editor → Main application → Methods 84

- 82 Set up of the logging from within the main application class.

Editor → Main application → Constructor 84

- 83 An example of how to use the logging decorator in a class. 86  
84 The scene graph view logs a corresponding message whenever an item is added to or removed from the scene graph. Note, that this logging only happens in *debug* mode.

Editor → Scene graph view → Methods 86

- 85 Connections between nodes in EBNF notation. 90  
86 Types of a node wrapped in a class, implemented as an enumerator.

Editor → Types → Node type 92

- 87 The atomic type class which builds the basis for node parameters. Note that the type of an atomic type is defined by the before implemented node type.

Editor → Parameters → Atomic type 92

- 88 A class which creates and holds all atomic types of the editor. Note that at this point only an atomic type for generic nodes is being created.

Editor → Parameters → Atomic types 93

- 89 Definition of the node (domain) model.

Editor → Node model 94

- 90 Constructor of the node (domain) model.

Editor → Node model → Constructor 94

- 91 Definition of the node view model.

Editor → Node view model 95

- 92 Constructor of the node view model.

Editor → Node view model → Constructor 96

- 93 The type and name attributes of the node view model as properties.

Editor → Node view model → Methods 97

- 94 The type attributes of the node domain model as property.

Editor → Node (domain) model → Methods 97

- 95 The paint method of the node view model. When a pixmap is being created, it gets cached immediately, based on its type, status and its selection status. If a pixmap already existing for a given tripe, type, status and selection, that pixmap is used.

Editor → Node view model → Methods 98

- 96 The cache key is being initialized within a node's constructor.

Editor → Node view model → Constructor 98

- 97 A method which creates a cache key based on the type, the status and the state of selection of a node.

Editor → Node view model → Methods 98

- 98 The status of the node is being initialized within the node's constructor.

Editor → Node domain model → Constructor 98

- 99 The status of a node view model is obtained by accessing the domain model's status.

Editor → Node domain model → Methods 99

- 100 A cache key is being created when no cache key for the given attributes is found.

Editor → Node view model → Methods → Paint 99

- 101 Based on the created or retrieved cache key a pixmap is being searched for.

Editor → Node view model → Methods → Paint 99

- 102 If no pixmap is found, a new pixmap is being created for the provided key and stored.

Editor → Node view model → Methods → Paint 99

- 103 Definition of the scene view component, derived from the QGraphicsView component.

Editor → Scene view 100

- 104 Constructor of the scene view component.

Editor → Scene view → Constructor 100

105 The scene view component is being set up by the main window.

Editor → Main window → Methods → Setup UI 101

106 The scene view component is being added to the main window's vertical splitter.

Editor → Main window → Methods → Setup UI 101

107 Whenever a scene is selected in the scene graph, the scene graph controller informs the scene controller about that selection.

Editor → Main application → Constructor 102

108 Whenever a scene is added to or removed from the scene graph, the scene graph controller informs the scene controller about those actions.

Editor → Main application → Constructor 102

109 Definition of the scene controller.

Editor → Scene controller 103

110 The scene controller being set up by the main application.

Editor → Main application → Constructor 103

111 Definition of the scene view model.

Editor → Scene view model 103

112 Constructor of the scene view model component.

Editor → Scene view model → Constructor 104

113 The method to draw the background of a scene. It is used to draw the identifier of a scene at the top left position of it.

Editor → Scene view model → Methods 105

114 Constructor of the scene controller. As can be seen, the scene controller holds all scenes (as a dictionary) and keeps track of the currently active scene.

Editor → Scene controller → Constructor 105

115 The slot which gets triggered whenever a new scene is added via the scene graph.

Editor → Scene controller → Slots 106

116 The slot which gets triggered whenever a scene is removed via the scene graph.

Editor → Scene controller → Slots 106

117

Editor → Scene controller → Slots 107

- 118 The signal which is emitted when the scene has been changed by the scene graph controller and that scene is known to the scene controller.

Editor → Scene controller → Signals 107

- 119 The slot of the scene view, which gets triggered whenever the scene changes. The scene interface, provided by QGraphicsView, is then invalidated to trigger the rendering of the scene view.

Editor → Scene view → Slots 107

- 120 The main application connects the scene view's signal that the scene was changed with the corresponding slot of the scene controller.

Editor → Main application → Constructor 108

- 121 Definition of a node for an implicitly defined sphere.

Implicit sphere node 109

- 122 Radius of the implicit sphere node as input.

Implicit sphere node → Inputs 110

- 123 The output of the implicit sphere node, which is of the atomic type implicit.

Implicit sphere node → Outputs 110

- 124 Implementation of the sphere in the OpenGL Shading Language (GLSL).

Implicit sphere node → Definitions 111

- 125 The position of the implicit sphere node as invocation.

Implicit sphere node → Invocations 111

- 126 The "body" of the implicit sphere node as node part.

Implicit sphere node → Parts 112

- 127 Mapping of the connections of the implicit sphere node. Note that the inputs and outputs are internal, therefore the node references are 0.

Implicit sphere node → Connections 113

- 128 Definition of the node controller.

Editor → Node controller 113

- 129 Constructor of the node controller.

Editor → Node controller → Constructor 114

130 A method that loads node definitions from external files from within the node controller.

Editor → Node controller → Methods 114

131 Definition of a part of a node definition.

Editor → Node definition part 115

132 Constructor of the node definition part.

Editor → Node definition part 115

133 The node controller keeps track of node definition parts.

Editor → Node controller → Constructor 116

134 Helper function which creates a value function from the given value.

Editor → Node domain model → Module methods 116

135 Definition of the value function class which is used within nodes.

Editor → Value function 117

136 Definition of the default value function class, which is derived from the value function class.

Editor → Default value function 118

137 The node part class.

Editor → Node part 119

138 Constructor of the node part class.

Editor → Node part 119

139 Definition of the function class which is used in parts of nodes.

Editor → Function 120

140 A class which holds the possible values of a state change of a node part.

Editor → State change 121

141 The node controller provides the atomic types which build the basis of the part of a node.

Editor → Node controller → Methods → Load nodes 121

142 Definition of the node definition class, which represents the definition of a node.

Editor → Node definition 122

143 Constructor of the node definition class.

Editor → Node definition → Constructor 122

144 The node controller holds a dictionary containing node definitions.

Editor → Node controller → Constructor 123

145 The node controller loads and parses node definition files from the file system.

Editor → Node controller → Methods → Load nodes 124

146 A method which tries to load a node definition from the file system using the provided file name.

Editor → Node controller → Methods → Load node definition from file name 125

147 Whenever a new node definition gets loaded, the node controller emits a corresponding signal containing the node view model for the loaded node definition.

Editor → Node controller → Methods → Load node definitions 126

148 A class method of the JSON module, which loads a node definition from a file handle (pointing to a JSON file containing a node definition).

Editor → JSON → Methods → Load node definition 127

149 A class method of the JSON module, which builds the input of a node definition from a file handle (pointing to a JSON file containing a node definition).

Editor → JSON → Methods → Build node definition input 128

150 A method of the node controller, which returns a node definition part by a provided identifier. If no node definition part is found for the given identifier, a new node definition part is created.

Editor → Node controller → Methods → Get node definition part 129

151 Method of the parameter module, which creates an object of a specific value instance based on the provided type of the value.

Editor → Parameter → Create value 130

152 Interface as basis for the value specific instances.

Editor → Parameter → Value interface 131

153 Class which provides an interface to the value of the value specific instances.

Editor → Parameter → Value 131

- 154 Implementation of the float value type.
- Editor → Parameter → FloatValue 132
- 155 Implementation of the scene value type.
- Editor → Parameter → SceneValue 132
- 156 Implementation of the input of the definition of a node.
- Editor → Node definition input 133
- 157 Constructor of the input of the definition of a node.
- Editor → Node definition input → Constructor 133
- 158 Function that creates a default value function based on a provided value.
- Editor → Node → Methods → Create default value function 134
- 159 A class method of the JSON module, which builds the output of a node definition from a file handle (pointing to a JSON file containing a node definition).
- Editor → JSON → Methods → Build node definition output 135
- 160 Implementation of the output of the definition of a node.
- Editor → Node definition output 135
- 161 Constructor of the output of the definition of a node.
- Editor → Node definition input → Constructor 136
- 162 A class method of the JSON module, which builds the definition of a node from a file handle (pointing to a JSON file containing a node definition).
- Editor → JSON → Methods → Build node definition 136
- 163 A method of the node controller, which returns a node definition by a provided identifier. If no node definition is found for the given identifier, a new node definition is created by loading the definition from the file system.
- Editor → Node controller → Methods → Get node definition 137
- 164 The root node of the system is manually created by the node controller and is also a node definition.
- Editor → Node controller → Constructor 138
- 165 Methods which add a given output of a node definition to a node definition. The first method adds the output at the end of the list of outputs, the second adds the output at the given index.
- Editor → Node definition → Methods 139



166 Type property of a node definition. If the node definition uses outputs, the type is derived by its primary output. Otherwise a generic type is assumed.

Editor → Node definition → Methods 140

167 A class method of the JSON module, which builds a part of the definition of a node from a file handle (pointing to a JSON file containing a node definition).

Editor → JSON → Methods → Build node definition part 141

168 Instantiation of the node controller from within the main application.

Editor → Main application → Constructor 141

169 Loading of nodes is triggered by the main application right after instantiating the node controller.

Editor → Main application → Constructor 142

170 Definition of a dialog to add nodes to the currently active scene. The nodes are ordered in columns according to their type.

Editor → Add node dialog 142

171 Class representing column within the dialog to create new node instances.

Editor → Add node dialog → Column 143

172 The dialog for adding new node instances is initialized by the scene view.

Editor → Scene view → Constructor 143

173 The event method of the scene view is overwritten for being able to show the dialog for adding new instances of nodes when the tabulator key is pressed.

Editor → Scene view → Methods 144

## *List of Tables*

1	List of the involved persons.	10
2	List of deliverables.	11
3	Phases of the project.	11
4	Milestones of the project.	11
5	Description of the components of the program implemented.	14
6	Description of the sub components of the editor component.	15
7	Layers as envisaged during the conceptual phase and used for the program implemented.	16
8	Properties/attributes of the node class.	26
9	Description of the components of the used software design pattern. [19], [20]	35
10	Layers of the developed software.	37
11	Properties/attributes of a node definition.	41
12	Atomic types, that define a node (definition).	44
13	Components a node is composed of.	91

# *Introduction*

THE APPLICATION AREA OF COMPUTER GRAPHICS exists since the beginning of modern computing. Computer scientists have always strived to create realistic depictions of the observable reality.

OVER TIME VARIOUS APPROACHES for creating artificial images (the so called rendering) have evolved. One of these approaches is ray tracing. This was introduced in 1968 by Appel in the article "Some Techniques for Shading Machine Renderings of Solids" [1]. In 1980 this methods were improved by Whitted in his work "An Improved Illumination Model for Shaded Display" [2].

RAY TRACING CAPTIVATES through simplicity while providing a very high image quality, including perfect refractions and reflections of light. For a long time although, the approach was not efficient enough to deliver images in real time, which requires creating at least 25 rendered images (frames) per second. Otherwise, due to the human anatomy, the output is perceived as either still and jerky images or as a too slow animation.

SPHERE TRACING is a ray tracing approach introduced in 1994 by Hart in his work "Sphere Tracing: A Geometric Method for the Antialiased Ray Tracing of Implicit Surfaces" [3]. This approach is faster than the classical ray tracing approaches in its method of finding intersections between rays and objects.

GRAPHICS PROCESSING UNITS (GPUs) have evolved over time and have become exponentially more powerful in processing power. Since around 2009, GPUs are able to produce real time computer graphics using sphere tracing. While allowing ray tracing in real time on modern GPUs, sphere tracing has, however, a clear disadvantage. The de facto way of representing the surface of objects using triangle based meshes cannot be used directly. Instead, distance functions are used for modeling the surfaces as seen from any view point.

## *Purpose and conditions*

### *Motivation*

UP TO THIS POINT IN TIME there are no solutions (at least none are known to the author) that provide a convenient way for modeling, animating and rendering objects and scenes using signed distance functions for modeling and sphere tracing for rendering. Most of the solutions using sphere tracing implement it by having one or multiple big fragment shaders containing everything from modeling to lighting. Other solutions provide node based approaches, but they allow either no sphere tracing at all, meaning they use rasterization, or they provide nodes containing (fragment-) shader code, which leads again to a single big fragment shader.

THIS THESIS aims at designing and developing a program which provides both, a node based approach for modeling and animating objects using signed distance functions and allowing the rendering of scenes using sphere tracing, efficiently enough to be executed in real time on the GPU.

### *Objectives and limitations*

THE OBJECTIVE OF THIS THESIS is the design and development of a program for *modeling*, *composing* and *rendering* real time computer graphics by providing a graphical toolbox.

MODELING is done by composing simple objects into complex objects and scenes using a node based graph structure of “nodes”.

COMPOSING includes two aspects: the combination of objects into scenes, and the creation of an animation which is defined by multiple scenes which follow a chronological order. The first aspect is realized by a scene graph structure. The second aspect is realized by a time line.

FOR RENDERING, a highly optimized algorithm based on ray tracing is used. The algorithm is called sphere tracing and allows the rendering of ray traced scenes in real time on the GPU. Contingent upon the rendering algorithm used all objects are modeled using distance functions.

REQUIRED OBJECTIVES are the following:

- Development of an editor for creating and editing real time rendered scenes, containing the following features.
  - A scene tree, allowing management (creation and deletion) of scenes.

- One node-based graph structure for each scene in the scene tree. This allows the composition of scenes using nodes and connections between the nodes.
- Nodes
  - \* Simple objects defined by signed distance functions: In this thesis the objects are limited to cube and sphere (other solids could be modeled in the same way).
  - \* Simple operations: Union, Intersection, Subtraction.
  - \* Transformations: Rotate, Translate and Scale.
  - \* Camera.
  - \* Renderer (ray traced rendering using sphere tracing)
  - \* Point light sources.

### *Related works*

PRELIMINARY to this thesis two project works were completed. The first was “Volume ray casting — basics & principles” [4], which describes the concepts of sphere tracing. The second was “QDE — a visual animation system, architecture” [5], which established the concepts of an editor and a player component, as well as the basis for a possible software architecture for these components.

FOR CLARITY IN THE EXPLANATION of this thesis first the architecture is presented, see section “Software architecture”. Then the rendering is presented in section “Rendering”.

### *Document structure*

THIS DOCUMENT IS DIVIDED INTO SIX CHAPTERS, the first being this chapter, “Introduction”. The second chapter “??” shows the planning of the project, including the persons involved, the deliverables, and phases and milestones.

THE ADMINISTRATIVE ASPECTS ARE FOLLOWED BY the chapter “?”. The purpose of this chapter is to present the principles, based on the previous project works mentioned above that this thesis is built upon.

THE NEXT CHAPTER on “Methodologies” introduces a concept called literate programming and elaborates some details of the implementation using this. Additionally it introduces standards and principles for implementation of the developed software.

THE FOLLOWING CHAPTER on “Implementation” describes the editor component.

THE LAST CHAPTER “Discussion and conclusion” considers the methodologies as well as the results. Some further work on the editor and the player components is proposed as well.

AFTER THE REGULAR CONTENT follow appendices, see “Appendix”, detailing the requirements for building the above-mentioned components, and the actual source code in form of a literal program.

# Administrative aspects

THE PREVIOUS CHAPTER provided an introduction to this thesis by outlining the purpose and conditions, the previous works and structure of this work.

THIS CHAPTER covers administrative aspects of this project, although they are not required for an understanding of the results.

THE FIRST SECTION defines the persons involved and their roles during this thesis. Afterwards the deliverable items are defined and described. The last section elaborates on the organization of the project work involved, including meetings, phases and milestones as well as the work schedule.

## Involved persons

Role	Name	Task
Author	Sven Osterwalder <sup>1</sup>	Author of the thesis.
Advisor	Prof. Claude Fuhrer <sup>2</sup>	Supervises the student doing the thesis.
Expert	Dr. Eric Dubuis <sup>3</sup>	Provides expertise concerning the thesis's subject, monitors and grades the thesis.

Table 1: List of the involved persons.

<sup>1</sup> sven.osterwaldertudents.bfh.ch

<sup>2</sup> claud.fuhrer@bfh.ch

<sup>3</sup> eric.dubuis@comet.ch



## Deliverables

Deliverable	Description
<i>Report</i>	The report contains the theoretical and technical details for implementing a system for composing real time computer graphics.
<i>Implementation</i>	The implementation of the system for composing real time computer graphics, developed during this project.

Table 2: List of deliverables.

## Organization of work

### Meetings

VARIOUS MEETINGS with the supervisor and the expert helped to reach the defined goals and to prevent erroneous directions during the project. The supervisor and the expert supported the author by providing suggestions throughout the work period. The minutes of some meetings may be found under the appendix meeting minutes.

Add correct reference

### Phases and milestones

Phase	Week / 2017
Start of the project	8
Definition of objectives and constraints	8-9
Documentation and development	8-30
Final review	30-31
Preparation for the defense of the thesis	31-32

Table 3: Phases of the project.

Milestone	End of week / 2017
Project structure is set up	8
Mandatory project goals are reached	30
Hand-in of the thesis	31
Defense of the thesis	32

Table 4: Milestones of the project.

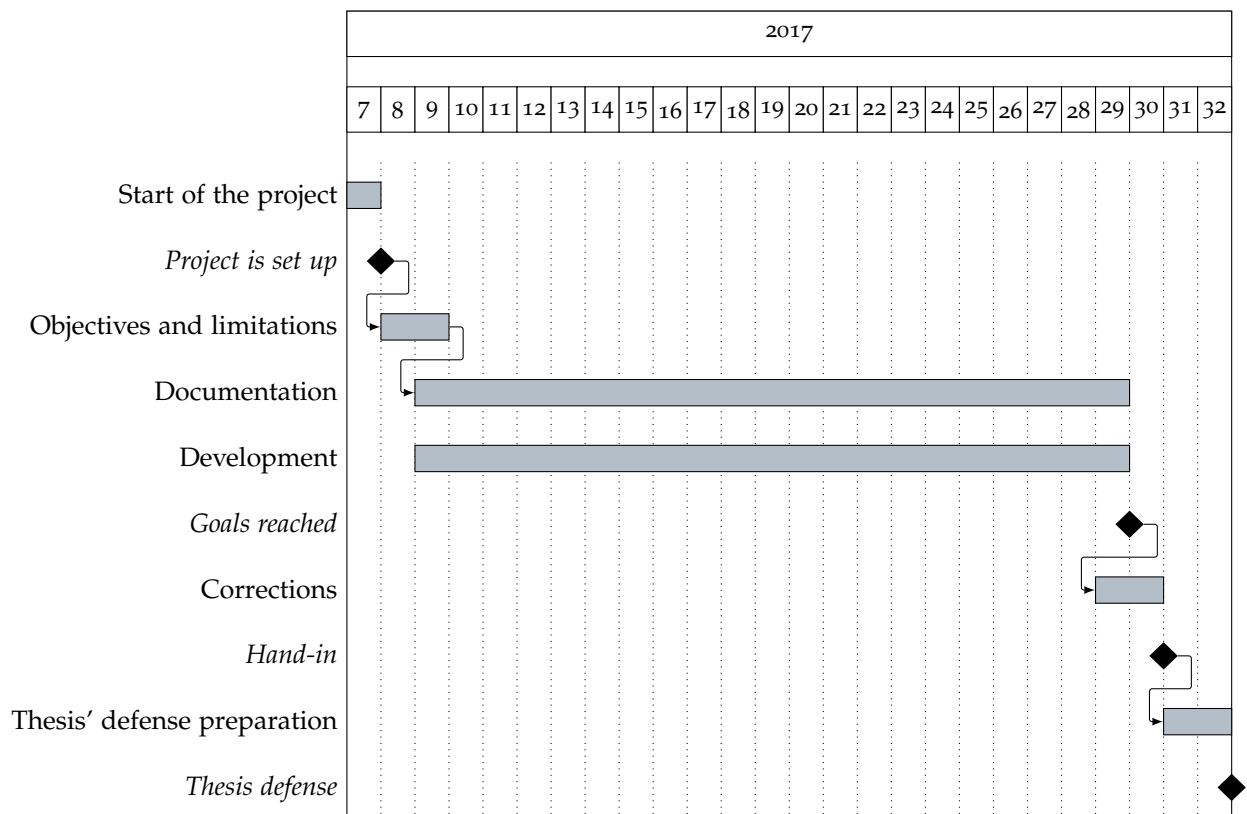
*Schedule*

Figure 1: Schedule of the project. The subtitle displays calendar weeks.

# *Fundamentals*

THE PREVIOUS CHAPTER covered administrative aspects including the persons involved, phases and the schedule, and milestones of the project work.

THIS CHAPTER presents the fundamentals which are required for an understanding of this thesis.

THE FIRST SECTION OF THIS CHAPTER defines the software architecture that would be used for the implementation of the program implemented. It is mainly a summary of the previous project work, “QDE — a visual animation system, architecture” [5]. The second section shows the algorithm which is used for rendering. It is a summary of a previous project work, “Volume ray casting — basics & principles” [4].

## *Software architecture*

THIS SECTION is a summary of the previous project work of the author, “QDE — a visual animation system, architecture” [5]. It describes the fundamentals for the architecture for the program implemented for this thesis.

SOFTWARE ARCHITECTURE is inherent to software engineering and software development. It may be implicit, for example when developing a smaller program where the concepts are intuitively clear and the design decisions are self-explanatory. Unfortunately, sometimes momentary “self-explanatory” decisions are in retrospect deceptive, so that some documentation may be necessary. But the architecture may also be developed as an initial conceptual process, for instance when developing large and complex programs.

BUT WHAT IS SOFTWARE ARCHITECTURE? Kruchten [6] defines software architecture as follows: “An architecture is the *set of significant decisions* about the organization of a software system, the selection of *structural elements* and their interfaces by which the system is composed, together with their *behavior* as specified in the collaborations among those elements, the *composition* of these elements into progressively larger subsystems, and the *architectural style* that guides

this organization – these elements and their interfaces, their collaborations, and their composition.”

Or as Fowler **folwer\_architect\_2003** puts it: “Whether something is part of the architecture is entirely based on whether the developers think it is important. [...] So, this makes it hard to tell people how to describe their architecture. ‘Tell us what is important.’ Architecture is about the important stuff. Whatever that is.”

THE IDEA ENVISAGED FOR THIS THESIS of using a node based graph for modeling objects and scenes and rendering them using sphere tracing, was developed in advance of this thesis. To ensure that this technical implementation was really feasible, a prototype was developed during the previous project work “*Volume ray casting - basics & principles*” [4].

THE ARCHITECTURE OF THIS PROTOTYPE had however evolved implicitly, and showed itself as hard to maintain and extend by providing no clear segregation between the data model and its representation.

WITH THE NEXT PROJECT WORK, “*QDE - a visual animation system. Software-Architektur.*”, a software architecture was developed to prevent the occurrence of such problems. The software architecture is based on the rational unified process (RUP) [6] what leads to an iterative approach.

BASED ON THE VISION of this thesis and using the methodologies of RUP, actors are defined. The actors in turn are participants in use cases that define functional requirements for the behavior of a system. The definition of use cases shows the limitations of the program and define its functionality and therefore the requirements.

THE COMPONENTS, shown in Table 5 and Figure 2, are established based on these requirements.

Component	Description
Player	Reads objects and scenes defined by the editor component and plays them back in the defined chronological order.
Editor	Allows modeling and composing of objects and scenes using a node based graphical user interface. Renders objects and scenes in real time using sphere tracing.

Table 5: Description of the components of the program implemented.

IDENTIFYING THE COMPONENTS helps finding the important conceptual items. Decomposing a domain into noteworthy concepts is “the quintessential object-oriented analysis step” [8]. “The do-

Sub component	Description
Scene tree	Holds scenes in a tree like structure. A scene is a directed graph holding nodes.
Node graph	Contains all nodes which define a single scene.
Parameter	Holds the parameters of a node of the node graph.
Rendering	Renders a node, presenting it for a viewer.
Time line	Depicts temporal events in terms of scenes which follow a chronological order.

Table 6: Description of the sub components of the editor component.

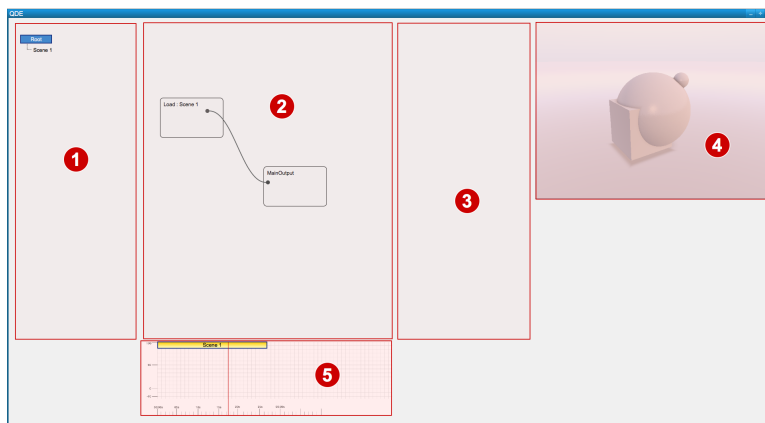


Figure 2: A mock up of the editor application showing its components.

- 1: Scene tree.
- 2: Node graph.
- 3: Parameter view.
- 4: Rendering view.
- 5: Time line.

main model is a visual representation of conceptual classes or real-situation objects in a domain.” [8]

THE EDITOR AND PLAYER COMPONENTS are shown in Figure 3 and in Figure 4 respectively in the form of a domain model. Each domain model is composed of components which build the sub components of the parent component, in this case the editor and player. These sub components represent the objects of the respective domain.

IDENTIFYING THE IMPORTANT CONCEPTS allows the definition of the logical architecture and shows the overall image of (software) classes in form of packets, subsystems and layers. For a detailed definition of these items the reader is referred to the previous project work [4, pp. 37 ff.].

TO REDUCE DEPENDENCIES AND THE COUPLING of components a “relaxed layered” architecture is used. In contrast to a strict layered architecture, which allows any layer to call services or interfaces only from the layer below, a relaxed layered architecture allows higher layers to communicate with any lower layer. The architecture defines five layers, as shown in Table 7.

TO ENSURE LOW COUPLING AND DEPENDENCIES also for the graphical user interface, the models and their views are segregated using the principle of model-view separation which states that domain ob-

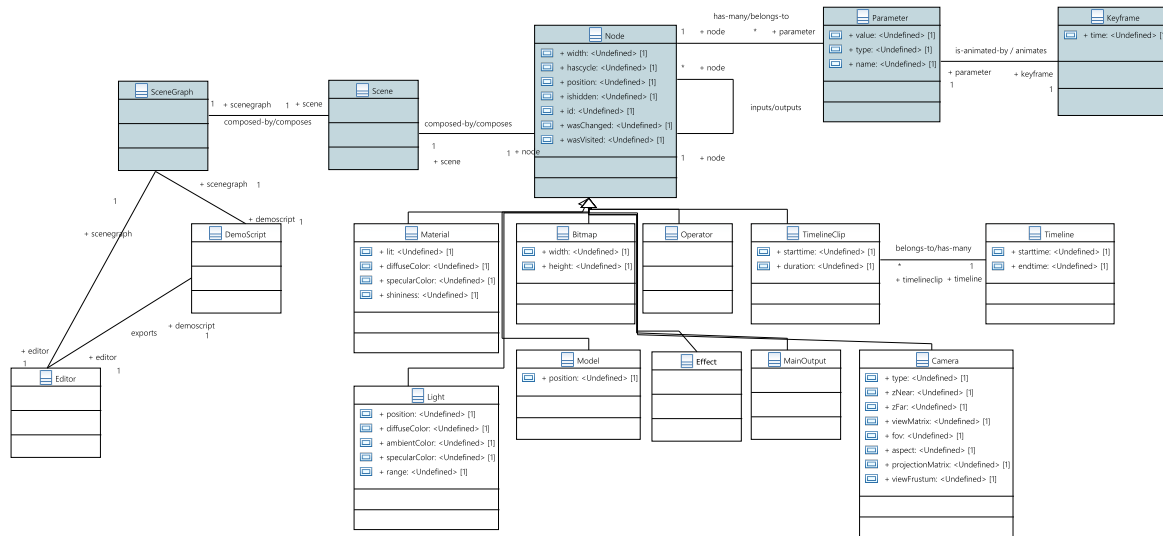


Figure 3: Domain model of the editor component.

jects, which are data models, should have no direct knowledge about their corresponding objects of the graphical user interface.

WORKFLOW OBJECTS control the user interaction with the visual objects by keeping track of the data models. Such *controllers* support the model-view separation principle and exist in the application layer.

Layer	Description
UI	All elements of the graphical user interface.
Application	Controllers (workflow objects).
Domain	Data models according to the logic of the application.
Technical services	Technical infrastructure, such as graphics, window creation and so on.
Foundation	Basic elements and low level services, such as timer, arrays or other data classes.

Table 7: Layers as envisaged during the conceptual phase and used for the program implemented.

CLASS DIAGRAMS ARE USED TO PROVIDE A SOFTWARE POINT OF VIEW, whereas domain models provide rather a conceptual point of view. A class diagram <sup>1</sup> shows classes, interfaces and their relationships. Figure 5 shows the class diagram of the editor component and Figure 6 shows the class diagram for the player component.

<sup>1</sup> The concepts of RUP and OOP are as used in the previous project (QDE) and therefore will not be detailed here.

## Rendering

THIS SECTION is a summary of the previous project work of the author, “Volume ray casting — basics & principles” [4]. It describes the fundamentals for the rendering algorithm that is used for the program implemented in this thesis.

RENDERING is the second main aspect of this thesis, as the objective

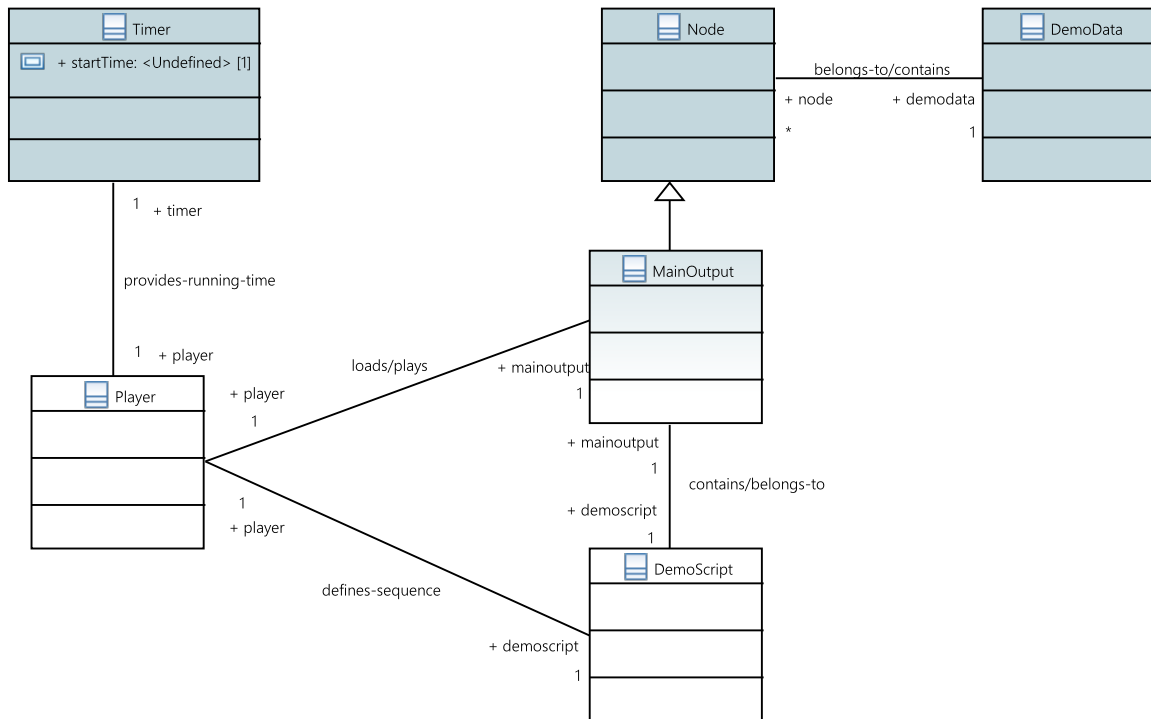


Figure 4: Domain model of the player component.

is the design and development of a program for modeling, composing and *rendering* real time computer graphics by providing a graphical toolbox.

FOLEY DESCRIBES RENDERING as a “process of creating images from models” [9]. The basic idea of rendering is to determine the color of a surface at each point. For this task two concepts have evolved: *illumination models* and *shading models*.

ILLUMINATION MODELS describe the amount of light that is transmitted from a point on a surface to a viewer. There exist two kinds of illumination models: local illumination models and global illumination models. Whereas local illumination models aggregate local data from adjacent surfaces and directly incoming light from light sources, global illumination models consider also indirect light from reflections and refractions. The algorithm used for rendering in the implemented program uses a *global illumination model*.

SHADING MODELS define when and how to use which illumination model.

GLOBAL ILLUMINATION MODELS “express the light being transferred from one point to another in terms of the intensity of the light emitted” [9, pp. 775 and 776]. Additionally to this direct intensity, the indirect intensity is considered, meaning “the intensity of light emitted from all other points that reaches the first and is reflected from the first to the second” [9, pp. 775 and 776] point is added.



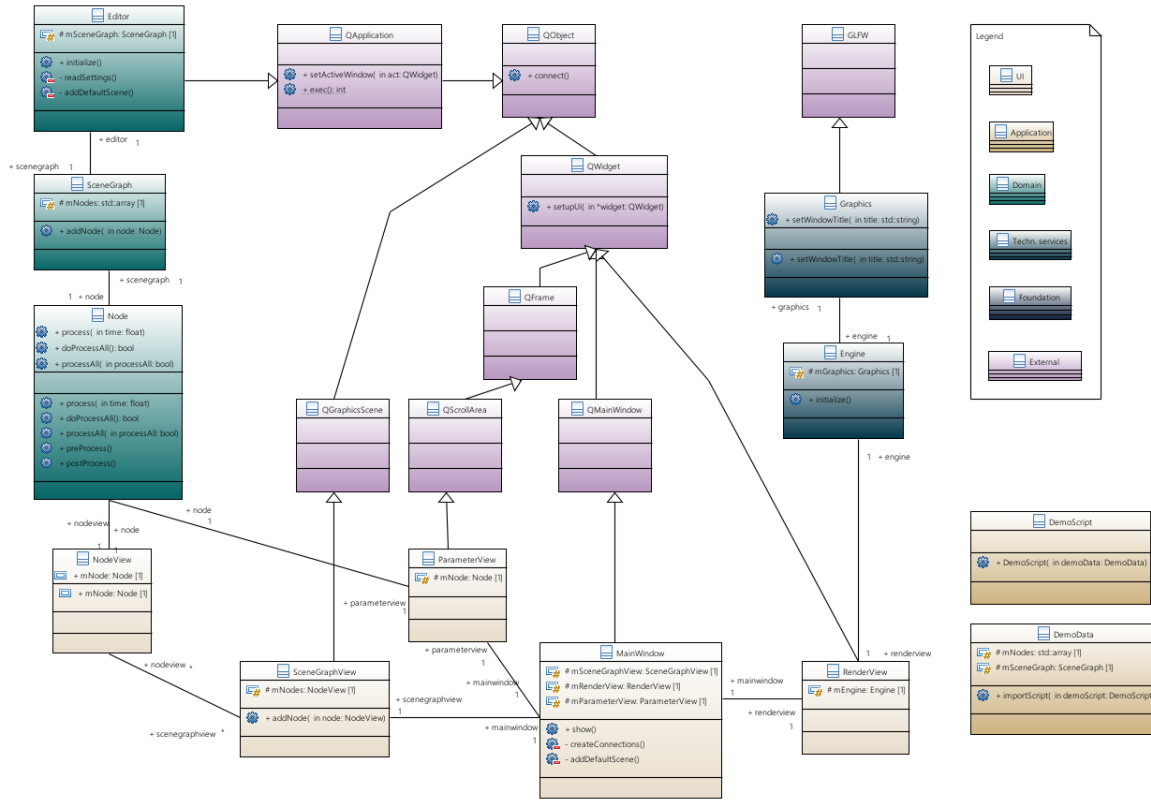


Figure 5: Class diagram of the editor component.

IN 1986 JAMES KAJIYA set up the so called rendering equation, which expresses this behavior. [10, 9, p. 776]

IMPLEMENTING A GLOBAL ILLUMINATION MODEL or the rendering equation directly for rendering images in viable (computational feasible in a workflow for instance for the production of animated films) or even real time is not really feasible, even on the fastest modern hardware (2017). The procedure is computationally complex and very time demanding.

A SIMPLIFIED APPROACH to implement global illumination models (and the rendering equation) is ray tracing. Ray tracing is able to produce high quality, realistic looking images. Although it is still demanding in terms of time and computations, the time complexity is viable for producing still images. For producing images in real time however, the algorithm is still too demanding. This is where a special form of ray tracing comes in.

SPHERE TRACING is a ray tracing approach for implicit surfaces introduced in 1994 by Hart in his work “Sphere Tracing: A Geometric Method for the Antialiased Ray Tracing of Implicit Surfaces” [3]. Sphere tracing is faster than the classical ray tracing approaches in its method of finding intersections between rays and objects. In contrast to the classical ray tracing approaches, the “marching distance” of rays is not defined by an absolute or a relative distance, but in-

$x, x'$  and  $x''$  Points in space.

$I(x, x')$  Intensity of the light going from point  $x'$  to point  $x$ .

$g(x, x')$  A geometrical scaling factor:

- 0 if  $x$  or  $x'$  are occluded by each other.
- $\frac{1}{r^2}$  if  $x$  and  $x'$  are visible to one other,  $r$  being the distance them.

$\varepsilon(x, x')$  Intensity of the light being emitted from point  $x'$  to point  $x$ .

$\rho(x, x', x'')$  Intensity of the light going from  $x''$  to  $x$ , being scattered on the surface near point  $x'$ .

$\int_S$  Integral over the union of all sur-

faces, hence  $S = \bigcup_{i=0}^n S_i$ ,  $n$  being the number of surfaces. All points  $x$ ,  $x'$  and  $x''$  brush all surfaces of all objects within the scene. Where  $S_i$  is the surface of object  $i$ , and so  $S_0$  being an additional surface in form of a hemisphere which spans the whole scene and acts as background.

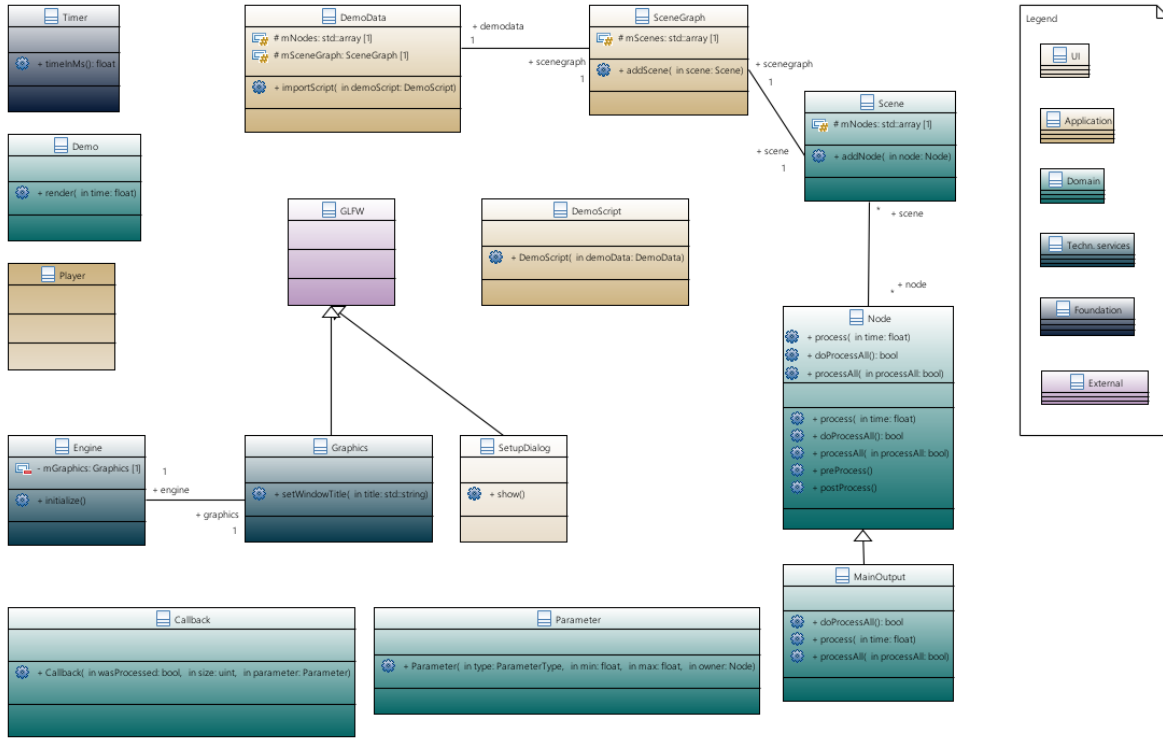


Figure 6: Class diagram of the player component.  
 Figure 7: The rendering equation as defined by James "Jim" Kajiya.

$$I(x, x') = g(x, x') \left[ \epsilon(x, x') + \int_S \rho(x, x', x'') I(x', x'') dx'' \right] \quad (1)$$

stead, distance functions are used. The distance functions are used to expand unbounding volumes (in this concrete case spheres, hence the name) along rays. Figure 8 illustrates this procedure.

UNBOUNDING VOLUMES contrast with bounding volumes, which enclose a solid. Unbounding volumes enclose a part of space without including certain objects (whereas including means touching). For calculating a unbounding volume, the distance between an object and the origin is being searched. Is this distance known, it can be taken as a radius of a sphere. Sphere tracing defines objects as implicit surfaces using distance functions. Therefore the distance from every point in space to every other point in space and to every surface of every object is known. These distances build a so called distance field.

THE SPHERE TRACING ALGORITHM is as follows. A ray is being shot from a viewer (an eye or a pinhole camera) through the image plane into a scene. The radius of an unbounding volume in form of a sphere is being calculated at the origin, as described above. This radius builds an intersection with the ray and represents the distance, that the ray will travel in a first step. From this intersection the next unbounding volume is being expanded and its radius is being calculated, which gives the next intersection with the ray. This procedure

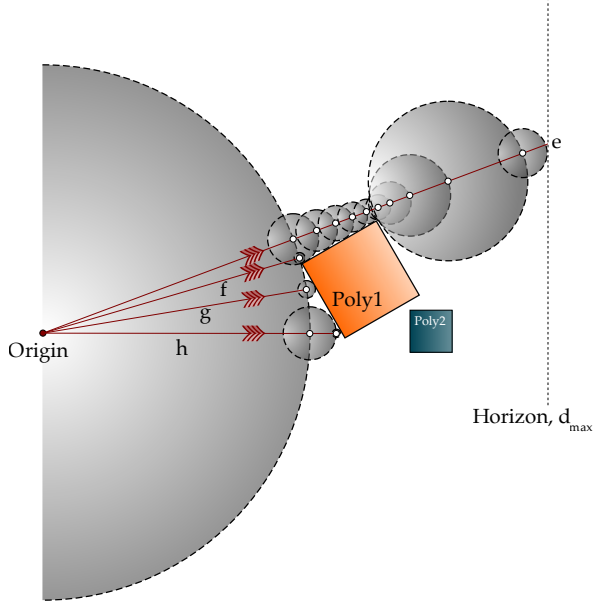


Figure 8: Illustration of the sphere tracing algorithm. Ray  $e$  hits no objects until reaching the horizon. Rays  $f$ ,  $g$  and  $h$  hit the solid  $poly1$ .

continues until an object is being hit or until a predefined maximum distance of the ray  $d_{max}$  is being reached. An object is being hit, whenever the returned radius of the distance function is below a predefined constant  $\epsilon$ . A possible implementation of the sphere tracing algorithm is shown in Figure 9. This Figure 9 is although only showing the distance estimation. Shading is done outside, for example in a render method which calls the sphere trace method. Shading means in this context the determination of a surface's respectively a pixel's color.

SHADING is done as proposed by Whitted in "An Improved Illumination Model for Shaded Display" [2]. This means, that the sphere tracing algorithm needs to return which object was hit and the material of this object. Depending on the objects material, three cases can occur: (1) the material is reflective and refractive, (2) the material is only reflective or (3) the material is diffuse. For simplicity only the last case is being taken into account. For the actual shading a local illumination method is used: *phong shading*.

THE PHONG ILLUMINATION MODEL describes (reflected) light intensity  $I$  as a composition of the ambient, the diffuse and the perfect specular reflection of a surface.

```

1  def sphere_trace():
2      ray_distance      = 0
3      estimated_distance = 0
4      max_distance      = 9001
5      max_steps         = 100
6      convergence_precision = 0.000001
7
8      while ray_distance < max_distance:
9          # sd_sphere is a signed distance function defining the implicit surface.
10         # cast_ray defines the ray equation given the current traveled /
11         # marched distance of the ray.
12         estimated_distance = sd_sphere(cast_ray(ray_distance))
13
14         if estimated_distance < convergence_precision:
15             # the estimated distance is already smaller than the desired
16             # precision of the convergence, so return the distance the ray has
17             # travelled as we have an intersection
18             return ray_distance
19
20         ray_distance = ray_distance + estimated_distance
21
22     # When we reach this point, there was no intersection between the ray and a
23     # implicit surface, so simply return 0
24     return 0

```

Figure 9: An abstract implementation of the sphere tracing algorithm. Algorithm in pseudo code, after [3][S. 531, Fig. 1]

$$I(\vec{V}) = k_a \cdot L_a + k_d \sum_{i=0}^{n-1} L_i \cdot (\vec{S}_i \cdot \vec{N}) + k_s \sum_{i=0}^{n-1} L_i \cdot (\vec{R}_i \cdot \vec{V})^{k_e} \quad (2)$$

Figure 10: The phong illumination model as defined by Phong Bui-Tuong. Note that the emissive term was left out intentionally as it is mainly used to achieve special effects.

# *Methodologies*

THE PREVIOUS CHAPTER provided the fundamentals that are required for understanding the results of this thesis.

THIS CHAPTER presents the methodologies that are used to implement this thesis.

THE FIRST SECTION OF THIS CHAPTER shows a principle called literate programming, which is used to generate this documentation and the practical implementation in terms of a software. The second section describes the agile methodologies, that are used to implement this thesis.

## *Literate programming*

SOFTWARE MAY BE DOCUMENTED IN DIFFERENT WAYS. It may be in terms of a documentation, e.g. in the form of a software architecture which describes the software conceptually and hints at its implementation. Or it may be in terms of documenting within the software itself through inline comments. Frequently both methodologies are used. However, all too frequently the documentation is not done properly, and even neglected as it can be quite costly with seemingly little benefit.

DOCUMENTING SOFTWARE IS CRITICAL. Whenever software is written, decisions are made. In the moment a decision is made, it may seem intuitively clear, as it has evolved through creative thought processes. The seeming clarity of the decision is most of the time deceptive. Is a decision still clear when some time has passed since making that decision? What were the considerations that led to it? Is the decision also clear for other, may be less-involved persons? All these concerns show that documenting software is critical. No documentation at all, or outdated or irrelevant documentation, can lead to unforeseen and costly efforts concerning work and time.

HOARE STATES 1973 in his work *Hints on Programming Language Design* that “documentation must be regarded as an integral part of the process of design and coding” [11, p. 195]: “The purpose of program documentation is to explain to a human reader the way in which a program works so that it can be successfully adapted after it goes

into service, to meet the changing requirements of its users, or to improve it in the light of increased knowledge, or just to remove latent errors and oversights. The view that documentation is something that is added to a program after it has been commissioned seems to be wrong in principle and counter-productive in practice. Instead, documentation must be regarded as an integral part of the process of design and coding. A good programming language will encourage and assist the programmer to write clear self-documenting code, and even perhaps to develop and display a pleasant style of writing. The readability of programs is immeasurably more important than their writeability.” [11, p. 195]

LITERATE PROGRAMMING, a paradigm proposed in 1984 by Knuth, goes even further. Knuth believes that “significantly better documentation of programs” can be best achieved “by considering programs to be works of literature” [12, p. 1]. Knuth proposes to change the “traditional attitude to the construction of programs” [12, p. 1]. Instead of imagining that the main task is to instruct a computer what to do, one should concentrate on explaining to human beings what the computer shall do. [12, p. 1]

THE IDEAS OF LITERATE PROGRAMMING have been embodied in several software systems, the first being *WEB*, introduced by Knuth himself. These systems are a combination of two languages: (1) a document formatting language and (2) a programming language. Such a software system uses a single document as input (which can be split up in multiple parts) and generates two outputs: (1) a document in a formatting language, such as Knuth’s  $\text{\LaTeX}$  [13] (which may then be converted in a printable and viewable form, such as PDF). (2) a compilable program in a programming language, such as Python or C (which may then be converted into an executable program). [12] The first process is called *weaving* and the second *tangling*. This process is illustrated in Figure 11.

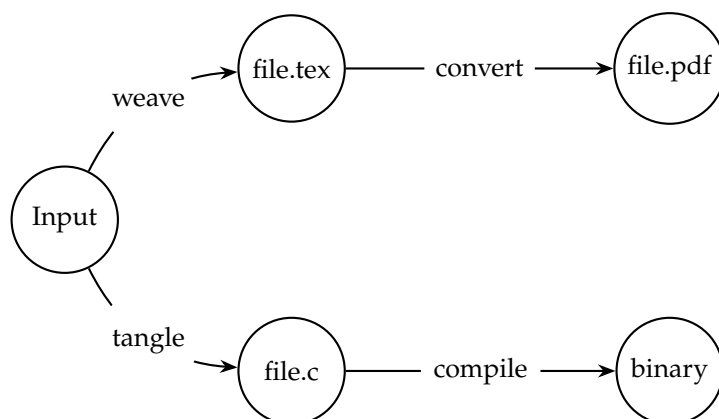


Figure 11: Illustration showing the processes of *weaving* and *tangling* documents from a input document. [12]

SEVERAL LITERATE PROGRAMMING (LP) SYSTEMS WERE EVALUATED during the first phase of this thesis: CWEB<sup>2</sup>, Noweb<sup>3</sup>, lit<sup>4</sup>,

<sup>2</sup> <http://www-cs-faculty.stanford.edu/~uno/cweb.html>

<sup>3</sup> <https://www.cs.tufts.edu/~nr/noweb/>

<sup>4</sup> <http://cdosborn.github.io/lit/lit/root.html>

PyLiterate <sup>5</sup>, pyWeb <sup>6</sup> and Babel <sup>7</sup>. All of these tools have their strengths and weaknesses. However, none of these systems fulfill all the needed requirements of this project: (1) Provide “pretty printing” <sup>1</sup> of the program parts. (2) Provide automatic references between the definition of program parts and their usage. (3) Expand program parts having the same name instead of redefining them. (4) Support Python as programming language. (5) Allow the inclusion of files for both parts, the document formatting language and the programming language. <sup>8</sup>

ULTIMATELY A FURTHER LITERATE PROGRAMMING SYSTEM, nuweb <sup>9</sup>, was chosen as it fulfills all these requirements. It has adapted and simplified the ideas of FunnelWeb <sup>10</sup>. It is independent of the programming language for the source code. As document formatting language it uses L<sup>A</sup>T<sub>E</sub>X. Although the documentation of nuweb states that it is not designed for the pretty printing of source code, it does provide an option to display source code as listings. This facility has been modified to support visualizing the expansion of parts as well as to use syntax highlighting of the code within L<sup>A</sup>T<sub>E</sub>X.

THE NUWEB SYSTEM PROVIDES SEVERAL COMMANDS TO PROCESS FILES. All commands begin with an at sign (@). Whenever a file or part does not contain any commands the file is copied unprocessed. nuweb provides a single executable program, which processes the input files and generates the output files (weaving and tangling, in document formatting language and as source code respectively).

A FRAGMENT CONSISTS OF SCRAPS which in this project contain the source code. They may also contain for instance paragraphs for formatted text or mathematical equations.

LITERATE PROGRAMMING CAN BE VERY EXPRESSIVE when all concepts are explicitly defined before implementation. Knuth sees this expressiveness an advantage as one is forced to clarify thoughts before programming [12, p. 13]. This is surely very true for small software but only partly true for larger software. The problem with larger software is, that when using literate programming, the documentation tends to be correspondingly large. *To overcome this problem* in this project, the actual implementation of the software is placed into the appendix .

ANOTHER PROBLEMATIC ASPECT is the implementation of repeating fragments or parts with similar but not identical technical details (such as imports or getter and setter methods). This might be interesting only for software developers or technically oriented readers who want to grasp all the details. *This aspect can be overcome* by moving recurring or uninteresting fragments to a separate file (see ).

TO SHOW THE PRINCIPLES OF LITERATE PROGRAMMING, without

<sup>5</sup> <https://github.com/bslatkin/pyliterate>

<sup>6</sup> <http://pywebtool.sourceforge.net/>

<sup>7</sup> <http://orgmode.org/worg/org-contrib/babel/>

<sup>8</sup> pretty printing refers to content-based formatting (e.g. line color and indentation to improve readability).

<sup>9</sup> <http://nuweb.sourceforge.net/>

<sup>10</sup> <http://www.ross.net/funnelweb/>

insert reference to appendix here

add reference to code fragments



annoying the reader, only an excerpt of some details is given here.

ONE OF THE MORE INTERESTING THINGS of the software might be the definition of a node and its loading from external files. These two aspects are shown below. More details of this example would go beyond the scope of this thesis.

add reference to the node concept within appendix

SOME ESSENTIAL THOUGHTS ABOUT CLASSES AND OBJECTS may help to stay consistent when developing the software, before implementing the node class. Each class should at least have four parts:

- (1) Signals — to inform other objects about events.
- (2) A constructor — creator of an initial instance of a class.
- (3) Various methods — actions which can be executed by the object.
- (4) Slots — receive signals from other objects.

This structure is applied to the declaration of the node class.

IMPLEMENTING THE NODE CLASS means simply defining a *scrap* called “Node definition declaration” using the above pattern. The *scrap* does not have any content at the moment, except references to other scraps, which build the body of the scrap and which will be defined later on.

$\langle \text{Node definition declaration ?} \rangle \equiv$

```

1 class NodeDefinition(object):
2     """Represents a definition of a node."""
3
4     # Signals
5     < Node definition signals ? >
6     < Node definition constructor ? >
7     < Node definition methods ? >
8
9     # Slots
10    < Node definition methods ? >◇

```

Figure 12: Declaration of the node definition class.

Fragment never referenced.

THE CONSTRUCTOR might be the first thing to implement, following the developed pattern. In Python the constructor defines the properties of a class <sup>11</sup>, therefore it defines what a class actually is or represents — the concept. After some thinking, and in context of the intended software, one might come up with the properties in Table 8 defining a node definition.

<sup>11</sup> Properties do not need to be defined in the constructor, they may be defined anywhere within the class. However, this can lead to confusion and it is therefore considered as good practice to define the properties of a class in its constructor.

Property	Description
ID	A globally unique identifier for the node definition.
Name	The name of the definition.
Description	The description of the definition. What does that definition provide?
Parent	The parent object of the current node definition.
Inputs	Inputs of the node definition. This may be distinct types or references to other nodes.
Outputs	The same as for inputs.
Invocation	A list of the node’s invocations or calls respectively.
Parts	Defines parts that may be processed when evaluating the node. Contains code which can be interpreted directly.
Connections	A list of connections of the node’s inputs and outputs. Each connection is composed by two parts: (1) a reference to another node and (2) a reference to an input or an output of that node. Is the reference not set, that is, its value is zero, this means that the connection is internal.
Instances	A list of node instances from a certain node definition.
Was changed	Flag, which indicates whether a definition was changed or not.

Table 8: Properties/attributes of the node class.

IMPLEMENTING THE CONSTRUCTOR of the node definition may now

follow from the properties defined in Table 8. As the name of the constructor definition was already given, by using it within Figure 12 (@<Node definition constructor@>), the very same name will be used for actually defining the scrap itself.

*<Node definition constructor ?> ≡*

```

1  def __init__(self, id_):
2      """Constructor.
3
4      :param id_: the globally unique identifier of the node.
5      :type id_: uuid.uuid4
6      """
7
8      self.id_ = id_
9
10     self.name = ""
11     self.description = ""
12     self.parent = None
13     self.inputs = []
14     self.outputs = []
15     self.invocations = []
16     self.parts = []
17     self.nodes = []
18     self.connections = []
19     self.instances = []
20     self.was_changed = False◇

```

Figure 13: Constructor of the node definition class. Note that the identifier is given by a corresponding parameter. Identifiers have to be generated when defining a node using an external file.

Fragment referenced in ?.

ONE OF THE PROBLEMS MENTIONED BEFORE can be seen in fig. 13: it shows a rather dull constructor without any logic which is not interesting. Additionally importing of modules would be needed, e.g. PyQt or system modules. This was left out deliberately. At this point the implementation of node definitions will not be shown further, as this is beyond scope. Further implementation can be seen at .

insert reference(s) to node domain model here

NODE DEFINITIONS WILL BE LOADED FROM EXTERNAL FILES in JSON format. This happens within the node controller component, which will not be shown here as this would go beyond the scope. Required attributes will be mentioned explicitly although. The method for loading the nodes, `load_node_definitions`, defined in fig. 14, does not have any arguments. Everything needed for loading nodes is encapsulated in the node controller.

WHEN LOADING THE NODE DEFINITIONS, there are two cases (and consequences) at the first instance: (1) the directory containing the node definitions exists, the load definitions may be loaded or (2) the

⟨Load node definitions ?⟩ ≡

```

1  def load_node_definitions(self):
2      """Loads all files with the ending NODES_EXTENSION
3      within the NODES_PATH directory, relative to
4      the current working directory.
5      """
6  ◇

```

Figure 14: Head of the method that loads node definitions from external JSON files.

Fragment defined by ?, ?.  
Fragment never referenced.

directory does not exist. In the first case the directory possibly containing node definitions is being searched for such files, in the second case a warning message is logged.

⟨Load node definitions ?⟩+ ≡

```

1  if os.path.exists(self.nodes_path):
2      ⟨ Find and load node definition files ?, ... ⟩
3  else:
4      ⟨ Output warning when directory with node definitions does not exist ? ⟩◇

```

Figure 15: Check whether the path containing the node definition files exist or not.

Fragment defined by ?, ?.  
Fragment never referenced.

IN THE FIRST CASE, when the directory containing the node definitions exists, files containing node definitions are searched. The files are searched by wildcard pattern matching the extension: \*.node.

⟨Find and load node definition files ?⟩ ≡

```

1  node_definition_files = glob.glob("{path}{sep}*.{ext}".format(
2      path=self.nodes_path,
3      sep=os.sep,
4      ext=self.nodes_extension
5  ))
6  num_node_definitions = len(node_definition_files)◇

```

Figure 16: When the directory containing the node definitions exists, files matching the pattern \*.node are searched.

Fragment defined by ?, ?.  
Fragment referenced in ?.

HAVING SEARCHED FOR NODE DEFINITION FILES, there are again two cases, similar as before: (1) files (possibly) containing node definitions exist or (2) no files with the ending .node exist within the

source directory. Again, as before, in the first case the node definitions will be loaded, in the second case a warning message will be logged.

*⟨ Find and load node definition files ? ⟩ + ≡*

```

1  if num_node_definitions > 0:
2      ⟨ Load found node definitions ?, ... ⟩
3  else:
4      ⟨ Output warning when no node definitions are found ? ⟩◇

```

Fragment defined by ?, ?.  
Fragment referenced in ?.

Figure 17: When files (possibly) containing node definition files are found, they are tried being loaded. When no such files are found, a warning message is being logged.

GIVEN THAT NODE DEFINITIONS ARE PRESENT, they are loaded from the file system, parsed and then stored internally as domain model. To maintain readability, all this is encapsulated in a method, `load_node_definition_from_file_name`, which is deliberately not shown here as this would go beyond scope. If the node definition cannot be loaded or parsed `None` is being returned.

*⟨ Load found node definitions ? ⟩ ≡*

```

1  self.logger.info(
2      "Found %d node definition(s), loading.",
3      num_node_definitions
4  )
5  t0 = time.perf_counter()
6  for file_name in node_definition_files:
7      self.logger.debug(
8          "Found node definition %s, trying to load",
9          file_name
10     )
11     node_definition = self.load_node_definition_from_file_name(
12         file_name
13     )◇

```

Fragment defined by ?, ?.  
Fragment referenced in ?.

Figure 18: Loading and parsing of the node definitions found within the folder containing (possibly) node definition files. If a node definition cannot be loaded or parsed, `None` is being returned.

WHEN A NODE DEFINITION COULD BE LOADED, a view model based on the domain model is being created. Both models are then stored internally and a signal about the loaded node definition is being emitted, to inform other components which are interested in this event.

*⟨Load found node definitions ?⟩+ ≡*

```

1      if node_definition is not None:
2          node_definition_view_model = node_view_model.NodeViewModel(
3              id=node_definition.id_,
4              domain_object=node_definition
5          )
6          self.node_definitions[node_definition.id_] = (
7              node_definition,
8              node_definition_view_model
9          )
10         ⟨ Node controller load node definition emit ? ⟩
11
12     t1 = time.perf_counter()
13     self.logger.info(
14         "Loading node definitions took %.10f seconds",
15         (t1 - t0)
16     )◇

```

Figure 19: A view model, based on the domain model, for the node definition is being created. Both models are then stored internally and the signal, that a node definition was loaded is being emitted.

Fragment defined by ?, ?.  
 Fragment referenced in ?.

THE IMPLEMENTATION OF THE EDGE CASES is still remaining at this point. When such an edge case happens, a corresponding message is logged. The edge cases are:

- (1) the directory holding the node definitions does not exist

*(Output warning when directory with node definitions does not exist ?) ≡*

```

1  message = QtCore.QCoreApplication.translate(
2      __class__.__name__,
3      "The directory holding the node definitions, %s, does not exist." % self.nodes_path
4  )
5  self.logger.fatal(message)◇

```

Figure 20: Output a warning when the path containing the node definition files does not exist.

Fragment referenced in ?.

or

- (2) no files containing node definitions are found.

*(Output warning when no node definitions are found ?) ≡*

```

1  message = QtCore.QCoreApplication.translate(
2      __class__.__name__,
3      "No files with node definitions found at %s." % self.nodes_path
4  )
5  self.logger.fatal(message)◇

```

Figure 21: Output a warning when no node definitions are being found.

Fragment referenced in ?.

## *Agile software development*

SOFTWARE ENGINEERING INVOKES ALWAYS A METHODOLOGY, be it wittingly or unwittingly. For a (very) small project the methodology may follow intuitively, by experience and it may be a mixture of methodologies. For medium to large projects however, using certain methodologies or principles becomes inevitable for being able to evaluate (the success of) a project.

EVERY COMMONLY USED SOFTWARE ENGINEERING METHODOLOGY has advantages but buries also certain risks. Be it a traditional method like the waterfall model, incremental development, the v-model, the spiral model or a more recent method like agile development. It depends largely on the project what methodology fits best and buries the least risks. [14], [15]

RISK IS THE BASIC PROBLEM OF SOFTWARE DEVELOPMENT. [16] Examples of risks are: schedule slips, canceled projects, increased defect rates, misunderstood domain/business, changes, false feature rich. [16]

TRADITIONAL SOFTWARE ENGINEERING METHODOLOGIES, such as the waterfall model or incremental development, struggle with change. In case of the waterfall model they embrace change not at all or, in the case of incremental development, the phases are rather long what allows only slow reaction.

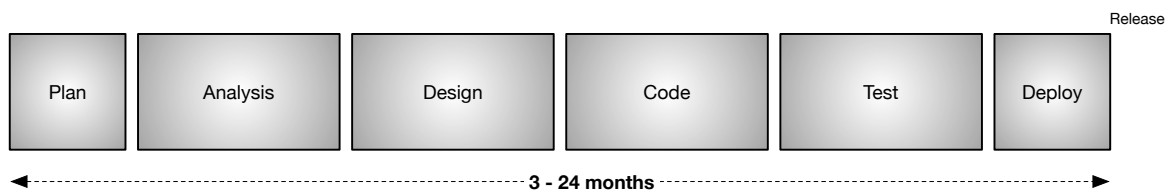


Figure 22: Phases of the water fall methodology. [17, p. 16]

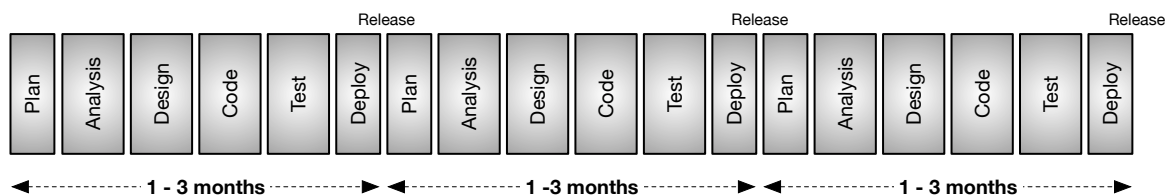


Figure 23: Phases of iterative development. [17, p. 16]

BY APPLYING BASIC PRINCIPLES, agile development methodologies try to overcome this problem. These principles may vary depending on the used methodology, but the fundamental principles are: (1) rapid feedback, (2) assume simplicity, (3) incremental change, (4) embracing change and (5) quality work. [16] Further details can be found at [16], [17].

AN ADAPTED VERSION OF EXTREME PROGRAMMING is used for this thesis. This methodology was chosen as after the preceding project work, *QDE - a visual animation system. Software-Architektur*. several things were still subject to change and therefore an exact planning, analysis and design, as traditional methodologies require it, would not be very practical.



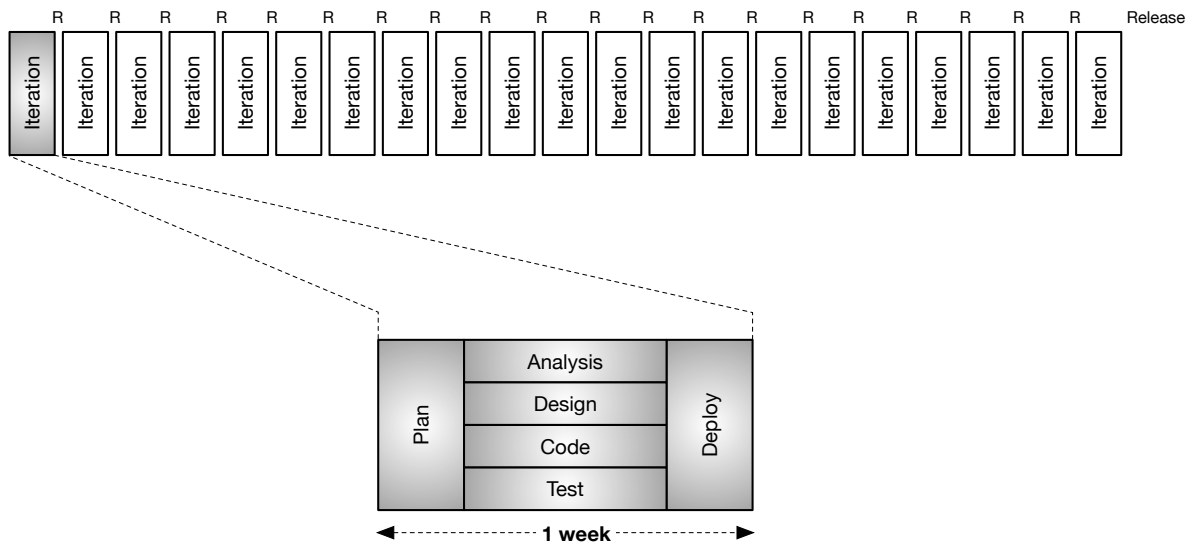


Figure 24: Iterations in the extreme programming methodology and phases of an iteration. [17, p. 18]

# *Implementation*

THE PREVIOUS CHAPTER introduced the methodologies that are required for understanding the following implementation of this thesis.

THIS CHAPTER presents the achieved results by means of three sections. The first section shows the software architecture that was developed and that is used for the program implemented. Aspects of the developed literate program are shown in the second section. The main concepts and the components of the implemented program are shown in the third section.

## *Software architecture*

THE SOFTWARE ARCHITECTURE holds the significant decisions of the envisaged software, the selection of structural elements, their behavior and their interfaces. [6] It is derived from the experiences based on the former project works, *Volume ray casting - basics & principles* and *QDE - a visual animation system. Software-Architektur*. which are condensed to build the fundamentals, see .

THREE ASPECTS define the software architecture: (1) an architectural software design pattern, (2) layers and (3) signals, allowing communication between components.

## *Software design*

A [SOFTWARE] DESIGN PATTERN “names, abstracts, and identifies the key aspects of a common design structure that make it useful for creating a reusable object-oriented design. The design pattern identifies the participating classes and instances, their roles and collaborations, and the distribution of responsibilities. Each design pattern focuses on a particular object-oriented design problem or issue. It describes when it applies, whether it can be applied in view of other design constraints, and the consequences and trade-offs of its use.” [18, p. 16]

TO SEPARATE DATA FROM ITS REPRESENTATION and to ensure a coherent design, a combination of the model-view-controller (MVC) and the model-view-view model pattern (MVVM) is used as archi-

textural software design pattern. [19], [20] This decision is based on experiences from the previous project works and allows to modify and reuse individual parts. This is especially necessary as the data created in the editor component will be reused by the player component.

FOUR KINDS OF COMPONENTS build the basis of the used pattern. table 9 provides a description of the components. fig. 25 shows an overview of the components (the colored items) including their communication. Additionally the user as well as the display is shown (in gray color).

Component	Description	Examples
Model	Represents the data or the business logic, completely independent from the user interface. It stores the state and does the processing of the problem domain.	Scene, Node Parameter
View	Consists of the visual elements.	Scene graph view, Scene view
View model	“Model of a view”, abstraction of the view, provides a specialization of the model that the view can use for data-binding, stores the state and may provide complex operations.	Scene graph view model, Scene view model, Node view model
Controller	Holds the data in terms of models. models. Acts as an interface between the components.	Scene graph controller, scene controller, node controller

Table 9: Description of the components of the used software design pattern [19], [20]

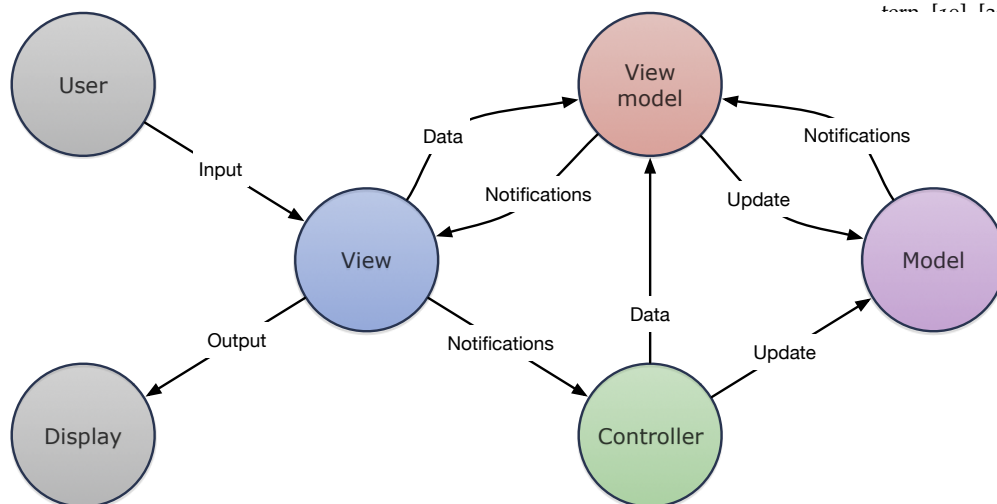


Figure 25: Components of the used pattern and their communication.

THE USED QT FRAMEWORK provides a very similar pattern respectively concept called “model/view pattern”. It combines the view and the controller into a single object. The pattern introduces a delegate between view and model, similar to a view model. The dele-

gate allows editing the model and communicates with the view. The communication is done by so called model indices coming from the model. Model indices are references to items of data. [21] “By supplying model indexes to the model, the view can retrieve items of data from the data source. In standard views, a delegate renders the items of data. When an item is edited, the delegate communicates with the model directly using model indexes.” [21] fig. 26 shows the model/view pattern.

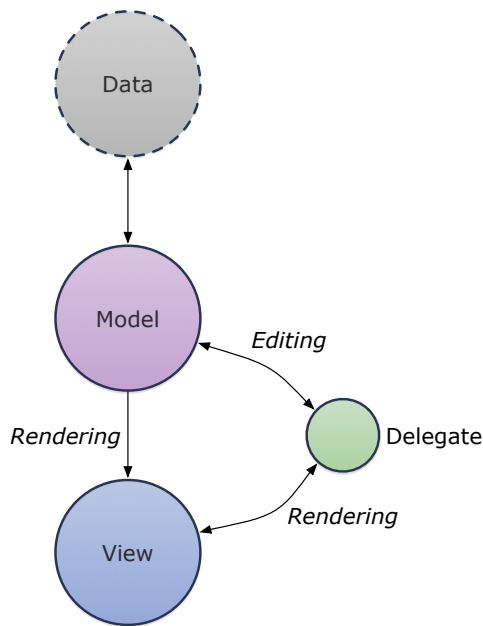


Figure 26: Qt's model/view pattern. [21]

ALTHOUGH OFFERING ADVANTAGES, such as to customize the presentation of items or the usage of a wide range of data sources, the model/view pattern was not used in general. This is mainly due to two reasons: (1) the developed and intended components use no data source except external files and (2) the concept of using model indices may add flexibility but introduces also overhead. The scene graph component of the editor was developed using Qt's abstract item model class which uses the model/view pattern. This showed, that the usage of the pattern can introduce unnecessary overhead, in terms of being more effort to implement, while not using the features of the pattern. Therefore the decision was taken against the usage of the pattern.

### Layers

TO REDUCE COUPLING AND DEPENDENCIES a relaxed layered architecture is used, as written in ?? . In contrast to a strict layered architecture, which allows any layer calling only services or interfaces from the layer below, the relaxed layered architecture allows higher layers to communicate with any lower layer. table 10 provides a graphical overview as well as a description of the layers. The colors have no meaning except to distinguish the layers visually.

Layer	Description	Examples
Graphical user interface (GUI)	All elements of the graphical user interface, views.	Scene graph view, scene view, render view
Graphical user interface domain (GUI domain)	View models.	Scene graph view model, node view model
Application	Controller/workflow objects.	Main application, scene graph controller, scene controller, node controller
Domain	Models respectively logic of the application.	Scene model, parameter model, node definition model, node domain model
Technical	Technical infrastructure, such as graphics, window creation and so on.	JSON parser, camera, culling, graphics, renderer
Foundation	Basic elements and low level services, such as a timer, arrays or other data classes.	Colors, common, constants, flags

Table 10: Layers of the developed software.

### Signals and slots

WHENEVER DESIGNING AND DEVELOPING software, coupling and cohesion can occur and may pose a problem if not considered early enough and properly. *Coupling* measures how strongly a component is connected, has knowledge of or depends on other components. High coupling impedes the readability and maintainability of software. Therefore low coupling ought to be strived. Larman states, that the principle of low coupling applies to many dimensions of software development and that it is one of the cardinal goals in building software. [8] *Cohesion* is a measurement of “how functionally related the operations of a software element are, and also measures how much work a software element is doing”. [8] Or put otherwise, “a measure of the strength of association of the elements within a module”. [22, p. 52] Low (or bad) cohesion does not imply, that a component does work only by itself, indeed it probably collaborates with many other objects. But low cohesion tends to create high (bad) coupling. It is therefore strived to keep objects focused, understandable and manageable while supporting low coupling. [8]

TO OVERCOME THE PROBLEMS of high coupling and low cohesion *signals and slots* are used. Signals and slots are a generalized implementation of the observer pattern, which can be seen in fig. 27.

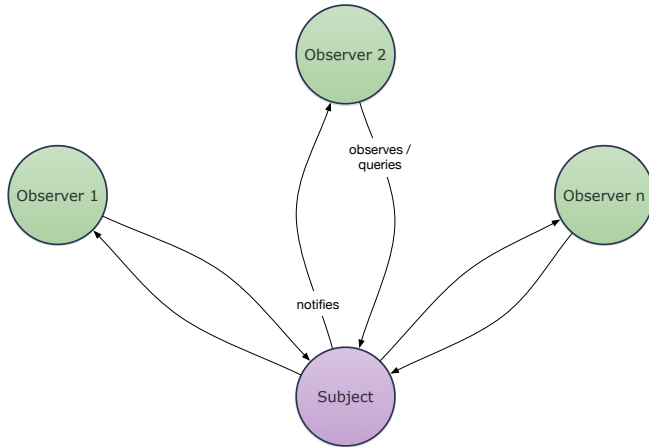


Figure 27: The observer pattern. [18]

A SIGNAL IS AN OBSERVABLE EVENT. A slot is a potential observer, typically a function. Slots are registered as observers to signals. Whenever a signal is emitted, the emitting class must call all the registered observers for that signal. Signals and slots have a many-to-many relationship. One signal may be connected to any number of slots and a slot may listen to any number of signals.

```

1 sender = Sender()
2 observer_1 = Observer()
3
4 sender.emit_some_signal.connect(
5     observer_1.some_slot
6 )
  
```

Figure 28: An example of an observer being registered to a signal.

SIGNALS CAN HOLD ADDITIONAL INFORMATION, such as single values or even references to objects. A simple example is loading nodes from files containing node definitions. The node controller, which loads node definitions from the file system, could emit two signals to inform other components, for example components of the GUI layer. (1) The total amount of node definitions to load and (2) the index of the last loaded node definition including a reference to the node definition. This information could for example be used by a dialog showing the progress of loading node definitions from the file system.

```
1 self.total_node_definitions.emit(num_node_definitions)
```

Figure 29: An example of emitting a signal including a value.

```
1 for index, definition_file in enumerate(node_definition_files):
2     node_definition = self.load_node_definition_from_file(
3         definition_file
4     )
5     self.node_definition_loaded(index, node_definition)
```

Figure 30: An example of emitting a signal including a value and a reference to an object.

### *Literate programming*

DOCUMENTATION IS CRUCIAL TO ANY SOFTWARE PROJECT. However, all too frequently the documentation is not done properly or is even neglected as it can be quite effortful with seemingly little benefit. No documentation at all, outdated or irrelevant documentation can cause unforeseen cost- and time-wise efforts. Using the literate programming paradigm prevents these problems, as the software emanates from the documentation. For this thesis literate programming was used as described in .

Mention usage of nuweb here, again?

ANOTHER TRAIN OF THOUGHT is required when using literate programming to develop software than when using traditional methodologies. This is due to the fact, that the approach is completely different. Traditional methodologies focus on instructing the computer what to do by writing program code. Literate programming focuses on explaining to human beings what the computer shall do by combining the documentation with code fragments in a single document. From this single document a program which can be compiled or run directly is extracted. The order of the code fragments matters only indirectly. They may appear in any order throughout the text. The code fragments are put into the right order for being compiled or run by defining the output files containing the needed code fragments in the right order.

THE NEED TO INCLUDE EVERY DETAIL makes literate programming very expressive and verbose. While this expressiveness may be an advantage for small software and partly also for larger software, it can also be a problem, especially for larger software: the documentation can get lengthy and hard to read, especially when including the implementation of technical details.

THESE ASPECTS were overcome by moving the implementation into the appendix and by outsourcing similar and very technical parts

Insert reference to appendix here.

and output file definitions into a separate file.

Insert reference to code fragments here.

## Program

TO RECALL, the objective of this thesis is the design and development of a program for modeling, composing and rendering real-time computer graphics by providing a graphical toolbox.

USING THE INTRODUCED METHODOLOGIES (see ) and the developed software architecture (see ) this intended program was implemented.

THE PROGRAM IMPLEMENTED is supposed to have two main components: the *editor* and *player*.

THE EDITOR COMPONENT provides a graphical system for modeling, composing and rendering of scenes. It allows composing scenes to an animation and to save an animation in an external file as a structure in a specific format. Rendering is done using the shown sphere tracing algorithm combined with Phong shading.

THE PLAYER COMPONENT simply plays an animation created with the editor component.

DUE TO TIME-RELATED REASONS however, only the editor component was implemented. Figure 31 shows an image of the program implemented.

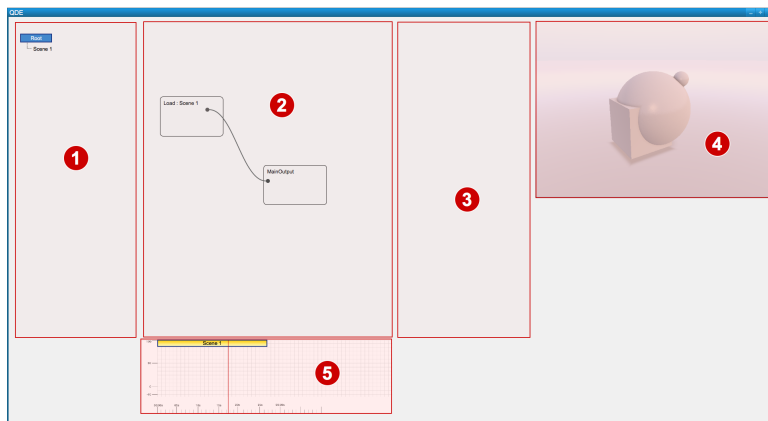


Figure 31: The implemented editor component.

THE QUINTESSENCE OF BOTH COMPONENTS is to output respectively to read a data structure in the JSON [23] format which defines an animation. This data structure provides the following elements: (1) an animation which contains (2) scenes, which contain (3) nodes. This data structure is evaluated and the result at the end of that evaluation is nothing else than shader-specific code which gets executed on the graphical processing unit (GPU).



AN ANIMATION is simply a composition of scenes which run in a sequential order within a defined time span.

A SCENE is a composition of nodes in form of a directed graph.

NODES are instances of node definitions and define the content of a scene and therefore of an animation.

NODE DEFINITIONS provide content in a specific structure, shown in Table 11.

Property	Description
<i>ID</i>	A global unique identifier (UUID <sup>1</sup> ).
<i>Name</i>	The name of the node, e.g. "Sphere".
<i>Description</i>	A description of the node's purpose.
<i>Inputs</i>	Parameters given to the node as inputs. This may be distinct types, e.g. float values or text input, references to other nodes.
<i>Outputs</i>	Values delivered by the node as outputs.
<i>Definitions</i>	A list of the node's definitions. This may be an actual definition of a (shader-) function in terms of an implicit surface.
<i>Invocation</i>	The format of a call to the node definition, including placeholders which will be replaced by parameters.
<i>Parts</i>	Defines text that may be processed when calling the node. Contains code which can be interpreted directly.
<i>Nodes</i>	The children a node has (child nodes). These entries are references to other nodes only.
<i>Parameters</i>	A list of the node's inputs and outputs in form of tuples. Each tuple is composed of two parts: (1) a reference to another node and (2) a reference to an input parameter or an output value of that node. If the first reference is not set, this means that the parameter is internal.

Table 11: Properties/attributes of a node definition.

<sup>1</sup> <https://docs.python.org/3/library/uuid.html>

CONTENT is whatever a node definition provides in terms of the definitions but the output has always to be an atomic type as defined in ??.

AN EXAMPLE of an node definition of type *implicit* for rendering a sphere is given in ??.

SUBSEQUENT EACH COMPONENT OF THE EDITOR is shown. This is done by showing an adapted component diagram [8, pp. 653 – 654]

```

1  {
2      "name": "Implicit sphere",
3      "id_": "16d90b34-a728-4caa-b07d-a3244ecc87e3",
4      "description": "Definition of a sphere by using implicit surfaces",
5      "inputs": [
6
7      {
8          "name": "radius",
9          "atomic_id": "468aea9e-0a03-4e63-b6b4-8a7a76775a1a",
10         "default_value": {
11             "type_": "float",
12             "value": "1"
13         },
14         "id_": "f5c6a538-1dbc-4add-a15d-ddc4a5e553da",
15         "description": "The radius of the sphere",
16         "min_value": "-1000",
17         "max_value": "1000"
18     }
19 ],
20     "outputs": [
21
22     {
23         "name": "output",
24         "id_": "a3ac68e5-5afe-4779-9e9f-5b619e041ae6",
25         "atomic_id": "c019271c-35b6-425c-9ff2-a1d893111adb"
26     }
27 ],
28     "definitions": [
29
30     {
31         "id_": "99d20a26-f233-4310-adb2-5e540726d079",
32         "script": [
33             "// Returns the signed distance to a sphere with given radius for the",
34             "// given position.",
35             "float sphere(vec3 position, float radius)",
36             "{",
37             "    return length(position) - radius;",
38             "}"
39         ]
40     }
41 ],

```

Figure 32: Teh cap.

```

1      "invocations": [
2
3      {
4          "id_": "4cd369d2-c245-49d8-9388-6b9387af8376",
5          "type": "implicit",
6          "script": [
7              "float s = sphere(",
8              "    16d90b34-a728-4caa-b07d-a3244ecc87e3-position,",
9              "    5c6a538-1dbc-4add-a15d-ddc4a5e553da",
10             ");"
11         ]
12     }
13 ],
14     "parts": [
15
16     {
17         "id_": "74b73ce7-8c9d-4202-a533-c77aba9035a6",
18         "name": "Implicit sphere node function",
19         "type_": "implicit",
20         "script": [
21             "# -*- coding: utf-8 -*-",
22             "",
23             "from PyQt5 import QtGui",
24             "",
25             "",
26             "class Class_ImplicitSphere(object):",
27             "    def __init__(self):",
28             "        self.position = QtGui.QVector3D()",
29             "",
30             "    def process(self, context, inputs):",
31             "        shader = context.current_shader.program",
32             "        ",
33             "        radius = inputs[0].process(context).value",
34             "        shader_radius_location = shader.uniformLocation(\"f5c6a538-1dbc-4add-a15d-ddc4a5e553da-radius\",",
35             "        shader.setUniformValue(shader_radius_location, radius)",
36             "        ",
37             "        position = self.position",
38             "        shader_position_location = shader.uniformLocation(",
39             "            \"16d90b34-a728-4caa-b07d-a3244ecc87e3-position\",",
40             "        )",
41             "        shader.setUniformValue(shader_position_location, position)",
42             "        ",
43             "        return context"
44         ]
45     }
46 ],

```

Figure 33: Teh cap 2.

Type	Description
<i>Generic</i>	A global unique identifier (UUID <sup>1</sup> ).
<i>Float</i>	The name of the node, e.g. "Sphere".
<i>Text</i>	A description of the node's purpose.
<i>Scene</i>	Parameters given to the node as inputs. This may be
<i>Image</i>	Values delivered by the node as outputs.
<i>Dynamic</i>	A list of the node's definitions. This may be an
<i>Mesh</i>	The format of a call to the node definition, including
<i>Implicit</i>	Defines text that may be processed when calling the node.

Table 12: Atomic types, that define a node (definition).

```

1  "nodes": [
2
3  ],
4  "connections": [
5
6  {
7    "source_node": "00000000-0000-0000-0000-000000000000",
8    "source_part": "f5c6a538-1dbc-4add-a15d-ddc4a5e553da",
9    "target_node": "00000000-0000-0000-0000-000000000000",
10   "target_part": "74b73ce7-8c9d-4202-a533-c77aba9035a6"
11 }
12 ]
13 }
```

Figure 34: Teh cap 3.

and an entity relationship diagram [8, pp. 501 ff.], if appropriate, followed by a description of the component. The component diagrams is used to show the signals a component emits and receives. The entity relationship diagram is used to show the relationships between components. Not all relationships are shown however, only the relations immediately related to the presented component are shown as the diagrams would otherwise be too crowded and confusing.

TO PRESERVE CLARITY all components are described in discrete sections. Although the implementation of the components is very specific, in terms of the programming language, their logic may be reused later on when developing the player component.

### Editor

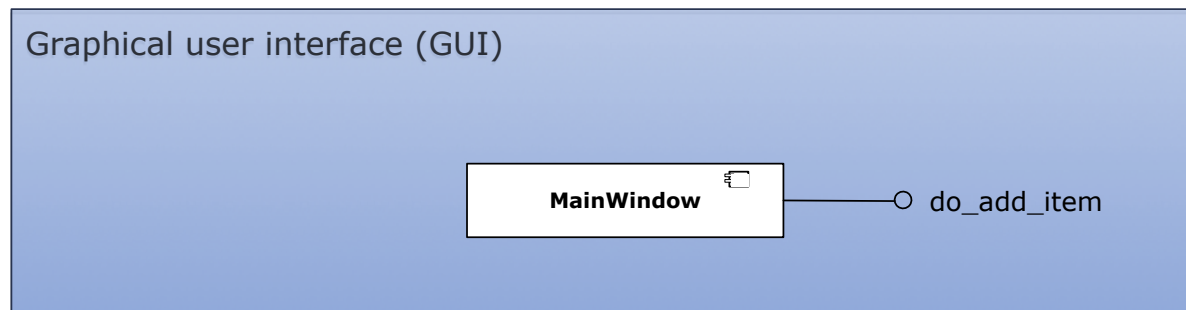


Figure 35: Component diagram of the editor component.

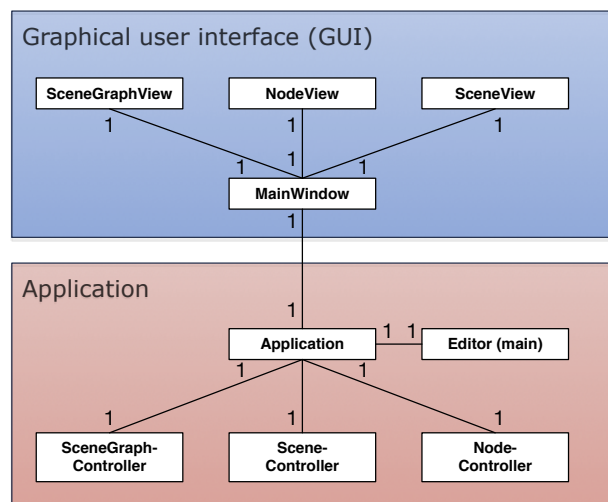


Figure 36: Entity relationship diagram of the editor component.

THE EDITOR COMPONENT is the main component, which acts as entry point for the application and ties all components together. The Application class sets up all the controllers and the main window. The MainWindow class sets up all the view-related components, therefore the scene graph view, the scene view and the renderer.

Elaborate more? Is this really necessary? I think it will be rather boring.

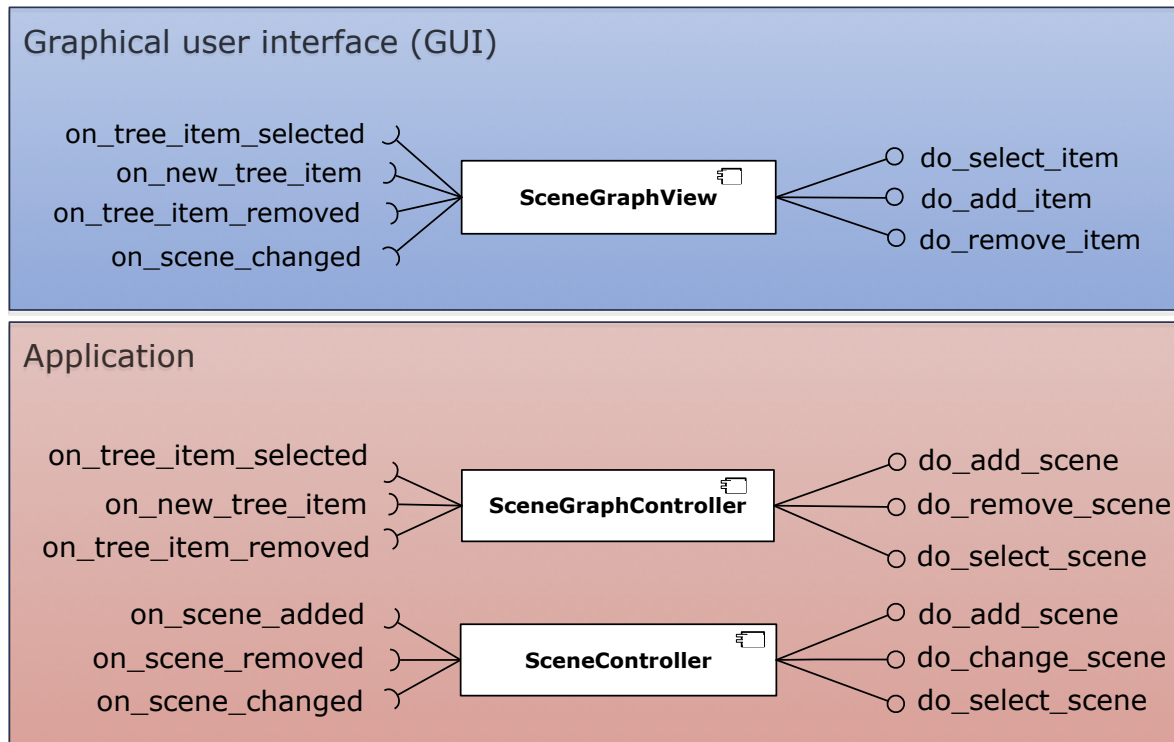
*Scene tree*

Figure 37: Component diagram of the scene tree component.

THE SCENE TREE COMPONENT allows to manage the scenes of the system. User interaction is provided by a tree-like view, which lets the user add, remove and select scenes.

Elaborate more? Is this really necessary? I think it will be rather boring.

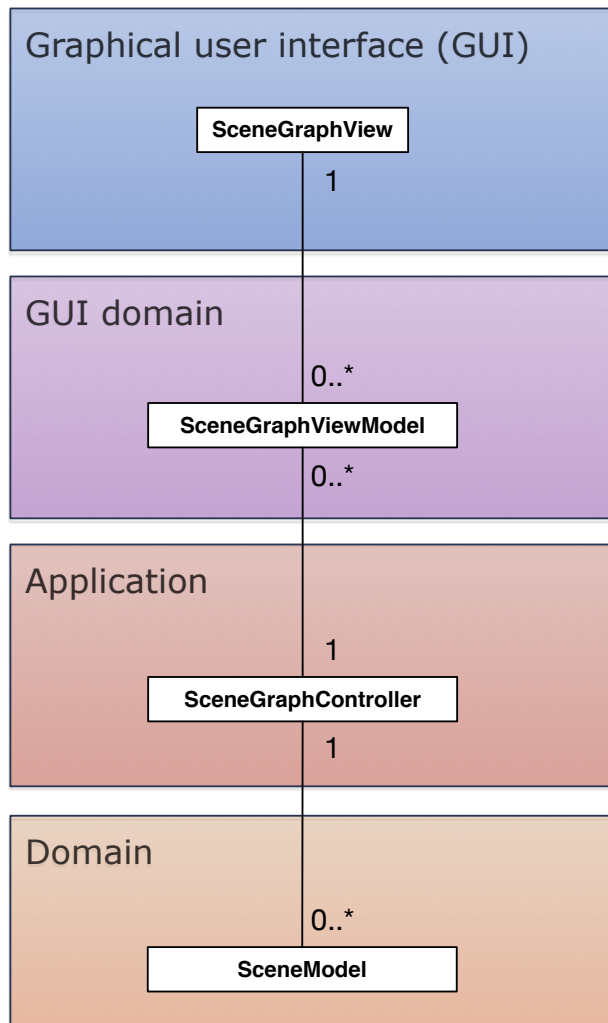


Figure 38: Entity relationship diagram of the scene tree component.

## *Discussion and conclusion*

Write chapter.

OPTIONAL OBJECTIVES are the following:

- Additional features for the editor, as follows.
  - A sequencer, allowing a time-based scheduling of defined scenes.
  - Additional nodes, such as operations (e.g. replication of objects) or post-processing effects (glow/glare, color grading and so on).
- Development of a standalone player application. The player allows the playback of animations (time-based, compounded scenes in sequential order) created with the editor.



# Appendix

# Implementation

TO BEGIN WITH THE IMPLEMENTATION of a project, it is necessary to first think about the goal that one wants to reach and about some basic structures and guidelines which lead to the fulfillment of that goal.

THE MAIN GOAL IS to have a visual animation system, which allows the creation and rendering of visually appealing scenes, using a graphical user interface for creation, and a ray tracing based algorithm for rendering.

Adapt goal to current state.

THE THOUGHTS TO REACH THIS GOAL were already developed in Fundamentals and Methodologies and will therefore not be repeated again.

AS STATED IN METHODOLOGIES, the literate programming paradigm is used to implement the components. To maintain readability only relevant code fragments are shown in place. The whole code fragments, which are needed for tangling, are found at ??.

THE EDITOR COMPONENT IS DESCRIBED FIRST as it is the basis for the whole project and also contains many concepts, that are re-used by the player component. Before starting with the implementation it is necessary to define requirements and some kind of framework for the implementation.

## Requirements

THE REQUIREMENTS FOR RUNNING THE IMPLEMENTATION are currently the following:

- A Unix derivative as operating system (Linux, macOS).
- Python <sup>12</sup> version 3.5.x or above
- PyQt5 <sup>13</sup> version 5.7 or above
- OpenGL <sup>14</sup> version 3.3 or above

<sup>12</sup> <http://www.python.org>

<sup>13</sup> <https://riverbankcomputing.com/software/pyqt/intro>

<sup>14</sup> <https://www.opengl.org/>

## *Name spaces and project structure*

TO PROVIDE A STRUCTURE FOR THE WHOLE PROJECT and for being able to stick to the thoughts established in Fundamentals and Methodologies, it may be wise to structure the project a certain way.

THE SOURCE CODE SHALL BE PLACED in the `src` directory underneath the main directory. The creation of the single directories is not explicitly shown, it is done by parts of this documentation which are tangled but not exported.

WHEN DEALING WITH DIRECTORIES AND FILES, Python uses the term *package* for (sub-) directories and *module* for files within directories.<sup>15</sup>

<sup>15</sup> <https://docs.python.org/3/reference/import.html#packages>

TO PREVENT HAVING MULTIPLE MODULES HAVING THE SAME NAME, name spaces are used.<sup>16</sup> The main name space shall be analogous to the project's name: `qde`. Underneath the source code folder `src`, each sub-folder represents a package and acts therefore also as a name space.

<sup>16</sup> <https://docs.python.org/3/tutorial/classes.html#python-scopes-and-namespaces>

TO ALLOW A WHOLE PACKAGE AND ITS MODULES being imported *as modules*, it needs to have at least a file inside, called `__init__.py`. Those files may be empty or they may contain regular source code such as classes or methods.

## *Coding style*

TO STAY CONSISTENT THROUGHOUT IMPLEMENTATION of components, a coding style is applied which is defined as follows.

- Classes use camel case, e.g. `class SomeClassName`.
- Folders respectively name spaces use only small letters, e.g. `foo.bar.baz`.
- Methods are all small caps and use underscores as spaces, e.g. `some_method_name`.
- Signals are methods, which are prefixed by the word “do”, e.g. `do_something`.
- Slots are methods, which are prefixed by the word “on”, e.g. `on_something`.
- Importing is done by the `from Foo import Bar` syntax, whereas `Foo` is a module and `Bar` is either a module, a class or a method.

## *Importing of modules*

FOR THE IMPLEMENTATION PYTHON IS USED, as mentioned in section “Requirements”. Python has “batteries included”, which means that it offers a lot of functionality through various modules, which

have to be imported first before using them. The same applies of course for self written modules. Python offers multiple possibilities concerning imports, for details see <https://docs.python.org/3/tutorial/modules.html>.

Is direct url reference ok or does this need to be citation?

However, PEP number 8 recommends to either import modules directly or to import the needed functionality directly.<sup>17</sup> As defined by the coding style, `??`, imports are done by the `from Foo import Bar` syntax.

<sup>17</sup> <https://www.python.org/dev/peps/pep-0020/>

THE IMPORTED MODULES ARE ALWAYS SPLIT UP: first the system modules are imported, modules which are provided by Python itself or by external libraries, then project-related modules are imported.

### *Framework for implementation*

TO STAY CONSISTENT WHEN IMPLEMENTING classes and methods, it makes sense to define a rough framework for their implementation, which is as follows: (1) Define necessary signals, (2) define the constructor and (3) implement the remaining functionality in terms of methods and slots. Concerning the constructor, the following pattern may be applied: (1) Set up the user interface when it is a class concerning the graphical user interface, (2) set up class-specific aspects, such as the name, the title or an icon, (3) set up other components used by that class and (4) initialize the connections, meaning hooking up the defined signals with corresponding methods.

Now, having defined the *requirements*, a *project structure*, a *coding style* and a *framework* for the actual *implementation*, the implementation of the editor may be approached.

# *Editor*

BEFORE DIVING RIGHT INTO THE IMPLEMENTATION of the editor, it may be good to reconsider what shall actually be implemented, therefore what the main functionality of the editor is and what its components are.

THE QUINTESSENCE OF THE EDITOR is to output a structure, be it in the JSON format or even in bytecode, which defines an animation.

AN ANIMATION is simply a composition of scenes which run in a sequential order within a time span. A scene is then a composition of nodes, which are at the end of their evaluation nothing else as shader specific code which gets executed on the GPU. As this definition is rather abstract, it may be easier to define what shall be achieved in terms of content and then work towards this definition.

A VERY BASIC DEFINITION OF WHAT SHALL BE ACHIEVED is the following. It shall be possible to create an animated scene using the editor application. The scene shall be composed of two objects, a sphere and a cube. Additionally it shall have a camera as well as a point light.

The camera shall be placed 5 units in height and 10 units in front of the center of the scene. The cube shall be placed in the middle of the scene, the sphere shall have an offset of 5 units to the right and 2 units in depth. The point light shall be placed 10 units above the center.

Both objects shall have different materials: the cube shall have a dull surface of any color whereas the sphere shall have a glossy surface of any color.

There shall be an animation of ten seconds duration. During this animation the sphere shall move towards the cube and they shall merge into a blob-like object. The camera shall move 5 units towards the two objects during this time.

TO ACHIEVE THIS OVERALL GOAL, while providing an user-friendly experience, several components are needed. These are the following, being defined in *QDE - a visual animation system. Software-Architektur*. pp. 29 ff. [5]

A *scene graph* allowing the creation and deletion of scenes. The scene graph has at least a root scene.

A *node-based graph* structure allowing the composition of scenes using nodes and connections between the nodes. There exists at least a root node at the root scene of the scene graph.

A *parameter window* showing parameters of the currently selected graph node.

A *rendering window* rendering the currently selected node or scene.

A *sequencer* allowing a time-based scheduling of defined scenes.

However, the above list is not complete. It is somehow intuitively clear, that there needs to be some *main component*, which holds all the mentioned components and allows a proper handling of the application (like managing resources, shutting down properly and so on).

THE MAIN COMPONENT is composed of a view and a controller, as the whole architecture uses layers and the MVVMC principle, see section “Software architecture”. A model is (at least at this point) not necessary. The view component shall be called *main window* and its controller shall be called *main application*.

TO PRESERVE CLARITY all components are described in discrete chapters. Although the implementation of the components is very specific, in terms of the programming language, their logic may be reused later on when developing the player component.

BEFORE IMPLEMENTING any of these components however, the editor application needs an entry point, that is a point where the application starts when being called.

### *Main entry point*

AN ENTRY POINT is a point where an application starts when being called. Python does this by evaluating a special variable within a module, called `__name__`. Its value is set to `__main__` if the module is “read from standard input, a script, or from an interactive prompt.”<sup>18</sup>

<sup>18</sup> [https://docs.python.org/3/library/\\_\\_main\\_\\_.html](https://docs.python.org/3/library/__main__.html)

ALL THAT THE ENTRY POINT NEEDS TO DO, in case of the editor application, is spawning the editor application, execute it and exit again, as can be seen below.

BUT WHERE TO PLACE THE MAIN ENTRY POINT? A very direct approach would be to implement that main entry point within the main application controller. But when running the editor application by calling it from the command line, calling a controller directly may rather be confusing. Instead it is more intuitive to have only a minimal entry point which is clearly visible as such. Therefore the main

*⟨Main entry point ?⟩ ≡*

```

1  if __name__ == "__main__":
2      app = application.Application(sys.argv)
3      status = app.exec()
4      sys.exit(status)
5  ◇

```

Figure 39: Main entry point of the editor application.

Editor → Main entry point

Fragment referenced in 148a.

entry point will be put in a file called `editor.py+` which is at the top level of the `~\verb+src` directory.

## Main application

THE EDITOR APPLICATION CANNOT BE STARTED YET, although a main entry point is defined by now. This is due the fact that there is no such thing as an editor application yet. Therefore a main application needs to be implemented.

QT VERSION 5 IS USED through the PyQt5 wrapper, as stated in the section “Requirements”. Therefore all functionality of Qt 5 may be used. Qt already offers a main application class, which can be used as a controller. The class is called `QApplication`.

BUT WHAT DOES SUCH A MAIN APPLICATION CLASS ACTUALLY DO? What is its functionality? Very roughly sketched, such a type of application initializes resources, enters a main loop, where it stays until told to shut down, and at the end it frees the allocated resources again.

Due to the usage of `QApplication` as super class it is not necessary to implement a main (event-) loop, as such is provided by Qt itself <sup>19</sup>.

As the main application initializes resources, it acts as a central node between the various layers of the architecture, initializing them and connecting them using signals.[5, pp. 37 — 38]

<sup>19</sup> <http://doc.qt.io/qt-5/qapplication.html#exec>

*⟨Main application declarations ?⟩ ≡*

```

1  common.with_logger
2  class Application(QtWidgets.QApplication):
3      """Main application for QDE."""
4
5      ⟨ Main application constructor ? ⟩
6      ⟨ Main application methods ? ⟩ ◇

```

Figure 40: Main application class of the editor application.

Editor → Application

Fragment referenced in 148b.

Therefore it needs to do at least three things: (1) initialize itself, (2) set up components and (3) connect components. This all happens when the main application is being initialized through its constructor.

*< Main application constructor ? > ≡*

```

1  def __init__(self, arguments):
2      """Constructor.
3
4      :param arguments: a (variable) list of arguments, that are
5                          passed when calling this class.
6      :type  argv:      list
7      """
8
9      < Set up internals for main application ?, ... >
10     < Set up components for main application ? >
11     < Add root node for main application ? >
12     < Set model for scene graph view ? >
13     < Load nodes ? >
14     self.main_window.show()◇

```

Figure 41: Constructor of the editor application class.

Editor → Application → Constructor

Fragment referenced in ?.

SETTING UP THE INTERNALS is straight forward: Passing any given arguments directly to QApplication, setting an application icon, a name as well as a display name.

*< Set up internals for main application ? > ≡*

```

1  super(Application, self).__init__(arguments)
2  self.setWindowIcon(QtGui.QIcon("assets/icons/im.png"))
3  self.setApplicationName("QDE")
4  self.setApplicationDisplayName("QDE")◇

```

Figure 42: Setting up the internals for the main application class.

Editor → Application → Constructor

Fragment defined by ?, ?.

Fragment referenced in ?.

The other two steps, setting up the components and connecting them can however not be done at this point, as there simply are no components available. A component to start with is the view component of the main application, the main window.

## Main window

HAVING A VERY BASIC IMPLEMENTATION of the main application, its view component, the main window, can now be implemented and then be set up by the main application.



THE MAIN FUNCTIONALITY of the main window is to set up the actual user interface, containing all the views of the components. Qt offers the class `QMainWindow` from which `MainWindow` may inherit.

*⟨Main window declarations ?⟩ ≡*

```

1  common.with_logger
2  class MainWindow(QtWidgets.QMainWindow):
3      """The main window class.
4      Acts as main view for the QDE editor application.
5      """
6
7      ⟨ Main window signals ? ⟩
8
9      ⟨ Main window methods ?, ... ⟩
10 ◇

```

Figure 43: Main window class of the editor application.

Editor → Main window

Fragment referenced in 149a.

FOR BEING ABLE TO SHUT DOWN the main application and therefore the main window, they need to react to a request for shutting down, either by a keyboard shortcut or a menu command. However, the main window is not able to force the main application to quit by itself. It would be possible to pass the main window a reference to the application, but that would lead to tight coupling and is therefore not considered as an option. Signals and slots allow exactly such cross-layer communication without coupling components tightly.

TO AVOID TIGHT COUPLING a signal within the main window is introduced, which tells the main application to shut down. A fitting name for the signal might be `do_close`.

*⟨Main window signals ?⟩ ≡*

```

1  do_close = QtCore.pyqtSignal()◇

```

Figure 44: Definition of the `do_close` signal of the main window class.

Editor → Main window → Signals

Fragment referenced in ?.

Now, that the signal for closing the window and the application is defined, two additional things need to be considered: The emission of the signal by the main window itself as well as the consumption of the signal by a slot of other classes.

The signal shall be emitted when the escape key on the keyboard is pressed or when the corresponding menu item was selected. As there is no menu at the moment, only the key pressed event is implemented by now.

⟨Main window methods ?⟩ ≡

```

1  def __init__(self, parent=None):
2      """Constructor."""
3
4      super(MainWindow, self).__init__(parent)
5      self.setup_ui()
6
7  def keyPressEvent(self, event):
8      """Gets triggered when a key press event is raised.
9
10     :param event: holds the triggered event.
11     :type  event: QKeyEvent
12     """
13
14     if event.key() == QtCore.Qt.Key_Escape:
15         self.do_close.emit()
16     else:
17         super(MainWindow, self).keyPressEvent(event)
18  ◇

```

Fragment defined by ?, ?.  
Fragment referenced in ?.

Figure 45: Definition of methods for the main window class.

Editor → Main window → Methods

THE MAIN WINDOW CAN NOW BE SET UP by the main application controller, which also listens to the do\_close signal through the inherited quit slot.

⟨Set up components for main application ?⟩ ≡

```

1  ⟨ Set up controllers for main application ?, ... ⟩
2  ⟨ Connect controllers for main application ?, ... ⟩
3  ⟨ Set up main window for main application ? ⟩◇

```

Fragment referenced in ?.

Figure 46: Setting up of components for the main application class.

Editor → Main application → Constructor

The used view component for the main window, QMainWindow, needs at least a central widget with a layout for being rendered.<sup>20</sup>

<sup>20</sup> <http://doc.qt.io/qt-5/qmainwindow.html#creating-main-window-components>

AS THE MAIN WINDOW WILL SET UP AND HOLD the whole layout for the application through multiple view components, a method setup\_ui is introduced, which sets up the whole layout. The method creates a central widget containing a grid layout.

TARGETING A LOOK as proposed in *QDE - a visual animation system. Software-Architektur* p. 9, a simple grid layout does however not provide enough possibilities. Instead a horizontal box layout in combination with splitters is used.

Recalling the components, the following layout is approached:

⟨ Set up main window for main application ? ⟩ ≡

```

1 self.main_window = qde_main_window.MainWindow()
2 self.main_window.do_close.connect(self.quit)
3 ⟨ Connect main window components ?, ... ⟩◇

```

Figure 47: Set up of the editor main window and its signals from within the main application.

Editor → Main application → Constructor

Fragment referenced in ?.

- A scene graph, on the left of the window, covering the whole height.
- A node graph on the right of the scene graph, covering as much height as possible.
- A view for showing the properties (and therefore parameters) of the selected node on the right of the node graph, covering as much height as possible.
- A display for rendering the selected node, on the right of the properties view, covering as much height as possible
- A sequencer at the right of the scene graph and below the other components at the bottom of the window, covering as much width as possible

Provide a picture of the layout here.

All the above taken actions to lay out the main window change nothing in the window's yet plain appearance. This is quite obvious, as none of the actual components are implemented yet.

A GOOD STARTING POINT for the implementation of the remaining components might be the scene graph, as it might be the most straight-forward component to implement.

*< Main window methods ? > + ≡*

```

1  def setup_ui(self):
2      """Sets up the user interface specific components."""
3
4      self.setObjectName('MainWindow')
5      self.setWindowTitle('QDE')
6      self.resize(1024, 768)
7      self.move(100, 100)
8      # Ensure that the window is not hidden behind other windows
9      self.activateWindow()
10
11     central_widget = QtWidgets.QWidget(self)
12     central_widget.setObjectName('central_widget')
13     grid_layout = QtWidgets.QGridLayout(central_widget)
14     central_widget.setLayout(grid_layout)
15     self.setCentralWidget(central_widget)
16     self.statusBar().showMessage('Ready.')
17
18     horizontal_layout_widget = QtWidgets.QWidget(central_widget)
19     horizontal_layout_widget.setObjectName('horizontal_layout_widget')
20     horizontal_layout_widget.setGeometry(QtCore.QRect(12, 12, 781, 541))
21     horizontal_layout_widget.setSizePolicy(QtWidgets.QSizePolicy.MinimumExpanding,
22     QtWidgets.QSizePolicy.MinimumExpanding)
23     grid_layout.addWidget(horizontal_layout_widget, 0, 0)
24
25     horizontal_layout = QtWidgets.QHBoxLayout(horizontal_layout_widget)
26     horizontal_layout.setObjectName('horizontal_layout')
27     horizontal_layout.setContentsMargins(0, 0, 0, 0)
28
29     self.scene_graph_view = guiscene.SceneGraphView()
30     self.scene_graph_view.setObjectName('scene_graph_view')
31     self.scene_graph_view.setMaximumWidth(300)
32     horizontal_layout.addWidget(self.scene_graph_view)
33
34     < Set up scene view in main window ? >
35     < Set up parameter view in main window ? >
36     < Set up render view in main window ? >
37
38     horizontal_splitter = QtWidgets.QSplitter()
39     < Add render view to horizontal splitter in main window ? >
40     < Add parameter view to horizontal splitter in main window ? >
41
42     vertical_splitter = QtWidgets.QSplitter()
43     vertical_splitter.setOrientation(QtCore.Qt.Vertical)
44     vertical_splitter.addWidget(horizontal_splitter)
45     < Add scene view to vertical splitter in main window ? >
46
47     horizontal_layout.addWidget(vertical_splitter)
48

```

Fragment defined by ?, ?.

Fragment referenced in ?.

Figure 48: Set up of the user interface of the editor's main window.

Editor → Main window → Methods

## Scene graph

THE SCENE GRAPH COMPONENT has two aspects to consider, as mentioned in chapter “Editor”: (1) a graphical aspect as well as (2) its data structure.

Define what a scene is by prose and code.

As described in subsection “Software design”, two kinds of models are used. A domain model, containing the actual data and a view model, which holds a reference to its corresponding domain model.

As the domain model builds the basis for the whole (data-) structure, it is implemented first.

⟨ Scene model declarations ? ⟩ ≡

```
1 class SceneModel(object):
2     """The scene model.
3     It is used as a base class for scene instances within the
4     whole system.
5     """
6
7     ⟨ Scene model signals ? ⟩
8     ⟨ Scene model methods ? ⟩
9     ⟨ Scene model slots ? ⟩◇
```

Figure 49: Definition of the scene model class, which acts as a base class for scene instances within the whole application.

Editor → Scene model

Fragment referenced in 149b.

THE ONLY KNOWN FACT at this point is, that a scene is a composition of nodes and therefore holds its nodes as a list. Additionally it holds a reference to its parent.

THE COUNTER PART OF THE DOMAIN MODEL is the view model. View models are used to visually represent something within the graphical user interface and they provide an interface to the domain layer. To this point, a simple reference in terms of an attribute is used as interface, which may be changed later on.

Concerning the user interface, a view model must fulfill the requirements posed by the user interface’s corresponding component. In this case this are actually two components: the scene graph view as well as the scene view.

*< Scene model methods ? > ≡*

```

1  def __init__(self, parent=None):
2      """Constructor.
3
4      :param parent: the parent scene of this scene. The parent is
5      None if the current scene is the root scene.
6      :type parent: SceneModel
7      """
8
9      self.id_ = uuid.uuid4()
10     self.nodes = []
11     self.parent = parent◇

```

Figure 50: The constructor of the scene model.

Editor → Scene model → Constructor

Fragment referenced in ?.

It would therefore make sense the use one view model for both components, but this is not possible as the view model of the scene view, `QGraphicsScene`, uses its own data model.

Therefore `QObject` will be used for the scene graph view model and `QGraphicsScene` will be used for the scene view model.

*< Scene graph view model declarations ? > ≡*

```

1  class SceneGraphViewModel(QObject):
2      """View model representing scene graph items.
3
4      The SceneGraphViewModel corresponds to an entry within the
5      scene graph. It is used by the QAbstractItemModel class and
6      must therefore at least provide a name and a row.
7      """
8
9      < Scene graph view model signals ? >
10     < Scene graph view model constructor ?, ... >
11     < Scene graph view model methods ?, ... >
12     < Scene graph view model slots ? >
13  ◇

```

Figure 51: Definition of the scene graph view model class, which corresponds to an entry within the scene graph.

Editor → Scene graph view model

Fragment referenced in 150a.

In terms of the scene graph, the view model must provide at least a name and a row. In addition, as written above, it holds a reference to the domain model.

SCENES MAY NOW BE INSTANTIATED, it is although necessary to manage scenes in a controlled manner. Therefore the class `SceneGraphController` will now be implemented, for being able to manage scenes.

As the scene graph shall be built as a tree structure, an appropriate data structure is needed. Qt provides the `QTreeWidget` class, but that

⟨ Scene graph view model constructor ? ⟩ ≡

```

1  def __init__(
2      self,
3      row,
4      domain_object,
5      name=QtCore.QCoreApplication.translate(
6          'SceneGraphViewModel', 'New scene'
7      ),
8      parent=None
9  ):
10     """Constructor.
11
12     :param row:          The row the view model is in.
13     :type row:           int
14     :param domain_object: Reference to a scene model.
15     :type domain_object: qde.editor.domain.scene.SceneModel
16     :param name:         The name of the view model, which will
17                          be displayed in the scene graph.
18     :type name:          str
19     :param parent:       The parent of the current view model
20                          within the scene graph.
21     :type parent:        qde.editor.gui_domain.scene.
22                          SceneGraphViewModel
23
24
25     super(SceneGraphViewModel, self).__init__(parent)
26
27     self.id_ = domain_object.id_
28     self.row = row
29     self.domain_object = domain_object
30     self.name = name
31

```

Figure 52: The constructor of the scene graph view model.

Editor → Scene graph view model → Constructor

Fragment defined by ?, ?.  
 Fragment referenced in ?.

class is in this case not suitable, as it does not separate the data from its representation, as stated by Qt: “Developers who do not need the flexibility of the Model/View framework can use this class to create simple hierarchical lists very easily. A more flexible approach involves combining a QTreeView with a standard item model. This allows the storage of data to be separated from its representation.”<sup>21</sup>

SUCH A STANDARD ITEM MODEL is QAbstractItemModel<sup>22</sup>, which is used as a base class for the scene graph controller.

*< Scene graph controller declarations ? > ≡*

```

1  common.with_logger
2  class SceneGraphController(QQtCore.QAbstractItemModel):
3      """The scene graph controller.
4      A controller for managing the scene graph by adding,
5      editing and removing scenes.
6      """
7
8      < Scene graph controller signals ? >
9      < Scene graph controller constructor ?, ... >
10     < Scene graph controller methods ?, ... >
11     < Scene graph controller slots ? >
12  ◇

```

Fragment referenced in 151a.

AS AT THIS POINT THE FUNCTIONALITY of the scene graph controller is not fully known, the constructor simply initializes its parent class and an empty list of scenes.

*< Scene graph controller constructor ? > ≡*

```

1  def __init__(self, parent=None):
2      """Constructor.
3
4      :param parent: The parent of the current view model within
5                     the scene graph.
6      :type parent: qde.editor.application.SceneGraphController
7      """
8
9      super(SceneGraphController, self).__init__(parent)
10  ◇

```

Fragment defined by ?, ?.

Fragment referenced in ?.

THE SCENE GRAPH CONTROLLER HOLDS AND MANAGES SCENE DATA.

<sup>21</sup> <http://doc.qt.io/qt-5/qtreeview.html#details>

<sup>22</sup> <http://doc.qt.io/qt-5/qabstractitemmodel.html>

Figure 53: The scene graph controller, inheriting from QAbstractItemModel.

Editor → Scene graph controller

Figure 54: Constructor of the scene graph controller.

Editor → Scene graph controller  
→ Constructor



Therefore it needs to have at least a root node. As the controller manages both, domain models and the view models, it needs to create both models.

Due to the dependencies of other components this cannot be done within the constructor, as components depending on the scene graph controller may not be listening to its signals at this point. Therefore this is done in a separate method called `add_root_node`.

*< Scene graph controller add root node ? > ≡*

```

1  def add_root_node(self):
2      """Add a root node to the data structure.
3      """
4
5      if self.root_node is None:
6          root_node = domain_scene.SceneModel()
7          self.view_root_node = guidomain_scene.SceneGraphViewModel(
8              row=0,
9              domain_object=root_node,
10             name=QtCore.QCoreApplication.translate(
11                 __class__.__name__, 'Root scene'
12             )
13         )
14         self.do_add_scene.emit(root_node)
15         self.layoutChanged.emit()
16         self.logger.debug("Added root node")
17     else:
18         self.logger.warn((
19             "Not (re-) adding root node, already"
20             "present!"
21         ))
22  ◇

```

Figure 55: A method to add the root node from within the scene graph controller.

Editor → Scene graph controller  
→ Methods

Fragment referenced in ?.

*< Scene graph controller methods ? > ≡*

```

1  < Scene graph controller add root node ? >
2  ◇

```

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.

Fragment referenced in ?.

The root scene can now be added by the main application, as all necessary components are set up.

THE SCENE GRAPH CONTROLLER MUST ALSO PROVIDE THE HEADER DATA, which is used to display the header within the view (due to the usage of the Qt view model ). As header data the name of the scenes as well as the number of nodes a scene contains shall be

Add reference to Qt's view model

⟨Add root node for main application ?⟩ ≡

```
1 self.scene_graph_controller.add_root_node()
2 ◇
```

Fragment referenced in ?.

displayed.

⟨Scene graph controller constructor ?⟩+ ≡

```
1 self.header_data = [
2     QtCore.QCoreApplication.translate(
3         __class__.__name__, 'Name'
4     ),
5     QtCore.QCoreApplication.translate(
6         __class__.__name__, '# Nodes'
7     )
8 ]
9 self.root_node = None
10 self.view_root_node = None◇
```

Fragment defined by ?, ?.

Fragment referenced in ?.

Figure 56: The root node of the scene graph being added by the main application.

Editor → Main application → Constructor

Figure 57: Initialization of the header data and the root node of the scene graph.

Editor → Scene graph controller → Constructor

AS `QAbstractItemModel` IS USED AS A BASIS for the scene graph controller, some methods must be implemented at very least: “When subclassing `QAbstractItemModel`, at the very least you must implement `index()`, `parent()`, `rowCount()`, `columnCount()`, and `data()`. These functions are used in all read-only models, and form the basis of editable models.”<sup>22</sup>

THE METHOD `INDEX` returns the position of an item in the (data-) model for a given row and column below a parent item.

THE METHOD `PARENT` returns the parent item of an item identified by a provided index. If that index is invalid, an invalid index is returned as well.

IMPLEMENTING THE `COLUMNCOUNT` AND `ROWCOUNT` METHODS is straight forward. The former returns simply the number of columns, in this case the number of headers, therefore 2.

The method `rowCount` returns the number of nodes for a given parent item (identified by its index within the data model).

THE LAST METHOD that has to be implemented due to the usage of `QAbstractItemModel`, is the `data` method. It returns the data for an

< Scene graph controller methods ? > + ≡

```

1  def index(self, row, column, parent=QtCore.QModelIndex()):
2      """Return the index of the item in the model specified by the
3      given row, column and parent index.
4
5      :param row: The row for which the index shall be returned.
6      :type row: int
7      :param column: The column for which the index shall be
8                      returned.
9      :type column: int
10     :param parent: The parent index of the item in the model. An
11                    invalid model index is given as the default
12                    parameter.
13     :type parent: QtCore.QModelIndex
14
15     :return: the model index based on the given row, column and
16             the parent index.
17     :rtype: QtCore.QModelIndex
18     """
19
20     if not parent.isValid():
21         self.logger.debug((
22             "Getting index for row {0}, col {1}, root node"
23         ).format(row, column))
24         return self.createIndex(row, column, self.view_root_node)
25
26     parent_node = parent.internalPointer()
27     self.logger.debug((
28         "Getting index for row {0}, col {1}, "
29         "parent {2}. Children: {3}"
30     ).format(
31         row, column, parent_node, len(parent_node.children())
32     ))
33     child_nodes = parent_node.children()
34
35     # It may happen, that the index is called at the same time as
36     # a node is being deleted respectively was deleted. In this
37     # case an invalid index is returned.
38     try:
39         child_node = child_nodes[row]
40         return self.createIndex(row, column, child_node)
41
42     except IndexError:
43         return QtCore.QModelIndex()

```

Figure 58: Implementation of QAbstractItemModel's index method for the scene graph controller.

Editor → Scene graph controller  
→ Methods

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.

Fragment referenced in ?.

< Scene graph controller methods ? > + ≡

```

1  def parent(self, model_index):
2      """Return the parent of the model item with the given index.
3      If the item has no parent, an invalid QModelIndex is returned.
4
5      :param model_index: The model index which the parent model
6                          index shall be derived for.
7      :type model_index: int
8
9      :return: the model index of the parent model item for the
10             given model index.
11      :rtype: QtCore.QModelIndex
12      """
13
14     # self.logger.debug("Getting parent")
15
16     if not model_index.isValid():
17         # self.logger.debug("No valid index for parent")
18         return QtCore.QModelIndex()
19
20     # The internal pointer of the the model index returns a
21     # scene graph view model.
22     node = model_index.internalPointer()
23     if node and node.parent() is not None:
24         # self.logger.debug("Index for parent")
25         return self.createIndex(
26             node.parent().row, 0, node.parent()
27         )
28     else:
29         # self.logger.debug("Index for root")
30         return QtCore.QModelIndex()
31     ◇

```

Figure 59: Implementation of QAbstractItemModel's parent method for the scene graph controller.

Editor → Scene graph controller  
→ Methods

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.

Fragment referenced in ?.

<Scene graph controller methods ?>+ ≡

```

1  def columnCount(self, parent):
2      """Return the number of columns for the children of the given
3      parent.
4
5      :param parent: The index of the item in the scene graph, which
6                      the column count shall be returned for.
7      :type parent: QtCore.QModelIndex
8
9      :return: the number of columns for the children of the given
10             parent.
11      :rtype: int
12      """
13
14      column_count = len(self.header_data) - 1
15      self.logger.debug("Getting column count: %s", column_count)
16
17      return column_count
18  ◇

```

Figure 60: Implementation of QAbstractItemModel's columnCount method for the scene graph controller.

Editor → Scene graph controller  
→ Methods

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.  
Fragment referenced in ?.

item identified by the given index for the given role.

A role indicates what type of data is provided. Currently the only role considered is the display of models (further information may be found at <http://doc.qt.io/qt-5/qt.html#ItemDataRole-enum>).

Depending on the column of the model index, the method returns either the name of the scene graph node or the number of nodes a scene contains.

IN ADDITION TO THE ABOVE MENTIONED METHODS, the QAbstractItemModel offers the method headerData, which “returns the data for the given role and section in the header with the specified orientation.”<sup>23</sup>

One thing, that may stand out, is, that the above defined data method returns the number of graph nodes within a scene by accessing the node\_count property of the scene graph view model.

The scene graph view model does therefore need to keep track of the nodes it contains, in form of a list, analogous to the domain model.

It does not make sense however to use the list of nodes from the domain model, as the view model will hold references to graphical objects where as the domain model holds only pure data objects. Therefore it is necessary, that the scene view model keeps track of its nodes separately.

THE METHOD NODE\_COUNT then simply returns the length of the node list.

The scene graph controller can now be set up by the main application controller.

<sup>23</sup> <http://doc.qt.io/qt-5/qabstractitemmodel.html#headerData>

< Scene graph controller methods ? > + ≡

```

1  def rowCount(self, parent):
2      """Return the number of rows for the children of the given
3      parent.
4
5      :param parent: The index of the item in the scene graph, which
6                      the row count shall be returned for.
7      :type parent: QtCore.QModelIndex
8
9      :return: the number of rows for the children of the given
10             parent.
11      :rtype: int
12      """
13
14     if not parent.isValid():
15         self.logger.debug("Parent is not valid")
16         row_count = 1
17     else:
18         # Get the actual object stored by the parent. In this case
19         # it is a SceneGraphViewModel.
20         node = parent.internalPointer()
21
22         if node is None:
23             self.logger.debug("Parent (node) is not valid")
24             row_count = 1
25         else:
26             row_count = len(node.children())
27
28     self.logger.debug("Getting row count: %s", row_count)
29     return row_count
30

```

Figure 61: Implementation of QAbstractItemModel's rowCount method for the scene graph controller.

Editor → Scene graph controller  
→ Methods

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.  
Fragment referenced in ?.

(Scene graph controller methods ?)+ ≡

```

1  def data(self, model_index, role=QtCore.Qt.DisplayRole):
2      """Return the data stored under the given role for the item
3      referred by the index.
4
5      :param model_index: The (data-) model index of the item.
6      :type model_index: int
7      :param role: The role which shall be used for representing
8                   the data. The default (and currently only
9                   supported) is displaying the data.
10     :type role: QtCore.Qt.DisplayRole
11
12     :return: the data stored under the given role for the item
13             referred by the given index.
14     :rtype: str
15     """
16
17     if not model_index.isValid():
18         self.logger.debug("Model index is not valid")
19         return None
20
21     # The internal pointer of the model index returns a scene
22     # graph view model.
23     node = model_index.internalPointer()
24
25     if node is None:
26         self.logger.debug("Node is not valid")
27         return None
28
29     if role == QtCore.Qt.DisplayRole:
30         # Return either the name of the scene or its number of
31         # nodes.
32         column = model_index.column()
33
34         if column == 0:
35             return node.name
36         elif column == 1:
37             return node.node_count
38

```

Figure 62: Implementation of QAbstractItemModel's data method for the scene graph controller.

Editor → Scene graph controller  
→ Methods

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.  
Fragment referenced in ?.

⟨Scene graph controller methods ?⟩+ ≡

```

1  def headerData(self, section, orientation=QtCore.Qt.Horizontal,
2      role=QtCore.Qt.DisplayRole):
3      """Return the data for the given role and section in the
4      header with the specified orientation.
5
6      Currently vertical is the only supported orientation. The
7      only supported role is DisplayRole. As the sections correspond
8      to the header, there are only two supported sections: 0 and 1.
9      If one of those parameters is not within the described values,
10     None is returned.
11
12     :param section: the section in the header. Currently only 0
13                     and 1 are supported.
14     :type section: int
15     :param orientation: the orientation of the display. Currently
16                        only Horizontal is supported.
17     :type orientation: QtCore.Qt.Orientation
18     :param role: The role which shall be used for representing
19                 the data. The default (and currently only
20                 supported) is displaying the data.
21     :type role: QtCore.Qt.DisplayRole
22
23     :return: the header data for the given section using the
24             given role and orientation.
25     :rtype: str
26     """
27
28     if (
29         orientation == QtCore.Qt.Horizontal and
30         role == QtCore.Qt.DisplayRole and
31         section in [0, 1]
32     ):
33         return self.header_data[section]
34

```

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.  
 Fragment referenced in ?.

Figure 63: Implementation of QAbstractItemModel's headerData method for the scene graph controller.

Editor → Scene graph controller  
 → Methods

⟨Scene graph view model constructor ?⟩+ ≡

```

1  self.nodes = []
2

```

Fragment defined by ?, ?.  
 Fragment referenced in ?.

Figure 64: Scene graph view models hold references to the nodes they contain.

Editor → Scene graph view model →  
 Constructor



⟨Scene graph view model methods ?⟩ ≡

```

1  property
2  def node_count(self):
3      """Return the number of nodes that this scene contains."""
4
5      return len(self.nodes)
6  ◇

```

Fragment defined by ?, 150b.  
Fragment referenced in ?.

⟨Set up controllers for main application ?⟩ ≡

```

1  self.scene_graph_controller = scene.SceneGraphController(self)◇

```

Fragment defined by ?, ?, ?.  
Fragment referenced in ?.

Figure 65: The number of (graphical) nodes which a scene graph view model contains implemented as a property.

Editor → Scene graph view model → Methods

Figure 66: The scene graph controller gets initialized within the main application.

Editor → Main application → Constructor

At this point data structures in terms of a (data-) model and a view model concerning the scene graph are implemented. Further a controller for handling the flow of the data for both models is implemented.

WHAT IS STILL MISSING, is the actual representation of the scene graph in terms of a view. Qt offers a plethora of widgets for implementing views. One such widget is `QTreeView`, which “implements a tree representation of items from a model. This class is used to provide standard hierarchical lists that were previously provided by the `QListView` class, but using the more flexible approach provided by Qt’s model/view architecture.”<sup>24</sup> Therefore `QTreeView` is used as basis for the scene graph view.

<sup>24</sup> fn:f377826acb87691: <http://doc.qt.io/qt-5/qtreeview.html#details>

THE CONSTRUCTOR simply initializes its parent class, as at this point the functionality of the scene graph view is not fully known.

FOR BEING ABLE TO DISPLAY SOMETHING, the scene graph view needs a controller to work with. In terms of Qt, the controller is called a model, as due its model/view architecture. This model may although not be set too early, as otherwise problems arise. It may only then be added, when the depending components are properly initialized, e.g. when the root node has been added.

BUT SCENES SHALL NOT ONLY BE DISPLAYED, instead it shall be possible to work with them. What shall be achieved, are three things: (1) Adding and removing scenes, (2) renaming scenes and (3) switching between scenes.

⟨ Scene graph view declarations ? ⟩ ≡

```

1  ⟨ Scene graph view decorators 153b ⟩
2  class SceneGraphView(QtWidgets.QTreeView):
3      """The scene graph view widget.
4      A widget for displaying and managing the scene graph.
5      """
6
7      ⟨ Scene graph view signals ?, ... ⟩
8      ⟨ Scene graph view constructor ?, ... ⟩
9      ⟨ Scene graph view methods ? ⟩
10     ⟨ Scene graph view slots ?, ... ⟩
11  ◇

```

Figure 67: Scene graph view, based on Qt's QTreeView.

Editor → Scene graph view

Fragment referenced in 151b.

⟨ Scene graph view constructor ? ⟩ ≡

```

1  def __init__(self, parent=None):
2      """Constructor.
3
4      :param parent: The parent of the current view widget.
5      :type parent: QtCore.QObject
6      """
7
8      super(SceneGraphView, self).__init__(parent)◇

```

Figure 68: Constructor of the scene graph view.

Editor → Scene graph view → Constructor

Fragment defined by ?, ?, ?.

Fragment referenced in ?.

⟨ Set model for scene graph view ? ⟩ ≡

```

1  self.main_window.scene_graph_view.setModel(
2      self.scene_graph_controller
3  )
4  ◇

```

Figure 69: The scene graph controller is being set as the scene graph view's model.

Editor → Main application → Constructor

Fragment referenced in ?.

TO SWITCH BETWEEN SCENES it is necessary to emit what scene was selected. This is needed to tell the other components, such as the node graph for example, that the scene has changed.

Through the `selectionChanged` signal the scene graph view already provides a possibility to detect if another scene was selected. This signal emits an item selection in terms of model indices although.

As this is very view- and model-specific, it would be easier for other components if the selected scene is emitted directly. To emit the selected index of the currently selected scene directly, the slot `on_tree_item_selected` is introduced.

⟨ Scene graph view slots ? ⟩ ≡

```

1  QtCore.pyqtSlot(QtCore.QItemSelection, QtCore.QItemSelection)
2  def on_tree_item_selected(self, selected, deselected):
3      """Slot which is called when the selection within the scene
4      graph view is changed.
5
6      The previous selection (which may be empty) is specified by
7      the deselected parameter, the new selection by the selected
8      paramater.
9
10     This method emits the selected scene graph item as scene
11     graph view model.
12
13     :param selected: The new selection of scenes.
14     :type selected: QtCore.QModelIndex
15     :param deselected: The previous selected scenes.
16     :type deselected: QtCore.QModelIndex
17     """
18
19     selected_item = selected.first()
20     selected_index = selected_item.indexes()[0]
21     self.do_select_item.emit(selected_index)
22     self.logger.debug(
23         "Tree item was selected: %s" % selected_index
24     )

```

Figure 70: Slot which is called when the selection within the scene graph view is changed.

Editor → Scene graph view → Slots

Fragment defined by ?, ?.

Fragment referenced in ?.

The `on_tree_item_selected` slot needs to be triggered as soon as the selection is changed. This is done by connecting the slot with the `selectionChanged` signal. The `selectionChanged` signal is however not directly accessible, it is only accessible through the selection model of the scene graph view (which is given by the usage of `QTreeView`). The selection model can although only be accessed when setting the data model of the view, which needs therefore to be expanded.

As stated in the above code fragment, `on_tree_item_selected`

⟨ Scene graph view methods ? ⟩ ≡

```

1  def setModel(self, model):
2      """Set the model for the view to present.
3
4      This method is only used for being able to use the selection
5      model's selectionChanged method and setting the current
6      selection to the root node.
7
8      :param model: The item model which the view shall present.
9      :type model: QtCore.QAbstractItemModel
10     """
11
12     super(SceneGraphView, self).setModel(model)
13
14     # Use a slot to emit the selected scene graph view model upon
15     # the selection of a tree item
16     selection_model = self.selectionModel()
17     selection_model.selectionChanged.connect(
18         self.on_tree_item_selected
19     )
20
21     # Set the index to the first node of the model
22     self.setCurrentIndex(model.index(0, 0))
23     self.logger.debug("Root node selected")◇

```

Figure 71: The setModel method, provided by QTreeView's interface, which is begin overwritten for being able to trigger the on\_tree\_item\_selected slot whenever the selection in the scene graph view has changed.

Editor → Scene graph view → Methods

Fragment referenced in ?.

emits another signal containing a reference to the currently selected scene, which needs to be implemented as well.

*⟨ Scene graph view signals ? ⟩ ≡*

```
1 do_select_item = QtCore.pyqtSignal(QtCore.QModelIndex)
2 ◇
```

Fragment defined by ?, ?.  
Fragment referenced in ?.

Figure 72: The signal that is being emitted when a scene within the scene graph view was selected. Note that the signal includes the model index of the selected item.

Editor → Scene graph view → Signals

ADDING AND REMOVING OF A SCENE are implemented in a similar manner as the selection of an item was implemented. However, the tree widget does not provide direct signals for those cases as it is the case when selecting a tree item, instead own signals, slots and actions have to be used.

*⟨ Scene graph view signals ? ⟩ + ≡*

```
1 do_add_item = QtCore.pyqtSignal(QtCore.QModelIndex)
2 do_remove_item = QtCore.pyqtSignal(QtCore.QModelIndex)
3 ◇
```

Fragment defined by ?, ?.  
Fragment referenced in ?.

Figure 73: Signals that get emitted whenever a scene is added or removed.

Editor → Scene graph view → Signals

An action gets triggered, typically by hovering over some item (in terms of a context menu for example) or by pressing a defined keyboard shortcut. For the adding and the removal, a keyboard shortcut will be used.

ADDING OF A SCENE ITEM shall happen when pressing the a key on the keyboard.

THE REMOVAL OF A SELECTED NODE shall be triggered upon the press of the delete+ and the~\verb+backspace key on the keyboard.

As can be seen in the two above listings, the triggered signals are connected with a corresponding slot. All these slots do is emitting another signal, but this time it contains a scene graph view model, which may be used by other components, instead of a model index.

ONE OF THE MENTIONED OTHER COMPONENTS is the scene graph controller. He needs to be informed whenever a scene was added, removed or selected, so that he is able to manage his data model correspondingly.

which exactly?

< Scene graph view constructor ? > + ≡

```

1   new_action_label = QtCore.QCoreApplication.translate(
2       __class__.__name__, 'New scene'
3   )
4   new_action = QtWidgets.QAction(new_action_label, self)
5   new_action.setShortcut(Qt.QKeySequence('a'))
6   new_action.setShortcutContext(QtCore.Qt.WidgetShortcut)
7   new_action.triggered.connect(self.on_new_tree_item)
8   self.addAction(new_action)
9

```

Fragment defined by ?, ?, ?.

Fragment referenced in ?.

Figure 74: Introduction of an action for adding a new scene, which reacts upon the “A” key being pressed on the keyboard.

Editor → Scene graph view → Constructor

< Scene graph view constructor ? > + ≡

```

1   remove_action_label = QtCore.QCoreApplication.translate(
2       __class__.__name__, 'Remove selected scene(s)'
3   )
4   remove_action = QtWidgets.QAction(remove_action_label, self)
5   remove_action.setShortcut(Qt.QKeySequence('Delete'))
6   remove_action.setShortcut(Qt.QKeySequence('Backspace'))
7   remove_action.setShortcutContext(QtCore.Qt.WidgetShortcut)
8   remove_action.triggered.connect(self.on_tree_item_removed)
9   self.addAction(remove_action)
10

```

Fragment defined by ?, ?, ?.

Fragment referenced in ?.

Figure 75: Introduction of an action for removing a new scene, which reacts upon the “delete” key being pressed on the keyboard.

Editor → Scene graph view → Constructor

⟨ Scene graph view slots ? ⟩ + ≡

```

1  QtCore.pyqtSlot()
2  def on_new_tree_item(self):
3      """Slot which is called when a new tree item was added by the
4      scene graph view.
5
6      This method emits the selected scene graph item as new tree
7      item in form of a scene graph view model.
8      """
9
10     selected_indexes = self.selectedIndexes()
11
12     # Sanity check: is actually an item selected?
13     if len(selected_indexes) > 0:
14         selected_item = selected_indexes[0]
15         self.do_add_item.emit(selected_item)
16         ⟨ Scene graph view log tree item added ? ⟩
17
18  QtCore.pyqtSlot()
19  def on_tree_item_removed(self):
20      """Slot which is called when a one or multiple tree items
21      were removed by the scene graph view.
22
23      This method emits the removed scene graph item in form of
24      scene graph view models.
25      """
26
27     selected_indexes = self.selectedIndexes()
28
29     # Sanity check: is actually an item selected? And has that
30     # item a parent?
31     # We only allow removal of items with a valid parent, as we
32     # do not want to have the root item removed.
33     if len(selected_indexes) > 0:
34         selected_item = selected_indexes[0]
35         if selected_item.parent().isValid():
36             self.do_remove_item.emit(selected_item)
37             ⟨ Scene graph view log tree item removed ? ⟩
38         else:
39             self.logger.warn("Root scene cannot be deleted")
40     else:
41         self.logger.warn('No item selected for removal')
42

```

Figure 76: Slots which emit themselves a signal whenever a scene is added from the scene graph or removed respectively.

Editor → Scene graph view → Slots

Fragment defined by ?, ?.  
 Fragment referenced in ?.

⟨ Scene graph controller slots ? ⟩ ≡

```

1  QtCore.pyqtSlot(QtCore.QModelIndex)
2  def on_tree_item_added(self, selected_item):
3      # TODO: Document method.
4
5      self.insertRows(0, 1, selected_item)
6      self.logger.debug("Added new scene")
7
8  QtCore.pyqtSlot(QtCore.QModelIndex)
9  def on_tree_item_removed(self, selected_item):
10     # TODO: Document method.
11
12     if not selected_item.isValid():
13         self.logger.warn(
14             "Selected scene is not valid, not removing"
15         )
16         return False
17
18     row = selected_item.row()
19     parent = selected_item.parent()
20     self.removeRows(row, 1, parent)
21
22  QtCore.pyqtSlot(QtCore.QModelIndex)
23  def on_tree_item_selected(self, selected_item):
24     # TODO: Document method.
25
26     if not selected_item.isValid():
27         self.logger.warn("Selected scene is not valid")
28         return False
29
30     selected_scene_view_model = selected_item.internalPointer()
31     selected_scene_domain_model = selected_scene_view_model.domain_object
32     self.do_select_scene.emit(selected_scene_domain_model)

```

Figure 77: Slots to handle adding, removing and selecting of tree items within the scene graph. The slots take a model index as argument (coming from `QAbstractItemModel`). This is analogous to the scene graph view.

Editor → Scene graph controller  
→ Slots

Fragment referenced in ?.



DESPITE HAVING THE SLOTS FOR ADDING, REMOVING AND SELECTING scene graph items implemented, the actual methods for adding and removing scenes, `on_tree_item_added+` and `on_tree_item_removed`, are still missing.

When inserting a new scene graph item, actually a row must be inserted, as the data model (Qt's) is using rows to represent the data. At the same time the controller has to keep track of the domain model.

As can be seen in the implementation below, it is not necessary to add the created model instances to a list of nodes, the usage of `QAbstractItemModel` keeps already track of this.

(Scene graph controller methods ?)+ ≡

```

1  def insertRows(self, row, count, parent=QtCore.QModelIndex()):
2      # TODO: Document method.
3
4      if not parent.isValid():
5          return False
6
7      parent_node = parent.internalPointer()
8      self.beginInsertRows(parent, row, row + count - 1)
9      domain_model = domain_scene.SceneModel(parent_node.domain_object)
10     view_model = guidomain_scene.SceneGraphViewModel(
11         row=row,
12         domain_object=domain_model,
13         parent=parent_node
14     )
15     self.endInsertRows()
16
17     self.layoutChanged.emit()
18     self.do_add_scene.emit(domain_model)
19
20     return True
21

```

Figure 78: Method for adding new scenes in terms of a domain model as well as a scene graph view model.

Editor → Scene graph controller  
→ Methods

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.  
Fragment referenced in ?.

The same logic applies when removing a scene.

AS BEFORE, THE MAIN APPLICATION NEEDS CONNECT THE COMPONENTS, in this case the scene graph view with the scene graph controller.

TO INFORM OTHER COMPONENTS ABOUT THE NEW MODELS, such as the node graph for example, the scene graph controller emits signals when a scene is being added, removed or selected respectively.

AT THIS POINT IT IS POSSIBLE TO MANAGE SCENES in terms of adding and removing them. The scenes are added to (or removed

⟨Scene graph controller methods ?⟩+ ≡

```

1  def removeRows(self, row, count, parent=QtCore.QModelIndex()):
2      # TODO: Document method.
3
4      if not parent.isValid():
5          self.logger.warn("Cannot remove rows, parent is invalid")
6          return False
7
8      self.beginRemoveRows(parent, row, row + count - 1)
9      parent_node = parent.internalPointer()
10     node_index = parent.child(row, parent.column())
11     node = node_index.internalPointer()
12     node.setParent(None)
13     # TODO: parent_node.child_nodes.remove(node)
14     self.endRemoveRows()
15     self.logger.debug(
16         "Removed {0} rows starting from {1} for parent {2}. Children: {3}".format(
17             count, row, parent_node, len(parent_node.children())
18         )
19     )
20
21     self.layoutChanged.emit()
22     self.do_remove_scene.emit(node.domain_object)
23
24     return True
25  ◇

```

Figure 79: Method for removing scenes. Note that this is mainly done by getting the object related to the given model index and setting the parent of that object to a nil object.

Editor → Scene graph controller  
→ Methods

Fragment defined by ?, ?, ?, ?, ?, ?, ?, ?.  
Fragment referenced in ?.

⟨Connect main window components ?⟩ ≡

```

1  self.main_window.scene_graph_view.do_add_item.connect(
2      self.scene_graph_controller.on_tree_item_added
3  )
4  self.main_window.scene_graph_view.do_remove_item.connect(
5      self.scene_graph_controller.on_tree_item_removed
6  )
7  self.main_window.scene_graph_view.do_select_item.connect(
8      self.scene_graph_controller.on_tree_item_selected
9  )
  ◇

```

Figure 80: The scene graph view's signals for adding, removing and selecting a scene are connected to the corresponding slots from the scene graph controller. Or, in other words, the controller/data reacts to actions invoked by the user interface.

Editor → Main application → Constructor

Fragment defined by ?, ?, 147d.  
Fragment referenced in ?.

*⟨ Scene graph controller signals ? ⟩ ≡*

```

1 do_add_scene    = QtCore.pyqtSignal(domain_scene.SceneModel)
2 do_remove_scene = QtCore.pyqtSignal(domain_scene.SceneModel)
3 do_select_scene = QtCore.pyqtSignal(domain_scene.SceneModel)
4 ◇

```

Figure 81: Signals emitted by the scene graph controller, in terms of domain models, whenever a scene is added, removed or selected.

Editor → Scene graph controller  
→ Signals

Fragment referenced in ?.

from respectively) the graphical user interface as well as the data structure.

So far the application (or rather the scene graph) seems to be working as intended. But how does one ensure, that it really does? Without a doubt, unit and integration tests are one of the best instruments to ensure functionality of code.

Check if the paragraph is still correct.

As stated before, in ??, it was an intention of this project to develop the application test driven. Due to the required amount of work when developing test driven, it was abstained from this intention and regular unit tests are written instead, which can be found in appendix, ??.

But nevertheless, it would be very handy to have at least some idea what the code is doing at certain places and at certain times.

One of the simplest approaches to achieve this, is a verbose output at various places of the application, which may be as simple as using Python's `print` function. Using the `print` function may allow printing something immediately, but it lacks of flexibility and demands each time a bit of effort to format the output accordingly (e.g. adding the class and the function name and so on).

Python's logging facility provides much more functionality while being able to keep things simple as well — if needed. The usage of the logging facility to log messages throughout the application may later even be used to implement a widget which outputs those messages. So logging using Python's logging facility will be implemented and applied for being able to have feedback when needed.

# Logging

IT IS ALWAYS VERY USEFUL to have a facility which allows tracing of errors or even just the flow of an application. Logging does allow such aspects by outputting text messages to a defined output, such as STDERR, STDOUT, streams or files.

LOGGING SHALL BE PROVIDED ON A CLASS-BASIS, meaning that each class (which wants to log something) needs to instantiate a logger and use a corresponding handler.

LOGGING IS A VERY CENTRAL ASPECT OF THE APPLICATION. It is the task of the main application to set up the logging facility which may then be used by other classes through a decorator.

THE MAIN APPLICATION SHALL THEREFORE SET UP the logging facility as follows:

- Use either an external logging configuration or the default logging configuration.
- When using an external logging configuration
  - The location of the external logging configuration may be set by the environment variable `QDE_LOG_CFG`.
  - Is no such environment variable set, the configuration file is assumed to be named `logging.json` and to reside in the application's main directory.
- When using no external logging configuration, the default logging configuration defined by `basicConfig` is used.
- Always set a level when using no external logging configuration, the default being `INFO`.

FOR NOT HAVING ONLY BASIC LOGGING AVAILABLE, a logging configuration is defined. The logging configuration provides three handlers: a console handler, which logs debug messages to `STDOUT`, a info file handler, which logs informational messages to a file named `info.log`, and a error file handler, which logs errors to a file named `error.log`. The default level is set to debug and all handlers are used. This configuration allows to get an arbitrarily named logger which uses that configuration.

⟨Main application methods ?⟩ ≡

```

1  def setup_logging(self,
2      default_path='logging.json',
3      default_level=logging.INFO):
4      """Setup logging configuration"""
5
6      env_key = 'QDE_LOG_CFG'
7      env_path = os.getenv(env_key, None)
8      path = env_path or default_path
9
10     if os.path.exists(path):
11         with open(path, 'rt') as f:
12             config = json.load(f)
13             logging.config.dictConfig(config)
14     else:
15         logging.basicConfig(level=default_level)

```

Fragment referenced in ?.

Figure 82: A method for setting up the logging, provided by the main application. If there exists an external configuration file for logging, this file is used for configuring the logging facility. Otherwise the standard configuration is used.

Editor → Main application → Methods

⟨Set up internals for main application ?⟩+ ≡

```

1  self.setup_logging()

```

Fragment defined by ?, ?.  
Fragment referenced in ?.

Figure 83: Set up of the logging from within the main application class.

Editor → Main application → Constructor

THE CONSEQUENCE OF PROVIDING logging on a class basis, as stated before, is, that each class has to instantiate a logging instance. To prevent the repetition of the same code fragment over and over, Python's decorator pattern is used <sup>25</sup>.

<sup>25</sup> <https://www.python.org/dev/peps/pep-0318/>

THE DECORATOR will be available as a method named `with_logger`. The method has the following functionality.

- Provide a name based on the current module and class.

*〈Set logger name 85a〉*  $\equiv$

```
1 logger_name = "{module_name}.{class_name}".format(
2     module_name=cls.__module__,
3     class_name=cls.__name__
4 )◇
```

Fragment referenced in 153a.

- Provide an easy to use interface for logging.

*〈Logger interface 85b〉*  $\equiv$

```
1 cls.logger = logging.getLogger(logger_name)
2
3 return cls◇
```

Fragment referenced in 153a.

THE USAGE OF THE DECORATOR `with_logger` is shown in the example in the following listing.

THE LOGGING FACILITY MAY NOW BE USED wherever it is useful to log something. Such a place is for example the adding and removal of scenes in the scene graph view.

Whenever the *a* or the *delete* key is being pressed now, when the scene graph view is focused, the corresponding log messages appear in the standard output, hence the console.

Now, having the scene graph component as well as an interface to log messages throughout the application implemented, the next component may be approached.

SCENES BUILD THE BASIS for the scene graph and the node graph as well. This is a good point to begin with the implementation of the node graph.

⟨ With logger example ? ⟩ ≡

```

1  from qde.editor.foundation import common
2
3  common.with_logger
4  def SomeClass(object):
5      """This class provides literally nothing and is used only to demonstrate the
6      usage of the logging decorator."""
7
8      def some_method():
9          """This method does literally nothing and is used only to demonstrate the
10          usage of the logging decorator."""
11
12         self.logger.debug(("I am some logging entry used for"
13                             "demonstration purposes only."))
14
15  ◇

```

Figure 84: An example of how to use the logging decorator in a class.

Fragment never referenced.

⟨ Scene graph view log tree item added ? ⟩ ≡

```

1  self.logger.debug("A new scene graph item was added.")
2  ◇

```

Figure 85: The scene graph view logs a corresponding message whenever an item is added to or removed from the scene graph. Note, that this logging only happens in *debug* mode.

Fragment referenced in ?.

Editor → Scene graph view → Methods

⟨ Scene graph view log tree item removed ? ⟩ ≡

```

1  self.logger.debug(
2      "The scene graph item at row {row} "
3      "and column {column} was removed."
4  ).format(
5      row=selected_item.row(),
6      column=selected_item.column()
7  ))
8  ◇

```

Fragment referenced in ?.

# Node graph

THE FUNCTIONALITY OF THE NODE GRAPH is, as its name states, to represent a data structure composed of nodes and edges. Each scene from the scene graph is represented within the node graph as such a data structure.

THE NODES ARE THE BUILDING BLOCKS of a real time animation. They represent different aspects, such as scenes themselves, time line clips, models, cameras, lights, materials, generic operators and effects. These aspects are only examples (coming from *QDE - a visual animation system. Software-Architektur*. p. 30 and 31) as the node structure will be expandable for allowing the addition of new nodes.

The implementation of the scene graph component was relatively straightforward partly due to its structure and partly due to the used data model and representation. The node graph component however, seems to be a bit more complex.

TO GET A FIRST OVERVIEW AND TO MANAGE ITS COMPLEXITY, it might be good to identify its sub components first before implementing them. When thinking about the implementation of the node graph, one may identify the following sub components:

*Nodes* Building blocks of a real time animation.

*Domain model* Holds data of a node, like its definition, its inputs and so on.

*Definitions* Represents a domain model as JSON data structure.

*Controller* Handles the loading of node definitions as well as the creation of node instances.

*View model* Represents a node within the graphical user interface.

*Scenes* A composition of nodes, connected by edges.

*Domain model* Holds the data of a scene, e.g. its nodes.

*Controller* Handles scene related actions, like when a node is added to a scene, when the scene was changed or when a node within a scene was selected.

*View model* Defines the graphical representation of scene which can be represented by the corresponding view. Basically the scene view model is a canvas consisting of nodes.

*View* Represents scenes in terms of scene view models within the graphical user interface.



## *Nodes*

WHAT ARE NODES AND NODE DEFINITIONS? As mentioned before, they are the building blocks of a real time animation. But what are those definitions actually? What do they actually define? There is not only one answer to this question, it is simply a matter of how the implementation is being done and therefore a set of decisions.

THE WHOLE (RENDERING) SYSTEM shall not be bound to only one representation of nodes, e.g. triangle based meshes. Instead it shall let the user decide, what representation is the most fitting for the goal he wants to achieve.

MULTIPLE KINDS OF NODE REPRESENTATIONS shall be supported by the system: images, triangle based meshes and solid modeling through function modeling (using signed distance functions for modeling implicit surfaces). Whereas triangle based meshes may either be loaded from externally defined files (e.g. in the Filmbox (FBX), the Alembic (ABC) or the Object file format (OBJ)) or directly be generated using procedural mesh generation.

NODES ARE ALWAYS PART OF A GRAPH, hence the name node graph, and are therefore typically connected by edges. This means that the graph gets evaluated recursively by its nodes, starting with the root node within the root scene. However, the goal is to have OpenGL shading language (GLSL) code at the end, independent of the node types.

FROM THIS POINT OF VIEW it would make sense to let the user define shader code directly within a node (definition) and to simply evaluate this code, which adds a lot of (creative) freedom. The problem with this approach is though, that image and triangle based mesh nodes are not fully implementable by using shader code only. Instead they have specific requirements, which are only perform-able on the CPU (e.g. allocating buffer objects).

WHEN THINKING OF NODES USED FOR SOLID MODELING however, it may appear, that they may be evaluated directly, without the need for pre-processing, as they are fully implementable using shader code only. This is kind of misleading however, as each node has its own definition which has to be added to shader and this definition is then used in a mapping function to compose the scene. This would mean to add a definition of a node over and over again, when spawning multiple instances of the same node type, which results in overhead bloating the shader. It is therefore necessary to pre-process solid modeling nodes too, exactly as triangle mesh based and image nodes, for being able to use multiple instances of the same node type within a scene while having the definition added only once.

ALL OF THESE THOUGHTS SUM UP in one central question for the implementation: Shall objects be predefined within the code (and therefore only nodes accepted whose type and sub type match those of predefined nodes) or shall all objects be defined externally using files?

This is a question which is not that easy to answer. Both methods have their advantages and disadvantages. Pre-defining nodes within the code minimizes unexpected behavior of the application. Only known and well-defined nodes are processed.

But what if someone would like to have a new node type which is not yet defined? The node type has to be implemented first. As Python is used for the editor application, this is not really a problem as the code is interpreted each time and is therefore not being compiled. Nevertheless such changes follow a certain process, such as making the actual changes within the code, reviewing and checking-in the code and so on, which the user normally does not want to be bothered with. Furthermore, when thinking about the player application, the problem of the necessity to recompile the code is definitively given. The player will be implemented in C, as there is the need for performance, which Python may not fulfill satisfactorily.

THE EXTERNAL DEFINITION OF NODES IS CHOSEN considering these aspects. This may result in nodes which cannot be evaluated or which have unwanted effects. As it is (most likely) in the users best interest to create (for his taste) appealing real time animations, it can be assumed, that the user will try avoiding to create such nodes or quickly correct faulty nodes or simply does not use such nodes.

Now, having chosen how to implement nodes, it is important to define what a node actually is. As a node may be referenced by other nodes, it must be uniquely identifiable and must therefore have a globally unique identifier. Concerning the visual representation, a node shall have a name as well as a description.

EACH NODE CAN HAVE MULTIPLE INPUTS AND AT LEAST ONE OUTPUT. The inputs may be either be atomic types (which have to be defined) or references to other nodes. The same applies to the outputs.

A NODE CONSISTS ALSO OF A DEFINITION. In terms of implicit surfaces this section contains the actual definition of a node in terms of the implicit function. In terms of triangle based meshes this is the part where the mesh and all its prerequisites as vertex array buffers and vertex array objects are set up or used from a given context.

In addition to a definition, a node contains an invocation part, which is the call of its defining function (coming from the definition mentioned just before) while respecting the parameters.

A NODE SHALL BE ABLE TO HAVE ONE OR MORE PARTS. A part typically contains the "body" of the node in terms of code and represents therefore the code-wise implementation of the node. A part

can be processed when evaluating the node. This part of the node is mainly about evaluating inputs and passing them on to a shader.

Furthermore a node may contain children (child-nodes) which are actually references to other nodes combined with properties such as a name, states and so on.

EACH NODE CAN HAVE MULTIPLE CONNECTIONS. A connection is composed of an input and an output plus a reference to a part. The input respectively the output may be zero, what means that the part of the input or output is internal.

Or, a bit more formal:

*<Connections between nodes in EBNF notation ?> ≡*

```

1  input = internal input | external input
2  internal input = zero reference, part reference
3  external input = node reference, part reference
4  zero reference = "0"
5  node reference = "uuid4"
6  part reference = "uuid4"
7  ◇

```

Figure 86: Connections between nodes in EBNF notation.

Fragment never referenced.

RECAPITULATING THE ABOVE MADE THOUGHTS a node is essentially composed by the following elements:

<sup>1</sup> <https://docs.python.org/3/library/uuid.html>

THE INPUTS AND OUTPUTS MAY BE PARAMETERS OF AN ATOMIC TYPE, as stated above. This seems like a good point to define the atomic types the system will have:

- Generic
- Float
- Text
- Scene
- Image
- Dynamic
- Mesh
- Implicit

As these atomic types are the foundation of all other nodes, the system must ensure, that they are initialized before all other nodes. Before being able to create instances of atomic types, there must be classes defining them.

Component	Description
<i>ID</i>	A global unique identifier (UUID <sup>1</sup> )
<i>Name</i>	The name of the node, e.g. "Cube".
<i>Description</i>	A description of the node's purpose.
<i>Inputs</i>	A list of the node's inputs. The inputs may either be parameters (which are atomic types such as float values or text input) or references to other nodes.
<i>Outputs</i>	A list of the node's outputs. The outputs may also either be parameters or references to other nodes.
<i>Definitions</i>	A list of the node's definitions. This may be an actual definition by a (shader-) function in terms of an implicit surface or prerequisites as vertex array buffers in terms of a triangle based mesh.
<i>Invocation</i>	A list of the node's invocations or calls respectively.
<i>Parts</i>	Defines parts that may be processed when evaluating the node. Contains code which can be interpreted directly.
<i>Nodes</i>	The children a node has (child nodes). These entries are references to other nodes only.
<i>Connections</i>	A list of connections of the node's inputs and outputs. Each connection is composed by two parts: A reference to another node and a reference to an input or an output of that node. Is the reference not set, that is, its value is zero, this means that the connection is internal.

Table 13: Components a node is composed of.

FOR IDENTIFICATION OF THE ATOMIC TYPES, an enumerator is used. Python provides the `enum` module, which provides a convenient interface for using enumerations<sup>26</sup>.

<sup>26</sup> <https://docs.python.org/3/library/enum.html>

Now, having identifiers for the atomic types available, the atomic types themselves can be implemented. The atomic types will be used for defining various properties of a node and are therefore its parameters.

EACH NODE MAY CONTAIN ONE OR MORE PARAMETERS as inputs and at least one parameter as output. Each parameter will lead back to its atomic type by referencing the unique identifier of the atomic type. For being able to distinguish multiple parameters using the same atomic type, it is necessary that each instance of an atomic type has its own identifier in form of an instance identifier (instance ID).

As the word atomic indicates, these types are atomic, meaning there only exists one explicit instance per type, which is therefore static. As can be seen in the code fragment below, the atomic types are parts of node definitions themselves. Only the creation of the generic atomic type is shown, the rest is omitted and can be found at

Add reference to code fragments.

HAVING THE ATOMIC TYPES DEFINED, nodes may now be defined.

⟨Node type declarations ?⟩ ≡

```

1  class NodeType(enum.Enum):
2      """Atomic types which a parameter may be made of."""
3
4      GENERIC = 0
5      FLOAT   = 1
6      TEXT    = 2
7      SCENE   = 3
8      IMAGE   = 4
9      DYNAMIC = 5
10     MESH     = 6
11     IMPLICIT = 7
12

```

Figure 87: Types of a node wrapped in a class, implemented as an enumerator.

Editor → Types → Node type

Fragment referenced in 154a.

⟨Parameter declarations ?⟩ ≡

```

1  class AtomicType(object):
2      """Represents an atomic type and is the basis for each node."""
3
4      def __init__(self, id_, type_):
5          """Constructor.
6
7          :param id_: the globally unique identifier of the atomic type.
8          :type id_: uuid.uuid4
9          :param type_: the type of the atomic type, e.g. "float".
10         :type type_: types.NodeType
11         """
12
13         self.id_ = id_
14         self.type_ = type_
15

```

Figure 88: The atomic type class which builds the basis for node parameters. Note that the type of an atomic type is defined by the before implemented node type.

Editor → Parameters → Atomic type

Fragment defined by ?, ?, 155.

Fragment referenced in 154b.

*<Parameter declarations ?>+ ≡*

```

1  class AtomicTypes(object):
2      """Creates and holds all atomic types of the system."""
3
4      staticmethod
5      def create_node_definition_part(id_, type_):
6          """Creates a node definition part based on the given identifier and
7          type.
8
9          :param id_: the identifier to use for the part.
10         :type id_: uuid.uuid4
11         :param type_: the type of the part.
12         :type type_: qde.editor.domain.parameter.AtomicType
13
14         :return: a node definition part.
15         :rtype: qde.editor.domain.node.NodeDefinitionPart
16         """
17
18         def create_func(id_, default_function, name, type_):
19             node_part = node.NodePart(id_, default_function)
20             node_part.type_ = type_
21             node_part.name = name
22             return node_part
23
24         node_definition_part = node.NodeDefinitionPart(id_)
25         node_definition_part.type_ = type_
26         node_definition_part.creator_function = create_func
27
28         return node_definition_part
29
30         Generic = create_node_definition_part.__func__(
31             id_="54b20acc-5867-4535-861e-f461bdbf3bf3",
32             type_=types.NodeType.GENERIC
33         )
34

```

Figure 89: A class which creates and holds all atomic types of the editor. Note that at this point only an atomic type for generic nodes is being created.

Editor → Parameters → Atomic types

Fragment defined by ?, ?, 155.  
Fragment referenced in 154b.

$\langle \text{Node domain model declarations ?} \rangle \equiv$

```

1  class NodeModel(object):
2      """Represents a node."""
3
4      # Signals
5      < Node domain model signals ? >
6
7      < Node domain model constructor ?, ... >
8
9      < Node domain model methods ? >
10

```

Figure 90: Definition of the node (domain) model.

Editor → Node model

Fragment referenced in 159a.

$\langle \text{Node domain model constructor ?} \rangle \equiv$

```

1  def __init__(self, id_, name="New node"):
2      """Constructor.
3
4      :param id_: the globally unique identifier of the node.
5      :type id_: uuid.uuid4
6      :param name: the name of the node.
7      :type name: str
8      """
9
10     self.id_ = id_
11     self.name = name
12
13     self.definition = None
14     self.description = ""
15     self.parent = None
16     self.inputs = []
17     self.outputs = []
18     self.parts = []
19     self.nodes = []
20     self.connections = []
21

```

Figure 91: Constructor of the node (domain) model.

Editor → Node model → Constructor

Fragment defined by ?, ?.

Fragment referenced in ?.

WHILE THE DETAILS OF A NODE ARE RATHER UNCLEAR at the moment, it is clear that a node needs to have a view model, which renders a node within a scene of the node graph.

QT DOES NOT OFFER A GRAPH VIEW BY DEFAULT, therefore it is necessary to implement such a graph view.

The most obvious choice for this implementation is the `QGraphicsView` component, which displays the contents of a `QGraphicsScene`, whereas `QGraphicsScene` manages `QGraphicsObject` components.

It is therefore obvious to use the `QGraphicsObject` component for representing graph nodes through a view model.

*< Node view model declarations ? > ≡*

```

1  class NodeViewModel(Qt.QGraphicsObject):
2      """Class representing a single node within GUI."""
3
4      # Constants
5      WIDTH = 20
6      HEIGHT = 17
7
8      # Signals
9      < Node view model signals ? >
10
11     < Node view model constructor ?, ... >
12
13     < Node view model methods ?, ... >
14  ◇

```

Figure 92: Definition of the node view model.

Editor → Node view model

Fragment referenced in 159b.

TO DISTINGUISH NODES, the name and the type of a node is used. It makes sense to access both attributes directly via the domain model instead of duplicating them.

THE DOMAIN MODEL DOES NOT PROVIDE ACCESS to its type at the moment however. The type is directly derived from the primary output of a node. If a node has no outputs at all, its type is assumed to be generic.

CONCERNING THE DRAWING OF NODES (or painting, as Qt calls it), each node type may be used multiple times. But instead of re-creating the same image representation over and over again, it makes sense to create it only once per node type. Qt provides `QPixmap+` and `~\verb+QPixmapCache` for this use case.

EACH NODE HAS A CACHE KEY ASSIGNED, which is used to identify that node.



$\langle \text{Node view model constructor ?} \rangle \equiv$

```

1  def __init__(self, id_, domain_object, parent=None):
2      """Constructor.
3
4      :param id_: the globally unique identifier of the atomic type.
5      :type id_: uuid.uuid4
6      :param domain_object: Reference to a scene model.
7      :type domain_object: qde.editor.domain.scene.SceneModel
8      :param parent: The parent of the current view widget.
9      :type parent: QtCore.QObject
10     """
11
12     super(NodeViewModel, self).__init__(parent)
13     self.id_ = id_
14     self.domain_object = domain_object
15
16     self.position = QtCore.QPoint(0, 0)
17     self.width = 4
18

```

Figure 93: Constructor of the node view model.

Editor → Node view model → Constructor

Fragment defined by ?, ?, 160a.

Fragment referenced in ?.

The cache key is composed of the type of the node, its status and whether it is selected or not.

As can be seen in the above code fragment, the status property of the node is used to create a cache key, but currently nodes do not have a status.

It may make sense although to provide a status for each node, which allows to output eventual problems like not having required connections and so on.

THIS STATUS IS ADDED to the constructor of the domain model of a node.

CONCERNING THE VIEW MODEL, again the status of the domain model is used as otherwise different states between user interface and domain model would be possible in the worst case.

Therefore it can now be checked, whether a node has a cache key or not. If it has no cache key, a new cache key is created.

The cache key itself is then used to find a corresponding pixmap.

If no pixmap with the given cache key exists, a new pixmap is being created and added to the cache using the cache key created before.

FOR ACTUALLY DISPLAYING THE NODES, another component is necessary: the scene view which is a graph consisting the nodes and edges.

*<Node view model methods ?> ≡*

```

1  property
2  def type_(self):
3      """Return the type of the node, determined by its domain model.
4
5      :return: the type of the node.
6      :rtype: types.NodeType
7      """
8
9      return self.domain_model.type_
10 ◇

```

Figure 94: The type and name attributes of the node view model as properties.

Editor → Node view model → Methods

Fragment defined by ?, ?, ?, ?, 161.

Fragment referenced in ?.

*<Node view model methods ?>+ ≡*

```

1  property
2  def name(self):
3      """Return the name of the node, determined by its domain model.
4
5      :return: the name of the node.
6      :rtype: str
7      """
8
9      return self.domain_model.name
10 ◇

```

Fragment defined by ?, ?, ?, ?, 161.

Fragment referenced in ?.

*<Node domain model methods ?> ≡*

```

1  property
2  def type_(self):
3      """Return the type of the node, determined by its primary output.
4      If no primary output is given, it is assumed that the node is of
5      generic type."""
6
7      type_ = types.NodeType.GENERIC
8
9      if len(self.outputs) > 0:
10         type_ = self.outputs[0].type_
11
12         return type_
13 ◇

```

Figure 95: The type attributes of the node domain model as property.

Editor → Node (domain) model → Methods

Fragment referenced in ?.

<Node view model methods ?>+ ≡

```

1  def paint(self, painter, option, widget):
2      """Paint the node.
3
4      First a pixmap is loaded from cache if available, otherwise
5      a new pixmap gets created. If the current node is selected a
6      rectangle gets additionally drawn on it. Finally the name, the type
7      as well as the subtype gets written on the node.
8      """
9
10     < Node view model methods paint ?, ... >
11

```

Figure 96: The paint method of the node view model. When a pixmap is being created, it gets cached immediately, based on its type, status and its selection status. If a pixmap already existing for a given tripe, type, status and selection, that pixmap is used.

Editor → Node view model → Methods

Fragment defined by ?, ?, ?, ?, 161.  
Fragment referenced in ?.

<Node view model constructor ?>+ ≡

```

1  self.cache_key = None
2

```

Figure 97: The cache key is being initialized within a node's constructor.

Editor → Node view model → Constructor

Fragment defined by ?, ?, 160a.  
Fragment referenced in ?.

<Node view model methods ?>+ ≡

```

1  def create_cache_key(self):
2      """Create an attribute based cache key for finding and creating
3      pixmaps."""
4
5      return "{type_name}{status}{selected}".format(
6          type_name=self.type_,
7          status=self.status,
8          selected=self.isSelected(),
9      )
10

```

Figure 98: A method which creates a cache key based on the type, the status and the state of selection of a node.

Editor → Node view model → Methods

Fragment defined by ?, ?, ?, ?, 161.  
Fragment referenced in ?.

<Node domain model constructor ?>+ ≡

```

1  self.status = flag.NodeStatus.OK
2

```

Figure 99: The status of the node is being initialized within the node's constructor.

Editor → Node domain model → Constructor

Fragment defined by ?, ?.  
Fragment referenced in ?.

*<Node view model methods ?>+ ≡*

```

1  property
2  def status(self):
3      """Return the current status of the node.
4
5      :return: the current status of the node.
6      :rtype: flag.NodeStatus
7      """
8
9      return self.domain_object.status
10 ◇

```

Fragment defined by ?, ?, ?, ?, 161.  
Fragment referenced in ?.

Figure 100: The status of a node view model is obtained by accessing the domain model's status.

Editor → Node domain model → Methods

*<Node view model methods paint ?> ≡*

```

1  if self.cache_key is None:
2      self.cache_key = self.create_cache_key()
3  ◇

```

Fragment defined by ?, ?, ?.  
Fragment referenced in ?.

Figure 101: A cache key is being created when no cache key for the given attributes is found.

Editor → Node view model → Methods → Paint

*<Node view model methods paint ?>+ ≡*

```

1  pixmap = Qt.QPixmapCache.find(self.cache_key)
2  ◇

```

Fragment defined by ?, ?, ?.  
Fragment referenced in ?.

Figure 102: Based on the created or retrieved cache key a pixmap is being searched for.

Editor → Node view model → Methods → Paint

*<Node view model methods paint ?>+ ≡*

```

1  if pixmap is None:
2      pixmap = self.create_pixmap()
3      Qt.QPixmapCache.insert(self.cache_key, pixmap)
4  ◇

```

Fragment defined by ?, ?, ?.  
Fragment referenced in ?.

Figure 103: If no pixmap is found, a new pixmap is being created for the provided key and stored.

Editor → Node view model → Methods → Paint

## Scene view

FOR IMPLEMENTING THE SCENE VIEW the QGraphicsView component is used as basis, as before with the node graph component. The graphics view displays the contents of scene, therefore a QGraphicsScene, whereas QGraphicsScene manages nodes in form of QGraphicsObject components.

*< Scene view declarations ? > ≡*

```
1  common.with_logger
2  class SceneView(Qt.QGraphicsView):
3      """Scene view widget.
4      A widget for displaying and managing scenes including their nodes and
5      connections between nodes."""
6
7      # Signals
8      < Scene view signals ? >
9
10     < Scene view constructor ?, ... >
11     < Scene view methods ? >
12     < Scene view slots ? >
13  ◇
```

Figure 104: Definition of the scene view component, derived from the QGraphicsView component.

Editor → Scene view

Fragment referenced in 151b.

*< Scene view constructor ? > ≡*

```
1  def __init__(self, parent=None):
2      """Constructor.
3
4      :param parent: the parent of this scene view.
5      :type parent: Qt.QObject
6      """
7
8      super(SceneView, self).__init__(parent)
9  ◇
```

Figure 105: Constructor of the scene view component.

Editor → Scene view → Constructor

Fragment defined by ?, ?.  
Fragment referenced in ?.

THE SCENE VIEW CAN NOW BE SET UP by the main window and is then added to its vertical splitter.

*⟨ Set up scene view in main window ? ⟩ ≡*

```

1  self.scene_view = guiscene.SceneView()
2  self.scene_view.setObjectName('scene_view')
3  size_policy = QtWidgets.QSizePolicy(
4      QtWidgets.QSizePolicy.Expanding,
5      QtWidgets.QSizePolicy.Expanding
6  )
7  size_policy.setHorizontalStretch(2)
8  size_policy.setVerticalStretch(0)
9  size_policy.setHeightForWidth(self.scene_view.sizePolicy().hasHeightForWidth())
10 self.scene_view.setSizePolicy(size_policy)
11 self.scene_view.setMinimumSize(Qt.QSize(0, 0))
12 self.scene_view.setAutoFillBackground(False)
13 self.scene_view setFrameShape(QtWidgets.QFrame.StyledPanel)
14 self.scene_view setFrameShadow(QtWidgets.QFrame.Sunken)
15 self.scene_view.setLineWidth(1)
16 self.scene_view.setVerticalScrollBarPolicy(QtCore.Qt.ScrollBarAsNeeded)
17 self.scene_view.setHorizontalScrollBarPolicy(QtCore.Qt.ScrollBarAsNeeded)
18 brush = QtGui.QBrush(Qt.QColor(0, 0, 0, 255))
19 brush.setStyle(QtCore.Qt.NoBrush)
20 self.scene_view.setBackgroundBrush(brush)
21 self.scene_view.setAlignment(QtCore.Qt.AlignLeadingQtCore.Qt.AlignLeftQtCore.Qt.AlignTop)
22 self.scene_view.setDragMode(QtWidgets.QGraphicsView.RubberBandDrag)
23 self.scene_view.setTransformationAnchor(QtWidgets.QGraphicsView.AnchorUnderMouse)
24 self.scene_view.setOptimizationFlags(QtWidgets.QGraphicsView.DontAdjustForAntialiasing)
25 ◇

```

Figure 106: The scene view component is being set up by the main window.

Editor → Main window → Methods → Setup UI

Fragment referenced in ?.

*⟨ Add scene view to vertical splitter in main window ? ⟩ ≡*

```

1  vertical_splitter.addWidget(self.scene_view)
2  ◇

```

Figure 107: The scene view component is being added to the main window's vertical splitter.

Editor → Main window → Methods → Setup UI

Fragment referenced in ?.

AT THIS POINT THE SCENE VIEW DOES NOT REACT whenever the scene is changed by the scene graph view. As before, the main application needs connect the components.

CONNECTING THE VIEW MODELS of the scene graph view and the scene view directly would not make much sense, as they both use different view models. Instead it makes sense to connect the `do_select_scene` signal of the scene graph controller with the `on_scene_changed` slot

of the scene controller as they both use the domain model of the scene.

*<Connect controllers for main application ?> ≡*

```
1 self.scene_graph_controller.do_select_scene.connect(
2     self.scene_controller.on_scene_changed
3 )◇
```

Fragment defined by ?, ?.  
Fragment referenced in ?.

The scene controller does not manage scene models directly, as the scene graph controller does. Instead it reacts on signals sent by the latter and manages its own scene view models.

*<Connect controllers for main application ?>+ ≡*

```
1 self.scene_graph_controller.do_add_scene.connect(
2     self.scene_controller.on_scene_added
3 )
4 self.scene_graph_controller.do_remove_scene.connect(
5     self.scene_controller.on_scene_removed
6 )◇
```

Fragment defined by ?, ?.  
Fragment referenced in ?.

Figure 108: Whenever a scene is selected in the scene graph, the scene graph controller informs the scene controller about that selection.

Editor → Main application → Constructor

Figure 109: Whenever a scene is added to or removed from the scene graph, the scene graph controller informs the scene controller about those actions.

Editor → Main application → Constructor

Loose some words about the scene controller?

THE SCENE VIEW MODELS REPRESENT A CERTAIN SCENE of the scene graph and hold the nodes of a specific scene. A scene view model is of type QGraphicsScene.

FOR BEING ABLE TO DISTINGUISH DIFFERENT SCENES, their identifier will be drawn at the top left position.

THE SCENE CONTROLLER DOES NOT DIRECTLY MANAGE SCENES. It has to react upon the signals sent by the scene graph controller. Additionally it needs to keep track of the currently selected scene, by holding a reference to that. The common identifier is the identifier of the domain model.

WHENEVER A NEW SCENE IS CREATED, the scene controller needs to create a scene of type QGraphicsScene and needs to keep track of that scene.

WHENEVER A SCENE IS DELETED, it needs to delete the scene from

⟨ Scene controller declarations ? ⟩ ≡

```

1  common.with_logger
2  class SceneController(Qt.QObject):
3      """The scene controller.
4
5      A controller for switching scenes and managing the nodes of a scene by
6      adding, editing and removing nodes to / from a scene.
7      """
8
9      # Signals
10     ⟨ Scene controller signals ? ⟩
11
12     ⟨ Scene controller constructor ? ⟩
13     ⟨ Scene controller methods ? ⟩
14
15     ⟨ Scene controller slots ?, ... ⟩
16  ◇

```

Figure 110: Definition of the scene controller.

Editor → Scene controller

Fragment referenced in 151a.

⟨ Set up controllers for main application ? ⟩+ ≡

```

1  self.scene_controller = scene.SceneController(self)◇

```

Figure 111: The scene controller being set up by the main application.

Editor → Main application → Constructor

Fragment defined by ?, ?, ?.  
Fragment referenced in ?.

⟨ Scene view model declarations ? ⟩ ≡

```

1  common.with_logger
2  class SceneViewModel(Qt.QGraphicsScene):
3      """Scene view model.
4      Represents a certain scene from the scene graph and is used to manage the
5      nodes of that scene."""
6
7      # Constants
8      WIDTH = 15
9      HEIGHT = 15
10
11     # Signals
12     ⟨ Scene view model signals ? ⟩
13
14     ⟨ Scene view model constructor ? ⟩
15     ⟨ Scene view model methods ?, ... ⟩
16  ◇

```

Figure 112: Definition of the scene view model.

Editor → Scene view model

Fragment referenced in 150a.



⟨Scene view model constructor ?⟩ ≡

```

1  def __init__(self, domain_object, parent=None):
2      """Constructor.
3
4      :param domain_object: Reference to a scene model.
5      :type domain_object: qde.editor.domain.scene.SceneModel
6      :param parent:        The parent of the current view model.
7      :type parent:        qde.editor.gui_domain.scene.SceneViewModel
8      """
9
10     super(SceneViewModel, self).__init__(parent)
11
12     self.id_ = domain_object.id_
13     self.nodes = []
14     self.insert_at = QtCore.QPoint(0, 0)
15     self.insert_at_colour = Qt.QColor(self.palette().highlight().color())
16
17     self.width = SceneViewModel.WIDTH * 20
18     self.height = SceneViewModel.HEIGHT * 17
19
20     self.setSceneRect(0, 0, self.width, self.height)
21     self.setItemIndexMethod(self.NoIndex)
22

```

Figure 113: Constructor of the scene view model component.

Editor → Scene view model → Constructor

Fragment referenced in ?.

its known scenes as well.

TO ACTUALLY CHANGE THE SCENE, the scene controller needs to react whenever the scene was changed. It does that by reacting on the `do_select_scene` signal sent by the scene graph controller.

As can be seen in Figure 118, the scene controller emits a signal that the scene was changed, containing the view model of the new scene.

The emitted signal, `do_change_scene`, is in turn consumed by the `on_scene_changed` slot of the scene view for actually changing the displayed scene.

AT THIS POINT SCENES CAN BE MANAGED AND DISPLAYED but they still cannot be rendered as nodes cannot be added yet. First of all as there are no nodes yet and second as there exists no possibility to add nodes.

⟨ Scene view model methods ? ⟩ ≡

```

1  def drawBackground(self, painter, rect):
2      # io = Qt.QGraphicsTextItem()
3      # io.setPos(0, 0)
4      # io.setDefaultTextColor(Qt.QColor(102, 102, 102))
5      # io.setPlainText(
6      #     "Scene: {0}".format(str(self))
7      # )
8      # self.addItem(io)
9
10     scene_rect = self.sceneRect()
11     text_rect = QtCore.QRectF(scene_rect.left() + 4,
12                               scene_rect.top() + 4,
13                               scene_rect.width() - 4,
14                               scene_rect.height() - 4)
15
16     message = str(self)
17     font = painter.font()
18     font.setBold(True)
19     font.setPointSize(14)
20     painter.setFont(font)
21     painter.setPen(QtCore.Qt.lightGray)
22     painter.drawText(text_rect.translated(2, 2), message)
23     painter.setPen(QtCore.Qt.black)
24     painter.drawText(text_rect, message)

```

Fragment defined by ?, 150c.  
 Fragment referenced in ?.

Figure 114: The method to draw the background of a scene. It is used to draw the identifier of a scene at the top left position of it.

Editor → Scene view model → Methods

⟨ Scene controller constructor ? ⟩ ≡

```

1  def __init__(self, parent):
2      """Constructor.
3
4      :param parent: the parent of this scene controller.
5      :type parent: Qt.QObject
6      """
7
8      super(SceneController, self).__init__(parent)
9
10     self.scenes = {}
11     self.current_scene = None
12

```

Fragment referenced in ?.

Figure 115: Constructor of the scene controller. As can be seen, the scene controller holds all scenes (as a dictionary) and keeps track of the currently active scene.

Editor → Scene controller → Constructor

$\langle \text{Scene controller slots ?} \rangle \equiv$

```

1 QtCore.pyqtSlot(domain_scene.SceneModel)
2 def on_scene_added(self, scene_domain_model):
3     """React when a scene was added.
4
5     :param scene_domain_model: the scene that was added.
6     :type scene_domain_model: qde.domain.scene.SceneModel
7     """
8
9     if scene_domain_model.id_ not in self.scenes:
10         scene_view_model = guidomain_scene.SceneViewModel(
11             domain_object=scene_domain_model
12         )
13         self.scenes[scene_domain_model.id_] = scene_view_model
14         self.logger.debug("Scene '%s' was added" % scene_view_model)
15     else:
16         self.logger.debug("Scene '%s' already known" % scene)
17
◇

```

Figure 116: The slot which gets triggered whenever a new scene is added via the scene graph.

Editor → Scene controller → Slots

Fragment defined by ?, ?, ?.

Fragment referenced in ?.

$\langle \text{Scene controller slots ?} \rangle + \equiv$

```

1 QtCore.pyqtSlot(domain_scene.SceneModel)
2 def on_scene_removed(self, scene_domain_model):
3     """React when a scene was removed/deleted.
4
5     :param scene_domain_model: the scene that was removed.
6     :type scene_domain_model: qde.domain.scene.SceneModel
7     """
8
9     if scene_domain_model.id_ in self.scenes:
10         del(self.scenes[scene_domain_model.id_])
11         self.logger.debug("Scene '%s' was removed" % scene_domain_model)
12     else:
13         self.logger.warn((
14             "Scene '%s' should be removed, "
15             "but is not known"
16         ) % scene_domain_model)
17
◇

```

Figure 117: The slot which gets triggered whenever a scene is removed via the scene graph.

Editor → Scene controller → Slots

Fragment defined by ?, ?, ?.

Fragment referenced in ?.

⟨ Scene controller slots ? ⟩ + ≡

```

1  QtCore.pyqtSlot(domain_scene.SceneModel)
2  def on_scene_changed(self, scene_domain_model):
3      """Gets triggered when the scene was changed by the view.
4
5      :param scene_domain_model: The currently selected scene.
6      :type scene_domain_model: qde.editor.domain.scene.SceneModel
7      """
8
9      if scene_domain_model.id_ in self.scenes:
10         self.current_scene = self.scenes[scene_domain_model.id_]
11         self.do_change_scene.emit(self.current_scene)
12         self.logger.debug("Scene changed: %s", self.current_scene)
13     else:
14         self.logger.warn((
15             "Should change to scene '%s', "
16             "but that scene is not known"
17         ) % scene_domain_model)
18  ◇

```

Fragment defined by ?, ?, ?.  
 Fragment referenced in ?.

Figure 118:

Editor → Scene controller → Slots

⟨ Scene controller signals ? ⟩ ≡

```

1  do_change_scene = QtCore.pyqtSignal(guidomain_scene.SceneViewModel)
2  ◇

```

Fragment referenced in ?.

Figure 119: The signal which is emitted when the scene has been changed by the scene graph controller and that scene is known to the scene controller.

Editor → Scene controller → Signals

⟨ Scene view slots ? ⟩ ≡

```

1  QtCore.pyqtSlot(scene.SceneViewModel)
2  def on_scene_changed(self, scene_view_model):
3      # TODO: Document method
4
5      self.setScene(scene_view_model)
6      # TODO: self.scrollTo(scene_view_model.view_position)
7      self.scene().invalidate()
8      self.logger.debug("Scene has changed: %s", scene_view_model)◇

```

Fragment referenced in ?.

Figure 120: The slot of the scene view, which gets triggered whenever the scene changes. The scene interface, provided by QGraphicsView, is then invalidated to trigger the rendering of the scene view.

Editor → Scene view → Slots

⟨Connect main window components ?⟩+ ≡

```
1 self.scene_controller.do_change_scene.connect(  
2     self.main_window.scene_view.on_scene_changed  
3 )◇
```

Fragment defined by ?, ?, 147d.  
Fragment referenced in ?.

Figure 121: The main application connects the scene view's signal that the scene was changed with the corresponding slot of the scene controller.

Editor → Main application → Constructor

# Nodes

THINKING OF THE DEFINITION OF WHAT SHALL BE ACHIEVED, as defined at Appendix , a node defining a sphere is implemented.

$\langle \text{Implicit sphere node ?} \rangle \equiv$

```
1 {
2   "name": "Implicit sphere",
3   "id_": "16d90b34-a728-4caa-b07d-a3244ecc87e3",
4   "description": "Definition of a sphere by using implicit surfaces",
5   "inputs": [
6      $\langle \text{Implicit sphere node inputs ?} \rangle$ 
7   ],
8   "outputs": [
9      $\langle \text{Implicit sphere node outputs ?} \rangle$ 
10  ],
11  "definitions": [
12     $\langle \text{Implicit sphere node definitions ?} \rangle$ 
13  ],
14  "invocations": [
15     $\langle \text{Implicit sphere node invocations ?} \rangle$ 
16  ],
17  "parts": [
18     $\langle \text{Implicit sphere node parts ?} \rangle$ 
19  ],
20  "nodes": [
21     $\langle \text{Implicit sphere node nodes ?} \rangle$ 
22  ],
23  "connections": [
24     $\langle \text{Implicit sphere node connections ?} \rangle$ 
25  ]
26 }◇
```

Figure 122: Definition of a node for an implicitly defined sphere.

Implicit sphere node

Fragment referenced in 162a.

At the current point the sphere node will only have one input: the radius of the sphere. The position of the sphere will be at the center (meaning the X-, the Y- and the Z-position are all 0).

FOR BEING ABLE TO CHANGE THE POSITION, another node will be introduced.

THE OUTPUT OF THE SPHERE NODE is of type implicit as the node

*⟨ Implicit sphere node inputs ? ⟩ ≡*

```

1  {
2    "name": "radius",
3    "atomic_id": "468aea9e-0a03-4e63-b6b4-8a7a76775a1a",
4    "default_value": {
5      "type_": "float",
6      "value": "1"
7    },
8    "id_": "f5c6a538-1dbc-4add-a15d-ddc4a5e553da",
9    "description": "The radius of the sphere",
10   "min_value": "-1000",
11   "max_value": "1000"
12 }◇

```

Fragment referenced in ?.

represents an implicit surface.

*⟨ Implicit sphere node outputs ? ⟩ ≡*

```

1  {
2    "name": "output",
3    "id_": "a3ac68e5-5afe-4779-9e9f-5b619e041ae6",
4    "atomic_id": "c019271c-35b6-425c-9ff2-a1d893111adb"
5  }◇

```

Fragment referenced in ?.

Figure 123: Radius of the implicit sphere node as input.

Implicit sphere node → Inputs

Figure 124: The output of the implicit sphere node, which is of the atomic type implicit.

Implicit sphere node → Outputs

THE DEFINITION OF THE NODE IS THE ACTUAL IMPLEMENTATION of a sphere as a implicit surface.

THE INVOCATION OF THE NODE is simply calling the above definition using the parameters of the node, which is in this case the radius.

THE PARAMETERS ARE IN CASE OF IMPLICIT SURFACES uniform variables of the type of the parameter, as implicit surfaces are rendered by the fragment shader. The uniform variables are defined by a type and an identifier, whereas in the case of paramaters their identifier is used.

The position of the node is an indirect parameter, which is not defined by the node's inputs. It will be setup by the node's parts.

THE PARTS OF THE NODE, in this case it is only one part, contain the body of the node. The body is about evaluating the inputs and passing them on to a shader.

*⟨ Implicit sphere node definitions ? ⟩* ≡

```

1 {
2   "id_": "99d20a26-f233-4310-adb2-5e540726d079",
3   "script": [
4     "// Returns the signed distance to a sphere with given radius for the",
5     "// given position.",
6     "float sphere(vec3 position, float radius)",
7     "{",
8     "    return length(position) - radius;",
9     "}"
10  ]
11 }◇

```

Figure 125: Implementation of the sphere in the OpenGL Shading Language (GLSL).

Implicit sphere node → Definitions

Fragment referenced in ?.

*⟨ Implicit sphere node invocations ? ⟩* ≡

```

1 {
2   "id_": "4cd369d2-c245-49d8-9388-6b9387af8376",
3   "type": "implicit",
4   "script": [
5     "float s = sphere(",
6     "    16d90b34-a728-4caa-b07d-a3244ecc87e3-position,",
7     "    5c6a538-1dbc-4add-a15d-ddc4a5e553da",
8     ");"
9   ]
10 }◇

```

Figure 126: The position of the implicit sphere node as invocation.

Implicit sphere node → Invocations

Fragment referenced in ?.



Change this to C and use CFFI.

*< Implicit sphere node parts ? > ≡*

```

1  {
2      "id_": "74b73ce7-8c9d-4202-a533-c77aba9035a6",
3      "name": "Implicit sphere node function",
4      "type_": "implicit",
5      "script": [
6          "# -*- coding: utf-8 -*-",
7          "",
8          "from PyQt5 import QtGui",
9          "",
10         "",
11         "class Class_ImplicitSphere(object):",
12             "def __init__(self):",
13                 "self.position = QtGui.QVector3D()",
14             "",
15             "def process(self, context, inputs):",
16                 "shader = context.current_shader.program",
17                 "",
18                 "radius = inputs[0].process(context).value",
19                 "shader_radius_location = shader.uniformLocation(\"f5c6a538-1dbc-4add-a15d-ddc4a5e553da\")",
20                 "shader.setUniformValue(shader_radius_location, radius)",
21                 "",
22                 "position = self.position",
23                 "shader_position_location = shader.uniformLocation(",
24                 "\"16d90b34-a728-4caa-b07d-a3244ecc87e3-position\"",
25                 ")",
26                 "shader.setUniformValue(shader_position_location, position)",
27                 "",
28                 "return context"
29         ]
30     }

```

Figure 127: The “body” of the implicit sphere node as node part.

Implicit sphere node → Parts

Fragment referenced in ?.

CONNECTIONS ARE COMPOSED OF AN INPUT AND AN OUTPUT plus a reference to a part, as stated in . In this case there is exactly one input, the radius, and one output, an object defined by implicit functions.

Add reference

The radius is being defined by an input, which is therefore being referenced as source. There is although no external node being referenced, as the radius is of the atomic type float. Therefore the source node is 0, meaning it is an internal reference. The input itself is used as part for the input.

The very same applies for the output of that connection. The radius is being consumed by the first part of the node’s part (which has only this part). As this definition is within the same node, the target node is also 0. The part is then being referenced by its identifier.

*< Implicit sphere node connections ? > ≡*

```

1 {
2   "source_node": "00000000-0000-0000-0000-000000000000",
3   "source_part": "f5c6a538-1dbc-4add-a15d-ddc4a5e553da",
4   "target_node": "00000000-0000-0000-0000-000000000000",
5   "target_part": "74b73ce7-8c9d-4202-a533-c77aba9035a6"
6 }◇

```

Figure 128: Mapping of the connections of the implicit sphere node. Note that the inputs and outputs are internal, therefore the node references are 0.

Implicit sphere node → Connections

Fragment referenced in ?.

NOW A VERY BASIC NODE IS AVAILABLE, but the node does not get recognized by the application yet. As nodes are defined by external files, they need to be searched, loaded and registered to make them available to the application.

THEREFORE THE NODE CONTROLLER IS INTRODUCED, which will manage the node definitions.

*< Node controller declarations ? > ≡*

```

1 common.with_logger
2 class NodeController(QtCore.QObject):
3     """The node controller.
4
5     A controller managing nodes.
6     """
7
8     # Constants
9     NODES_PATH = "nodes"
10    NODES_EXTENSION = "node"
11    ROOT_NODE_ID = uuid.UUID("026c04d0-36d2-49d5-ad15-f4fb87fe8eeb")
12    ROOT_NODE_OUTPUT_ID = uuid.UUID("a8fadcf-c-4e19-4862-90cf-a262eef2219b")
13
14    # Signals
15    < Node controller signals 138>
16
17    < Node controller constructor ?, ... >
18    < Node controller methods ?, ... >
19
20    < Node controller slots ?>
21 ◇

```

Figure 129: Definition of the node controller.

Editor → Node controller

Fragment referenced in 162b.

THE NODE CONTROLLER ASSUMES, that all node definitions are placed within the nodes subdirectory of the application's working directory. Further it assumes, that node definition files use the node extension.

*<Node controller constructor ?> ≡*

```

1  def __init__(self, parent=None):
2      """ Constructor.
3
4      :param parent: the parent of this node controller.
5      :type parent: QtCore.QObject
6      """
7
8      super(NodeController, self).__init__(parent)
9
10     self.nodes_path = "{current_dir}{sep}{nodes_path}".format(
11         current_dir=os.getcwd(),
12         sep=os.sep,
13         nodes_path=NodeController.NODES_PATH
14     )
15     self.nodes_extension = NodeController.NODES_EXTENSION

```

Figure 130: Constructor of the node controller.

Editor → Node controller → Constructor

Fragment defined by ?, ?, ?, ?.  
Fragment referenced in ?.

THE NODE CONTROLLER WILL THEN SCAN that directory containing the node definitions and load each one.

*<Node controller methods ?> ≡*

```

1  def load_nodes(self):
2      """Loads all files with the ending NodeController.NODES_EXTENSION
3      within the NodeController.NODES_PATH directory, relative to the current
4      working directory.
5      """
6
7      < Node controller load nodes method ?, ... >

```

Figure 131: A method that loads node definitions from external files from within the node controller.

Editor → Node controller → Methods

Fragment defined by ?, ?, ?, ?.  
Fragment referenced in ?.

NODE DEFINITIONS WILL CONTAIN PARTS. The parts within a node definition are used to create corresponding parts within instances of themselves. The parts are able to create values based on the atomic types through functions.

THE PART OF A NODE DEFINITION holds an identifier as well as an expression to create a function for creating and handling values which will be used when evaluating a node. Further it provides a function which allows to instantiate itself as part of a node (instance).

THE NODE CONTROLLER NEEDS TO KEEP TRACK of node definition

$\langle \text{Node definition part domain model declarations ?} \rangle \equiv$

```

1  class NodeDefinitionPart(object):
2      """Represents a part of the definition of a node."""
3
4      # Signals
5       $\langle \text{Node definition part domain model signals ?} \rangle$ 
6
7       $\langle \text{Node definition part domain model constructor ?} \rangle$ 
8       $\langle \text{Node definition part domain model methods ?} \rangle \diamond$ 

```

Figure 132: Definition of a part of a node definition.

Editor → Node definition part

Fragment referenced in 159a.

$\langle \text{Node definition part domain model constructor ?} \rangle \equiv$

```

1  def __init__(self, id_):
2      """Constructor.
3
4      :param id_: the globally unique identifier of the part of the node
5      definition.
6      :type id_: uuid.uuid4
7      """
8
9      self.id_ = id_
10     self.type_ = None
11     self.name = None
12     self.parent = None
13
14     # This property is used when evaluating node instances using this node
15     # definition
16     self.function_creator = lambda: create_value_function(
17         parameter.FloatValue(0)
18     )
19
20     # This property will be used to create/instantiate a part of a node
21     # instance
22     self.creator_function = None
23      $\diamond$ 

```

Figure 133: Constructor of the node definition part.

Editor → Node definition part

Fragment referenced in ?.

parts, as they are a central aspect and may be reused.

$\langle \text{Node controller constructor ?} \rangle + \equiv$

```
1  self.node_definition_parts = {}
2  ◇
```

Fragment defined by ?, ?, ?, ?.  
Fragment referenced in ?.

Figure 134: The node controller keeps track of node definition parts.

Editor → Node controller → Constructor

The code snippet defining the constructor of a node definition part, Figure 132, uses a function called `create_value_function` of the functions module.

$\langle \text{Node domain module methods ?} \rangle \equiv$

```
1  def create_value_function(value):
2      """Creates a new value function using the provided value.
3
4      :param value: the value which the function shall have.
5      :type  value: qde.editor.domain.parameter.Value
6      """
7
8      value_function = NodePart.ValueFunction()
9      value_function.value = value.clone()
10
11     return value_function
12  ◇
```

Fragment defined by ?, ?.  
Fragment referenced in 159a.

Figure 135: Helper function which creates a value function from the given value.

Editor → Node domain model → Module methods

THAT BRINGS UP THE CONCEPT OF VALUE FUNCTIONS. Value functions are one of the building blocks of a node. They are used to evaluate a node value-wise through its inputs.

THE VALUE FUNCTION OF A NODE may not be clear during the initialization of the node or it may be simply be subject to change. Therefore it makes sense to provide a default value function which gets used by default.

THE VALUE FUNCTION RELIES STRONGLY ON THE CONECEPT OF NODE PARTS, which is not defined yet. A part of a node is actually an instance of an atomic type (which is usually an input) within an instance of a node definition.

A PART OF A NODE HAS A FUNCTION, which gets called whenever a part of a node is being processed.

*<Node part domain model value function declarations ?> ≡*

```

1  class ValueFunction(Function):
2      """Class representing a value function for nodes."""
3
4      def __init__(self):
5          """Constructor."""
6
7          super(NodePart.ValueFunction, self).__init__()
8          self.value = None
9
10     def clone(self):
11         """Clones the currently set value function.
12
13         :return: a clone of the currently set value function.
14         :rtype: qde.editor.domain.node.NodePart.Function
15         """
16
17         new_function = create_value_function(self.value)
18         new_function.node_part = self.node_part
19
20         return new_function
21
22     def process(self, context, inputs, output_index):
23         """Processes the value function for the given context, the given inputs
24         and the given index of the output.
25
26         :param context: the context of the processing
27         :type context: qde.editor.domain.node.NodePartContext
28         :param inputs: a list of inputs to process
29         :type inputs: list
30         :param output_index: the index of the output which shall be used
31         :type output_index: int
32
33         :return: the context
34         :rtype: qde.editor.domain.node.NodePartContext
35         """
36
37         if not self.value.is_cachable or self.has_changed:
38             if len(inputs) > 0:
39                 inputs[0].process(context, self.processing_index)
40                 value.set_value_from_context(context)
41             else:
42                 self.value.set_value_in_context(context)
43
44                 self.has_changed = False
45         else:
46             self.value.set_value_in_context(context)
47
48         # TODO: Handle events
49
50         return context◇

```

Figure 136: Definition of the value function class which is used within nodes.

Editor → Value function

Fragment referenced in ?.

(Node part domain model default value function declarations ?) ≡

```

1  class DefaultValueFunction(ValueFunction):
2      """The default value function of a node part."""
3
4      def __init__(self):
5          """Constructor."""
6
7          super(NodePart.DefaultValueFunction, self).__init__()
8
9      def clone(self):
10         """Returns itself as a default value function may not be cloned.
11
12         :return: a self-reference.
13         :rtype: DefaultValueFunction
14         """
15
16         return self
17
18     def process(self, context, inputs, output_index):
19         """Processes the default value function for the given context, the given inputs
20         and the given index of the output.
21
22         :param context: the context of the processing
23         :type context: qde.editor.domain.node.NodePartContext
24         :param inputs: a list of inputs to process
25         :type inputs: list
26         :param output_index: the index of the output which shall be used
27         :type output_index: int
28
29         :return: the context
30         :rtype: qde.editor.domain.node.NodePartContext
31         """
32
33         self.value.set_value_in_context(context)
34         self.has_changed = False
35
36         return context◇

```

Figure 137: Definition of the default value function class, which is derived from the value function class.

Editor → Default value function

Fragment referenced in ?.

$\langle \text{Node part domain model declarations ?} \rangle \equiv$

```

1  class NodePart(object):
2      """Represents a part of a node."""
3
4      < Node part domain model function declarations ? >
5      < Node part domain model value function declarations ? >
6      < Node part domain model default value function declarations ? >
7
8      # Signals
9      < Node part domain model signals ? >
10
11     < Node part domain model constructor ? >
12     < Node part domain model methods ? >
13  ◇

```

Figure 138: The node part class.

Editor → Node part

Fragment referenced in 159a.

$\langle \text{Node part domain model constructor ?} \rangle \equiv$

```

1  def __init__(self, id_, default_function):
2      """Constructor.
3
4      :param id_: the identifier of the node part.
5      :type id_: uuid.uuid4
6      :param default_function: the default function of the part
7      :type default_function: Function
8      """
9
10     self.id_ = id_
11     self.function_ = default_function
12     self.default_function = default_function
13     self.type_ = types.NodeType.GENERIC◇

```

Figure 139: Constructor of the node part class.

Editor → Node part

Fragment referenced in ?.



⟨Node part domain model function declarations ?⟩ ≡

```

1  class Function(object):
2      """Represents the function of a part of a node."""
3
4      def __init__(self):
5          """Constructor."""
6
7          self.has_changed = True
8          self.evaluation_index = 0
9          self.changed_state = types.StateChange.VALUE.value | types.StateChange.SUBTREE.value
10
11     def clone(self):
12         """Clones the currently set function."""
13
14         message = QtCore.QCoreApplication.translate(
15             __class__.__name__,
16             "This method must be implemented in a child class"
17         )
18         raise NotImplementedError(message)
19
20     def process(self, context, inputs, output_index):
21         """Processes the value function for the given context, the given
22         inputs."""
23
24         message = QtCore.QCoreApplication.translate(
25             __class__.__name__,
26             "This method must be implemented in a child class"
27         )
28         raise NotImplementedError(message)
29

```

Figure 140: Definition of the function class which is used in parts of nodes.

Editor → Function

Fragment referenced in ?.

WHEN A PART OF A NODE IS BEING PROCESSED, also its inputs are processed. Whenever an input (value) changes, the node part needs to handle the changes. There are three possible types of changes: nothing has changed, the value (of the function) has changed or the subtree (inputs) has changed.

*<Node part state changed declarations ?> ≡*

```

1 class StateChange(enum.Enum):
2     """Possible changes of state."""
3
4     NOTHING = 0
5     VALUE   = 1
6     SUBTREE = 2◇

```

Figure 141: A class which holds the possible values of a state change of a node part.

Editor → State change

Fragment referenced in 154a.

FINALLY ALL NODES WILL BE COMPOSED OF ATOMIC TYPES. When building the node definition from the JSON input, the (atomic) part of the node definition is fetched from the node controller. Therefore it is necessary to provide parts for the atomic types before loading all the node definitions.

*<Node controller load nodes method ?> ≡*

```

1 for atomic_type in parameter.AtomicTypes.atomic_types:
2     if atomic_type.id_ not in self.node_definition_parts:
3         self.node_definition_parts[atomic_type.id_] = atomic_type
4         self.logger.info(
5             "Added atomic type %s: %s",
6             atomic_type.type_, atomic_type.id_
7         )
8     else:
9         self.logger.warn((
10             "Already knowing node part for atomic type %s. This should not"
11             "happen"
12         ), atomic_type.type_)◇

```

Figure 142: The node controller provides the atomic types which build the basis of the part of a node.

Editor → Node controller → Methods  
→ Load nodes

Fragment defined by ?, ?.  
Fragment referenced in ?.

HAVING THE ATOMIC TYPES AVAILABLE AS PARTS, the node definitions themselves may be loaded. There is only one problem to that: there is nothing to hold the node definitions. Therefore the node definition domain model is introduced.

THE DEFINITION OF A NODE is quite similar to a node itself. As the

$\langle \text{Node definition domain model declarations ?} \rangle \equiv$

```

1 class NodeDefinition(object):
2     """Represents the definition of a node."""
3
4     # Signals
5      $\langle \text{Node definition domain model signals ?} \rangle$ 
6
7      $\langle \text{Node definition domain model constructor ?} \rangle$ 
8      $\langle \text{Node definition domain model methods ?, ...} \rangle \diamond$ 

```

Figure 143: Definition of the node definition class, which represents the definition of a node.

Editor → Node definition

Fragment referenced in 159a.

definition of a node may be changed, the flag `was_changed` is added. Further a node definition holds all instances of itself, meaning nodes.

$\langle \text{Node definition domain model constructor ?} \rangle \equiv$

```

1 def __init__(self, id_):
2     """Constructor.
3
4     :param id_: the globally unique identifier of the node.
5     :type id_: uuid.uuid4
6     """
7
8     self.id_ = id_
9
10    self.name = ""
11    self.description = ""
12    self.parent = None
13    self.inputs = []
14    self.outputs = []
15    self.definitions = []
16    self.invocations = []
17    self.parts = []
18    self.nodes = []
19    self.connections = []
20    self.instances = []
21    self.was_changed = False◇

```

Figure 144: Constructor of the node definition class.

Editor → Node definition → Constructor

Fragment referenced in ?.

THE NODE CONTROLLER IS NOW ABLE to instantiate nodes definitions and keep them in a list. The controller manages both, the domain and the view models. As they both share the same ID, as the view model is being created from the data of the domain model, only one entry is necessary. The entry in the dictionary will therefore hold a tuple, containing the domain and the view model, identified by their common identifier.

$\langle \text{Node controller constructor ?} \rangle + \equiv$

```
1  self.node_definitions = {}
2  ◇
```

Fragment defined by ?, ?, ?, ?.

Fragment referenced in ?.

Figure 145: The node controller holds a dictionary containing node definitions.

Editor → Node controller → Constructor

THE NODE CONTROLLER SCANS the node subdirectory, containing the node definitions, for files ending in node.

IF A FILE CONTAINING A NODE DEFINITION IS FOUND, its identifier is extracted from the file name. If the node definition is not known yet, it gets loaded and added to the list of known node definitions.

WHENEVER A NEW NODE DEFINITION GETS LOADED, other components need to be informed about the fact, that a new node definition is available. However, as the signal emits a view model, the loaded node definition cannot be emitted directly. Instead a view model needs to be created, which will then be emitted.

THE LOADING OF THE NODE DEFINITION ITSELF is simply about parsing the various sections and handling them correspondingly. To prevent the node controller from being bloated, the parsing is done in a separate module responsible for JSON specific tasks.

NOT ALL PARTS OF NODE DEFINITIONS ARE DEFINED YET: inputs, outputs, other node definitions, connections, definitions, invocations and parts. First the building of the node definition inputs is defined.

THERE ARE A FEW THINGS MISSING, which are used in the above code fragment: the possibility to create values from given parameters, the actual node definition input as domain model and getting the node definition part identified by the given atomic identifier.

THE CREATION OF VALUES FROM GIVEN PARAMETERS is done within the parameter module, as this is something very parameter specific. Therefore a static method is defined, which returns an instance of an atomic type, e.g. a float value or a scene.

instance of atomic type, ok?

FOR THE SPECIFIC VALUE INSTANCES a generic value interface is defined. This interface holds a reference to the atomic type of the value and defines what type the function of a value is.

Then an interface for setting and getting values is defined.

NOW THE SPECIFIC VALUE TYPES ARE IMPLEMENTED, based either on the generic or the concrete value interface, depending on the type.

*<Node controller load nodes method ?>+ ≡*

```

1  if os.path.exists(self.nodes_path):
2      node_definition_files = glob.glob("{path}{sep}*.{ext}".format(
3          path=self.nodes_path,
4          sep=os.sep,
5          ext=self.nodes_extension
6      ))
7      num_node_definitions = len(node_definition_files)
8      if num_node_definitions > 0:
9          self.logger.info(
10             "Found %d node definition(s), loading.",
11             num_node_definitions
12         )
13         t0 = time.perf_counter()
14         for file_name in node_definition_files:
15             self.logger.debug(
16                 "Found node definition %s, trying to load",
17                 file_name
18             )
19             node_definition = self.load_node_definition_from_file_name(file_name)
20             if node_definition is not None:
21                 node_definition_view_model = node_view_model.NodeViewModel(
22                     id=node_definition.id_,
23                     domain_object=node_definition
24                 )
25                 self.node_definitions[node_definition.id_] = (
26                     node_definition,
27                     node_definition_view_model
28                 )
29                 <Node controller load node definition emit ?>
30
31             t1 = time.perf_counter()
32             self.logger.info(
33                 "Loading node definitions took %.10f seconds",
34                 (t1 - t0)
35             )
36         else:
37             message = QtCore.QCoreApplication.translate(
38                 __class__.__name__, "No node definitions found."
39             )
40             self.logger.warn(message)
41     else:
42         message = QtCore.QCoreApplication.translate(
43             __class__.__name__, "No node definitions found."
44         )
45         self.logger.warn(message)
46

```

Figure 146: The node controller loads and parses node definition files from the file system.

Editor → Node controller → Methods  
→ Load nodes

Fragment defined by ?, ?.

Fragment referenced in ?.

(Node controller methods ?)+ ≡

```

1  def load_node_definition_from_file_name(self, file_name):
2      """Loads a node definition from the given file name.
3      If no such file exists, None is returned.
4
5      :param file_name: the file name to load.
6      :type file_name: str
7
8      :return: the loaded node definition and its identifier or None
9      :rtype: qde.editor.domain.node.NodeDefinition or None
10     """
11
12     if not os.path.exists(file_name):
13         self.logger.warn((
14             "Tried to load node definition from file %s, "
15             "but the file does not exist"
16         ), file_name)
17         return None
18
19     # Extract the definition identifier from the file name, which is
20     # "uuid4.node".
21     definition_id = os.path.splitext(os.path.basename(file_name))[0]
22
23     if definition_id in self.node_definitions:
24         self.logger.warn(
25             "Should load node definition from file %s, but is already loaded",
26             file_name
27         )
28         return self.node_definitions[definition_id]
29
30     try:
31         with open(file_name) as definition_fh:
32             node_definition = json.Json.load_node_definition(
33                 self, definition_fh
34             )
35             self.logger.debug(
36                 "Loaded node definition %s from file %s",
37                 definition_id, file_name
38             )
39             # TODO: Trigger (loading) callback
40             < Node controller load node definition trigger callback ?>
41             return node_definition
42     except json.decoder.JSONDecodeError as exc:
43         self.logger.warn(
44             "There was an error loading the node definition %s: %s",
45             definition_id, exc
46         )
47         return None◇

```

Figure 147: A method which tries to load a node definition from the file system using the provided file name.

Editor → Node controller → Methods  
→ Load node definition from file name

Fragment defined by ?, ?, ?, ?.

Fragment referenced in ?.

*<Node controller load node definition emit ?> ≡*

```
1 self.do_add_node_view_definition.emit(node_definition_view_model)
2 ◇
```

Fragment referenced in ?, ?.

Figure 148: Whenever a new node definition gets loaded, the node controller emits a corresponding signal containing the node view model for the loaded node definition.

Editor → Node controller → Methods  
→ Load node definitions

Here just two implementations are given as an example. The other implementations can be found at .

[link to fragments](#)

THE DEFINITION OF THE INPUT OF A NODE DEFINITION is still missing however.

THE CODE SNIPPET DEFINING THE CONSTRUCTOR OF A NODE DEFINITION INPUT uses a function called `create_default_value_function` of the `functions` module. This function creates a default value function based on the given default value.

WITH THIS LAST IMPLEMENTATION all the parts needed for creating and handling node definition inputs are defined, which leads to the next implementation. The outputs of a node definition. The outputs are in the same way implemented as the inputs of a node definition.

THE DOMAIN MODEL OF THE NODE DEFINITION OUTPUT is very similar to the input, has less attributes although.

A NODE DEFINITION MAY CONTAIN REFERENCES to other node definitions, therefore it is necessary to parse them. The parsing is similar to that of the inputs and outputs.

As can be seen in the above code fragment, the node definition is returned by the node controller. This is very similar to getting the node definition part from the node controller.

THE NODE CONTROLLER HOLDS A REFERENCE TO THE ROOT NODE of the root scene of the system. This scene acts as an entry point when evaluating the scene graph.

CURRENTLY THERE IS NO POSSIBILITY TO ADD OUTPUTS to a node definition. Adding an output simply adds that output to the list of outputs the node definition has. Furthermore that output needs to be added for each instance of that node definition as well.

[Add inputs as well?](#)

Having the reading and parsing of inputs, outputs and other node definition implemented, the reading and parsing of connections, definitions, invocations and parts still remains.

THE READING AND PARSING of connections, definitions and invocation is very straightforward and very similar to the one of the node

`<JSON methods ?> ≡`

```

1  classmethod
2  def load_node_definition(cls, node_controller, json_file_handle):
3      """Loads a node definition from given JSON input.
4
5      :param node_controller: reference to the node controller
6      :type node_controller: qde.editor.application.node.NodeController
7      :param json_file_handle: an open file handle containing JSON data
8      :type json_file_handle: file
9
10     :return: a node definition
11     :rtype: qde.editor.domain.node.NodeDefinition
12     """
13
14     o = json.load(json_file_handle)
15
16     name          = str(o['name'])
17     id_           = uuid.UUID(o['id'])
18     description   = str(o['description'])
19
20     inputs = []
21     for input in o['inputs']:
22         node_definition_input = cls.build_node_definition_input(
23             node_controller, input
24         )
25         inputs.append(node_definition_input)
26
27     outputs = []
28     for output in o['outputs']:
29         node_definition_output = cls.build_node_definition_output(
30             node_controller, output
31         )
32         outputs.append(node_definition_output)
33
34     node_definitions = {}
35     for node_def in o['nodes']:
36         definition_id, node_definition = cls.build_node_definition(node_def)
37         node_definitions[definition_id] = node_definition
38
39     connections = []
40     for conn in o['connections']:
41         connection = cls.build_node_definition_connection(conn)
42         connections.append(connection)
43
44     definitions = []
45     for d in o['definitions']:
46         definition = cls.build_node_definition_definition(d)
47         definitions.append(definition)
48
49     invocations = []
50     for i in o['invocations']:
51         invocation = cls.build_node_definition_invocation(i)
52         invocations.append(invocation)
53
54     node_definition          = node.NodeDefinition(id_)
55     node_definition.name     = name
56     node_definition.description = description
57     node_definition.inputs   = inputs
58     node_definition.outputs  = outputs
59     node_definition.nodes    = node_definitions
60     node_definition.connections = connections
61     node_definition.definitions = definitions
62     node_definition.invocations = invocations

```

Figure 149: A class method of the JSON module, which loads a node definition from a file handle (pointing to a JSON file containing a node definition).

Editor → JSON → Methods →  
Load node definition



<JSON methods ?>+ ≡

```

1  classmethod
2  def build_node_definition_input(cls, node_controller, json_input):
3      """Builds and returns a node definition input from the given JSON input
4      data.
5
6      :param node_controller: a reference to the node controller
7      :type  node_controller: qde.editor.application.node.NodeController
8      :param json_input: the input in JSON format
9      :type  json_input: dict
10
11      :return: a node definition input
12      :rtype:  qde.editor.domain.node.NodeDefinitionInput
13      """
14
15      input_id          = uuid.UUID(json_input['id'])
16      name              = str(json_input['name'])
17      atomic_id         = uuid.UUID(json_input['atomic_id'])
18      description       = str(json_input['description'])
19      node_definition_part = node_controller.get_node_definition_part(atomic_id)
20
21      default_value_str = ""
22      default_value_entry = json_input['default_value']
23      default_value = parameter.create_value(
24          default_value_entry['type_'],
25          default_value_entry['value']
26      )
27
28      min_value = float(json_input['min_value'])
29      max_value = float(json_input['max_value'])
30
31      node_definition_input = node.NodeDefinitionInput(
32          input_id,
33          name,
34          node_definition_part,
35          default_value
36      )
37      node_definition_input.description = description
38      node_definition_input.min_value = min_value
39      node_definition_input.max_value = max_value
40
41      cls.logger.debug(
42          "Built node definition input for node definition %s",
43          atomic_id
44      )
45      return node_definition_input
46

```

Figure 150: A class method of the JSON module, which builds the input of a node definition from a file handle (pointing to a JSON file containing a node definition).

Editor → JSON → Methods →  
Build node definition input

Fragment defined by ?, ?, ?, ?, 165a, 166a, 167a.

Fragment referenced in 163b.

<Node controller methods ?>+ ≡

```

1  def get_node_definition_part(self, id_):
2      """Returns the node definition part identified by the given identifier.
3
4      If no such part is available, a generic part with that identifier is being
5      created.
6
7      :param id_: the identifier of the part of the node definition to get.
8      :type id_: uuid.uuid4
9
10     :return: the node definition part identified by the given identifier.
11     :rtype: qde.editor.domain.node.NodeDefinitionPart
12     """
13
14     if str(id_) not in self.node_definition_parts:
15         self.logger.warn((
16             "Part %s of the node definition was not found. Creating a"
17             "generic one."
18         ), id_)
19
20         type_ = types.NodeType.GENERIC
21         def create_func(id_, default_function, name, type_):
22             node_part = node.NodePart(id_, None)
23             node_part.type_ = type_
24             node_part.name = name
25             return node_part
26         node_definition_part = node.NodeDefinitionPart(id_)
27         node_definition_part.type_ = type_
28         node_definition_part.creator_function = create_func
29         self.node_definition_parts[id_] = node_definition_part
30         return node_definition_part
31     else:
32         return self.node_definition_parts[str(id_)]
33

```

Figure 151: A method of the node controller, which returns a node definition part by a provided identifier. If no node definition part is found for the given identifier, a new node definition part is created.

Editor → Node controller → Methods  
→ Get node definition part

Fragment defined by ?, ?, ?, ?.  
Fragment referenced in ?.

*<Parameter domain module methods ?> ≡*

```

1  def create_value(type_, value_string):
2      """Creates an object of the given type with the given value.
3
4      :param type_: the type of the value to create.
5      :type type_: str
6      :param value_string: the value that the value shall have.
7      "type value_string: str
8
9      :return: a value-type of the given type with the given value.
10     :rtype: qde.editor.domain.parameter.Value
11     """
12
13     if type_.lower() == "float":
14         float_value = float(value_string)
15         return FloatValue(float_value)
16     elif type_.lower() == "text":
17         return TextValue(value_string)
18     elif type_.lower() == "image":
19         return ImageValue()
20     elif type_.lower() == "scene":
21         return SceneValue()
22     elif type_.lower() == "generic":
23         return GenericValue()
24     elif type_.lower() == "dynamic":
25         return DynamicValue()
26     elif type_.lower() == "mesh":
27         return MeshValue()
28     elif type_.lower() == "implicit":
29         return ImplicitValue()
30     else:
31         message = QtCore.QCoreApplication.translate(
32             __module__, __name__, "Unknown type for value provided"
33         )
34         raise Exception(message)◇

```

Figure 152: Method of the parameter module, which creates an object of a specific value instance based on the provided type of the value.

Editor → Parameter → Create value

Fragment referenced in 154b.

*(Parameter domain model value generic interface ?) ≡*

```

1  class ValueInterface(object):
2      """Generic value interface."""
3
4      def __init__(self):
5          """Constructor."""
6
7          self.function_type = None
8
9      def clone(self):
10         """Clones the currently set value.
11
12         :return: a clone of the currently set value
13         :rtype: qde.editor.domain.parameter.ValueInterface
14         """
15
16         message = QtCore.QCoreApplication.translate(
17             __module__.__name__,
18             "This method must be implemented in a child class"
19         )
20         raise NotImplementedError(message)◇

```

Figure 153: Interface as basis for the value specific instances.

Editor → Parameter → Value interface

Fragment referenced in 154b.

*(Parameter domain model value interface ?) ≡*

```

1  class Value(ValueInterface):
2      """Value interface for setting and getting values."""
3
4      def __init__(self, value):
5          """Constructor.
6
7          :param value: the value that shall be held
8          :type value: object
9          """
10
11         super(Value, self).__init__()
12         self.value = value◇

```

Figure 154: Class which provides an interface to the value of the value specific instances.

Editor → Parameter → Value

Fragment referenced in 154b.

$\langle \text{Parameter domain model float value ?} \rangle \equiv$

```

1  class FloatValue(Value):
2      """A class holding float values."""
3
4      def __init__(self, float_value):
5          """Constructor.
6
7          :param float_value: the float value that shall be held
8          :type float_value: float
9          """
10
11         super(FloatValue, self).__init__(float_value)
12         self.function_type = types.NodeType.FLOAT
13
14     def clone(self):
15         """Clones the currently set value.
16
17         :return: a clone of the currently set value
18         :rtype: qde.editor.domain.parameter.ValueInterface
19         """
20
21         return FloatValue(self.value)◇

```

Figure 155: Implementation of the float value type.

Editor → Parameter → FloatValue

Fragment referenced in 154b.

$\langle \text{Parameter domain model scene value ?} \rangle \equiv$

```

1  class SceneValue(ValueInterface):
2      """A class holding scene values."""
3
4      def __init__(self):
5          """Constructor."""
6
7          super(SceneValue, self).__init__()
8          self.function_type = types.NodeType.SCENE
9
10     def clone(self):
11         """Clones the currently set value.
12
13         :return: a clone of the currently set value
14         :rtype: qde.editor.domain.parameter.ValueInterface
15         """
16
17         return SceneValue()◇

```

Figure 156: Implementation of the scene value type.

Editor → Parameter → SceneValue

Fragment referenced in 154b.

$\langle \text{Node definition input domain model declarations ?} \rangle \equiv$

```

1 class NodeDefinitionInput(object):
2     """Represents an input of a definition of a node."""
3
4     # Signals
5      $\langle \text{Node definition input domain model signals ?} \rangle$ 
6
7      $\langle \text{Node definition input domain model constructor ?} \rangle$ 
8      $\langle \text{Node definition input domain model methods ?} \rangle \diamond$ 

```

Figure 157: Implementation of the input of the definition of a node.

Editor  $\rightarrow$  Node definition input

Fragment referenced in 159a.

$\langle \text{Node definition input domain model constructor ?} \rangle \equiv$

```

1 def __init__(self, id_, name, node_definition_part, default_value):
2     """Constructor.
3
4     :param id_: the identifier of the definition
5     :type id_: uuid.uuid4
6     :param name: the name of the definition
7     :type name: str
8     :param node_definition_part: the atomic part of the node definition
9     :type node_definition_part: TODO
10    :param default_value: the default value of the input
11    :type default_value: qde.editor.domain.parameter.Value
12    """
13
14    self.id_ = id_
15    self.name = name
16    self.node_definition_part = node_definition_part
17    self.description = ""
18    self.min_value = -100000
19    self.max_value = 100000
20
21    self.default_function = create_default_value_function(
22        default_value
23    )

```

Figure 158: Constructor of the input of the definition of a node.

Editor  $\rightarrow$  Node definition input  
 $\rightarrow$  Constructor

Fragment referenced in ?.

$\langle \text{Node domain module methods ?} \rangle + \equiv$

```

1  def create_default_value_function(value):
2      """Creates a new default value function using the provided value.
3
4      :param value: the value which the function shall have.
5      :type value: qde.editor.domain.parameter.Value
6      """
7
8      value_function = NodePart.DefaultValueFunction()
9      value_function.value = value.clone()
10
11     return value_function

```

Figure 159: Function that creates a default value function based on a provided value.

Editor → Node → Methods →  
Create default value function

Fragment defined by ?, ?.  
Fragment referenced in 159a.

definitions. Therefore it will not be shown in detail. Details are found at

Add reference to code fragments here

THE LAST PART WHEN LOADING A NODE DEFINITION is reading and parsing the code part of the node.

FINALLY THE NODE CONTROLLER NEEDS TO BE INSTANTIATED by the main application and the loading of the node definitions needs to be triggered. The loading may although not be triggered at the same place as the signals for reacting upon new node definitions need to be in place first.

LOADING OF NODE DEFINITIONS is done right before the main window is shown, as at that point all necessary connections between signals and slots are in place.

NOW NODE DEFINITIONS ARE BEING LOADED AND PARSED. Although there is no possibility to select and instantiate the node definitions yet. To allow the instantiation of nodes, a (user interface) component is necessary: A dialog for adding nodes to the currently active scene. It will access all the loaded nodes and provide an interface for selecting a node definition which then will be instantiated.

THE KEY IDEA OF THE ADD NODE DIALOG is to have multiple columns where each column defines a specific node type. The node definitions of each type are then vertically listed per column. As these columns are tightly tied to the add node dialog, the declaration of the column class is part of the add node dialog.

Add position correction to add node dialog.

<JSON methods ?>+ ≡

```

1  classmethod
2  def build_node_definition_output(cls, node_controller, json_input):
3      """Builds and returns a node definition output from the given JSON input
4      data.
5
6      :param node_controller: a reference to the node controller
7      :type node_controller: qde.editor.application.node.NodeController
8      :param json_input: the input in JSON format
9      :type json_input: dict
10
11      :return: a node definition output
12      :rtype: qde.editor.domain.node.NodeDefinitionOutput
13      """
14
15      output_id = uuid.UUID(json_input['id_'])
16      name = str(json_input['name'])
17      atomic_id = uuid.UUID(json_input['atomic_id'])
18      node_definition_part = node_controller.get_node_definition_part(atomic_id)
19
20      node_definition_output = node.NodeDefinitionOutput(
21          output_id,
22          name,
23          node_definition_part
24      )
25
26      cls.logger.debug(
27          "Built node definition output for node definition %s",
28          atomic_id
29      )
30      return node_definition_output
31  ◇

```

Figure 160: A class method of the JSON module, which builds the output of a node definition from a file handle (pointing to a JSON file containing a node definition).

Editor → JSON → Methods →  
Build node definition output

Fragment defined by ?, ?, ?, ?, 165a, 166a, 167a.

Fragment referenced in 163b.

<Node definition output domain model declarations ?> ≡

```

1  class NodeDefinitionOutput(object):
2      """Represents an output of a definition of a node."""
3
4      # Signals
5      < Node definition output domain model signals ?>
6
7      < Node definition output domain model constructor ?>
8      < Node definition output domain model methods ?>◇

```

Figure 161: Implementation of the output of the definition of a node.

Editor → Node definition output

Fragment referenced in 159a.



*<Node definition output domain model constructor ?> ≡*

```

1  def __init__(self, id_, name, node_definition_part):
2      """Constructor.
3
4      :param id_: the identifier of the definition
5      :type id_: uuid.uuid4
6      :param name: the name of the definition
7      :type name: str
8      :param node_definition_part: the atomic part of the node definition
9      :type node_definition_part: qde.editor.domain.node.NodeDefinitionPart
10     """
11
12     self.id_ = id_
13     self.name = name
14     self.node_definition_part = node_definition_part◇

```

Figure 162: Constructor of the output of the definition of a node.

Editor → Node definition input  
→ Constructor

Fragment referenced in ?.

*<JSON methods ?>+ ≡*

```

1  classmethod
2  def build_node_definition(cls, node_controller, json_input):
3      """Builds and returns a node definition from the given JSON input data.
4
5      :param node_controller: a reference to the node controller
6      :type node_controller: qde.editor.application.node.NodeController
7      :param json_input: the input in JSON format
8      :type json_input: dict
9
10     :return: a dictionary containing the node definition at the index of the
11     definition identifier.
12     :rtype: dict
13     """
14
15     definition_id = uuid.UUID(json_input['id_'])
16     atomic_id = uuid.UUID(json_input['atomic_id'])
17
18     node_definition, node_view_model = node_controller.get_node_definition(
19         atomic_id
20     )
21
22     cls.logger.debug(
23         "Built node definition for node definition %s",
24         atomic_id
25     )
26     return (definition_id, node_definition)
27 ◇

```

Figure 163: A class method of the JSON module, which builds the definition of a node from a file handle (pointing to a JSON file containing a node definition).

Editor → JSON → Methods →  
Build node definition

Fragment defined by ?, ?, ?, ?, 165a, 166a, 167a.

Fragment referenced in 163b.

<Node controller methods ?>+ ≡

```

1  def get_node_definition(self, id_):
2      """Returns the node definition identified by the given identifier.
3      If no such definition is available, it will be tried to load the
4      definition. If this is not possible as well, None will be returned.
5      :param id_: the identifier of the node definition to get.
6      :type id_: uuid.uuid4
7
8      :return: the node definition identified by the given identifier or None.
9      :rtype: qde.editor.domain.node.NodeDefinition or None
10     """
11
12
13
14     self.logger.debug(
15         "Getting node definition %s",
16         id_
17     )
18
19     if str(id_) in self.node_definitions:
20         return self.node_definitions[str(id_)]
21     elif self.root_node is not None and id_ == self.root_node.id_:
22         return self.root_node
23     else:
24         # The node definition was not found, try to load it from node
25         # definition files.
26         file_name = os.path.join(
27             self.nodes_path,
28             id_,
29             self.nodes_extension
30         )
31         node_definition = self.load_node_definition_from_file_name(
32             file_name
33         )
34         if node_definition is not None:
35             node_definition_view_model = node_view_model.NodeViewModel(
36                 id_=node_definition.id_,
37                 domain_object=node_definition
38             )
39             self.node_definitions[node_definition.id_] = (
40                 node_definition,
41                 node_view_model
42             )
43             return (node_definition, node_view_model)
44         else:
45             return None◇

```

Figure 164: A method of the node controller, which returns a node definition by a provided identifier. If no node definition is found for the given identifier, a new node definition is created by loading the definition from the file system.

Editor → Node controller → Methods  
→ Get node definition

Fragment defined by ?, ?, ?, ?.  
Fragment referenced in ?.

$\langle \text{Node controller constructor ?} \rangle + \equiv$

```

1  # TODO: Load from coonfiguration?
2  self.root_node = node.NodeDefinition(NodeController.ROOT_NODE_ID)
3  self.root_node.name = QtCore.QCoreApplication.translate(
4      __class__, __name__,
5      'Root'
6  )
7  root_node_output = node.NodeDefinitionOutput(
8      NodeController.ROOT_NODE_OUTPUT_ID,
9      QtCore.QCoreApplication.translate(
10         __class__, __name__,
11         'Output'
12     ),
13     parameter.AtomicTypes.Generic
14 )
15 self.root_node.add_output(root_node_output)
16 self.logger.debug("Created root node %s", NodeController.ROOT_NODE_ID)◇

```

Figure 165: The root node of the system is manually created by the node controller and is also a node definition.

Editor → Node controller → Constructor

Fragment defined by ?, ?, ?, ?.

Fragment referenced in ?.

THE DIALOG FOR ADDING A NODE INSTANCE from a node definition shall only be shown from within a scene, that is from within the scene view. Therefore the add node dialog is added to the scene view.

WHENEVER THE SCENE VIEW IS FOCUSED and the tabulator key is being pressed, the dialog for adding a node shall be shown. For achieving this, the event method of the scene view needs to be overwritten.

$\langle \text{Node controller signals 138} \rangle \equiv$

```

1  do_add_node_view_definition = QtCore.pyqtSignal(node_view_model.NodeViewModel)◇

```

Fragment referenced in ?.

⟨Node definition domain model methods ?⟩ ≡

```

1  def add_output(self, node_definition_output):
2      """Adds the given output to the beginning of the list of outputs and
3      also to all instances of this node definition.
4
5      :param node_definition_output: the output to add.
6      :type  node_definition_output: qde.editor.domain.node.NodeDefinitionOutput
7      """
8
9      self.add_output_at(len(self.outputs), node_definition_output)
10
11  def add_output_at(self, index, node_definition_output):
12      """Adds the given output to the list of outputs at the given index
13      position and also to all instances of this node definition.
14
15      :param index: the position in the list of outputs where the new output
16                    shall be added at.
17      :type  index: int
18      :param node_definition_output: the output to add.
19      :type  node_definition_output: qde.editor.domain.node.NodeDefinitionOutput
20
21      :raise: an index error when the given index is not valid.
22      :raises: IndexError
23      """
24
25      if index < 0 or index > len(self.outputs):
26          raise IndexError()
27
28      self.outputs.insert(index, node_definition_output)
29
30      for instance in self.instances:
31          instance.add_output_at(
32              index,
33              node_definition_output.create_instance()
34          )
35
36      # TODO: Insert connection if output is atomic
37
38      self.was_changed = True

```

Figure 166: Methods which add a given output of a node definition to a node definition. The first method adds the output at the end of the list of outputs, the second adds the output at the given index.

Editor → Node definition → Methods

Fragment defined by ?, ?.  
 Fragment referenced in ?.

*<Node definition domain model methods ?>+ ≡*

```

1  # TODO: Describe this properly
2  property
3  def type_(self):
4      """Return the type of the node, determined by its primary output.
5      If no primary output is given, it is assumed that the node is of
6      generic type."""
7
8      type_ = types.NodeType.GENERIC
9
10     if len(self.outputs) > 0:
11         type_ = self.outputs[0].node_definition_part.type_
12
13     return type_◇

```

Figure 167: Type property of a node definition. If the node definition uses outputs, the type is derived by its primary output. Otherwise a generic type is assumed.

Editor → Node definition → Methods

Fragment defined by ?, ?.  
Fragment referenced in ?.

*<Add node dialog slots 140a> ≡*

```

1  QtCore.pyqtSlot(node_view_model.NodeViewModel)
2  def on_node_definition_added(self, node_view_model):
3      """Slot which is called whenever a new node definition is being added.
4
5      :param node_view_model: The newly added node definition.
6      :type node_view_model: qde.editor.gui_domain.node.NodeDefinitionViewModel
7      """
8
9      self.logger.debug("Got new node definition: %s", node_view_model)
10
11     node_name = node_view_model.domain_object.name
12     type_name = node_view_model.domain_object.type_.name
13     < On node definition added implementation 140b>◇

```

Fragment referenced in ?.

*<On node definition added implementation 140b> ≡*

```

1  < Check if the node definition is already known 143a>
2  < Get or create column by type name 143b>
3  < Create sub frame for given node definition 146b>
4  < Create button for given node definition and add to sub frame 146c, ... >
5  < Add sub frame to column 147b>
6  < Save the node definition to list of known nodes 147c>◇

```

Fragment referenced in 140a.

<JSON methods ?>+ ≡

```

1  classmethod
2  def build_node_definition_part(cls, node_controller, parent, json_input):
3      """Builds and returns a node definition part from the given JSON input data.
4
5      :param node_controller: a reference to the node controller
6      :type  node_controller: qde.editor.application.node.NodeController
7      :param parent: the parent of the node definition part
8      :type  parent: qde.editor.domain.node.NodeDefinition
9      :param json_input: the input in JSON format
10     :type  json_input: dict
11
12     :return: the built part of the node definition
13     :rtype: qde.editor.domain.node.NodeDefinitionPart
14     """
15
16     part_id      = uuid.UUID(json_input['id'])
17     name         = str(json_input['name'])
18
19     script_lines = []
20     for script_line in json_input['script']:
21         script_lines.append(str(script_line))
22     script = "\n".join(script_lines)
23
24     type_string = json_input['type']
25     type_ = types.NodeType[type_string.upper()]
26
27     node_definition_part = node.NodeDefinitionPart(part_id)
28     node_definition_part.name = name
29     node_definition_part.type_ = type_
30     node_definition_part.parent = parent
31
32     node_controller.node_definition_parts[part_id] = node_definition_part
33
34     cls.logger.debug(
35         "Built part for node definition %s",
36         part_id
37     )
38     return node_definition_part
39  ◇

```

Figure 168: A class method of the JSON module, which builds a part of the definition of a node from a file handle (pointing to a JSON file containing a node definition).

Editor → JSON → Methods → Build node definition part

Fragment defined by ?, ?, ?, ?, 165a, 166a, 167a.

Fragment referenced in 163b.

<Set up controllers for main application ?>+ ≡

```

1  self.node_controller = node.NodeController()◇

```

Fragment defined by ?, ?, ?.

Fragment referenced in ?.

Figure 169: Instantiation of the node controller from within the main application.

Editor → Main application → Constructor

⟨ Load nodes ? ⟩ ≡

```
1 self.node_controller.load_nodes()◇
```

Fragment referenced in ?.

Figure 170: Loading of nodes is triggered by the main application right after instantiating the node controller.

Editor → Main application → Constructor

⟨ Add node dialog declarations ? ⟩ ≡

```
1 common.with_logger
2 class AddNodeDialog(QtWidgets.QDialog):
3     """Class for adding nodes to a scene view."""
4
5     # Signals
6     ⟨ Add node dialog signals ? ⟩
7
8     ⟨ Add node dialog column declaration ? ⟩
9
10    def __init__(self, parent=None):
11        """Constructor.
12
13        :param parent: the parent of this dialog.
14        :type parent: QtGui.QWidget
15        """
16
17        super(AddNodeDialog, self).__init__(parent)
18
19        self.columns = {}
20        self.node_definitions = {}
21        self.chosen_node_definition = None
22
23        self.setFixedSize(parent.width(), parent.height())
24        self.setWindowTitle("Add node")
25
26        layout = QtWidgets.QHBoxLayout(self)
27        # layout.setContentsMargins(0, 0, 0, 0)
28        ()# layout.setSizeConstraint(Qt.QLayout.SetFixedSize)
29        self.setLayout(layout)
30
31    ⟨ Add node dialog methods 145a ⟩
32
33    # Slots
34    ⟨ Add node dialog slots 140a ⟩
35    ◇
```

Fragment referenced in 167b.

Figure 171: Definition of a dialog to add nodes to the currently active scene. The nodes are ordered in columns according to their type.

Editor → Add node dialog

⟨Add node dialog column declaration ?⟩ ≡

```

1  class Column(object):
2      """Class representing a column within the add node dialog."""
3
4      def __init__(self):
5          """Constructor."""
6
7          self.frame      = None
8          self.sub_frames = []
9          self.label      = None
10         self.v_box_layout = None
11

```

Fragment referenced in ?.

Figure 172: Class representing column within the dialog to create new node instances.

Editor → Add node dialog → Column

⟨Scene view constructor ?⟩+ ≡

```

1  self.add_node_dialog = node.AddNodeDialog(self)
2

```

Fragment defined by ?, ?.

Fragment referenced in ?.

Figure 173: The dialog for adding new node instances is initialized by the scene view.

Editor → Scene view → Constructor

⟨Check if the node definition is already known 143a⟩ ≡

```

1  if node_view_model.id_ not in self.node_definitions:
2

```

Fragment referenced in 140b.

⟨Get or create column by type name 143b⟩ ≡

```

1  column = self.get_or_create_column_by_name(type_name)

```

Fragment referenced in 140b.



⟨ Scene view methods ? ⟩ ≡

```

1  def event(self, event):
2      if (
3          event.type() == Qt.QEvent.KeyPress and
4          event.key() == QtCore.Qt.Key_Tab
5      ):
6          self.logger.debug("Tabulator was pressed")
7
8          # Sanity check: Open the dialog only if it is not opened already.
9          if not self.add_node_dialog.isVisible():
10             current_scene = self.scene()
11             assert current_scene is not None
12             insert_at = current_scene.insert_at
13             insert_position = QtCore.QPoint(
14                 insert_at.x() * node_view_model.NodeViewModel.WIDTH,
15                 insert_at.y() * node_view_model.NodeViewModel.HEIGHT
16             )
17             insert_position = self.mapToGlobal(self.mapFromScene(insert_position))
18             self.add_node_dialog.move(insert_position)
19             add_dialog_result = self.add_node_dialog.exec()
20
21             # At this point we are sure, that this dialog instance was handled
22             # properly, so accepting the event might be sane here.
23             event.accept()
24
25             if add_dialog_result == QtWidgets.QDialog.Accepted:
26                 ⟨ Handle node definition chosen ? ⟩
27                 return True
28             else:
29                 return False
30
31     return super(SceneView, self).event(event)
32

```

Figure 174: The event method of the scene view is overwritten for being able to show the dialog for adding new instances of nodes when the tabulator key is pressed.

Editor → Scene view → Methods

Fragment referenced in ?.

⟨Add node dialog methods 145a⟩ ≡

```

1  def get_or_create_column_by_name(self, column_name):
2      """Gets the column for the given column name.
3      If there is no column for the given column name available, a new column
4      using the given column name is created.
5
6      :param column_name: the name of the column to get or create.
7      :type column_name: str
8
9      :return: the column for the given column name.
10     :rtype: AddNodeDialog.Column
11     """
12
13     ⟨ Get existing column object by name 145b⟩
14     ⟨ Create new column object based on name 146a⟩
15
16     return column◇

```

Fragment referenced in ?.

⟨Get existing column object by name 145b⟩ ≡

```

1  if column_name in self.columns:
2      column = self.columns[column_name]◇

```

Fragment referenced in 145a.

*⟨ Create new column object based on name 146a ⟩ ≡*

```

1  else:
2      frame = QtWidgets.QFrame(self)
3      self.layout().addWidget(frame)
4      frame.setContentsMargins(0, 0, 0, 0)
5
6      row = QtWidgets.QVBoxLayout(frame)
7      row.setContentsMargins(0, 0, 0, 0)
8
9      caption = "<h2>{0}</h2>".format(column_name)
10     label = QtWidgets.QLabel(caption, frame)
11     label.setContentsMargins(4, 2, 4, 2)
12     label_font = QtGui.QFont()
13     label_font.setFamily(label_font.defaultFamily())
14     label_font.setBold(True)
15     label_font.setUnderline(True)
16     label.setFont(label_font)
17
18     row.addWidget(label)
19     row.addStretch(1)
20
21     column = AddNodeDialog.Column()
22     column.frame = frame
23     column.label = column_name
24     column.v_box_layout = row
25     self.columns[column_name] = column◇

```

Fragment referenced in 145a.

*⟨ Create sub frame for given node definition 146b ⟩ ≡*

```

1      sub_frame = QtWidgets.QFrame(column.frame)
2      sub_frame_column = QtWidgets.QHBoxLayout(sub_frame)
3      sub_frame_column.setContentsMargins(0, 0, 0, 0)
4      sub_frame_column.setSpacing(0)◇

```

Fragment referenced in 140b.

*⟨ Create button for given node definition and add to sub frame 146c ⟩ ≡*

```

1      button_label = gui_helper.ClickableLabel(node_name, sub_frame)
2      button_label.setContentsMargins(4, 0, 4, 0)
3      button_label.setSizePolicy(
4          Qt.QSizePolicy.Expanding, Qt.QSizePolicy.Preferred
5      )
6      sub_frame_column.addWidget(button_label)◇

```

Fragment defined by 146c, 147a.

Fragment referenced in 140b.

*< Create button for given node definition and add to sub frame 147a > + ≡*

```

1     def _add_node_button_clicked(node_view_model):
2         self.chosen_node_definition = node_view_model
3         self.accept()
4
5         button_label.clicked.connect(funcutils.partial(
6             _add_node_button_clicked, node_view_model
7         ))◇

```

Fragment defined by 146c, 147a.  
Fragment referenced in 140b.

*< Add sub frame to column 147b > ≡*

```

1     column.v_box_layout.insertWidget(
2         column.v_box_layout.count() - 1, sub_frame
3     )
4     column.sub_frames.append(sub_frame)◇

```

Fragment referenced in 140b.

*< Save the node definition to list of known nodes 147c > ≡*

```

1     self.node_definitions[node_view_model.id_] = node_view_model
2     self.logger.debug("Added node definition %s", node_view_model)
3     # TODO: Handle shortcuts
4
5     else:
6         self.logger.warn("Node definition %s is already known", node_view_model)
7     ◇

```

Fragment referenced in 140b.

*< Connect main window components 147d > + ≡*

```

1     self.node_controller.do_add_node_view_definition.connect(
2         self.main_window.scene_view.add_node_dialog.on_node_definition_added
3     )◇

```

Fragment defined by ?, ?, 147d.  
Fragment referenced in ?.

## Code fragments

"../src/editor.py" 148a≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """ Main entry point for the QDE editor application. """
5
6  # System imports
7  import sys
8
9  # Project imports
10 from qde.editor.application import application
11
12 < Main entry point ? >
13 ◇

```

"../src/qde/editor/application/application.py" 148b≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """Main application module for the QDE editor."""
5
6  # System imports
7  import logging
8  import logging.config
9  import os
10 import json
11 from PyQt5 import Qt
12 from PyQt5 import QtCore
13 from PyQt5 import QtGui
14 from PyQt5 import QtWidgets
15
16 # Project imports
17 from qde.editor.foundation import common
18 from qde.editor.application import node
19 from qde.editor.application import scene
20 from qde.editor.gui import main_window as qde_main_window
21
22
23 < Main application declarations ? >
24 ◇

```

"../src/qde/editor/gui/main\_window.py" 149a≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """ Module holding the main application window. """
5
6  # System imports
7  from PyQt5 import Qt
8  from PyQt5 import QtCore
9  from PyQt5 import QtGui
10 from PyQt5 import QtWidgets
11
12 # Project imports
13 from qde.editor.foundation import common
14 from qde.editor.gui import scene as guiscene
15
16
17 < Main window declarations ? >
18 ◇

```

"../src/qde/editor/domain/scene.py" 149b≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """ Module holding scene related aspects concerning the domain layer. """
5
6  # System imports
7  import uuid
8  from PyQt5 import Qt
9  from PyQt5 import QtCore
10
11 # Project imports
12
13
14 < Scene model declarations ? >
15 ◇

```

"../src/qde/editor/gui\_domain/scene.py" 150a≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """ Module holding scene related aspects concerning the gui_domain layer. """
5
6  # System imports
7  from PyQt5 import Qt
8  from PyQt5 import QtCore
9
10 # Project imports
11 from qde.editor.foundation import common
12
13 < Scene graph view model declarations ?>
14 < Scene view model declarations ?>
15 ◇

```

*< Scene graph view model methods 150b>+ ≡*

```

1  def __str__(self):
2      """Return the string representation of the current object."""
3
4      return str(self.id_)[0:8]
5  ◇

```

Fragment defined by ?, 150b.

Fragment referenced in ?.

*< Scene view model methods 150c>+ ≡*

```

1  def __str__(self):
2      """Return the string representation of the current object."""
3
4      return str(self.id_)[0:8]
5  ◇

```

Fragment defined by ?, 150c.

Fragment referenced in ?.

"../src/qde/editor/application/scene.py" 151a≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """ Module holding scene related aspects concerning the application layer.
5  """
6
7  # System imports
8  from PyQt5 import Qt
9  from PyQt5 import QtCore
10
11 # Project imports
12 from qde.editor.foundation import common
13 from qde.editor.domain import scene as domain_scene
14 from qde.editor.gui_domain import scene as guidomain_scene
15
16 < Scene graph controller declarations ?>
17 < Scene controller declarations ?>
18 ◇

```

"../src/qde/editor/gui/scene.py" 151b≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """ Module holding scene related aspects concerning the graphical user interface layer.
5  """
6
7  # System imports
8  from PyQt5 import Qt
9  from PyQt5 import QtCore
10 from PyQt5 import QtWidgets
11
12 # Project imports
13 from qde.editor.foundation import common
14 from qde.editor.gui_domain import node as node_view_model
15 from qde.editor.gui_domain import scene
16 from qde.editor.gui import node
17
18 < Scene graph view declarations ?>
19 < Scene view declarations ?>
20 ◇

```



"../logging.json" 152≡

```

1  {
2      "version": 1,
3      "disable_existing_loggers": false,
4      "formatters": {
5          "simple": {
6              "format": "%(asctime)s - %(levelname)-7s - %(name)s.%(funcName)s::%(lineno)s: %(message)s"
7          }
8      },
9
10     "handlers": {
11         "console": {
12             "class": "logging.StreamHandler",
13             "level": "DEBUG",
14             "formatter": "simple",
15             "stream": "ext://sys.stdout"
16         },
17
18         "info_file_handler": {
19             "class": "logging.handlers.RotatingFileHandler",
20             "level": "INFO",
21             "formatter": "simple",
22             "filename": "info.log",
23             "maxBytes": 10485760,
24             "backupCount": 20,
25             "encoding": "utf8"
26         },
27
28         "error_file_handler": {
29             "class": "logging.handlers.RotatingFileHandler",
30             "level": "ERROR",
31             "formatter": "simple",
32             "filename": "errors.log",
33             "maxBytes": 10485760,
34             "backupCount": 20,
35             "encoding": "utf8"
36         }
37     },
38
39     "root": {
40         "level": "DEBUG",
41         "handlers": ["console", "info_file_handler", "error_file_handler"],
42         "propagate": "no"
43     }
44 }◇

```

"../src/qde/editor/foundation/common.py" 153a ≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """Module holding common helper methods."""
5
6  # System imports
7  import logging
8  from PyQt5 import Qt
9  from PyQt5 import QtCore
10 from PyQt5 import QtWidgets
11
12 # Project imports
13
14
15 def with_logger(cls):
16     """Add a logger instance (using a stream handler) to the given class.
17
18     :param cls: the class which the logger shall be added to.
19     :type  cls: a class of type cls.
20
21     :return: the class with the logger instance added.
22     :rtype:  a class of type cls.
23     """
24
25     < Set logger name 85a >
26     < Logger interface 85b >
27     ◇

```

*< Scene graph view decorators 153b >* ≡

```

1  common.with_logger
2  ◇

```

Fragment referenced in ?.

"../src/qde/editor/foundation/type.py" 154a≡

```

1  # -*- coding: utf-8 -*-
2  """Module for type-specific aspects."""
3
4  # System imports
5  import enum
6
7  # Project imports
8
9
10 < Node type declarations ?>
11 < Node part state changed declarations ?>
12 ◇

```

"../src/qde/editor/domain/parameter.py" 154b≡

```

1  # -*- coding: utf-8 -*-
2
3  """Module for parameter-specific aspects."""
4
5  # System imports
6
7  # Project imports
8  from qde.editor.foundation import type as types
9  from qde.editor.domain import node
10
11 < Parameter declarations ?, ... >
12 < Paramater domain model value generic interface ?>
13 < Paramater domain model value interface ?>
14 < Paramater domain model float value ?>
15 < Paramater domain model text value 156a>
16 < Paramater domain model scene value ?>
17 < Parameter domain module methods ?>
18 ◇

```

(Parameter declarations 155)+ ≡

```

1   FloatValue = create_node_definition_part.__func__(
2       id_="468aea9e-0a03-4e63-b6b4-8a7a76775a1a",
3       type_=types.NodeType.FLOAT
4   )
5   Text = create_node_definition_part.__func__(
6       id_="e43bdd1b-a895-4bd8-8d5a-b401a63f7a6f",
7       type_=types.NodeType.TEXT
8   )
9   Scene = create_node_definition_part.__func__(
10      id_="bfb47e7text7-1b05-4864-8397-de30bf005ff8",
11      type_=types.NodeType.SCENE
12  )
13  Image = create_node_definition_part.__func__(
14      id_="21fd1960-1307-4b53-b7bf-d08f02757335",
15      type_=types.NodeType.IMAGE
16  )
17  DynamicValue = create_node_definition_part.__func__(
18      id_="68720ae3-8068-43ce-94d8-8705dc3b8bfe",
19      type_=types.NodeType.DYNAMIC
20  )
21  Mesh = create_node_definition_part.__func__(
22      id_="9791d341-b92c-43dd-954a-9d83b9020e43",
23      type_=types.NodeType.MESH
24  )
25  Implicit = create_node_definition_part.__func__(
26      id_="c019271c-35b6-425c-9ff2-a1d893111adb",
27      type_=types.NodeType.IMPLICIT
28  )
29
30  atomic_types = [
31      FloatValue,
32      Text,
33      Scene,
34      Image,
35      DynamicValue,
36      Mesh,
37      Implicit,
38  ]
39
40  ◇

```

Fragment defined by ?, ?, 155.

Fragment referenced in 154b.

⟨Paramater domain model text value 156a⟩ ≡

```

1  class TextValue(Value):
2      """A class holding values for text/string nodes."""
3
4      def __init__(self, string_value):
5          """Constructor.
6
7          :param string_value: the string value that shall be held
8          :type string_value: str
9          """
10
11         super(TextValue, self).__init__(string_value)
12         self.function_type = types.NodeType.TEXT
13
14     def clone(self):
15         """Clones the currently set value.
16
17         :return: a clone of the currently set value
18         :rtype: qde.editor.domain.parameter.ValueInterface
19         """
20
21         return TextValue(self.value)◇

```

Fragment referenced in 154b.

⟨Paramater domain model image value 156b⟩ ≡

```

1  class ImageValue(ValueInterface):
2      """A class holding values for image nodes."""
3
4      def __init__(self):
5          """Constructor."""
6
7          super(ImageValue, self).__init__()
8          self.function_type = types.NodeType.IMAGE
9
10     def clone(self):
11         """Clones the currently set value.
12
13         :return: a clone of the currently set value
14         :rtype: qde.editor.domain.parameter.ValueInterface
15         """
16
17         return ImageValue()◇

```

Fragment never referenced.

⟨Paramater domain model generic value 157a⟩ ≡

```

1  class GenericValue(ValueInterface):
2      """A class holding values for generic nodes."""
3
4      def __init__(self):
5          """Constructor."""
6
7          super(GenericValue, self).__init__()
8          self.function_type = types.NodeType.GENERIC
9
10     def clone(self):
11         """Clones the currently set value.
12
13         :return: a clone of the currently set value
14         :rtype: qde.editor.domain.parameter.ValueInterface
15         """
16
17     return GenericValue()◇

```

Fragment never referenced.

⟨Paramater domain model dynamic value 157b⟩ ≡

```

1  class DynamicValue(ValueInterface):
2      """A class holding values for dynamic nodes."""
3
4      def __init__(self):
5          """Constructor."""
6
7          super(DynamicValue, self).__init__()
8          self.function_type = types.NodeType.DYNAMIC
9
10     def clone(self):
11         """Clones the currently set value.
12
13         :return: a clone of the currently set value
14         :rtype: qde.editor.domain.parameter.ValueInterface
15         """
16
17     return DynamicValue()◇

```

Fragment never referenced.

⟨Paramater domain model mesh value 158a⟩ ≡

```

1  class MeshValue(ValueInterface):
2      """A class holding values for mesh nodes."""
3
4      def __init__(self):
5          """Constructor."""
6
7          super(MeshValue, self).__init__()
8          self.function_type = types.NodeType.MESH
9
10     def clone(self):
11         """Clones the currently set value.
12
13         :return: a clone of the currently set value
14         :rtype: qde.editor.domain.parameter.ValueInterface
15         """
16
17     return MeshValue()◇

```

Fragment never referenced.

⟨Paramater domain model implicit value 158b⟩ ≡

```

1  class ImplicitValue(ValueInterface):
2      """A class holding values for implicit surface nodes."""
3
4      def __init__(self):
5          """Constructor."""
6
7          super(ImplicitValue, self).__init__()
8          self.function_type = types.NodeType.IMPLICIT
9
10     def clone(self):
11         """Clones the currently set value.
12
13         :return: a clone of the currently set value
14         :rtype: qde.editor.domain.parameter.ValueInterface
15         """
16
17     return ImplicitValue()◇

```

Fragment never referenced.

"../src/qde/editor/domain/node.py" 159a≡

```

1  # -*- coding: utf-8 -*-
2
3  """Module for node-specific aspects."""
4
5  # System imports
6
7  # Project imports
8  from qde.editor.foundation import type as types
9  from qde.editor.foundation import flag
10
11  { Node domain model declarations ?}
12  { Node part domain model declarations ?}
13  { Node definition domain model declarations ?}
14  { Node definition part domain model declarations ?}
15  { Node definition input domain model declarations ?}
16  { Node definition output domain model declarations ?}
17  { Node definition connection domain model declarations 164}
18  { Node definition definition domain model declarations 165b}
19  { Node definition invocation domain model declarations 166b}
20  { Node domain module methods ?, ... }
21  ◇

```

"../src/qde/editor/gui\_domain/node.py" 159b≡

```

1  # -*- coding: utf-8 -*-
2
3  """ Module holding node related aspects concerning the gui_domain layer. """
4
5  # System imports
6  from PyQt5 import Qt
7  from PyQt5 import QtCore
8
9  # Project imports
10 from qde.editor.foundation import common
11
12 common.with_logger
13 { Node view model declarations ?}
14 ◇

```



(Node view model constructor 160a)+ ≡

```

1     self.setPos(self.position)
2     self.setAcceptHoverEvents(True)
3     self.setFlag(Qt.QGraphicsObject.ItemIsFocusable)
4     self.setFlag(Qt.QGraphicsObject.ItemIsMovable)
5     self.setFlag(Qt.QGraphicsObject.ItemIsSelectable)
6     self.setFlag(Qt.QGraphicsObject.ItemClipsToShape)
7

```

Fragment defined by ?, 160a.  
 Fragment referenced in ?.

"../src/qde/editor/foundation/flag.py" 160b≡

```

1  # -*- coding: utf-8 -*-
2
3  """Module for flag-specific aspects."""
4
5  # System imports
6  import enum
7
8  # Project imports
9
10
11  class NodeStatus(enum.Enum):
12      """Statues which a node can have."""
13
14      OK = 0
15      NO_INPUTS = 1
16      WRONG_INPUT = 2
17      INPUT_ERRONEOUS = 3
18      INPUT_CYCLIC = 4
19      LINK_MISSING = 5
20      TOO_MANY_INPUTS = 6
21

```

(Node view model methods 161)+ ≡

```

1  def boundingRect(self):
2      """Return the bounding rectangle of the node.
3
4      :return: the bounding rectangle of the node.
5      :rtype: Qt.QRectF
6      """
7
8      return Qt.QRectF(
9          0, 0, self.width * NodeViewModel.WIDTH, NodeViewModel.HEIGHT
10     )
11
12  def create_pixmap(self):
13      """Creation of the pixmap (=bitmap, the actual 'image')"""
14
15      image = QImage(self.boundingRect().size().toSize(),
16                     QImage.Format_ARGB32_Premultiplied)
17      pixmap = QPixmap.fromImage(image)
18      pixmap.fill(Qt.transparent)
19
20      rect = self.boundingRect()
21
22      painter = QPainter()
23      painter.begin(pixmap)
24      painter.setRenderHint(QPainter.Antialiasing)
25
26      # Shape
27      path = QPainterPath()
28      path.addRect(rect)
29      # path.addRoundedRect(rect, 5, 5)
30      painter.drawPath(path)
31
32      # Color / gradient
33      color = QColor(255, 0, 0, 128)
34      color.setHsv(color.hsvHue(), 160, 255)
35      color_desaturated = color
36      color_desaturated.setHsv(color.hsvHue(), 40, 255)
37      top_color = QColor(60, 70, 80)
38      if self.status is not flag.NodeStatus.OK:
39          top_color = QColor(255, 0, 0)
40      gradient_top_color = cmn.multiply_colors(
41          top_color, color_desaturated
42      )
43      gradient_bottom_color = cmn.multiply_colors(
44          QColor(110, 120, 130), color_desaturated
45      )
46      rect_gradient = QLinearGradient(
47          QPoint(0.0, 0.0), QPoint(0.0, rect.height())
48      )
49      rect_gradient.setColorAt(0.0, gradient_top_color)
50      rect_gradient.setColorAt(1.0, gradient_bottom_color)
51
52      brush = QBrush(rect_gradient)
53
54      painter.fillPath(path, brush)
55      painter.end()
56
57      return pixmap
58

```

"../nodes/16d90b34-a728-4caa-b07d-a3244ecc87e3.node" 162a≡

1 < *Implicit sphere node* ? >◇

"../src/qde/editor/application/node.py" 162b≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """ Module holding node related aspects concerning the application layer.
5  """
6
7  # System imports
8  import glob
9  import os
10 import time
11 import uuid
12 from PyQt5 import Qt
13 from PyQt5 import QtCore
14
15 # Project imports
16 from qde.editor.foundation import common
17 from qde.editor.foundation import type as types
18 from qde.editor.technical import json
19 from qde.editor.domain import parameter
20 from qde.editor.domain import node
21 from qde.editor.gui_domain import node as node_view_model
22
23
24 < Node controller declarations ? >
25 ◇

```

"../src/qde/editor/technical/json.py" 163a≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """ Module holding JSON related aspects.
5  """
6
7  # System imports
8  import json
9  import uuid
10
11 # Project imports
12 from qde.editor.foundation import common
13 from qde.editor.foundation import type as types
14 from qde.editor.domain import node
15 from qde.editor.domain import parameter
16
17
18 < JSON module declarations 163b >
19 ◇

```

*< JSON module declarations 163b >* ≡

```

1  common.with_logger
2  class Json(object):
3      """Class handling JSON relevant tasks.
4      """
5
6      < JSON methods ?, ... >
7  ◇

```

Fragment referenced in 163a.

⟨ Node definition connection domain model declarations 164 ⟩ ≡

```

1  class NodeDefinitionConnection(object):
2      """Represents a connection of a definition of a node."""
3
4      # Signals
5      ⟨ Node definition connection domain model signals ? ⟩
6
7      def __init__(self,
8                  source_node_id, source_part_id,
9                  target_node_id, target_part_id):
10         """Constructor.
11
12         :param source_node_id: the identifier of the source node.
13         :type source_node_id: uuid.uuid4
14         :param source_part_id: the identifier of the part of the source node.
15         :type source_part_id: uuid.uuid4
16         :param target_node_id: the identifier of the target node.
17         :type target_node_id: uuid.uuid4
18         :param target_part_id: the identifier of the part of the target node.
19         :type target_part_id: uuid.uuid4
20         """
21
22         self.source_node_id = source_node_id
23         self.source_part_id = source_part_id
24         self.target_node_id = target_node_id
25         self.target_part_id = target_part_id◇

```

Fragment referenced in 159a.

⟨JSON methods 165a⟩+ ≡

```

1  classmethod
2  def build_node_definition_connection(cls, json_input):
3      """Builds and returns a connection for a node definition from the given
4      JSON input data.
5
6      :param json_input: the input in JSON format
7      :type json_input: dict
8
9      :return: the connection of a node definition.
10     :rtype: qde.editor.domain.node.NodeDefinitionConnection
11     """
12
13     source_node_id = uuid.UUID(json_input['source_node'])
14     source_part_id = uuid.UUID(json_input['source_part'])
15     target_node_id = uuid.UUID(json_input['target_node'])
16     target_part_id = uuid.UUID(json_input['target_part'])
17
18     node_definition_connection = node.NodeDefinitionConnection(
19         source_node_id,
20         source_part_id,
21         target_node_id,
22         target_part_id
23     )
24
25     cls.logger.debug("Built node definition connection")
26     return node_definition_connection
27  ◇

```

Fragment defined by ?, ?, ?, ?, 165a, 166a, 167a.

Fragment referenced in 163b.

⟨Node definition definition domain model declarations 165b⟩ ≡

```

1  class NodeDefinitionDefinition(object):
2      """Represents a definition part of a definition of a node."""
3
4      def __init__(self, id_, script):
5          """Constructor.
6
7          :param id_: the globally unique identifier of the definition.
8          :type id_: uuid.uuid4
9          :param script: the script part of the definition.
10         :param script: str
11         """
12
13         self.id_ = id_
14         self.script = script
15  ◇

```

Fragment referenced in 159a.

⟨JSON methods 166a⟩+ ≡

```

1  classmethod
2  def build_node_definition_definition(cls, json_input):
3      """Builds and returns a definition for a node definition from the given
4      JSON input data.
5
6      :param json_input: the input in JSON format
7      :type json_input: dict
8
9      :return: the definition of a node definition.
10     :rtype: qde.editor.domain.node.NodeDefinitionDefinition
11     """
12
13     definition_id = uuid.UUID(json_input['id_'])
14     script        = str(json_input['script'])
15
16     node_definition_definition = node.NodeDefinitionDefinition(
17         definition_id,
18         script
19     )
20
21     cls.logger.debug("Built node definition definition")
22     return node_definition_definition
23  ◇

```

Fragment defined by ?, ?, ?, ?, 165a, 166a, 167a.

Fragment referenced in 163b.

⟨Node definition invocation domain model declarations 166b⟩ ≡

```

1  class NodeDefinitionInvocation(object):
2      """Represents an invocation of a definition of a node."""
3
4      def __init__(self, id_, script):
5          """Constructor.
6
7          :param id_: the globally unique identifier of the definition.
8          :type id_: uuid.uuid4
9          :param script: the script part of the invocation.
10         :param script: str
11         """
12
13         self.id_ = id_
14         self.script = script

```

Fragment referenced in 159a.

⟨JSON methods 167a⟩+ ≡

```

1  classmethod
2  def build_node_definition_invocation(cls, json_input):
3      """Builds and returns a invocation for a node definition from the given
4      JSON input data.
5
6      :param json_input: the input in JSON format
7      :type json_input: dict
8
9      :return: the invocation of a node definition.
10     :rtype: qde.editor.domain.node.NodeDefinitionInvocation
11     """
12
13     invocation_id = uuid.UUID(json_input['id_'])
14     script         = str(json_input['script'])
15
16     node_definition_invocation = node.NodeDefinitionInvocation(
17         invocation_id,
18         script
19     )
20
21     cls.logger.debug("Built node definition invocation")
22     return node_definition_invocation
23  ◇

```

Fragment defined by ?, ?, ?, ?, 165a, 166a, 167a.

Fragment referenced in 163b.

"../src/qde/editor/gui/node.py" 167b≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """Module holding node related aspects."""
5
6  # System imports
7  import functools
8  from PyQt5 import Qt
9  from PyQt5 import QtCore
10 from PyQt5 import QtGui
11 from PyQt5 import QtWidgets
12
13 # Project imports
14 from qde.editor.foundation import common
15 from qde.editor.gui_domain import node as node_view_model
16 from qde.editor.gui_domain import helper as gui_helper
17
18
19 ⟨ Add node dialog declarations ? ⟩
20  ◇

```



"../src/qde/editor/gui\_domain/helper.py" 168≡

```

1  #!/usr/bin/python
2  # -*- coding: utf-8 -*-
3
4  """Module holding graphical user interface related helper classes and
5  methods."""
6
7  # System imports
8  from PyQt5 import Qt
9  from PyQt5 import QtCore
10 from PyQt5 import QtGui
11 from PyQt5 import QtWidgets
12
13 # Project importss
14 from qde.editor.foundation import common
15 from qde.editor.gui_domain import node
16
17
18 common.with_logger
19 class ClickableLabel(QtWidgets.QLabel):
20     """Class providing a label object which emits a signal called 'clicked'
21     when receiving a mouse press event."""
22
23     # Signals
24     clicked = QtCore.pyqtSignal()
25
26     def __init__(self, text, parent):
27         """Constructor.
28
29         :param text: the text, that the label will show.
30         :type text: str
31         :param parent: the parent object of this label.
32         :type parent: Qt.QObject
33         """
34
35         super(ClickableLabel, self).__init__(text, parent)
36         parent.installEventFilter(self)
37         label_font = QtGui.QFont()
38         label_font.setFamily(label_font.defaultFamily())
39         self.setFont(label_font)
40         self.logger.debug(self.font())
41
42     def eventFilter(self, object, event):
43         if event.type() == QtCore.QEvent.Enter:
44             font = self.font()
45             font.setUnderline(True)
46             self.setFont(font)
47             return True
48         elif event.type() == QtCore.QEvent.Leave:
49             font = self.font()
50             font.setUnderline(False)
51             self.setFont(font)
52             return True
53
54         return False
55
56     def mousePressEvent(self, event):
57         """Event handler when a mouse button was pressed on this label. Emits a
58         signal called 'clicked'.
59
60         :param event: the event which occurred.
61         :type event: Qt.QMouseEvent
62         """
63

```

# Bibliography

- [1] A. Appel, "Some Techniques for Shading Machine Renderings of Solids", in *Proceedings of the April 30–May 2, 1968, Spring Joint Computer Conference*, ser. AFIPS '68 (Spring), New York, NY, USA: ACM, 1968, pp. 37–45. DOI: 10.1145/1468075.1468082.
- [2] T. Whitted, "An Improved Illumination Model for Shaded Display", *Commun. ACM*, vol. 23, no. 6, pp. 343–349, Jun. 1980, ISSN: 0001-0782. DOI: 10.1145/358876.358882.
- [3] J. C. Hart, "Sphere Tracing: A Geometric Method for the Antialiased Ray Tracing of Implicit Surfaces", *The Visual Computer*, vol. 12, pp. 527–545, 1994.
- [4] S. Osterwalder, *Volume ray casting - basics & principles*. Bern University of Applied Sciences, Feb. 14, 2016.
- [5] —, *QDE - a visual animation system. Software-Architektur*. Bern University of Applied Sciences, Aug. 5, 2016.
- [6] P. Kruchten, *The Rational Unified Process: An Introduction*, 3rd ed. Boston, MA, USA: Addison-Wesley Longman Publishing Co., Inc., 2003, ISBN: 0321197704.
- [7] M. Fowler, "Who needs an architect?", *IEEE Softw.*, vol. 20, no. 5, pp. 11–13, Sep. 2003, ISSN: 0740-7459. DOI: 10.1109/MS.2003.1231144.
- [8] C. Larman, *Applying UML and Patterns: An Introduction to Object-Oriented Analysis and Design and Iterative Development (3rd Edition)*. Upper Saddle River, NJ, USA: Prentice Hall PTR, 2004, ISBN: 978-0-13-148906-6.
- [9] J. Foley, *Computer Graphics: Principles and Practice*, ser. Addison-Wesley systems programming series. Addison-Wesley, 1996, ISBN: 978-0-201-84840-3.
- [10] J. T. Kajiya, "The Rendering Equation", *SIGGRAPH Comput. Graph.*, vol. 20, no. 4, pp. 143–150, Aug. 1986, ISSN: 0097-8930. DOI: 10.1145/15886.15902.
- [11] C. A. R. Hoare, "Hints on programming language design", Stanford, CA, USA, Tech. Rep., 1973.
- [12] D. E. Knuth, "Literate programming", *Comput. J.*, vol. 27, no. 2, pp. 97–111, May 1984, ISSN: 0010-4620. DOI: 10.1093/comjnl/27.2.97.

- [13] —, *The TEXbook*. Boston, MA, USA: Addison-Wesley Longman Publishing Co., Inc., 1987, ISBN: 0-201-13448-9.
- [14] H. Hijazi, T. Khmour, and A. Alarabeyyat, "Article: A review of risk management in different software development methodologies", *International Journal of Computer Applications*, vol. 45, no. 7, pp. 8–12, Apr. 2012, Full text available.
- [15] T. Mens and S. Demeyer, *Software Evolution*, 1st ed. Springer Publishing Company, Incorporated, 2008, ISBN: 9783540764397.
- [16] K. Beck and C. Andres, *Extreme Programming Explained: Embrace Change (2Nd Edition)*. Addison-Wesley Professional, 2004, ISBN: 0321278658.
- [17] J. Shore and S. Warden, *The Art of Agile Development*, First. O'Reilly, 2007, ISBN: 9780596527679.
- [18] E. Gamma, R. Helm, R. Johnson, and J. Vlissides, *Design Patterns: Elements of Reusable Object-oriented Software*. Boston, MA, USA: Addison-Wesley Longman Publishing Co., Inc., 1995, ISBN: 0-201-63361-2.
- [19] M. Fowler. (Jul. 19, 2004). Presentation model, martinowler.com, [Online]. Available: <https://martinfowler.com/eaDev/PresentationModel.html> (visited on 03/07/2017).
- [20] J. Gossman. (). Introduction to model/view/ViewModel pattern for building WPF apps, Tales from the Smart Client, [Online]. Available: <https://blogs.msdn.microsoft.com/johngossman/2005/10/08/introduction-to-modelviewviewmodel-pattern-for-building-wpf-apps/> (visited on 06/07/2017).
- [21] The Qt Company Ltd., *Model/View Programming | Qt Widgets 5.9*, en, 2017.
- [22] I. C. Society, P. Bourque, and R. E. Fairley, *Guide to the Software Engineering Body of Knowledge (SWEBOK(R)): Version 3.0*, 3rd. Los Alamitos, CA, USA: IEEE Computer Society Press, 2014, ISBN: 9780769551661.
- [23] "The JSON Data Interchange Format", ECMA, Tech. Rep. Standard ECMA-404 1st Edition / October 2013, Oct. 2013.

Fix glossaries

Print index