

```
In [1]: import pandas as pd
```

Data used for this tutorial:

Air quality data


```
In [2]: air_quality = pd.read_csv("data/air_quality_no2.csv", index_col=0, parse_dates=True)
```

```
In [3]: air_quality.head()
```

```
Out[3]:
```

	station_antwerp	station_paris	station_london
datetime			
2019-05-07 02:00:00	NaN	NaN	23.0
2019-05-07 03:00:00	50.5	25.0	19.0
2019-05-07 04:00:00	45.0	27.7	19.0
2019-05-07 05:00:00	NaN	50.4	16.0
2019-05-07 06:00:00	NaN	61.9	NaN

How to create new columns derived from existing columns?

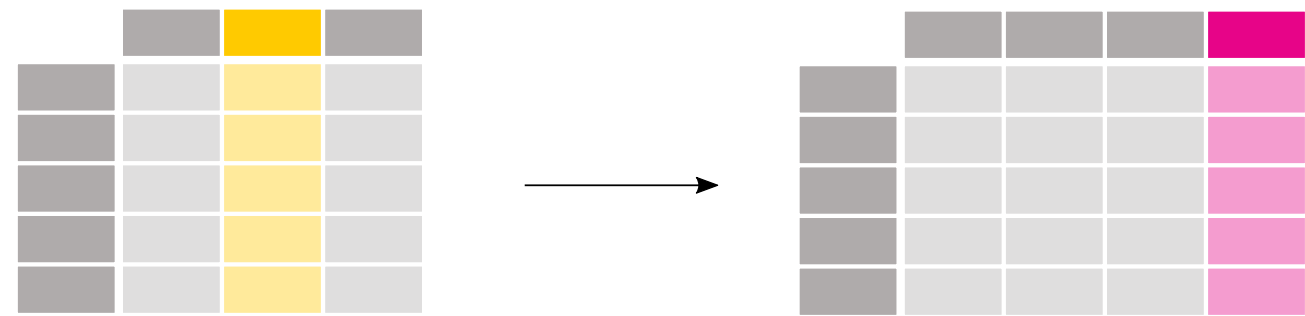

? I want to express the NO_2 concentration of the station in London in mg/m^3
(If we assume temperature of 25 degrees Celsius and pressure of 1013 hPa, the conversion factor is 1.882)

```
In [4]: air_quality["london_mg_per_cubic"] = air_quality["station_london"] * 1.882
```

```
In [5]: air_quality.head()
```


```
Out[5]:
```

	station_antwerp	station_paris	station_london	london_mg_per_cubic
datetime				
2019-05-07 02:00:00	NaN	NaN	23.0	43.286
2019-05-07 03:00:00	50.5	25.0	19.0	35.758
2019-05-07 04:00:00	45.0	27.7	19.0	35.758
2019-05-07 05:00:00	NaN	50.4	16.0	30.112
2019-05-07 06:00:00	NaN	61.9	NaN	NaN

To create a new column, use the `[]` brackets with the new column name at the left side of the assignment.

Note

The calculation of the values is done **element_wise**. This means all values in the given column are multiplied by the value 1.882 at once. You do not need to use a loop to iterate each of the rows!

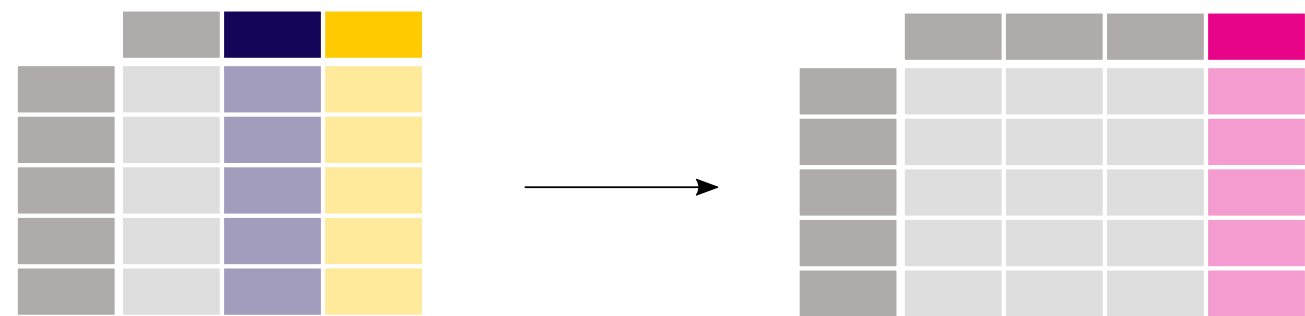

Search the docs ...

Installation

Package overview

Getting started tutorials

What kind of data does pandas handle?

How do I read and write tabular data?

How do I select a subset of a DataFrame ?

How to create plots in pandas?

How to create new columns derived from existing columns?

How to calculate summary statistics?

How to reshape the layout of tables?

How to combine data from multiple tables?

How to handle time series data with ease?

How to manipulate textual data?

Comparison with other tools

Community tutorials

? I want to check the ratio of the values in Paris versus Antwerp and save the result in a new column

```
In [6]: air_quality["ratio_paris_antwerp"] = (  
...:     air_quality["station_paris"] / air_quality["station_antwerp"]  
...: )  
...:  
  
In [7]: air_quality.head()  
Out[7]:
```

	station_antwerp	station_paris	station_london	london_mg_per_cubic
ratio_paris_antwerp				
datetime				
2019-05-07 02:00:00	NaN	NaN	23.0	43.286
NaN				
2019-05-07 03:00:00	50.5	25.0	19.0	35.758
0.495050				
2019-05-07 04:00:00	45.0	27.7	19.0	35.758
0.615556				
2019-05-07 05:00:00	NaN	50.4	16.0	30.112
NaN				
2019-05-07 06:00:00	NaN	61.9	NaN	NaN
NaN				

The calculation is again element-wise, so the `/` is applied *for the values in each row*.

Also other mathematical operators (`+`, `-`, `*`, `/`) or logical operators (`<`, `>`, `=`,...) work element wise. The latter was already used in the [subset data tutorial](#) to filter rows of a table using a conditional expression.

If you need more advanced logic, you can use arbitrary Python code via `apply()`.

? I want to rename the data columns to the corresponding station identifiers used by openAQ

```
In [8]: air_quality_renamed = air_quality.rename(  
...:     columns={  
...:         "station_antwerp": "BETR801",  
...:         "station_paris": "FR04014",  
...:         "station_london": "London Westminster",  
...:     }  
...: )  
...:  
  
In [9]: air_quality_renamed.head()  
Out[9]:
```

	BETR801	FR04014	London Westminster	london_mg_per_cubic
ratio_paris_antwerp				
datetime				
2019-05-07 02:00:00	NaN	NaN	23.0	43.286
NaN				
2019-05-07 03:00:00	50.5	25.0	19.0	35.758
0.495050				
2019-05-07 04:00:00	45.0	27.7	19.0	35.758
0.615556				
2019-05-07 05:00:00	NaN	50.4	16.0	30.112
NaN				
2019-05-07 06:00:00	NaN	61.9	NaN	NaN
NaN				

The `rename()` function can be used for both row labels and column labels. Provide a dictionary with the keys the current names and the values the new names to update the corresponding names.

The mapping should not be restricted to fixed names only, but can be a mapping function as well. For example, converting the column names to lowercase letters can be done using a function as well:

```
In [10]: air_quality_renamed = air_quality_renamed.rename(columns=str.lower)

In [11]: air_quality_renamed.head()
Out[11]:
```

	betr801	fr04014	london	westminster	london_mg_per_cubic
ratio_paris_antwerp					
datetime					
2019-05-07 02:00:00	NaN	NaN		23.0	43.286
NaN					
2019-05-07 03:00:00	50.5	25.0		19.0	35.758
0.495050					
2019-05-07 04:00:00	45.0	27.7		19.0	35.758
0.615556					
2019-05-07 05:00:00	NaN	50.4		16.0	30.112
NaN					
2019-05-07 06:00:00	NaN	61.9		NaN	NaN
NaN					

To user guide Details about column or row label renaming is provided in the user guide section on [renaming labels](#).

REMEMBER

- Create a new column by assigning the output to the DataFrame with a new column name in between the `[]`.
- Operations are element-wise, no need to loop over rows.
- Use `rename` with a dictionary or function to rename row labels or column names.

To user guide The user guide contains a separate section on [column addition and deletion](#).

[Previous](#)
[How to create plots in pandas?](#)

[Next](#)
[How to calculate summary statistics?](#)