General Information

Fleming Door Products ASSA ABLOY

Baron Steel Doors & Frames ASSA ABLOY

Head Office, Plant & Warehouse

101 Ashbridge Circle, Woodbridge
Ontario, Canada L4L 3R5

Telephone: (416) 749-2111
Toll Free: (800) 263-7515
Fax: (905) 851-8346
Website: www.flemingdoor.com
e-mail: Orders.flemingbaron@assaabloy.com
Quotes.flemingbaron@assaabloy.com
Specialtyorders.flemingbaron@assaabloy.com
Specialtyquotes.flemingbaron@assaabloy.com

Hours

Monday-Thursday: 7:30 a.m. to 4:30 p.m. E.S.T.
Friday: 7:30 a.m. to 4:00 p.m. E.S.T.

TERMS & CONDITIONS

Taxes:
Prices do not include any present or future Federal, Province, or Local property, license, privilege, sales, use, excise, gross receipts or other like taxes or assessments, which may result from transactions or any services performed in connection herewith.

Acceptance
With respect to it's Fleming-branded products, ASSA ABLOY Door Group, Inc. (hereinafter "Fleming") reserves the right to decline an order, in whole or in part, when the type or quantity of goods or credit worthiness of the Purchaser is not satisfactory to Fleming in its sole and absolute discretion.

The terms and conditions contained herein constitute the entire agreement between the parties.

Purchase Orders, Quotations ("Quote") requests, Acknowledgements or the like issued by the Purchaser that have contrary standard terms and conditions are not binding on Fleming, unless such terms and conditions are approved in a separate written agreement by Fleming's authorized representatives. In the event of an acceptance of Purchaser's Purchase Order by Fleming, the Purchaser agrees that such acceptance is solely conditioned on Purchaser's acceptance of the terms and conditions set forth in this instrument, regardless of the terms and conditions specified in the Purchaser's Purchase order. The terms and conditions in Purchaser's Purchase Order which conflict with terms and conditions of this instrument shall be disregarded and are hereby rejected, and this instrument shall constitute the entire agreement between Fleming and the Purchaser. In the event that Fleming does not enforce or require strict performance of any term or condition hereof, or of any other document, instrument or other agreement relating to goods sold, such lack of enforcement or requirement of strict performance will not waive, affect or diminish any right of

Fleming to enforce or require strict performance of such term or condition in the future.

Prices
All prices are subject to change without notice and are not guaranteed. All shipments will be made at prices in effect at the time of order acceptance. Possession of this price list does not constitute an agreement to sell.

Acknowledgements, invoices and quotations are on an "Errors and Omissions Excepted" basis (commonly referred to as E.O.E.). We reserve the right to correct clerical, stenographic and other obvious errors at any time.

Payment Terms:
Full payment for all orders shall be required at the time the order is placed unless credit facilities have been granted to the Customer. For all Customers with credit facilities, terms are net thirty (30) days after invoice date. It is understood that Fleming may impose and charge a finance charge of 2% per month or the highest rate allowed by law on any amount which becomes past due and delinquent.

Additionally, the Customer shall be responsible for all collection costs, court costs and reasonable attorney's fees in connection with the recovery of any delinquent amount.

Minimum Invoice:
Minimum invoice for a complete purchase order is $100 CAD net product value. Any order not totaling this minimum will be invoiced at the minimum invoice amount.

Taxes:
Prices do not include any present or future Federal, Province, or Local property, license, privilege, sales, use, excise, gross receipts or other like taxes or assessments, which may result from transactions or any services performed in connection herewith.

Quotations:
If Fleming elects to offer a Quote, such Quote will be valid for ninety (90) days. Complete shipment of the order must be accepted by Purchaser within six (6) calendar months from the date of Quote issuance.

The Quote number and project name must be referenced on the purchase order. Any invoiced order that has the incorrect discount applied to it and did not have a Quote copy attached to the order or the

General Information

Quote number written on the order will have a service fee of $250 net DEDUCTED from any sales credit issued for the difference in discount.

The Quote is null and void if the Purchase Order does not include ALL product lines listed on the Quote or if the quantities for an item covered by the Quote deviate by 10% or more. The Purchaser will have to solicit a new quotation.

Any changes to the original quote requested by the customer will required a new quote to be issued by Fleming. All requested changes must reference the original quote number.

Fleming and its sales representatives reserve the right, in their sole discretion and for any reason, to refuse a Distributor's request to quote a price other than Fleming standard list price and regardless of whether Fleming or its sales representatives have previously quoted discounted prices to the Distributor on some or all of its orders.

Locations for Door Hardware / Other Door Hardware Manufacturers' Templating:
Customers shall complete orders with all necessary information, templates and order forms. In the event that a drawing is submitted in addition to an order and there is an inconsistency between the description of the products in the order and the drawing, the description in the order shall prevail.

Unless specified otherwise, Fleming will prepare all door hardware locations, preparations and reinforcing to the Fleming standards. When other than Fleming's standard hardware locations, preparations or reinforcements are required the Customer shall provide all necessary information required to prepare the ordered product. The Customer shall be solely responsible for the accuracy and completeness of all such information. Any deviation from Fleming's standards must be specified in writing with order forms, templates and/or drawings provided by the Customer.

Changes / Cancellation of Orders:
Customers shall be responsible for all errors or omissions on any such purchase order and shall review the order acknowledgement immediately to ensure it is consistent with their order. Changes or cancellations to orders for product with SKU part numbers or quick ships will not be accepted if the order has been scheduled for production. Changes or cancellations to a custom order that has been released to production will be subject to a charge of costs for material and production expenses that have been incurred prior to notification from Customer. Charges are billed on Customer's original order. In those instances where a cancellation is accepted, Fleming reserves the right to make a reasonable cancellation charge based on expenses incurred. Minor changes such as a revision to the handing on 1 or 2 lines of an order may be completed via e-mail notification. All other changes will require the order to be re-submitted with all of the corrections/changes highlighted or identified. All accepted changes to an order will affect the original due date.

Delivery:
Orders will be acknowledged and given a scheduled delivery date based on estimated manufacturing lead times. Acknowledgements provide approximate shipping dates and are subject to change. Complete information is required to process all orders. Orders with insufficient information for processing may be subject to extended lead times which are relative to the time required in obtaining the necessary information for order processing. Manufacturing lead time will begin once all information is received to process an order. Fleming will use reasonable efforts to deliver products as estimated, but makes no guarantee as to delivery dates. Fleming will not be liable for back charges incurred based on availability of product or as a result of delays in delivery caused by insufficient information required to process an order.

Fleming will not be held responsible for delays in delivery caused by strikes, fires, floods or any other causes beyond our control, including the delivery of material to us. Under no circumstances shall Fleming be liable or accountable for consequential damages due to failure of delivery. Unless your order specifies otherwise, partial shipments will be made on or after the scheduled delivery date.

Terms of Shipment:
All products are shipped FOB factory unless otherwise agreed to in writing from Fleming. Title to and risk of loss and damage to product shipped is the responsibility of the purchaser and delivery is deemed to be complete upon transfer of the product to a common carrier. It shall be the Customer's responsibility to

inspect the products immediately upon delivery. All claims for freight damage or shortage shall be reported to the carrier in writing within the time required by the carrier indicating the pro bill number, date of receipt and description of claim. All freight claims are the responsibility of the Customer. Carriers carry limited insurance. If the Customer requires additional insurance coverage please contact our Customer service department.

Fleming will assist the Purchaser with documentation necessary to make a claim if requested to do so by the purchaser.

Customer Pick Up:
A Customer Pick Up Request must be faxed to Fleming a minimum of 24 hours in advance. For stock orders not picked up within 5 business days of scheduled pick up date, a 25% handling fee will be charged to the applicable invoices and the material placed back in Fleming inventory.

Claims:
In the event of Fleming or Customer error, claims for shortages, pricing errors and/or incorrectly filled orders must be submitted in writing to Customer Service within 48 hours from receipt of material. In respect of claims acknowledged and accepted by Fleming, Fleming shall either perform the corrective action itself, replace the product, or contract someone to perform the corrective action on Fleming's behalf. Back charges for corrective action must be pre-approved by Fleming.

Any claims for shortages or damage by the Carrier must be made by the Customer directly to the Carrier.

Invoice Deduction:
Fleming Customer Service Representative must be notified of any disputed invoices within thirty 30 days from the date of invoice. Deductions should only be taken for the disputed amount and the balance of the invoice is due and payable within standard payment terms.

Returned Goods:
No Material is to be returned to our facilities without prior written approval ("Return Goods Authorization" or "RGA") from Fleming. It is the policy of Fleming to not accept returns of any materials that are correctly furnished as per the Customer's Purchase Order. Replacement shall be made in accordance with the Fleming warranty, to the extent applicable, and only after Fleming determines that a defective product was shipped or a product not referred to in the order was shipped in error. All returns must refer to Fleming's RGA and be shipped freight prepaid.

Storage and Exposure:
Proper storage of doors and frames, in accordance with the current editions of ANSI A250.8, Part 4.1 and/or NAAMM/HMMA 840 "Guide Specifications for Installation and Storage of Hollow Metal Doors and Frames" and/or CSDMA 08 11 13, Part 3.1 "Site Storage and Protection", shall be the responsibility of the customer.

Price Book and Technical Manual Ownership:
All Fleming Price Books and Technical Manuals, whether hard copy or electronic format, are the property of Fleming and the Customer shall not provide such, or copies thereof, to any other party. Upon Fleming ceasing to sell products to any Customer, Fleming may request the return of all Price Books and Technical Manuals and Customer shall immediately return such to Fleming at Customer's cost.

Governing Law:
The rights and obligations of the parties shall be governed by the laws of the Province of Ontario, excluding any conflicts of law provisions. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this

Headings:
The section headings used herein are for convenience or reference only and do not form a part of these terms and conditions.

Limited Warranty:
Fleming represents and warrants the products to be free of defects in material and workmanship for a period of one (1) year from the date of invoice.

Products manufactured of paintable galvanneal steel are warranted for a period of ten (10) years from the date of invoice against perforation from corrosion and against loss of finish paint adhesion, when installed and finish painted in accordance with our instructions and those of the paint manufacture(s). Products manufactured of G90 (Z275) galvanized steel are not warranted for finish paint adhesion.

General Information

The use of concrete admixtures in mortar, resulting in acidic corrosion frames, shall void this Warranty. Exterior doors must be fitted with watertight steel or vinyl top caps, supplied by Fleming, prior to installation and water infiltration damage resulting from the failure to comply with any of these requirements shall void this Warranty. Product storage, handling and installation must conform to ANSI A250.8, Part 4.1 and/or NAAMM/HMMA 840 "Guide Specifications for Installation and Storage of Hollow Metal Doors and Frames" and/or CSDMA 08 11 13, Part

3.1 "Site Storage and Protection", current editions. Damage resulting from improper storage, handling or installation of the product without limitation as a result of non-compliance with the above standards, shall void this Warranty.

This warranty does not cover defects or damage arising from improper installation, lack of or improper maintenance, improper storage, shipping and handling, corrosion, erosion, ordinary wear and tear, misuse, abuse, accident, unauthorized service, or use with unauthorized non-Fleming products or parts.

The only liability of Fleming in tort or contract whether under this warranty or otherwise, shall be limited to the repair or replacement of any product or component part which shall prove defective as covered by this warranty.

Claims under this Warranty must be submitted in writing, immediately upon detection of defective condition. Such claim must clearly identify the project, product and condition. No remedial action may be undertaken on our behalf, without our express written consent, except at risk of voiding this warranty. Remedial action to repair or replace product is at our discretion, subject to review of the reported claim and/or inspection of the product, as may be deemed appropriate by Fleming.

This warranty is in lieu of all other expressed warranties. To the extent permitted by law, all implied warranties are limited to the duration of this warranty. ASSA ABLOY and its subsidiaries, associated companies and partners shall not be liable for any incidental or consequential damages. No agent, sales representative or dealer has the authority to increase or alter the obligations of this warranty.

Except as expressly set forth, Fleming makes no other representations or warranties, express or implied at law or in equity, with respect to the products or their characteristics, quality or performance, including without limitation, the implied warranties of merchantability, fitness for a particular purpose or non infringement of any intellectual property rights of third parties and any such representations and warranties are hereby expressly disclaimed.

Some provinces do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from province to province.

Indemnity:
Purchaser shall indemnify Fleming and hold Fleming harmless against all claims, liability, loss or other damages (including costs, legal or otherwise incurred by Fleming) to all persons for injury of any nature, including sickness and/or death, property damage at the time of delivery or after when the product is no longer in Fleming possession or control.

Force Majeure:
Fleming shall not be liable for its failure to perform due to any contingencies beyond its control, including but not limited to acts of God, fires, floods, wars, sabotage, accidents, labour disputes, shortages, government laws, ordinances, rules and regulations.

Fleming shall not be liable for its failure to deliver due to its inability to obtain materials, equipment failure, labour actions, transportation issues or any similar contingencies.

In the event of delays due to the aforementioned contingencies, the date of delivery will be postponed by such length of time as the circumstances dictate.

Copyrights and Patents:
Many products in Fleming catalogues, brochures and price lists are either patented, Copyrighted or registered by ASSA ABLOY.

Copyright © March 15, 2018, ASSA ABLOY Door Group Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Fleming Metal Industries Inc. is prohibited.

General Information

Weights (in lbs)

The weights noted below are for estimating only.

Frame Parts

16ga Masonry

Jamb Depth	Hinge Jambs			Strike Jambs			2" Face Heads				
	6'8"	7'0"	8'0"	6'8"	7'0"	8'0"	2'6"	3'0"	4'0"	6'0"	8'0"
4 3/4"	16	17	18	15	16	18	5	6	9	13	15
5 3/4"	17	18	20	16	17	19	6	7	10	14	18
6 3/4"	18	19	22	17	18	20	6	7	10	15	19
7 3/4"	19	20	23	18	19	22	7	8	11	16	21
8 3/4"	20	21	25	19	20	24	8	9	12	17	23

16ga Drywall

Jamb Depth	Hinge Jambs			Strike Jambs			2" Face Heads				
	6'8"	7'0"	8'0"	6'8"	7'0"	8'0"	2'6"	3'0"	4'0"	6'0"	8'0"
4 3/4"	16	18	19	15	17	18	6	7	9	13	17
5 7/8"	17	19	20	16	18	19	6	8	10	14	19
6 5/8"	17	19	20	16	18	19	7	8	10	14	19
7 1/8"	18	20	21	17	19	20	8	9	11	16	21
8 1/4"	19	21	22	18	20	21	9	10	12	18	23

Sticks

Jamb Depth	Open Sections (ST-OS)				Mullion Sections (ST-MS)			
	Hinge	Strike	Blank		Hinge	Strike	Blank	
	OSH-10'2(70)	OSS-10'2	OS-10'2	OS-10'2;4F	MSH-10'2(70)	MSS-10'2	MS-70	MS-10'2
4 3/4"	22	21	20	28	38	37	27	37
5 3/4"	24	23	22	30	45	44	34	44
6 3/4"	26	25	24	32	52	51	41	51
7 3/4"	28	27	26	34	59	58	48	58
8 3/4"	30	29	28	36	64	63	53	63

Doors

Size	D20	D18	D16	E18	TRR18	H16
30x68	81	96	116	96	140	151
30x70	83	98	119	98	142	155
30x80	97	115	139	115	159	181
36x70	99	117	142	117	161	185
40x70	113	134	162	-	178	212
40x80	129	153	186	-	197	242

General Information

Standard Packaging

Many of our standard items are pre-packaged in standard skid quantities. For these items, order for less than full skid load quantities may lead to longer delivery times.

Standard Skid Load Quantities - Door & Frames	
DW 5 5/8" & 5 7/8"	100 pieces per skid (100 hinge jambs or 100 strike jambs)
5 3/4" masonry jambs	99 pieces per skid (99 hinge jambs or 99 strike jambs)
OS head/rail	99 pieces per skid
MS blank mullion	66 pieces per skid
Steel Doors	Stock Doors A40 doors: 25 per skid Primed doors: 20 per skid
Skid Charges	Standard - $40 per skid net
	Heavy Duty - $50 per skid net
	Crate - $60 per crate net

***Special Skidding Instructions:**
When product is required to be skidded by floor the product must be ordered by floor. It is preferable to separate each floor on individual purchase orders.

Labelling:
- All eligible hinge jambs receive a UL embossing.
- Expandable hinge jambs receive a 1 1/2 hr embossing.
- Doors with part numbers will receive fire label holes in the edge of the door. Custom doors will not receive fire label holes.
- Frames do not receive fire label holes.

Standard Packaging Continued

Standard Door Sizes, Preps, Core and Gauge	
Width (Imperial)	2'0" to 4'0" in 2" Increments
Width (Metric)	600 to 1200 in 50mm Increments
Height (Imperial)	6'8", 6'10", 7'0", 8'0"
Height (Metric)	2050mm, 2150mm, 2400mm
Lock Preps	161, 86ED, R/P, 91A, ASA, ASA x FB
Cores	Honeycomb, Polystyrene
Locations	MSPIO (Pioneer), MSCECO (CECO), MSCUR (CURRIES)

Standard Frame Sizes	
Width (Imperial)	2'0" to 6'0" in 2" increments and 6'2", 6'4" and 8'0"
Width (Metric)	600 to 1800 and 2400 in 50mm Increments
Height (Imperial)	6'8", 6'10", 7'0", 8'0"
Height (Metric)	2050mm, 2150mm, 2400mm

Standard Frame Jamb Depth and Gauge	
DW 18ga	4 1/2", 4 3/4", 5 5/8", 5 7/8", 6 1/4", 6 5/8", 7 1/8" 7 3/4", 8 1/4", (Jamb Depth)
DW 16ga	4 1/2", 4 3/4", 5 5/8", 5 7/8", 6 1/4", 6 5/8", 7 1/8" 7 3/4", 8 1/4", (Jamb Depth)
M 18ga	4 3/4", 5 3/4", 6 3/4", 7 3/4", 8 1/4", 8 3/4", 146mm (Jamb Depth)
M 16ga	4 3/4", 5 3/4", 6 3/4", 7 3/4", 8 1/4", 8 3/4", 121mm, 146mm, 172mm, 197mm, 210 mm, 222mm, 324mm (Jamb Depth)
TB 16ga	5 3/4" (Jamb Depth)
DE 16ga	5 3/4" (Jamb Depth)

NOTES:

NOTE:

- Some jamb depths have limited sizes. See "edge" for full line of standard and stock items.
- Sizes other than noted above, additional charges will apply.
- Continuous Hinge: Net width of the door or the make and model of the cont. hinge must be noted
- Masonry and Drywall frames will be supplied as Fleming frame profile unless it is clearly noted on the purchase order

Light Kit Reference Guide

Nominal Size/Kit Size	Glass Size	Cut Out Size	Visible Glass: Std Screw Fix Stop	Visible Glass: Snap In Glazing	Visible Glass: Thermal Glazing	Trim Outside To Outside
Vertical Kits						
10	9 3/4	10 1/8	8 3/4	8 1/2	8 3/4	11
12	11 3/4	12 1/8	10 3/4	10 1/2	10 3/4	13
16	15 3/4	16 1/8	14 3/4	14 1/2	14 3/4	17
20	19 3/4	20 1/8	18 3/4	18 1/2	18 3/4	21
22	21 3/4	22 1/8	20 3/4	20 1/2	20 3/4	23
23	22 3/4	23 1/8	21 3/4	21 1/2	21 3/4	24
24 1/2	24 1/4	24 5/8	23 1/4	23	23 1/4	25 1/2
25 3/16	24 15/16	25 5/16	23 15/16	23 11/16	23 15/16	26 3/16
29	28 3/4	29 1/8	27 3/4	27 1/2	27 3/4	30
31 3/8	31 1/8	31 1/2	30 1/8	29 7/8	30 1/8	32 3/8
33 3/8	33 1/8	33 1/2	32 1/8	31 7/8	32 1/8	34 3/8
35 3/8	35 1/8	35 1/2	34 1/8	33 7/8	34 1/8	36 3/8
42 3/8	42 1/8	42 1/2	41 1/8	40 7/8	41 1/8	43 3/8
44	43 3/4	44 1/8	42 3/4	42 1/2	42 3/4	45
54	53 3/4	54 1/8	52 3/4	52 1/2	52 3/4	55
63 7/8	63 5/8	64	62 5/8	62 3/8	62 5/8	64 7/8
65 7/8	65 5/8	66	64 5/8	64 3/8	64 5/8	66 7/8
67 7/8	67 5/8	68	66 5/8	66 3/8	66 5/8	68 7/8

Nominal Size/Kit Size	Glass Size	Cut Out Size	Visible Glass: Std Screw Fix Stop	Visible Glass: Snap In Glazing	Visible Glass: Thermal Glazing	Trim Outside To Outside
Horizontal Kits						
5	4 3/4	5 1/8	3 3/4	3 1/2	3 3/4	6
6	5 3/4	6 1/8	4 3/4	4 1/2	4 3/4	7
10	9 3/4	10 1/8	8 3/4	8 1/2	8 3/4	11
12	11 3/4	12 1/8	10 3/4	10 1/2	10 3/4	13
18	17 3/4	18 1/8	16 3/4	16 1/2	16 3/4	19
20	19 3/4	20 1/8	18 3/4	18 1/2	18 3/4	21
22	21 3/4	22 1/8	20 3/4	20 1/2	20 3/4	23
24	23 3/4	24 1/8	22 3/4	22 1/2	22 3/4	25
30	29 3/4	30 1/8	28 3/4	28 1/2	28 3/4	31
32	31 3/4	32 1/8	30 3/4	30 1/2	30 3/4	33
36	35 3/4	36 1/8	34 3/4	34 1/2	34 3/4	37

NOTES:

- For the glass size noted we have assumed 1/4" clearance. The actual glass dimensions must be confirmed by your glass supplier/installer.
- When ordering a Light Kit or a Light Kit installed into a door, nominal dimensions are assumed.

Metric Hinge, Strike and Lock Locations

Frame				
D Hinge Height	E Frame Top	F Frame Bottom	I Strike Height	J Deadlock Height
88.9	203.2	308.0	1023.9	1219.2
101.6	196.9	314.3	1023.9	1219.2
114.3	190.5	320.7	1023.9	1219.2
127.0	184.2	327.0	1023.9	1219.2

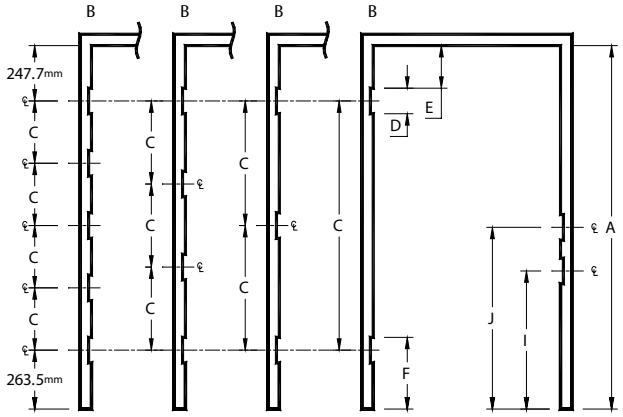

*34.9mm thick doors and frames will receive 1 pair (2) of 88.9mm hinges up to and including 2032mm.

Door				
D Hinge Height	G Door Top	H Door Bottom	K Lock Height	L Deadlock Height
88.9	200.0	288.9	1004.8	1200.1
101.6	193.7	295.2	1004.8	1200.1
114.3	187.3	301.6	1004.8	1200.1
127.0	181.0	307.9	1004.8	1200.1

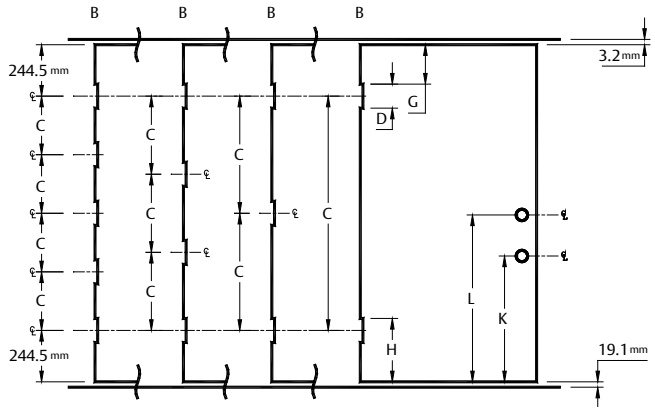

Note: Unless ordered otherwise, top and bottom hinge centerline shown are used (pitch is calculated)

A Rebate Height			B Hinge Qty	C Pitch
1219.2	48	(4'0)	2	708.0
1270	50	(4'2)	2	758.8
1320.8	52	(4'4)	2	809.6
1371.6	54	(4'6)	2	860.4
1422.4	56	(4'8)	2	911.2
1473.2	58	(4'10)	2	962.0
1524	60	(5'0)	2	1012.8
1574.8	62	(5'2)	3	531.8
1625.6	64	(5'4)	3	557.2
1676.4	66	(5'6)	3	582.6
1727.2	68	(5'8)	3	608.0
1778	70	(5'10)	3	633.4
1828.8	72	(6'0)	3	658.8
1879.6	74	(6'2)	3	684.2
1930.4	76	(6'4)	3	709.6
1981.2	78	(6'6)	3	735.0
2032	80	(6'8)	3	760.4
2050	80.709		3	769.4
2082.8	82	(6'10)	3	785.8
2133.6	84	(7'0)	3	811.2
2150	84.646		3	819.4
2184.4	86	(7'2)	3	836.6
2235.2	88	(7'4)	3	862.0
2286	90	(7'6)	3	887.4
2336.8	92	(7'8)	4	608.5
2350	92.520		4	612.9
2387.6	94	(7'10)	4	625.5
2400	94.488		4	629.6
2438.4	96	(8'0)	4	642.4
2489.2	98	(8'2)	4	659.3
2540	100	(8'4)	4	676.3
2590.8	102	(8'6)	4	693.2
2641.6	104	(8'8)	4	710.1
2692.4	106	(8'10)	4	727.1
2743.2	108	(9'0)	4	744.0
2794	110	(9'2)	4	760.9
2844.8	112	(9'4)	4	777.9
2895.6	114	(9'6)	4	794.8
2946.4	116	(9'8)	4	811.7
2997.2	118	(9'10)	4	828.7
3048	120	(10'0)	4	845.6
3050	120.079		5	634.7
3098.8	122	(10'2)	5	646.9
3100	122.047		5	647.2
3149.6	124	(10'4)	5	659.6
3200.4	126	(10'6)	5	672.3
3251.2	128	(10'8)	5	685.0
3302	130	(10'10)	5	697.7
3352.8	132	(11'0)	5	710.4
3403.6	134	(11'2)	5	723.1
3454.4	136	(11'4)	5	735.8
3505.2	138	(11'6)	5	748.5
3556	140	(11'8)	5	761.2
3606.8	142	(11'10)	5	773.9
3657.6	144	(12'0)	5	786.6

Imperial Hinge, Strike and Lock Locations

Frame				
D Hinge Height	E Frame Top	F Frame Bottom	I Strike Height	J Deadlock Height
3 1/2	8	12 1/8	40 5/16	48
4	7 3/4	12 3/8	40 5/16	48
4 1/2	7 1/2	12 5/8	40 5/16	48
5	7 1/4	12 7/8	40 5/16	48

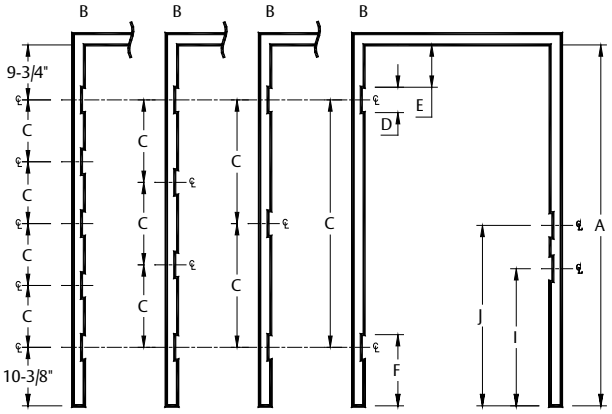

*1 3/8" thick doors and frames will receive 1 pair (2) of 3 1/2" hinges up to and including 6'8"

Door				
D Hinge Height	G Door Top	H Door Bottom	K Lock Height	L Deadlock Height
3 1/2	7-7/8	11-3/8	39-9/16	47-1/4
4	7-5/8	11-5/8	39-9/16	47-1/4
4 1/2	7-3/8	11-7/8	39-9/16	47-1/4
5	7-1/8	12-1/8	39-9/16	47-1/4

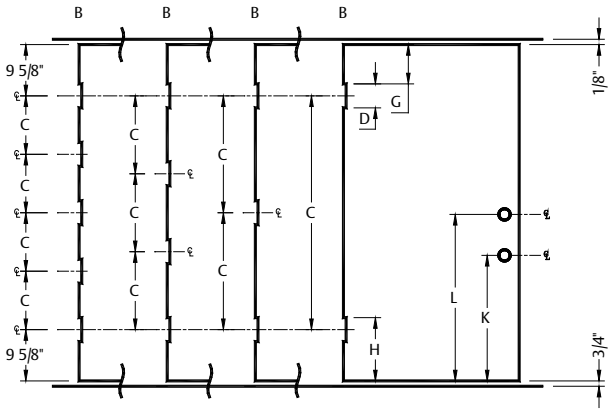

Note: Unless ordered otherwise, top and bottom hinge centerline shown are used (pitch is calculated)

Frame		
A Rebate Height	B Hinge Qty	C Pitch
4'0	2	27.875
4'2	2	29.875
4'4	2	31.875
4'6	2	33.875
4'8	2	35.875
4'10	2	37.875
5'0	2	39.875
5'2	3	20.938
5'4	3	21.938
5'6	3	22.938
5'8	3	23.938
5'10	3	24.938
6'0	3	25.938
6'2	3	26.938
6'4	3	27.938
6'6	3	28.938
6'8	3	29.938
6'10	3	30.938
7'0	3	31.938
7'2	3	32.938
7'4	3	33.938
7'6	3	34.938
7'8	4	23.958
7'10	4	24.625
8'0	4	25.292
8'2	4	25.958
8'4	4	26.625
8'6	4	27.292
8'8	4	27.958
8'10	4	28.625
9'0	4	29.292
9'2	4	29.958
9'4	4	30.625
9'6	4	31.292
9'8	4	31.958
9'10	4	32.625
10'0	4	33.292
10'2	5	25.469
10'4	5	25.969
10'6	5	26.469
10'8	5	26.969
10'10	5	27.469
11'0	5	27.969
11'2	5	28.469
11'4	5	28.969
11'6	5	29.469
11'8	5	29.969
11'10	5	30.469
12'0	5	30.969

Imperial Hinge Locations for Dutch Doors

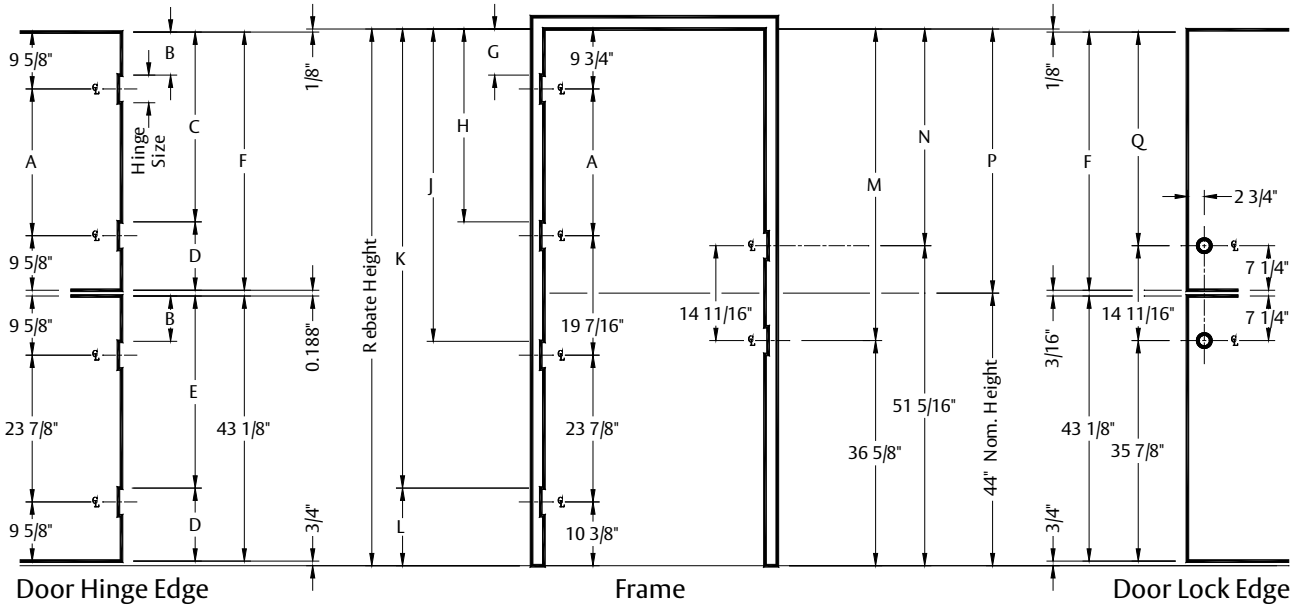

Hinge Height	Frame		Door		
	G	L	B	D	E
4	7 3/4	12 3/8	7 5/8	11 5/8	31 1/2
4 1/2	7 1/2	12 5/8	7 3/8	11 7/8	31 1/4
5	7 1/4	12 7/8	7 1/8	12 1/8	31

Dutch doors and frames up to
(and including) 7'6" nominal height
2 pairs of hinges

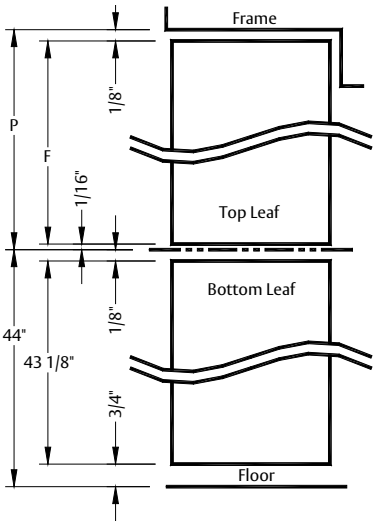

Rebate Height	(Nominal) P	(Actual) F	For 4-1/2" Height Hinges Only					Strike/Lock and Deadlock		
			A	C	H	J	K	M	N	Q
6'8" (80")	3'0" (36")	35 13/16	16 9/16	23 15/16	24 1/16	43 1/2	67 3/8	43 3/8	28 11/16	28 9/16
6'10" (82")	3'2" (38")	37 13/16	18 9/16	25 15/16	26 1/16	45 1/2	69 3/8	45 3/8	30 11/16	30 9/16
7'0" (84")	3'4" (40")	39 13/16	20 9/16	27 15/16	28 1/16	47 1/2	71 3/8	47 3/8	32 11/16	32 9/16
7'2" (86")	3'6" (42")	41 13/16	22 9/16	29 15/16	30 1/16	49 1/2	73 3/8	49 3/8	34 11/16	34 9/16
7'6" (90")	3'10" (46")	45 13/16	26 9/16	33 15/16	34 1/16	53 1/2	77 3/8	53 3/8	38 11/16	38 9/16

General Information

Nomenclature – Frame Parts

FRAME SERIES

M = Masonry
DW = Drywall
EXP = Expandable Drywall
CO = Cased Open
CODW = Cased Open Drywall
DE = Double Egress
TB = Thermally Broken
SO = Slip On

COMPONENT TYPE

BJ = Blank Jamb
SJ = Strike Jamb
HJ = Hinge Jamb
HD = Head Jamb

COMPONENT GAGE

12, 14, 16, 18

DOOR THICKNESS

4=1 3/4”
8=1 3/8”

NOMINAL SIZE

Width or Height (feet & inches)

JAMB DEPTH

Inches

DW-HJ-16-4-7’0-5 7/8-RH;NSHS,5

Handing

LH, RH (where required)

OPTIONS

See Supported Frame Options

NOTE: The Fleming frame profile will be supplied unless “Baron Profile” is clearly noted on the purchase order. The “F and the “B” have been removed from the beginning of the description. When the Baron frame profile is required, “BPROF” will be added to the description after the semi-colon.

Nomenclature – Frames

FRAME SERIES

M = Masonry
DW = Drywall
EXP = Expandable Drywall
CO = Cased Open
CODW = Cased Open Drywall
DE = Double Egress
TB = Thermally Broken
SO = Slip On

FRAME TYPE

FS = Frame Single
FD = Frame Double

COMPONENT GAGE

12, 14, 16, 18

DOOR THICKNESS

4=1 3/4”
8=1 3/8”

NOMINAL SIZE

Width X Height (feet & inches)

JAMB DEPTH

Inches

DW-FS-16-4-2’11X7’0-5 7/8-RH;ELSTR-T&B

Handing

LH, RH (where required)

OPTIONS

See Supported Frame Options

NOTE: The Fleming frame profile will be supplied unless “Baron Profile” is clearly noted on the purchase order. The “F and the “B” have been removed from the beginning of the description. When the Baron frame profile is required, “BPROF” will be added to the description after the semi-colon.

General Information

Nomenclature – Sticks

STICK SERIES

ST = Stock Stick
CST = Custom Stick
COST = Cased-Open Stock Stick
COCST = Cased-Open Custom Stick
TBCST = Thermal Custom Stick
TWCST = Trimwall Custom Stick

STICK TYPE

OS = Open Section Blank
OSH = Open Section Hinge
OSS = Open Section Strike
MS = Mullion Section Blank
MSH = Mullion Section Hinge
MSS = Mullion Section Strike
MSHH = Mullion Section Hinge both sides
MSSS = Mullion Section Strike both sides
MSHS = Mullion Section Hinge and Strike
FP = Filler Plate
FPCF45 = Filler Plate Corner Fill 45°
FPCF90 = Filler Plate Corner Fill 90°
CP2 = Corner Post 2 way
CP3 = Corner Post 3 way

COMPONENT GAGE

12, 14, 16, 18

DOOR THICKNESS

4=1 3/4" door or misc. stick
8=1 3/8" door

NOMINAL SIZE

Length (feet & inches)
*door rabbet in () for hardware

JAMB DEPTH

Inches

CST-OSH-16-4-10'0('0)-5 7/8-RH;NSHS,5

Handing

LH, RH (where required)

OPTIONS

See Supported Frame Options

NOTE: The Fleming frame profile will be supplied unless "Baron Profile" is clearly noted on the purchase order. The "F and the "B" have been removed from the beginning of the description. When the Baron frame profile is required, "BPROF" will be added to the description after the semi-colon.

Nomenclature – Frames

Frame Section/Profile Options

ER	Equal rabbets
DW	Adds DW returns to M, DE, CO, TB series product
SR	Single rabbet - M, DW and TB product
NSRET	Non-std. returns
__F	Non-std. face on stick product ONLY
__FHX__FJ	Non-std. face on ALL mitered product. __FH specifies Head face size & __FJ specifies Jamb face i.e. 4FHX2FJ signifies a 4" face head mitered to suit a 2" face jamb.

Frame Assembly Options

FW	Face welded assembly
PW	Profile welded assembly
TW	Tack welded assembly
NSKD	Forces KD corners on product where KD is not standard
PMO	Punch miter only
N/NOTCH	Eliminates notching on rebate size mullion
T&B	Tag & band parts

Frame Anchor Options

EWA	1/4" dia. existing wall anchor prep. (with butterfly)
EWA3/8	3/8" dia. existing wall anchor prep. (with butterfly)
EWAPDO	1/4" dia. existing wall anchor prep. (punch & dimple only)
EWA3/8PDO	3/8" dia. existing wall anchor prep. (punch & dimple only)
ZANC	Welded in Z anchors
FANC	Welded in fire anchors + straps
WANC	Welded in wood stud anchors

Strike Prep. Options

ASA	ASA strike
ASANL	ASANL strike only at deadlock height
S/ASA	Small ASA or T-strike
S/ASANL	Small ASANL strike only at deadlock height
ASA+ASA	ASA strike and ASA strike at deadlock height
ASA+ASANL	ASA strike and ASANL strike at deadlock height
ASA+S/ASANL	ASA strike and small ASANL strike at deadlock height
S/ASA+S/ASA	Small ASA strike and Small ASA strike at deadlock height
S/ASA+S/ASANL	Small ASA strike and Small ASANL strike at deadlock height
SURFSTR	Surface strike reinforcing in SJ or double HD
INTSTR	Small ASA & small ASA no-lip 4" CL to CL to suit interconnected lock preps.
ELSTR	Electric strike (hdwr. reference required)
FB	Reversible flush-bolt strike prep. at center of rabbet
MSTR/S	mortised strike, roller latch or soffit strike single (hdwr. reference required)
MSTR/D	mortised strike, roller latch or soffit strike double (hdwr. reference required)
SPECSTR	Special strike – anything not covered above (hdwr. reference required)
BLK	Blank jamb instead of standard Strike jamb in frame
NSSH	Non-std. strike height (NSSH,COL for "Colonial")

Nomenclature – Frames

Hinge Prep. Options

3/16HR	3/16" thick hinge reinforcing
ANCH	Anchor hinge prep. (hdwr. reference required)
DM	Double mortise hinge prep.
DMHWT	Double mortise heavy weight hinge prep.
ELH	Electric hinge prep. (hdwr. reference required)
HWT	Heavy weight hinge prep.
H+	Heavy weight + 1/16 hinge prep.
HBOX	Hinge guard boxes on DW series frame
NSHS,3.5	3 ½" templated non-standard hinge size
NSHS,4	4" templated non-standard hinge size
NSHS,5	5" templated non-standard hinge size
NH	No hinge cut-outs or reinforcing
NSHP	Non standard hinge position
NSHQ,x	Non standard hinge quantity for given rabbet size – x denotes quantity
M/PIV	Mortise pivot rep. (hdwr. reference required)
P/PIV	Pocket pivot prep. (hdwr. reference required)
S/STRIP	Surface hinge rein. using strip in door rabbet (hdwr. reference required)
SOSS	SOSS hinge prep. (hdwr. reference required)

Frame Holder/Closer Prep. Options

CRPA	Surface closer rein parallel arm - handing required on single head
CRRA	Surface closer rein regular arm - handing required on single head
CRRAPUSH	Surface closer rein regular arm, push head face - handing required on single head
COHH	Concealed overhead holder prep. - handing required on single head (hdwr. reference required)
COHC	Concealed overhead closer prep. - handing required on single head (hdwr. reference required)
SURH	Surface holder rein - handing required on single head
SFFW	Surface soffit rein, full head width

Nomenclature – Frames

Miscellaneous Frame Options

CDT,H	Conduit and Boxes prep. from head to hinge jamb (frame singles)
CDT,S	Conduit and Boxes prep. from head to strike jamb (frame singles)
CDT,HS	Conduit and Boxes prep. from head to hinge & strike jamb (frame singles)
CDT,HH	Conduit and Boxes prep. from head to both hinge jambs (frame doubles)
CDT,H@LH	Conduit and Boxes prep. from head to left hinge jamb (frame doubles)
CDT,H@RH	Conduit and Boxes prep. from head to right hinge jamb (frame doubles)
ELYNX,H	Electro Lynx prep. from head to hinge jamb (frame singles)
ELYNX,S	Electro Lynx prep. from head to strike jamb (frame singles)
ELYNX,HS	Electro Lynx prep. from head to hinge & strike jamb (frame singles)
ELYNX,HH	Electro Lynx prep. from head to both hinge jambs (frame doubles)
ELYNX,H@LH	Electro Lynx prep. from head to left hinge jamb (frame doubles)
ELYNX,H@RH	Electro Lynx prep. from head to right hinge jamb (frame doubles)
G90	G90 material
SANI	Sanitary base
SLPSTP	Sloped stop/hospital profile
DBLHD	Double undersize head with silencers <= 48”
SGLHD	Singe full size head without silencers > 48”
NSKD	Forces KD corners on product where KD is not standard
PMO	Punch miter only
T&B	Tag & band parts
N/S	No silencers (used for SJ’s, BJ’s & HD’s)
UNEQPR	Unequal pair center on double frame or head
COMM	Communicating frame or frame part with symmetrical hardware locations. Opposite rabbet automatically adjusted. Swing required for processing purposes.
EPT	Electric power transfer prep. (hdwr. reference required)
DPS	Door position sensor prep. (hdwr. reference required)
MAGC	Magnetic contact prep. (hdwr. reference required)
PRIME,	Prime door (colour reference required, if other than grey)
PAINT,	Paint door (colour reference required)

Frame Fire Label Options

ULXMETX.33	Underwriters Laboratories, metal, 20 min. fire label
ULXMETX.75	Underwriters Laboratories, metal, ¾ Hr. fire label (avail. as ½ Hr. TRR Dr.)
ULXMETX1.5	Underwriters Laboratories, metal, 1 ½ Hr. fire label (avail. as ½ Hr. TRR Dr.)
ULXMETX3	Underwriters Laboratories, metal, 3 Hr. fire label (avail. as ½ Hr. TRR Dr.)
ULXMYLX.33	Underwriters Laboratories, mylar, 20 min. fire label
ULXMYLX.75	Underwriters Laboratories, mylar, ¾ Hr. fire label
ULXMYLX1.5	Underwriters Laboratories, mylar, 1 ½ Hr. fire label
ULXMYLX3	Underwriters Laboratories, mylar, 3 Hr. fire label
WHIX.33	Warnock Hersey, 20 min. fire label
WHIX.75	Warnock Hersey, ¾ Hr. fire label (avail. as 1 Hr. TRR Dr.)
WHIX1.5	Warnock Hersey, 1 ½ Hr. fire label (avail. as 1 Hr. TRR Dr.)
WHIX3	Warnock Hersey, 3 Hr. fire label
POSPRES	Positive Pressure supplementary label (Warnock Hersey)
SMK	Smoke & draft control supplementary label (Warnock Hersey)
WIND	Windstorm

Nomenclature – Doors

DOOR SERIES

D16 = D-Series, 16ga, Honeycomb Core
D18 = D-Series, 18ga, Honeycomb Core
D20 = D-Series, 20ga, Honeycomb Core
D16PS = D-Series, 16ga, Polystyrene Core
D18PS = D-Series, 18ga, Polystyrene Core
D20PS = D-Series, 20ga, Polystyrene Core
D16PI = D-Series, 16ga, Poly-Isocyanurate Core
D18PI = D-Series, 18ga, Poly-Isocyanurate Core
D20PI = D-Series, 20ga, Poly-Isocyanurate Core
D16TR = D-Series, 16ga, T.R.R. Core
D18TR = D-Series, 18ga, T.R.R. Core
E18PS = E-Series, 18ga, Polystyrene Core
H16 = H-Series, 16ga, seam weld, steel stiffened
H14 = H-Series, 14ga, seam weld, steel stiffened
H12 = H-Series, 12ga, seam weld, steel stiffened
D16LSS = 16ga, lock seam, laminated steel stiffened
D18LSS = 18ga, lock seam, laminated steel stiffened
D20LSS = 20ga, lock seam, laminated steel stiffened
CW16 = CW-Series, 16ga, seam weld, Honeycomb Core
CW14 = CW-Series, 14ga, seam weld, Honeycomb Core

ELEVATION

F, P, G, NL1, NL2, V, FG, 2NL, 2G, 2P, R, L
Support for the following add-ins
+L = louver
+LB = louver bridged
+LC = louver with inner channel
+S = mail slot
+SB = mail slot bridged

THICKNESS

4=1 3/4”(44.4mm)
8=1 3/8” (34.9mm)

NOMINAL SIZE

WidthxHeight
Feet and inches or millimeters

HANDING

LH, RH, L/R, LHR, RHR

D18PS-NL1-4-2’10 1/2X7’0-RH-ASAXFB;SF-STCAP

LOCK, PANIC OR STRIKE PREP

BLK, R/P, 161, 161L, 160, 163, 165, 161NS, 86ED, ANSI, N/REIN, ASA, ASANL, S/ASA, S/ASANL, INTSTR, SVR, CVR
With hdwr. reference - ML, INT, MP, RP, SVRP, CVRP, ELSTR, OBSTR

OPTIONS

See Door Options for availability

2ND LOCK OR STRIKE PREPARATIONS

+161, +160, +163, +165, +161NS, +86ED, +ANSI
+ASA, +ASANL, +S/ASA, +S/ASANL
With hdwr. reference - +DL, +DLSTR

FLUSH-BOLT PREPARATIONS

XFB, XFB@24&12, XFB@36&12, XSB, XFBTO, XFB@24TO, XFB@36TO

Nomenclature – Doors

Door Hinge Prep. Options

HWT	Heavy weight hinge prep.
H+	Heavy weight + 1/16 hinge prep.
DM	Double mortise hinge prep.
DMHWT	Double mortise heavy weight hinge prep.
NSHS,3.5	3 ½" templated non-standard hinge size
NSHS,4	4" templated non-standard hinge size
NSHS,5	5" templated non-standard hinge size
NH	No hinge cut-outs or reinforcing
NH+US	No hinge cut-outs or reinforcing, undersize to suit surface hinge (nominal width & hdwr. reference required)
ELH	Electric hinge prep. (hdwr. reference required)
3/16HR	3/16" thick hinge reinforcing
S/STRIP	Surface hinge rein. using strip in door edge (hdwr. reference required)
S/CNL	Surface hinge rein. using internal door channel (hdwr. reference required)
SOSS	SOSS hinge prep. (hdwr. reference required)
M/PIV	Mortise pivot rep. (hdwr. reference required)
P/PIV	Pocket pivot prep. (hdwr. reference required)
ANCH	Anchor hinge prep. (hdwr. reference required)
NSHP	Non standard hinge position
NSHQ,x	Non standard hinge quantity for given door size – x denotes quantity

Door Lock/Panic Preps.

BLK	Blank door reinforcing – for push/pulls, surface rim & vertical rod panics
161	Cylindrical lock
161L	Cylindrical lock with lever prep.
160	2 3/8" backset, 2 ¼" x 1" face plate cylindrical lock
163	3 3/4" backset cylindrical lock
165	5" backset cylindrical lock
161NS	Cylindrical lock edge prep with non-standard function holes
86ED	Mortise lock or mortise panic edge prep and reinforcing
ANSI	Mortise lock with ANSI front and back prep.
N/REIN	No lock/panic prep.
ML	Mortise lock prep. with function holes (hdwr. reference required)
INT	Interconnected lock prep. (hdwr. reference required)
MP	Mortise panic prep. with function holes (hdwr. reference required)
RP	Rim panic prep. With function holes (hdwr. reference required)
SVRP	Surface vertical rod panic prep. with function holes (hdwr. reference required)
CVRP	Concealed vertical rod panic prep. with function holes (hdwr. reference required)
DL	Deadlock prep. (hdwr. reference required)
SPEC	Special edge cut-out

Nomenclature – Doors

Inactive Door Preps.

ASA	ASA strike
ASANL	ASA no-lip strike
S/ASA	Small ASA strike or T-strike
S/ASANL	Small ASA no-lip strike
DLSTR	Deadlock strike
INTSTR	Small ASA & small ASA no-lip 4" CL to CL to suit interconnected lock preps.
BLK	Blank door reinforcing – for push/pulls, surface rim & vertical rod panics
ELSTR	Electric strike (hdwr. reference required)
OBSTR	Open back strike (hdwr. reference required)
SPEC	Special edge cut-out

Door Flush-bolt Preps. (add as suffix to Inactive Door Preps.)

XFB	ASA flush bolts @ 12" from top & 12" from bottom
XFB@24&12	ASA flush bolts @ 24" from top & 12" from bottom
XFB@36&12	ASA flush bolts @ 36" from top & 12" from bottom
XSB	Surface bolt rein. @ top & bottom
XFBTO	ASA flush bolt @ 12" from top only & surface bolt rein. @ bottom
XFB@24TO	ASA flush bolt @ 24" from top only & surface bolt rein. @ bottom
XFB@36TO	ASA flush bolt @ 36" from top only & surface bolt rein. @ bottom

Door Edge Prep. Options

CW	Continuously Welded edge
CWL	Continuously Welded Lock edge
CWH	Continuously Welded Hinge edge
BNA	Applied Plastic Bull nose edge hinge & lock side
BNAL	Applied Plastic Bull nose lock edge
BNAH	Applied Plastic Bull nose hinge edge
BNI	Integral Steel Bull nose edge hinge & lock side
BNI	Integral Steel Bull nose lock edge
BNIH	Integral Steel Bull nose hinge edge
DE	Tack weld lock edge & install double egress rein. channel
SF	Tack weld & seam fill hinge & lock edge
SFL	Tack weld & seam fill lock edge
SFH	Tack weld & seam fill hinge edge
SQ	Square edge hinge & lock side
SQL	Square edge lock side
SQH	Square edge hinge side
TW	Tack weld hinge & lock edge
TWL	Tack weld lock edge
TWH	Tack weld hinge edge

Nomenclature – Doors

FASTF	Fastened flat bar astragal
ZASTF	Fastened Z astragal
FASTF/ACTIVE	Fastened flat bar astragal on active door
FASTW	Welded flat bar astragal
ZASTW	Welded Z astragal
FASTW/ACTIVE	Welded flat bar astragal on active door

COHC	Concealed overhead closer prep. (hdwr. reference required)
COHH	Concealed overhead holder prep. (hdwr. reference required)
FSTCAP	Welded & filled steel top cap
RABCAP	Rabbeted top cap
SNCAP	Snap in steel top cap
STCAP	Welded steel top cap
VCAP	Vinyl top cap

STBTM	Welded steel bottom cap
FSTBTM	Welded & filled steel bottom cap
CONCBTM	Concealed door bottom prep. (hdwr. reference required)
MORTBTM	Mortised door bottom prep. (hdwr. reference required)

Door Label Options

ULXMYLX.33	Underwriters Laboratories, mylar, 20 min. fire label
ULXMETX.33	Underwriters Laboratories, metal, 20 min. fire label
ULXMYLX.75	Underwriters Laboratories, mylar, ¾ Hr. fire label
ULXMETX.75	Underwriters Laboratories, metal, ¾ Hr. fire label (avail. as ½ Hr. TRR Dr.)
ULXMYLX1.5	Underwriters Laboratories, mylar, 1 ½ Hr. fire label
ULXMETX1.5	Underwriters Laboratories, metal, 1 ½ Hr. fire label (avail. as ½ Hr. TRR Dr.)
ULXMYLX3	Underwriters Laboratories, mylar, 3 Hr. fire label
ULXMETX3	Underwriters Laboratories, metal, 3 Hr. fire label (avail. as ½ Hr. TRR Dr.)
WHIX.33	Warnock Hersey, 20 min. fire label
WHIX.75	Warnock Hersey, ¾ Hr. fire label (avail. as 1 Hr. TRR Dr.)
WHIX1.5	Warnock Hersey, 1 ½ Hr. fire label (avail. as 1 Hr. TRR Dr.)
WHIX3	Warnock Hersey, 3 Hr. fire label
POSPRES	Positive Pressure supplementary label (Warnock Hersey)
SMK	Smoke & draft control supplementary label (Warnock Hersey)
WIND	Windstorm

Nomenclature – Doors

Miscellaneous Door Options

1NR	Narrow rail prep.
1NS	Narrow stile prep. one side
2NR	Narrow rails - 2 or more
2NS	Narrow stile prep. two sides
1PAN	1 Panel
2PAN	2 Panel
2PANAT	2 Panel Arched Top
2PANPAT	2 Panel Plank Embossed Arched Top
6PAN	6 Panel
8PAN	8 Panel
BRCO	Lite bridged cut-out
CDT	Conduit
CNLGLZ	Inner & outer channels, removable glazing stops front & back
CO	Lite cut-out only
DPS	Door position sensor prep. (hdwr. reference required)
ELYNX	Electro Lynx prep.
EPT	Electric power transfer prep. (hdwr. reference required)
G90	G90 front and back skins
HPO	Hinge Prep. Only - no lock edge or closer reinf.
INCNL	Inner channel only glazing
MAGC	Magnetic contact prep. (hdwr. reference required)
MAGFW	Magnetic lock full width closer reinforcing
MSCEC	Manufacturer Standard - Ceco
MSCUR	Manufacturer Standard - Curries
MSPIO	Manufacturer Standard - Pioneer
NSUC	Nonstandard undercut
PRIME,	Prime door (colour reference required, if other than grey)
PAINT,	Paint door (colour reference required)
THGLZ	Thermal glazing

Customer Care Form

Date Issued: _____ Distributor Name: _____

Problem Reported By: _____ Phone Number: _____

Customer PO Number: _____ Sales Order Number: _____

Mark Numbers: _____ Line Numbers: _____

No. of Doors: _____ Number of Frames: _____

Job Name: _____

Job Site Address: _____

Stage of Product

At Distributor Shop	☐ Yes	☐ No	Glass Installed	☐ Yes	☐ No
Installed	☐ Yes	☐ No	Painted	☐ Yes	☐ No
Hardware Installed	☐ Yes	☐ No	Fire Rated Opening	☐ Yes	☐ No
Pictures Provided	☐ Yes	☐ No	Union Labour Required	☐ Yes	☐ No

Detailed Description Of Problem (Summary of Complaint)

_____

_____

_____

Recommended Solution

_____

_____

_____

Estimated Cost for Field or Shop Repair (Detailed Breakdown Required)

_____

_____

_____

_____

M – Series Masonry Frames

General Information

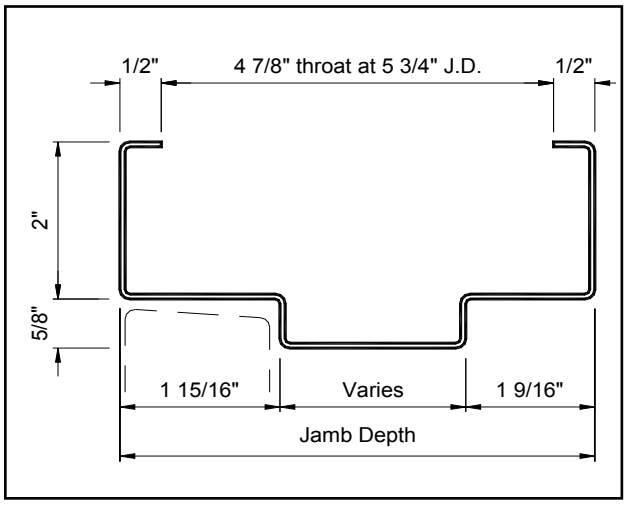

Index

Page	Description
25	General Information
26	18ga Masonry Frames
27	16ga Masonry Frames
28	16ga Metric Masonry Frames
29	14ga Masonry Frames
30 to 34	Custom Options & Extras

Product Features

Material:

All product is manufactured from A40 Paintable Galvanneal Steel.

Hinge Jambs:

10ga High Frequency Hinge Reinforcing in all hinge locations of every Hinge Jamb.

All hinge jambs for 1 3/4" thick doors (unless ordered otherwise) receive 1 1/2pr (2pr on hinge jambs over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

All eligible Hinge Jambs are provided with cULus Embossed fire labels. 12ga material does not get embossment.

Strike Jambs:

ASA Strike Reinforcing comes standard on all Strike Jambs for 1 3/4" thick doors (unless ordered otherwise). This strike reinforcing is a 1 piece strike and dust box manufactured from 16ga steel with tapped holes extruded to a 12ga equivalent.

All Strike & Blank Jambs include bumper (silencer) holes.

Throat Sizes:

5 3/4" Jamb depth jambs and heads have a 4 7/8" throat. All other jamb depths have a throat opening 1" less than the jamb depth.
12ga frames have 5/8" return.

Non-Standard Sizes:

Standard jamb depths are listed in the general information section.

Always use next highest width, height or jamb depth when pricing Non-Standard Sizes, then use add-on for non-standard width, height or jamb depth.

Double Heads are undersized by 1/16" so standard width doors can be used.

Profile:

NOTE: The Fleming frame profile will be supplied unless "Baron Profile" is clearly noted on the purchase order. The "F and the "B" have been removed from the beginning of the description. When the Baron frame profile is required, "BPROF" will be added to the description after the semi-colon. "BPROF" IS AVAILABLE ON MASONRY AND DRYWALL FRAMES ONLY.

M – Series Masonry Frames

Frame Estimating

18ga Masonry Frames

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
SINGLE M-FS-18-4	3'0"	7'0"	121	121	126	126	136	173	213
		8'0"	138	138	144	144	154	193	231
		9'0"	186	186	192	192	202	238	277
		9'10"	227	227	232	232	241	278	318
	4'0"	7'0"	122	122	127	127	137	174	214
		8'0"	139	139	145	145	155	194	232
		9'0"	187	187	193	193	203	239	278
		9'10"	228	228	233	233	242	279	319
DOUBLE M-FD-18-4	6'0"	7'0"	147	147	154	154	165	208	258
		8'0"	173	173	178	178	191	236	284
		9'0"	221	221	226	226	239	280	330
		9'10"	261	261	268	268	277	320	370
	8'0"	7'0"	154	154	162	162	175	216	267
		8'0"	180	180	186	186	201	244	293
		9'0"	228	228	234	234	249	288	339
		9'10"	268	268	276	276	287	328	379
	9'10"	7'0"	196	196	204	204	217	258	308
		8'0"	222	222	228	228	243	286	334
		9'0"	270	270	276	276	291	330	380
		9'10"	310	310	318	318	329	370	420

Component Pricing

18ga Masonry Frame Parts

Type	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
Hinge Jambs	7'0"	59	59	62	62	66	80	97
	8'0"	72	72	74	74	79	94	110
	9'0"	96	96	98	98	103	116	133
	9'10"	116	116	119	119	122	136	153
Strike Jambs	7'0"	47	47	48	48	53	67	84
	8'0"	51	51	54	54	58	73	89
	9'0"	75	75	78	78	82	96	112
	9'10"	96	96	97	97	102	116	133
2" Face Heads	3'0"	15	15	16	16	17	26	32
	4'0"	16	16	17	17	18	27	33
	6'0"	29	29	30	30	33	48	64
	8'0"	36	36	38	38	43	56	73
	9'10"	78	78	80	80	85	98	114

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, welded in floor anchors.
- **Wall anchors must be ordered separately - see accessory section .**
- 2" face jambs and 2" or 4" face heads receive KD corner preps, all other face sizes receive PMO corners unless otherwise requested (an upcharge may apply).
- **For non-standard width, height or jamb depths, use larger size and add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Welded assembly $55
- 4" F head up to 4'0" $14
- 4" F head up to 7'0" $14
- 4" F head up to 10'2" $14
- EWA anchor prep $41
- UL fire anchor prep $41
- Welded Z anchor prep $41
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Except where noted, above prices are PER FRAME.

M – Series Masonry Frames

Frame Estimating

16ga Masonry Frames

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
SINGLE M-FS-16-4	3'0"	7'0"	129	129	133	133	145	181	219
		8'0"	146	146	151	151	163	200	239
		9'0"	195	195	199	199	211	246	283
		9'10"	234	234	240	240	252	286	325
	4'0"	7'0"	130	130	134	134	145	182	221
		8'0"	147	147	152	152	163	201	241
		9'0"	196	196	200	200	211	247	285
		9'10"	235	235	241	241	252	287	327
DOUBLE M-FD-16-4	6'0"	7'0"	157	157	160	160	175	214	265
		8'0"	179	179	186	186	199	242	291
		9'0"	229	229	234	234	247	288	337
		9'10"	269	269	274	274	289	326	379
	8'0"	7'0"	164	164	169	169	184	222	273
		8'0"	186	186	195	195	208	250	299
		9'0"	236	236	243	243	256	296	345
		9'10"	276	276	283	283	298	334	387
	9'10"	7'0"	206	206	210	210	225	265	316
		8'0"	228	228	236	236	249	293	342
		9'0"	278	278	284	284	297	339	388
		9'10"	318	318	324	324	339	377	430

Component Pricing

16ga Masonry Frame Parts

Type	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
Hinge Jambs	7'0"	63	63	64	64	69	82	99
	8'0"	74	74	77	77	81	96	112
	9'0"	99	99	101	101	105	119	135
	9'10"	119	119	121	121	126	138	156
Strike Jambs	7'0"	49	49	51	51	55	70	86
	8'0"	55	55	56	56	61	75	93
	9'0"	79	79	80	80	85	98	114
	9'10"	98	98	101	101	105	119	135
2" Face Heads	3'0"	17	17	18	18	21	29	34
	4'0"	18	18	19	19	21	30	36
	6'0"	31	31	32	32	37	50	67
	8'0"	38	38	41	41	46	58	75
	9'10"	80	80	82	82	87	101	118

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, welded in floor anchors.
- **Wall anchors must be ordered separately - see accessory section .**
- 2" face jambs and 2" or 4" face heads receive KD corner preps, all other face sizes receive PMO corners unless otherwise requested (an upcharge may apply).
- **For non-standard width, height or jamb depths, use larger size and add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Welded assembly $55
- 4" F head up to 4'0" $14
- 4" F head up to 7'0" $14
- 4" F head up to 10'2" $14
- EWA anchor prep $41
- UL fire anchor prep $41
- Welded Z anchor prep $41
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Except where noted, above prices are PER FRAME.

M – Series Masonry Frames

Frame Estimating

16ga Metric Masonry Frames

Type	Nominal Width	Nominal Height	Jamb Depth 121	146	172	197	222	254	330
SINGLE M-FS-16-4	900	2150	129	129	133	133	145	181	219
		2450	146	146	151	151	163	200	239
		2750	195	195	199	199	211	246	283
		3000	234	234	240	240	252	286	325
	1200	2150	130	130	134	134	145	182	221
		2450	147	147	152	152	163	201	241
		2750	196	196	200	200	211	247	285
		3000	235	235	241	241	252	287	327
DOUBLE M-FD-16-4	2150	2150	157	157	160	160	175	214	265
		2450	179	179	186	186	199	242	291
		2750	229	229	234	234	247	288	337
		3000	269	269	274	274	289	326	379
	2450	2150	164	164	169	169	184	222	273
		2450	186	186	195	195	208	250	299
		2750	236	236	243	243	256	296	345
		3000	276	276	283	283	298	334	387
	3000	2150	206	206	210	210	225	265	316
		2450	228	228	236	236	249	293	342
		2750	278	278	284	284	297	339	388
		3000	318	318	324	324	339	377	430

Component Pricing

16ga Metric Masonry Frame Parts

Type	Nominal Height	Jamb Depth 121	146	172	197	222	254	330
Hinge Jambs	2150	63	63	64	64	69	82	99
	2450	74	74	77	77	81	96	112
	2750	99	99	101	101	105	119	135
	3000	119	119	121	121	126	138	156
Strike Jambs	2150	49	49	51	51	55	70	86
	2450	55	55	56	56	61	75	93
	2750	79	79	80	80	85	98	114
	3000	98	98	101	101	105	119	135
2" Face Heads	900	17	17	18	18	21	29	34
	1200	18	18	19	19	21	30	36
	1800	31	31	32	32	37	50	67
	2450	38	38	41	41	46	58	75
	3000	80	80	82	82	87	101	118

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, welded in floor anchors.
- **Wall anchors must be ordered separately - see accessory section .**
- 2" face jambs and 2" or 4" face heads receive KD corner preps, all other face sizes receive PMO corners unless otherwise requested (an upcharge may apply).
- **For non-standard width, height or jamb depths, use larger size and add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Welded assembly $55
- 4" F head up to 4'0" $14
- 4" F head up to 7'0" $14
- 4" F head up to 10'2" $14
- EWA anchor prep $41
- UL fire anchor prep $41
- Welded Z anchor prep $41
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Except where noted, above prices are PER FRAME.

M – Series Masonry Frames

Frame Estimating

14ga Masonry Frames

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
SINGLE M-FS-14-4	3'0"	7'0"	180	180	184	184	196	232	270
		8'0"	197	197	202	202	214	251	290
		9'0"	246	246	250	250	262	297	334
		9'10"	285	285	291	291	303	337	376
	4'0"	7'0"	181	181	185	185	196	233	272
		8'0"	198	198	203	203	214	252	292
		9'0"	247	247	251	251	262	298	336
		9'10"	286	286	292	292	303	338	378
DOUBLE M-FD-14-4	6'0"	7'0"	208	208	211	211	226	265	316
		8'0"	230	230	237	237	250	293	342
		9'0"	280	280	285	285	298	339	388
		9'10"	320	320	325	325	340	377	430
	8'0"	7'0"	215	215	220	220	235	273	324
		8'0"	237	237	246	246	259	301	350
		9'0"	287	287	294	294	307	347	396
		9'10"	327	327	334	334	349	385	438
	9'10"	7'0"	257	257	261	261	276	316	367
		8'0"	279	279	287	287	300	344	393
		9'0"	329	329	335	335	348	390	439
		9'10"	369	369	375	375	390	428	481

Component Pricing

14ga Masonry Frame Parts

Type	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
Hinge Jambs	7'0"	80	80	81	81	86	99	116
	8'0"	91	91	94	94	98	113	129
	9'0"	116	116	118	118	122	136	152
	9'10"	136	136	138	138	143	155	173
Strike Jambs	7'0"	66	66	68	68	72	87	103
	8'0"	72	72	73	73	78	92	110
	9'0"	96	96	97	97	102	115	131
	9'10"	115	115	118	118	122	136	152
2" Face Heads	3'0"	34	34	35	35	38	46	51
	4'0"	35	35	36	36	38	47	53
	6'0"	48	48	49	49	54	67	84
	8'0"	55	55	58	58	63	75	92
	9'10"	97	97	99	99	104	118	135

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, welded in floor anchors.
- **Wall anchors must be ordered separately - see accessory section .**
- 2" face jambs and 2" or 4" face heads receive KD corner preps, all other face sizes receive PMO corners unless otherwise requested (an upcharge may apply).
- **For non-standard width, height or jamb depths, use larger size and add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Welded assembly $55
- 4" F head up to 4'0" $14
- 4" F head up to 7'0" $14
- 4" F head up to 10'2" $14
- EWA anchor prep $41
- UL fire anchor prep $41
- Welded Z anchor prep $41
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Except where noted, above prices are PER FRAME.

Frame Options

1. Hinge Jamb Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per part	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity (IE: 4 hinge preps on a 7'0" jamb or a dutch door hinge jamb)	Per hinge	$25
1c	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous hinge - reinforcing bar/strip only	Per part	$66
1d	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per part	$66
1e	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped		$171
1f	**Mortised Pivots** (M/PIV)	Top & bottom pivot (drilled and tapped) Intermediate pivots (drilled and tapped)	Per part Per part	$66 $40
1g	**Pocket Pivots** (P/PIV)	Prep for 1 1/2pr. pocket pivots (drilled and tapped)	Per part	$394
1h	**SOSS Hinges** (SOSS)	Prep for 1 1/2pr. SOSS hinges	Per part	$329
1i	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1j	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79

2. Strike Jamb Hardware

2a	**Surface Strike** (SURFSTR)	Reinforcing for surface panic strike	Per prep	$18
2b	**Deadlock Strike** (+ASA, +ASANL, +S/ASA, +S/ASANL)	1 1/4" X 4 7/8" with or without lip or 1 1/8" X 2 3/4" with or without lip	Per prep	$14
2c	**Interconnected Lock Strike** (INTSTR)	1 1/8" X 2 3/4" with lip and 1 1/8" X 2 3/4" without lip, 4" CL to CL spacing to suit interconnected lock strikes (ie: Yale 4800LN)	Per prep	$23
2d	**Electric Strike** (ELSTR)	Electric, open back or special strike prep	Per prep	$86
2e	**Blank Strike Jamb** (BLK)	Used when ordering FRAMES that require a blank jamb instead of the Fleming standard ASA strike prep		N/C
2f	**No Silencers** (N/S)	Used when no silencer/bumper holes are required		N/C

M – Series Masonry Frames

Frame Options

3. Head Hardware

3a	**Surface Closer Rein** (CRRA, CRPA, CRRAPUSH)	Surface closer reinforcing - specify regular arm, parallel arm or regular arm on push side. For single heads, specify handing	Per closer	$18
3b	**Surface Holder Rein** (SURH)	Surface holder reinforcing. For single heads, specify handing	Per holder	$18
3c	**Concealed Overhead Closer** (COHC)	Concealed or semi-concealed overhead closer prep	Per closer	$131
3d	**Concealed Overhead Holder/Stop** (COHH, COHS)	Concealed overhead holder/stop prep	Per holder	$26
3e	**Mag Lock Rein** (SFFW)	Surface soffit reinforcing full width for magnetic locks	Per lock	$33
3f	**Flush Bolt Strike** (RFB)	Reversible prep in head for flush bolt strikes		$22
3g	**Mortised Strike or Latch Prep** (MSTR/S, MSTR/D)	Mortised strike or latch prep	Per prep	$27
3h	**Surface Strike** (SURFSTR)	Reinforcing for surface strike	Per prep	$18
3i	**DPS** (DPS)	Door position sensor prep (DPS size must be noted)	Per prep	$21
3j	**12ga Angle**	12ga angle reinforcing	Per foot	$12
3k	**Roller latch** (RL)	Roller Latch Prep	Per Prep	$27

4. Welding and Anchors

4a	**Welded Assembly** (FW)	Back of face welded assembly - includes shipping bars but does **NOT** include anchors	Per frame	$55
4b	**Profile Welded Assembly** (PW)	Profile welded assembly - includes shipping bars but does **NOT** include anchors	Per frame	$114
4c	**E.W.A.** (EWA1/4, EWA3/8)	Punch & dimple for Existing Wall Anchor - 1/4" or 3/8" dia. and butterfly guide **(3/8" dia. standard unless otherwise noted, bolts & shields NOT included)**	Per frame Per jamb	$41 $21
4d	**E.W.A.** (pipe and strap)	Pipe and strap prep	Per frame Per jamb	$59 $30
4e	**E.W.A. Punch & Dimple Only** (EWA1/4PDO, EWA3/8PDO)	Punch & dimple ONLY Existing Wall Anchor - 1/4" or 3/8" dia. **(3/8" dia. standard unless otherwise noted, bolts & shields NOT included)**	Per frame Per jamb	$26 $14
4f	**Z Anchors** (ZANC)	Welded in Z anchors (3 per jamb)	Per frame Per jamb	$41 $21
4g	**Fire Anchors** (FANC)	Welded in UL fire anchors (3 per jamb)	Per frame Per jamb	$41 $21
4h	**Welded Wood Stud Anchors** (WANC)	Welded in wood stud anchors (3 per jamb)	Per frame Per jamb	$41 $21
4i	**No Floor Anchors** (NBA)	No welded in floor anchors required		N/C

Frame Options

5. Width, Height or Jamb Depth

5a	**Non-Std Width**	Non standard width	per piece	$3
5b	**Non-Std Height**	Non standard height	per piece	$3
5c	**Non-Std JD**	Non standard jamb depth	per piece	$3
5d	**Full Width Head** (FSHD)	Full width double head (no undersizing)		N/C

(add to the next highest size or jamb depth)

6. Corner Miter Conditions

6a	**Non-Std. KD** (NSKD)	If KD corner clips are required where the jambs are other then a 2" face and the head is other then 2" or 4" face	Per part Per frame	$2 $7
6b	**Punch Miter Only** (PMO)	If a punch miter corner is required in lieu of KD corner on product where KD corner would be standard		N/C

7. Material

7a	**G90 16ga** (G90)	Custom frame parts manufactured from 16ga G90 Galvanized steel (ADD to 16ga pricing)	Per 4' part Per 7' part Per 10' part	$15 $15 $15
7b	**14ga**	Custom frame parts manufactured from 14ga A40 Paintable Galvanneal steel	See Page 31	
7c	**G90 14ga** (G90)	Custom frame parts manufactured from 14ga G90 Galvanized steel (ADD to 16ga pricing)	Per 4' part Per 7' part Per 10' part	Contact Factory
7d	**12ga Punch Miter Only**	Custom frame parts manufactured from 12ga A40 Paintable Galvanneal steel (ADD to 16ga pricing) (Minimum/Standard 5/8" backbend and 3/4" high stop)	Per 4' part Per 7' part Per 10' part	Contact Factory
7e	**G90 12ga Punch Miter Only** (G90)	Custom frame parts manufactured from 12ga G90 Galvanized steel (ADD to 16ga pricing) (Minimum/Standard 5/8" backbend and 3/4" high stop)	Per 4' part Per 7' part Per 10' part	Contact Factory

M – Series Masonry Frames

Frame Options

8. Profile

8a	**Drywall Return** (DW)	Drywall or second return	Per part	$2
8b	**Equal/Non-Std. Rabbet** (ER, NSORAB)	Both rabbets with same dimension or other than standard	Per part	$7
8c	**Non-Std stop height** (NSSTPH)	Stop height other then standard	Per part	$7
8d	**Non-Std return** (NSRET)	Return up to 1”	Per part	$21
8e	**Single Rabbet** (SR)	One rabbet only	Per part	$7
8f	**Communicating Frame** (COMM)	Hinge jamb provided with extra 1 1/2pr. hinges Strike jamb provided with extra ASA strike	Per frame Per HJ Per SJ Per HD	$46 $29 $9 $7
8g	**Shadowline** **Punch Miter Only**	1/2” to 1” Shadowline Over 1” to 4” Shadowline	Per part Per part	$12 $24
8h	**Hospital Profile Frame** (SLPSTP)	Sloped stop frame	Per part Per frame	$47 $138
8i	**Sanitary Base** (SANI,4, SANI,6) (Hospital Stop)	4” to 6” high sanitary base prep	Per part	$87
8j	**Contra-Swing Head**	Head for a Contra-Swing frame	Per part	$74

Frame Options

9. Misc

9a	**Cased open**	For cased open frames price 2 strikes/jambs and one head		
9b	**Electrical box**	Electrical/junction box installed	Per prep	$47
9c	**Conduit** (CDT,H, CDT,S, CDT,HS, CDT,HH, CDT,H@LH, CDT, H@RH)	Electrical box and 3/4" conduit (available on welded frames only)	1 side 2 sides	$263 $526
9d	**Welded Mullion**	Welded Mullion (add to welded double frame, mullion not included)	Per prep	$131
9e	**E-Lynx** (ELYNX,H, ELYNX,S, ELYNX,HS, ELYNX,HH, ELYNX,H@LH, ELYNX,H@RH)	Electrical box, 3/4" conduit and E-Lynx wire (available on welded frames only)	1 side 2 sides	$329 $658
9f	**Rescue hardware**	Pivot prep Special strike	Per prep Per prep	$66 $93
9g	**Factory priming** (PRIME, _____)	Factory priming (Minimum 25 frames/order) (A40 material only, priming of the inside throat not included)	Per part	$21

	FACE DIMENSION		
	UP TO 4'0"	UP TO 7'0"	UP TO 10'2"
<2"	5	5	5
OVER 2-4"	11	11	11
OVER 4-6"	15	15	15
OVER 6-8"	Contact factory		
OVER 8-10"			
OVER 10-12"			
OVER 12"			

DW – Series Drywall Frames

General Information

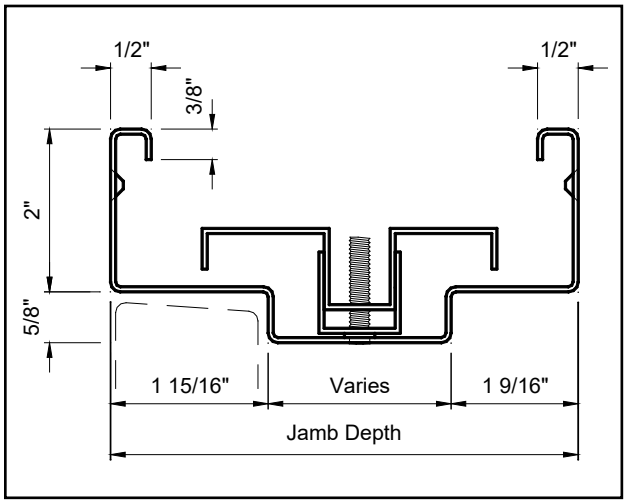

Index

Page	Description
35	General Information
36	18ga Drywall Frames for 1 3/4" Thick Doors
37	18ga Drywall Frames for 1 3/8" Thick Doors
38	16ga Drywall Frames
39	16ga Drywall Cased Open Frames
40	18ga Slip On Frames
41 to 43	Custom Options & Extras

Product Features

Material:

All product is manufactured from A40 Paintable Galvanneal Steel.

Hinge Jambs:

10ga High Frequency Hinge Reinforcing in all hinge locations of every Hinge Jamb.

All hinge jambs for 1 3/4" thick doors (unless ordered otherwise) receive 1 1/2pr (2pr on hinge jambs over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

All eligible Hinge Jambs are provided with cULus Embossed fire labels.

Strike Jambs:

ASA Strike Reinforcing comes standard on all Strike Jambs for 1 3/4" thick doors (unless ordered otherwise). This strike reinforcing is a 1 piece strike and dust box manufactured from 16ga steel with tapped holes extruded to a 12ga equivalent.

All Strike & Blank Jambs include bumper (silencer) holes.

Anchoring:

A Drywall Adjustable Tension anchor comes standard in all jambs. Each jamb is also dimpled on the face at the bottom for screw fixing (#8 drywall screw) to drywall or stud.

When ordering Baron drywall frames, strap anchors at the base are supplied in lieu of dimple holes

Non-Standard Sizes:

Standard jamb depths are listed in the general information section.

Always use next highest width, height or jamb depth up when pricing Non-Standard Sizes, then use add-on for non-standard width, height or jamb depth.

Double Heads are undersized by 1/16" so standard width doors can be used.

Profile:

NOTE: The Fleming frame profile will be supplied unless "Baron Profile" is clearly noted on the purchase order. The "F and the "B" have been removed from the beginning of the description. When the Baron frame profile is required, "BPROF" will be added to the description after the semi-colon. "BPROF" IS AVAILABLE ON MASONRY AND DRYWALL FRAMES ONLY.

DW – Series Drywall Frames

Frame Estimating

18ga Drywall Frames for 1 3/4" Thick Doors

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 7/8"	6 1/4"	7 1/8"	7 3/4"	10"
SINGLE DW-FS-18-4	3'0"	7'0"	130	135	150	150	150	173
		8'0"	146	153	170	170	170	202
		9'0"	176	184	201	201	201	229
		9'10"	202	209	227	227	227	256
	4'0"	7'0"	130	136	151	151	151	174
		8'0"	146	154	171	171	171	203
		9'0"	176	185	202	202	202	230
		9'10"	202	210	228	228	228	257
DOUBLE DW-FD-18-4	6'0"	7'0"	157	165	185	185	185	211
		8'0"	179	189	211	211	211	249
		9'0"	209	221	243	243	243	275
		9'10"	237	245	267	267	267	305
	8'0"	7'0"	166	175	194	194	194	222
		8'0"	188	199	220	220	220	260
		9'0"	218	231	252	252	252	286
		9'10"	246	255	276	276	276	316
	9'10"	7'0"	179	188	207	207	207	237
		8'0"	201	212	233	233	233	275
		9'0"	231	244	265	265	265	301
		9'10"	259	268	289	289	289	331

Component Pricing

18ga Drywall Frame Parts

Type	Nominal Height	Jamb Depth 4 3/4"	5 7/8"	6 1/4"	7 1/8"	7 3/4"	10"
Hinge Jambs	7'0"	63	66	72	72	72	80
	8'0"	74	78	85	85	85	99
	9'0"	89	94	101	101	101	112
	9'10"	103	106	113	113	113	127
Strike Jambs	7'0"	49	51	57	57	57	69
	8'0"	54	57	64	64	64	79
	9'0"	69	72	79	79	79	93
	9'10"	81	85	93	93	93	105
2" Face Heads	3'0"	18	18	21	21	21	24
	4'0"	18	19	22	22	22	25
	6'0"	31	33	41	41	41	51
	8'0"	40	43	50	50	50	62
	9'10"	53	56	63	63	63	77

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- **Frame Prices** include 2 knock down Jambs, 1 knock down Head, Drywall tension anchors and Dimples at bottom of jamb.
- **Jamb Prices** include Drywall tension anchor and Dimples at bottom of jamb.
- KD corner is only available with 2" face jambs with a 2" face head.
- **For non-standard width, height or jamb depth, use larger size and add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Jamb Depths over 10" contact factory.

Except where noted, above prices are PER FRAME.

DW – Series Drywall Frames

Frame Estimating

18ga Drywall Frames for 1 3/8" Thick Doors

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 7/8"	6 1/4"	7 1/8"	7 3/4"	10"
SINGLE DW-FS-18-8	3'0"	7'0"	164	168	185	185	185	212
		8'0"	180	189	208	208	208	248
		9'0"	215	224	245	245	245	276
		9'10"	246	254	273	273	273	307
	4'0"	7'0"	164	169	186	186	186	213
		8'0"	180	190	209	209	209	249
		9'0"	215	225	246	246	246	277
		9'10"	246	255	274	274	274	308
DOUBLE DW-FD-18-8	6'0"	7'0"	195	201	223	223	223	258
		8'0"	217	229	253	253	253	302
		9'0"	255	265	291	291	291	330
		9'10"	285	295	319	319	319	362
	8'0"	7'0"	205	213	235	235	235	271
		8'0"	227	241	265	265	265	315
		9'0"	265	277	303	303	303	343
		9'10"	295	307	331	331	331	375
	9'10"	7'0"	220	228	250	250	250	287
		8'0"	242	256	280	280	280	331
		9'0"	280	292	318	318	318	359
		9'10"	310	322	346	346	346	391

Component Pricing

18ga Drywall Frame Parts for 1 3/8" Thick Doors

Type	Nominal Height	Jamb Depth 4 3/4"	5 7/8"	6 1/4"	7 1/8"	7 3/4"	10"
Hinge Jambs	7'0"	77	79	86	86	86	97
	8'0"	88	93	101	101	101	119
	9'0"	107	111	120	120	120	133
	9'10"	122	126	134	134	134	149
Strike Jambs	7'0"	61	63	70	70	70	82
	8'0"	66	70	78	78	78	96
	9'0"	82	87	96	96	96	110
	9'10"	98	102	110	110	110	125
2" Face Heads	3'0"	26	26	29	29	29	33
	4'0"	26	27	30	30	30	34
	6'0"	41	43	51	51	51	64
	8'0"	51	55	63	63	63	77
	9'10"	66	70	78	78	78	93

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- **Frame Prices** include 2 knock down Jambs, 1 knock down Head, Drywall tension anchors and Dimples at bottom of jamb.
- **Hardware Preps** include 3 1/2" hinge prep (square corner), small ASA
  -2 hinge preps for up to 6'8".
- **Jamb Prices** include Drywall tension anchor and Dimples at bottom of jamb.
- KD corner is only available with 2" face jambs with a 2" face head.
- **For non-standard width, height or jamb depth, use larger size and add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Jamb Depths over 10" contact factory.

Except where noted, above prices are PER FRAME.

DW – Series Drywall Frames

Frame Estimating

16ga Drywall Frames

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 7/8"	6 1/4"	7 1/8"	7 3/4"	10"
SINGLE DW-FS-16-4	3'0"	7'0"	135	142	158	158	158	184
		8'0"	152	159	177	177	177	211
		9 0"	200	210	238	238	238	273
		9'10"	241	249	275	275	275	312
	4'0"	7'0"	136	144	158	158	158	185
		8'0"	153	161	177	177	177	212
		9'0"	201	212	238	238	238	274
		9'10"	242	251	275	275	275	313
DOUBLE DW-FD-16-4	6'0"	7'0"	164	172	191	191	191	227
		8'0"	188	196	217	217	217	261
		9'0"	236	246	279	279	279	323
		9'10"	276	286	315	315	315	361
	8'0"	7'0"	172	181	201	201	201	238
		8'0"	196	205	227	227	227	272
		9'0"	244	255	289	289	289	334
		9'10"	284	295	325	325	325	372
	9'10"	7'0"	213	224	247	247	247	287
		8'0"	237	248	273	273	273	321
		9'0"	285	298	335	335	335	383
		9'10"	325	338	371	371	371	421

Component Pricing

16ga Drywall Frame Parts

Type	Nominal Height	Jamb Depth 4 3/4"	5 7/8"	6 1/4"	7 1/8"	7 3/4"	10"
Hinge Jambs	7'0"	66	69	75	75	75	87
	8'0"	78	81	88	88	88	104
	9'0"	102	106	119	119	119	135
	9'10"	122	126	137	137	137	154
Strike Jambs	7'0"	51	54	61	61	61	72
	8'0"	56	59	67	67	67	82
	9'0"	80	85	97	97	97	113
	9'10"	101	104	116	116	116	133
2" Face Heads	3'0"	18	19	22	22	22	25
	4'0"	19	21	22	22	22	26
	6'0"	32	34	41	41	41	53
	8'0"	40	43	51	51	51	64
	9'10"	81	86	97	97	97	113

NOTES:

- **Use the next highest size (JD, Width or Height) for pricing.**
- **Frame price includes** 2 knock down Jambs, 1 knock down Head, Drywall tension anchors and Dimples at bottom of jamb
- **Jamb Prices** include Drywall tension anchor and Dimples at bottom of jamb.
- KD corner is only available with 2" face jambs with a 2" face head.
- **For non-standard width, height or jamb depths, use larger size and add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Jamb Depths over 10" contact factory.

Except where noted, above prices are PER FRAME.

DW – Series Drywall Frames

Frame Estimating

16ga Drywall Cased Open Frames

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 7/8"	6 1/4"	7 1/8"	7 3/4"	10"
SINGLE CODW-FS-16-4	3'0"	7'0"	100	107	124	124	124	149
		8'0"	110	117	136	136	136	169
		9 0"	158	169	196	196	196	231
		9'10"	200	207	234	234	234	271
	4'0"	7'0"	101	109	124	124	124	150
		8'0"	111	119	136	136	136	170
		9 0"	159	171	196	196	196	232
		9'10"	201	209	234	234	234	272
DOUBLE CODW-FD-16-4	6'0"	7'0"	114	122	143	143	143	177
		8'0"	124	132	155	155	155	197
		9 0"	172	184	215	215	215	259
		9'10"	214	222	253	253	253	299
	8'0"	7'0"	122	131	153	153	153	188
		8'0"	132	141	165	165	165	208
		9 0"	180	193	225	225	225	270
		9'10"	222	231	263	263	263	310
	9'10"	7'0"	163	174	199	199	199	237
		8'0"	173	184	211	211	211	257
		9 0"	221	236	271	271	271	319
		9'10"	263	274	309	309	309	359

Component Pricing

16ga Drywall Cased Open Frames

Type	Nominal Height	Jamb Depth 4 3/4"	5 7/8"	6 1/4"	7 1/8"	7 3/4"	10"
JAMB CODW-BJ-16-4	7'0"	41	44	51	51	51	62
	8'0"	46	49	57	57	57	72
	9'0"	70	75	87	87	87	103
	9'10"	91	94	106	106	106	123
HEAD CODW-HD-16-4	3'0"	18	19	22	22	22	25
	4'0"	19	21	22	22	22	26
	6'0"	32	34	41	41	41	53
	8'0"	40	43	51	51	51	64
	9'10"	81	86	97	97	97	113

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head Drywall tension anchors and Dimples at bottom of jamb.
- **Price reflects** No Hinge (NH) and No Strike (BLK) as options in the frame description.
- KD corner is only available with 2" face jambs with a 2" face head.
- **For non-standard width, height or jamb depths, use larger size and add-on below.**
- **Fire Labeling NOT Permitted.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Jamb Depths over 10" contact factory.

Except where noted, above prices are PER FRAME.

DW – Series Drywall Frames

Frame Estimating

18ga Slip On Frames

Type	Nominal Width	Nominal Height	Throat Dimension 3 1/2"	3 3/4"	4 5/8"	4 7/8"	5 1/4"	6 1/8"	6 3/4"	7 1/4"
SINGLE	3'0"	7'0"	114	114	124	124	124	137	137	137
		8'0"	131	131	141	141	141	156	156	156
	4'0"	7'0"	115	115	124	124	124	137	137	137
		8'0"	132	132	141	141	141	156	156	156
DOUBLE	6'0"	7'0"	143	143	158	158	158	170	170	170
		8'0"	167	167	182	182	182	196	196	196

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Except where noted, above prices are PER FRAME.

Component Pricing

18ga Slip on Components

Type	Nominal Height	Throat Dimension 3 1/2"	3 3/4"	4 5/8"	4 7/8"	5 1/4"	6 1/8"	6 3/4"	7 1/4"
Hinge Jambs	7'0"	59	59	62	62	62	68	68	68
	8'0"	71	71	74	74	74	81	81	81
Strike Jambs	7'0"	44	44	47	47	47	54	54	54
	8'0"	49	49	52	52	52	60	60	60
2" Face Heads	3'0"	11	11	15	15	15	15	15	15
	4'0"	12	12	15	15	15	15	15	15
	6'0"	25	25	34	34	34	34	34	34

DW – Series Drywall Frames

Frame Options

1. Hinge Jamb Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per part	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity (IE: 4 hinge preps on a 7'0" jamb or a dutch door hinge jamb)	Per hinge	$25
1c	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous hinge - reinforcing bar/strip only	Per part	$66
1d	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per part	$66
1e	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped		$171
1f	**Mortised Pivots** (M/PIV)	Top & Bottom pivot (drilled and tapped) Intermediate pivots (drilled and tapped)	Per part Per part	$66 $40
1g	**Pocket Pivots** (P/PIV)	Prep for 1 1/2" pr. pocket pivots (drilled and tapped)	Per part	$394
1h	**SOSS Hinges** (SOSS)	Prep for 1 1/2" pr. SOSS hinges	Per part	$329
1i	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1k	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79

2. Strike Jamb Hardware

2a	**Surface Strike** (SURFSTR)	Reinforcing for surface panic strike	Per prep	$18
2b	**Deadlock Strike** (+ASA, +ASANL, +S/ASA, +S/ASANL)	1 1/4" x 4 7/8" with or without lip or 1 1/8" x 2 3/4" with or without lip	Per prep	$14
2c	**Interconnected Lock Strike** (INTSTR)	1 1/8" x 2 3/4" with lip and 1 1/8" x 2 3/4" without lip, 4" CL to CL spacing to suit interconnected lock strikes (ie: Yale 4800LN)	Per prep	$23
2d	**Electric Strike** (ELSTR)	Electric, open back or special strike prep	Per prep	$86
2e	**Blank Strike Jamb** (BLK)	Used when ordering FRAMES that require a blank jamb instead of the Fleming standard ASA strike prep		N/C
2f	**No Silencers** (N/S)	Used when no silencer/bumper holes are required		N/C

Frame Options

3. Head Hardware

3a	**Surface Closer Rein** (CRRA, CRPA, CRRAPUSH)	Surface closer reinforcing - specify regular arm, parallel arm or regular arm on push side. For single heads, specify handing	Per closer	$18
3b	**Surface Holder Rein** (SURH)	Surface holder reinforcing. For single heads, specify handing	Per holder	$18
3c	**Concealed Overhead Closer** (COHC)	Concealed or semi-concealed overhead closer prep	Per closer	$131
3d	**Concealed Overhead Holder/Stop** (COHH) (COHS)	Concealed overhead holder/stop prep	Per holder	$26
3e	**Mag Lock Rein** (SFFW)	Surface soffit reinforcing full width for magnetic locks	Per lock	$33
3f	**Flush Bolt Strike** (RFB)	Reversible prep in head for flush bolt strikes		$22
3g	**Mortised Strike or Latch Prep** (MSTR/S, MSTR/D)	Mortised strike or latch prep	Per prep	$27
3h	**Surface Strike** (SURFSTR)	Reinforcing for surface strike	Per prep	$18
3i	**DPS** (DPS)	Door position sensor prep (DPS size must be noted)	Per Prep	$21
3j	**12ga Angle**	12ga angle reinforcing	Per foot	$12
3k	**Roller latch** (RL)	Roller Latch Prep	Per Prep	$27

4. Width, Height or Jamb Depth

4a	**Non-Std Width**	Non standard width	per piece	$3
4b	**Non-Std Height**	Non standard height	per piece	$3
4c	**Non-Std JD**	Non standard jamb depth	per piece	$3
4d	**Full Width Head** (FSHD)	Full width double head (no undersizing)		N/C

(add to the next highest size or jamb depth)

5. Material

5a	**14ga**	Custom frame parts manufactured from 14ga A40 Paintable Galvanneal steel (Add to 16ga price)	Per 4' part Per 7' part Per 10' part	$14 $14 $14

DW – Series Drywall Frames

Frame Options

6. Profile

6a	**Equal/Non-Std. Rabbet** (ER, NSORAB)	Both rabbets with same dimension or other than standard	Per part	$7
6b	**Non-Std stop height** (NSSTPH)	Stop height other then standard	Per part	$7
6c	**Non-Std return** (NSRET)	Return up to 1"	Per part	$21
6d	**Single Rabbet** (SR)	One rabbet only	Per part	$7
6e	**Communicating Frame** (COMM)	Hinge jamb provided with extra 1 1/2 pr. hinges Strike jamb provided with extra ASA strike	Per frame Per HJ Per SJ Per HD	$46 $29 $9 $7
6f	**Shadowline Punch Miter Only**	1/2" to 1" Shadowline Over 1" to 4" Shadowline	Per part Per part	$12 $24
6g	**Hospital Profile Frame** (SLPSTP)	Sloped stop frame	Per part Per frame	$47 $138
6h	**Sanitary Base** (SANI,4, SANI,6)	4" to 6" high sanitary base prep	Per part	$87
6i	**Contra-Swing Head**	Head for a Contra-Swing frame	Per part	$74
6j	**Pocket Door Frame**	Pocket Door frame	Per Frame	$105
6l	**Strap Anchor** (STRAP)	Strap anchor at the base of the frame and the middle of the frame (No dimpled hole)	Per frame	N/C

7. Misc

7a	**Electrical box**	Electrical/junction box installed	Per prep	$47
7b	**Rescue hardware**	Pivot prep Special strike	Per prep Per prep	$66 $93
7c	**Factory priming** (PRIME, _____)	Factory priming (Minimum 25 frames/order) (A40 material only, priming of the inside throat not included)	Per part	$21

TB – Series Thermal Frames

General Information

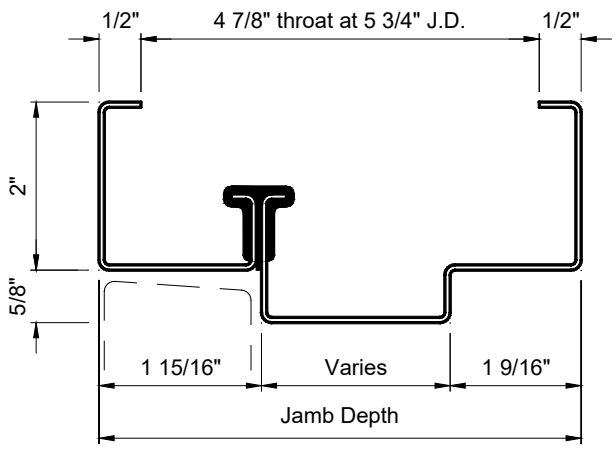

Index

Page	Description
45	General Information
46	16ga Thermal Break Frames
47 to 50	Custom Options & Extras

Product Features

Material:

All product is manufactured from A40 Paintable Galvanneal Steel.

Hinge Jambs:

10ga High Frequency Hinge Reinforcing in all hinge locations of every Hinge Jamb.

All hinge jambs for 1 3/4" thick doors (unless ordered otherwise) receive 1 1/2pr (2pr on hinge jambs over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

Strike Jambs:

ASA Strike Reinforcing comes standard on all Strike Jambs for 1 3/4" thick doors (unless ordered otherwise). This strike reinforcing is manufactured from 16ga steel with tapped holes extruded to a 12ga equivalent.

All Strike & Blank Jambs include bumper (silencer) holes.

Throat Sizes:

5 3/4" Jamb Depth jambs and heads have a 4 7/8" throat. All other jamb depths have a throat opening 1" less than the jamb depth.

Thermal Construction:

Thermal construction is only available in 16ga and 14ga.

Non-Standard Sizes:

Standard jamb depths are listed in the general information section.

Always use next highest width, height or jamb depth when pricing Non-Standard Sizes, then use add-on for non-standard width, height or jamb depth.

Double Heads are undersized by 1/16" so standard width doors can be used.

Profile:

The Thermally broken frame is supplied as the Fleming profile as a standard. Any changes to this profile will receive an upcharge.

TB – Series Thermal Frames

Frame Estimating

16ga Thermal Break Frames

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"
SINGLE TB-FS-16-4	3'0"	7'0"	313	313	316	337	355	381
		8'0"	329	329	334	356	372	401
		9'0"	380	380	385	406	425	446
		9'10"	419	419	424	444	465	484
	4'0"	7'0"	314	314	318	337	356	382
		8'0"	330	330	336	356	373	402
		9'0"	381	381	387	406	426	447
		9'10"	420	420	426	444	466	485
DOUBLE TB-FD-16-4	6'0"	7'0"	360	360	363	384	403	431
		8'0"	384	384	387	410	427	457
		9'0"	434	434	439	460	481	503
		9'10"	474	474	477	498	521	541
	8'0"	7'0"	368	368	372	393	412	438
		8'0"	392	392	396	419	436	464
		9'0"	442	442	448	469	490	510
		9'10"	482	482	486	507	530	548
	9'10"	7'0"	382	382	386	406	426	451
		8'0"	406	406	410	432	450	477
		9'0"	456	456	462	482	504	523
		9'10"	496	496	500	520	544	561

Component Pricing

16ga Thermal Break Frame Parts

Type	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"
Hinge Jambs	7'0"	152	152	153	160	166	176
	8'0"	164	164	165	173	178	189
	9'0"	189	189	191	198	205	212
	9'10"	209	209	210	217	225	231
Strike Jambs	7'0"	119	119	120	127	133	142
	8'0"	123	123	126	133	138	149
	9'0"	149	149	151	158	164	171
	9'10"	168	168	171	177	184	190
2" Face Heads	3'0"	42	42	43	50	56	63
	4'0"	43	43	45	50	57	64
	6'0"	56	56	57	64	71	79
	8'0"	64	64	66	73	80	86
	9'10"	78	78	80	86	94	99

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, welded in floor anchors.
- Metal is separated by a PVC spline.
- All Thermal Material meets or exceeds the standard for Insulated Frames CGSB 82-GP-5M
- 2" face jambs and 2" or 4" face heads receive KD corner preps, all other face sizes receive PMO corners unless otherwise requested (an upcharge may apply).
- **For non-standard width, height or jamb depths, use larger size and add-on below.**
- **Wall anchors must be ordered separately – see accessory section.**
- **Fire labeling NOT permitted**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Welded assembly $55
- 4" F head up to 4'0" $14
- 4" F head up to 7'0" $14
- 4" F head up to 10'2" $14
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18

Except where noted, above prices are PER FRAME.

TB – Series Thermal Frames

Frame Options

1. Hinge Jamb Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per part	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity (IE: 4 hinge preps on a 7'0" jamb or a dutch door hinge jamb)	Per hinge	$25
1d	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous hinge - reinforcing bar/strip only	Per part	$66
1e	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per part	$66
1f	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped		$171
1g	**Mortised Pivots** (M/PIV)	Top & Bottom pivot (drilled and tapped) Intermediate pivots (drilled and tapped)	Per part Per part	$66 $40
1h	**SOSS Hinges** (SOSS)	Prep for 1 1/2pr. SOSS hinges	Per part	$329
1i	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1j	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79

2. Strike Jamb Hardware

2a	**Surface Strike** (SURFSTR)	Reinforcing for surface panic strike	Per prep	$18
2b	**Deadlock Strike** (+ASA, +ASANL, +S/ASA, +S/ASANL)	1 1/4" X 4 7/8" with or without lip or 1 1/8" X 2 3/4" with or without lip	Per prep	$14
2c	**Interconnected Lock Strike** (INTSTR)	1 1/8" X 2 3/4" with lip and 1 1/8" X 2 3/4" without lip, 4" CL to CL spacing to suit interconnected lock strikes (ie: Yale 4800LN)	Per prep	$23
2d	**Electric Strike** (ELSTR)	Electric, open back or special strike prep	Per prep	$86
2e	**Blank Strike Jamb** (BLK)	Used when ordering FRAMES that require a blank jamb instead of the Fleming standard ASA strike prep		N/C
2f	**No Silencers** (N/S)	Used when no silencer/bumper holes are required		N/C

Frame Options

3. Head Hardware

3a	**Surface Closer Rein** (CRRA, CRPA, CRRAPUSH)	Surface closer reinforcing - specify regular arm, parallel arm or regular arm on push side. For single heads, specify handing	Per closer	$18
3b	**Surface Holder Rein** (SURH)	Surface holder reinforcing. For single heads, specify handing	Per holder	$18
3c	**Concealed Overhead Closer** (COHC)	Concealed or semi-concealed overhead closer prep	Per closer	$131
3d	**Concealed Overhead Holder/Stop** (COHH) (COHS)	Concealed overhead holder/stop prep	Per holder	$26
3e	**Mag Lock Rein** (SFFW)	Surface soffit reinforcing full width for magnetic locks	Per lock	$33
3f	**Flush Bolt Strike** (RFB)	Reversible prep in head for flush bolt strikes		$22
3g	**Mortised Strike or Latch Prep** (MSTR/S, MSTR/D)	Mortised strike or latch prep	Per prep	$27
3h	**Surface Strike** (SURFSTR)	Reinforcing for surface strike	Per prep	$18
3i	**DPS** (DPS)	Door position sensor prep (DPS size must be noted)	Per prep	$21
3j	**12ga Angle**	12ga angle reinforcing	Per foot	$12

4. Welding, Anchors and Accessories

4a	**Welded Assembly** (FW)	Back of face welded assembly - includes spreader bars but does **NOT** include anchors	Per frame	$55
4b	**Profile Welded Assembly** (PW)	Profile welded assembly - includes spreader bars but does **NOT** include anchors	Per frame	$114
4c	**E.W.A.** (EWA1/4, EWA3/8)	Punch & dimple for Existing Wall Anchor - 1/4" or 3/8" dia. and butterfly guide **(3/8" dia. standard unless otherwise noted, bolts & shields NOT included)**	Per frame Per jamb	$41 $21
4d	**E.W.A.** (pipe and strap)	Pipe and strap prep	Per frame Per jamb	$59 $30
4e	**E.W.A. Punch & Dimple Only** (EWA1/4PDO, EWA3/8PDO)	Punch & dimple ONLY Existing Wall Anchor - 1/4" or 3/8" dia. **(3/8" dia. standard unless otherwise noted, bolts & shields NOT included)**	Per frame Per jamb	$26 $14
4f	**Welded Wood Stud Anchors** (WANC)	Welded in wood stud anchors (3 per frame)	Per frame Per jamb	$41 $21
4g	**No Floor Anchors** (NBA)	No welded in floor anchors required		N/C

TB – Series Thermal Frames

Frame Options

5. Width, Height or Jamb Depth

5a	**Non-Std Width**	Non standard width	per piece	$3
5b	**Non-Std Height**	Non standard height	per piece	$3
5c	**Non-Std JD**	Non standard jamb depth	per piece	$3
5d	**Full Width Head** (FSHD) **(add to the next highest size or jamb depth)**	Full width double head (no undersizing)		N/C

6. Corner Miter Conditions

6a	**Non-Std. KD Head** (NSKD)	If KD corner clips are require where the jambs are other then a 2" face and the head is other then 2" or 4" face	Per part Per frame	$2 $6
6b	**Punch Miter Only** (PMO)	If a punch miter corner is required in lieu of KD corner on product where KD corner would be standard.		N/C

7. Material

7a	**G90 16ga** (G90)	Custom frame parts manufactured from 16ga G90 Galvanized steel (ADD to 16ga pricing)	Per 4' part Per 7' part Per 10' part	$15 $15 $15
7b	**14ga**	Custom frame parts manufactured from 14ga A40 Paintable Galvanneal steel (ADD to 16ga pricing)	Per 4' part Per 7' part Per 10' part	$14 $14 $14
7c	**G90 14ga** (G90)	Custom frame parts manufactured from 14ga G90 Galvanized steel (ADD to 16ga pricing)	Per 4' part Per 7' part Per 10' part	Contact factory

TB – Series Thermal Frames

Frame Options

8. Profile

8a	**Drywall Return** (DW)	Drywall or second return	Per part	$2
8b	**Equal/Non-Std. Rabbet** (ER, NSORAB)	Both rabbets with same dimension or other than standard	Per part	$7
8c	**Non-Std stop height** (NSSTPH)	Stop height other then standard	Per part	$7
8d	**Non-Std return** (NSRET)	Return up to 1”	Per part	$21
8e	**Single Rabbet** (SR)	One rabbet only	Per part	$7

9. Misc

9a	**Electrical box**	Electrical/junction box installed	Per prep	$47
9b	**Conduit** (CDT,H, CDT,S, CDT,HS, CDT,HH, CDT,H@LH, CDT, H@RH)	Electrical box and 1/2” conduit (available on welded frames only)	1 side 2 sides	$263 $526
9c	**E-Lynx** (ELYNX,H, ELYNX,S, ELYNX,HS, ELYNX,HH, ELYNX,H@LH, ELYNX,H@RH)	Electrical box, 1/2” conduit and E-Lynx wire (available on welded frames only)	1 side 2 sides	$329 $658
9e	**Factory priming** (PRIME, _____)	Factory priming (Minimum 25 frames/order) (A40 material only, priming of the inside throat not included)	Per part	$21

DE – Series Double Egress Frames

General Information

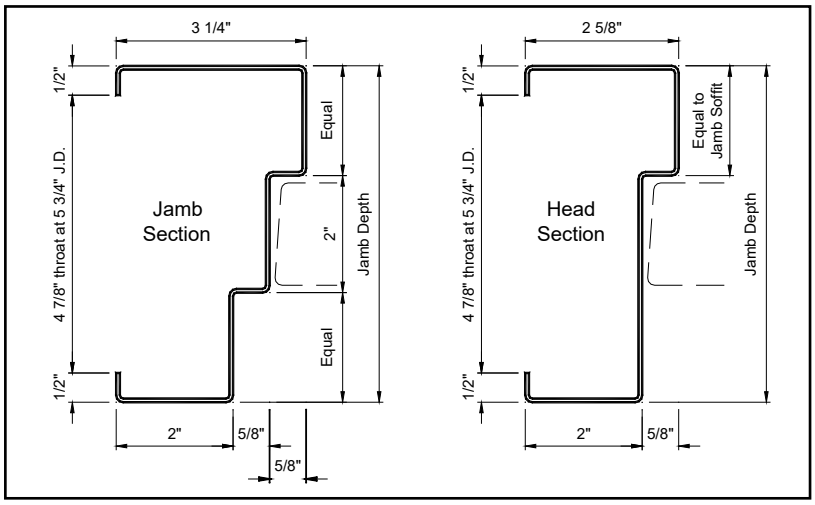

Index

Page	Description
51	General Information
52	16ga Double Egress Frames and Parts
53 to 56	Custom Options & Extras

Product Features

Material:

All product is manufactured from A40 Paintable Galvanneal Steel.

Hinge Jambs:

10ga High Frequency Hinge Reinforcing in all hinge locations of every Hinge Jamb.

All hinge jambs for 1 3/4" thick doors (unless ordered otherwise) receive 1 1/2pr (2pr on hinge jambs over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

All eligible Hinge Jambs are provided with cULus Embossed fire labels.

Heads:

An inverted channel is installed in all double egress heads to help prevent twisting and sagging.

Throat Sizes:

5 3/4" Jamb Depth jambs and heads have a 4 7/8" throat. All other jamb depths have a throat opening 1" less than the jamb depth.

Non-Standard Sizes:

Standard jamb depths are listed in the general information section.

Always use next highest width, height or jamb depth up when pricing Non-Standard Sizes, then use add-on for non-standard width, height or jamb depth.

Double Heads are undersized by 3/16" so standard width doors can be used.

Corner Configuration:

The standard corner configuration is notched for welding by the distributor.

Profile:

The Double Egress frame is supplied as the Fleming profile as a standard. Any changes to this profile will receive an upcharge.

DE – Series Double Egress Frames

Frame Estimating

16ga Double Egress Frames and Parts

Type	Nominal Width	Nominal Height	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
DOUBLE DE-FD-16-4	6'0"	7'0"	302	302	307	307	321	367	418
		8'0"	350	350	353	353	367	417	468
		9'0"	400	400	405	405	419	463	514
		9'10"	440	440	445	445	457	501	550
	8'0"	7'0"	309	309	314	314	330	375	426
		8'0"	357	357	360	360	376	425	476
		9'0"	407	407	412	412	428	471	522
		9'10"	447	447	452	452	466	509	558
	9'10"	7'0"	352	352	359	359	373	417	467
		8'0"	400	400	405	405	419	467	517
		9'0"	450	450	457	457	471	513	563
		9'10"	490	490	497	497	509	551	599

NOTES:

- **Use the next highest size (JD, Width or Height) for pricing.**
- **Price includes 2** Jambs, 1 Head, and welded in floor anchors.
- Double Egress frames and frame parts come standard with a butt joint.
- **Wall anchors must be ordered separately - see accessory section.**
- **For non-standard width, height or jamb depths use larger size and add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Non-Std JD (per piece) $3
- Surface closer/holder rein. (per prep) $18
- Metal label $21
- Mylar label $9
- Welded assembly $55
- 4" F head up to 7'0" $14
- EWA anchor prep $41
- UL fire anchor prep $41
- Welded Z anchor prep $41
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22

Except where noted, above prices are PER FRAME.

Component Pricing

Type	JB Height or HD Width	Jamb Depth 4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
Hinge Jambs	7'0"	111	111	113	113	118	133	150
	8'0"	135	135	136	136	141	158	175
	9'0"	160	160	162	162	167	181	198
	9'10"	180	180	182	182	186	200	216
2" Face Heads	6'0"	80	80	81	81	85	101	118
	8'0"	87	87	88	88	94	109	126
	9'10"	130	130	133	133	137	151	167

DE – Series Double Egress Frames

Frame Options

1. Hinge Jamb Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per part	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity (IE: 4 hinge preps on a 7'0" jamb or a dutch door hinge jamb)	Per hinge	$25
1c	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous hinge - reinforcing bar/strip only	Per part	$66
1d	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per part	$66
1e	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped		$171
1f	**Mortised Pivots** (M/PIV)	Top & Bottom pivots (drilled and tapped) Intermediate pivots (drilled and tapped)	Per part Per part	$66 $40
1g	**Pocket Pivots** (P/PIV)	Prep for 1 1/2" pr. pocket pivots (drilled and tapped)	Per part	$394
1h	**SOSS Hinges** (SOSS)	Prep for 1 1/2" pr. SOSS hinges	Per part	$329
1i	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1j	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79

DE – Series Double Egress Frames

Frame Options

2. Head Hardware

2a	**Surface Closer Rein** (CRRA, CRPA, CRRAPUSH)	Surface closer reinforcing - specify regular arm, parallel arm or regular arm on push side.	Per closer	$18
2b	**Surface Holder Rein** (SURH)	Surface holder reinforcing	Per holder	$18
2c	**Concealed Overhead Closer** (COHC)	Concealed or semi-concealed overhead closer prep	Per closer	$131
2d	**Concealed Overhead Holder/Stop** (COHH, COHS)	Concealed overhead holder/stop prep	Per holder	$26
2e	**Mag Lock Rein** (SFFW)	Surface soffit reinforcing full width for magnetic locks	Per lock	$33
2f	**Flush Bolt Strike** (FB)	Reversible prep in head for flush bolt strikes		$22
2g	**Mortised Strike or Latch Prep** (MSTR/S, MSTR/D)	Mortised strike or latch prep	Per prep	$27
2h	**Surface Strike** (SURFSTR)	Reinforcing for surface strike	Per prep	$18
2i	**DPS** (DPS)	Door position sensor prep (DPS size must be noted)	Per prep	$21
2j	**12ga Angle**	12ga angle reinforcing	Per foot	$12
2k	**Roller latch** (RL)	Roller Latch Prep	Per Prep	$27

3. Welding, Anchors and Accessories

3a	**Welded Assembly** (FW)	Back of face welded assembly - includes spreader bars but does **NOT** include anchors	Per frame	$55
3b	**Profile Welded Assembly** (PW)	Profile welded assembly - includes spreader bars but does **NOT** include anchors	Per frame	$114
3c	**E.W.A.** (EWA1/4, EWA3/8)	Punch & dimple for Existing Wall Anchor - 1/4" or 3/8" dia. and strap and spacer. **(3/8" dia. standard unless otherwise noted, bolts & shields NOT included)**	Per frame Per jamb	$41 $21
3d	**E.W.A.** (pipe and strap)	Pipe and strap prep	Per frame Per jamb	$59 $30
3e	**E.W.A. Punch & Dimple Only** (EWA1/4PDO, EWA3/8PDO)	Punch & dimple ONLY Existing Wall Anchor - 1/4" or 3/8" dia. **(3/8" dia. standard unless otherwise noted, bolts & shields NOT included)**	Per frame Per jamb	$26 $14
3f	**Z Anchors** (ZANC)	Welded in Z anchors (3 per frame)	Per frame Per jamb	$41 $21
3g	**Fire Anchors** (FANC)	Welded in UL Fire anchors (3 per frame)	Per frame Per jamb	$41 $21
3h	**Welded Wood Stud Anchors** (WANC)	Welded in wood stud anchors (3 per frame)	Per frame Per jamb	$41 $21
3i	**No Floor Anchors** (NBA)	No welded in floor anchors required		N/C

DE – Series Double Egress Frames

Frame Options

4. Width, Height or Jamb Depth

4a	**Non-Std Width**	Non standard width	per piece	$3
4b	**Non-Std Height**	Non standard height	per piece	$3
4c	**Non-Std JD**	Non standard jamb depth	per piece	$3

(add to the next highest size or jamb depth)

5. Corner Miter Conditions (Standard construction is butt joint)

5a	**Non-Std. KD** (NSKD)	If KD corner clips are require where the jambs are other than a 2" face and the head is other then 2" or 4" face	Per part Per frame	$2 $7
5b	**KD corner clips**	KD corner clips are available in Double Egress but must be noted on purchase order		N/C

6. Material

6a	**G90 16ga** (G90)	Custom frame parts manufactured from 16ga G90 Galvanized steel (Add to 16ga pricing)	Per 4' part Per 7' part Per 10' part	$15 $15 $15
6b	**14ga**	Custom frame parts manufactured from 14ga A40 Paintable Galvanneal steel (Add to 16ga pricing)	Per 4' part Per 7' part Per 10' part	$14 $14 $14
6c	**G90 14ga** (G90)	Custom frame parts manufactured from 14ga G90 Galvanized steel (ADD to 16ga pricing)	Per 4' part Per 7' part Per 10' part	Contact Factory
6d	**12ga**	Custom frame parts manufactured from 12ga A40 Paintable Galvanneal steel (ADD to 16ga pricing) (Minimum/Standard 5/8" backbend) (Return)	Per 4' part Per 7' part Per 10' part	Contact Factory
6e	**G90 12ga** (G90)	Custom frame parts manufactured from 12ga G90 Galvanized steel (ADD to 16ga pricing) (Minimum/Standard 5/8" backbend) (Return)	Per 4' part Per 7' part Per 10' part	Contact Factory

DE – Series Double Egress Frames

Frame Options

7. Profile

7a	**Drywall Return** (DW)	Drywall or second return	Per part	$2
7b	**Non-Std return** (NSRET)	Return up to 1”	Per part	$20
7b	**Sanitary Base** (SANI,4, SANI,6)	4” to 6” sanitary base	Per part	$190

8. Misc

8a	**Electrical box**	Electrical/junction box installed	Per prep	$47
8b	**Conduit** (CDT,H, CDT,S, CDT,HS, CDT,HH, CDT,H@LH, CDT, H@RH)	Electrical box and 1/2” conduit (available on welded frames only)	1 side 2 sides	$263 $526
8c	**E-Lynx** (ELYNX,H, ELYNX,S, ELYNX,HS, ELYNX,HH, ELYNX,H@LH, ELYNX,H@RH)	Electrical box, 1/2” conduit and E-Lynx wire (available on welded frames only)	1 side 2 sides	$329 $658
8d	**Factory priming** (PRIME, _____)	Factory priming (Minimum 25 frames/order) (A40 material only, priming of the inside throat not included)	Per part	$21

Expandable Frames

General Information

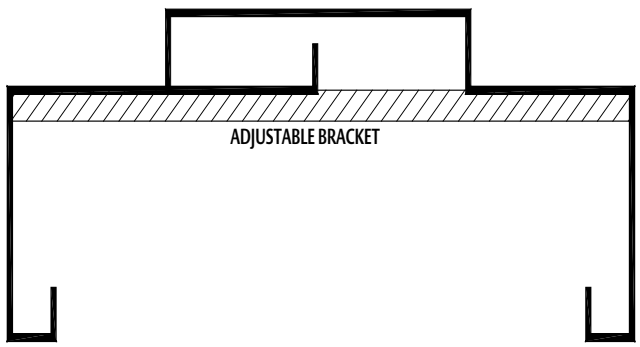

Index

Page	Description
57	General Information
58	18ga Expandable Frames
59	18ga Reversible Expandable Frames
60	16ga Expandable Frames
61	16ga Reversible Expandable Frames
62	18ga Slip-On Expandable Frames
63	16ga Slip-on Expandable Frames
64 to 65	Custom Options & Extras

Product Features

Material:

All product manufactured from A40 Paintable Galvanneal Steel.

Hinge Jambs:

10ga High Frequency Hinge Reinforcing in all hinge locations of every Hinge Jamb.

All hinge jambs for 1 3/4" thick doors (unless ordered otherwise) receive 1 1/2pr (2pr on hinge jambs over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

6'8" and 7'0" eligible Hinge Jambs are provided with WH Embossed fire labels.

Strike Jambs:

ASA Strike Reinforcing comes standard on all Strike Jambs for 1 3/4" thick doors (unless specified otherwise). This strike reinforcing is manufactured from 12ga steel and **does not have a dust box.**

All Strike & Blank Jambs include bumper (silencer) holes.

#7 x 2 1/2" screws to be ordered from the accessory section (6 per jamb, 4 per head)

Non-Standard Sizes:

Always use next highest width or height when pricing Non-Standard Sizes, then use add-ons for non-standard width, height.

Standard profile above and jamb section available only.

Double Heads are undersized by 1/8" so standard width doors can be used.

Profile:

The Expandable frame is supplied as the Baron profile as a standard. Any changes to this profile will receive an upcharge.

Frame Estimating

18ga Expandable Frames

Opening	Frame Size		Adjustable Jamb Depth	
	Width	Height	5 1/2"– 8 3/4"	8 1/2"– 13 1/4"
SINGLE	3'0"	7'0"	183	215
		8'0"	203	244
	4'0"	7'0"	184	216
		8'0"	204	245
DOUBLE	6'0"	7'0"	218	253
		8'0"	244	291
	8'0"	7'0"	227	264
		8'0"	253	302

Component Pricing

18ga Expandable Frame Parts

Jamb & Head Sizes		Adjustable Jamb Depth	
		5 1/2"– 8 3/4"	8 1/2"– 13 1/4"
Hinge Jambs	7'0"	83	94
	8'0"	96	113
Strike or Blank Jambs	7'0"	68	83
	8'0"	75	93
Heads	3'0"	32	38
	4'0"	33	39
	6'0"	52	65
	8'0"	61	76

NOTES:

- **Use next highest size (Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, all pieces have dimples along each face.
- **Anchors must be ordered separately - see accessory section.**
- **For non-standard width or height use add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Surface closer/holder rein. (per piece) $18
- Metal label $21
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18
- No Dimples on Face n/c

Except where noted, above prices are PER FRAME.

Expandable Frames

Frame Estimating

18ga Reversible Expandable Frames

Opening	Frame Size		Adjustable Jamb Depth	
	Width	Height	5 1/2"– 8 3/4"	8 1/2"– 13 1/4"
SINGLE	3'0"	7'0"	210	242
		8'0"	230	271
	4'0"	7'0"	211	243
		8'0"	231	272
DOUBLE	6'0"	7'0"	245	280
		8'0"	271	318
	8'0"	7'0"	254	291
		8'0"	280	329

Component Pricing

18ga Reversible Expandable Frame Parts

Jamb & Head Sizes		Adjustable Jamb Depth	
		5 1/2"– 8 3/4"	8 1/2"– 13 1/4"
Hinge Jambs	7'0"	92	103
	8'0"	105	122
Strike or Blank Jambs	7'0"	77	92
	8'0"	84	102
Heads	3'0"	41	47
	4'0"	42	48
	6'0"	61	74
	8'0"	70	85

NOTES:

- **Use next highest size (Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, all pieces have dimples along each face.
- **Anchors must be ordered separately - see accessory section.**
- **For non-standard width or height use add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Surface closer/holder rein. (per piece) $18
- Metal label $21
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18
- No Dimples on Face n/c

Except where noted, above prices are PER FRAME.

Frame Estimating

16ga Expandable Frames

Opening	Frame Size		Adjustable Jamb Depth	
	Width	Height	5 1/2"– 8 3/4"	8 1/2"– 13 1/4"
SINGLE	3'0"	7'0"	239	358
		8'0"	258	385
	4'0"	7'0"	239	359
		8'0"	258	386
DOUBLE	6'0"	7'0"	272	401
		8'0"	298	435
	8'0"	7'0"	282	412
		8'0"	308	446

Component Pricing

16ga Expandable Frame Parts

Jamb & Head Sizes		Adjustable Jamb Depth	
		5 1/2"– 8 3/4"	8 1/2"– 13 1/4"
Hinge Jambs	7'0"	102	145
	8'0"	115	162
Strike or Blank Jambs	7'0"	88	130
	8'0"	94	140
Heads	3'0"	49	83
	4'0"	49	84
	6'0"	68	111
	8'0"	78	122

NOTES:

- **Use next highest size (Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, all pieces have dimples along each face.
- **Anchors must be ordered separately - see accessory section.**
- **For non-standard width or height use add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Surface closer/holder rein. (per piece) $18
- Metal label $21
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18
- No Dimples on Face n/c

Except where noted, above prices are PER FRAME.

Expandable Frames

Frame Estimating

16ga Reversible Expandable Frames

Opening	Frame Size		Adjustable Jamb Depth	
	Width	Height	5 1/2"– 8 3/4"	8 1/2"– 13 1/4"
SINGLE	3'0"	7'0"	185	211
		8'0"	204	238
	4'0"	7'0"	185	212
		8'0"	204	239
DOUBLE	6'0"	7'0"	218	254
		8'0"	244	288
	8'0"	7'0"	228	265
		8'0"	254	299

Component Pricing

16ga Reversible Expandable Frame Parts

Jamb & Head Sizes		Adjustable Jamb Depth	
		5 1/2"– 8 3/4"	8 1/2"– 13 1/4"
Hinge Jambs	7'0"	84	96
	8'0"	97	113
Strike or Blank Jambs	7'0"	70	81
	8'0"	76	91
Heads	3'0"	31	34
	4'0"	31	35
	6'0"	50	62
	8'0"	60	73

NOTES:

- **Use next highest size (Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, all pieces have dimples along each face.
- **Anchors must be ordered separately - see accessory section.**
- **For non-standard width or height use add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Surface closer/holder rein. (per piece) $18
- Metal label $21
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18
- No Dimples on Face n/c

Except where noted, above prices are PER FRAME.

Frame Estimating

18ga Slip-on Expandable Frames

Opening	Frame Size		Wall Thickness	
	Width	Height	4 1/2"– 7 3/4"	7 1/2"– 12 1/4"
SINGLE	3'0"	7'0"	162	194
		8'0"	182	223
	4'0"	7'0"	163	195
		8'0"	183	224
DOUBLE	6'0"	7'0"	197	232
		8'0"	223	270
	8'0"	7'0"	206	243
		8'0"	232	281

Component Pricing

18ga Slip-on Expandable Frame Parts

Jamb & Head Sizes		Wall Thickness	
		4 1/2"– 7 3/4"	7 1/2"– 12 1/4"
Hinge Jambs	7'0"	76	87
	8'0"	89	106
Strike or Blank Jambs	7'0"	61	76
	8'0"	68	86
Heads	3'0"	25	31
	4'0"	26	32
	6'0"	45	58
	8'0"	54	69

NOTES:

- **Use next highest size (Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, all pieces have dimples along each face.
- **Anchors must be ordered separately - see accessory section.**
- **For non-standard width or height use add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Surface closer/holder rein. (per piece) $18
- Metal label $21
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18
- No Dimples on Face n/c

Except where noted, above prices are PER FRAME.

Expandable Frames

Frame Estimating

16ga Slip-on Expandable Frames

Opening	Frame Size		Wall Thickness	
	Width	Height	4 1/2"– 7 3/4"	7 1/2"– 12 1/4"
SINGLE	3'0"	7'0"	218	337
		8'0"	237	364
	4'0"	7'0"	218	338
		8'0"	237	365
DOUBLE	6'0"	7'0"	251	380
		8'0"	277	414
	8'0"	7'0"	261	391
		8'0"	287	425

Component Pricing

16ga Slip-on Expandable Frame Parts

Jamb & Head Sizes		Wall Thickness	
		4 1/2"– 7 3/4"	7 1/2"– 12 1/4"
Hinge Jambs	7'0"	95	138
	8'0"	108	155
Strike or Blank Jambs	7'0"	81	123
	8'0"	87	133
Heads	3'0"	42	76
	4'0"	42	77
	6'0"	61	104
	8'0"	71	115

NOTES:

- **Use next highest size (Width or Height) for pricing**
- **Price includes** 2 knock down Jambs, 1 knock down Head, all pieces have dimples along each face.
- **Anchors must be ordered separately - see accessory section.**
- **For non-standard width or height use add-on below.**

EXTRAS:

- Non-Std Width (per piece) $3
- Non-Std Height (per piece) $3
- Surface closer/holder rein. (per piece) $18
- Metal label $21
- Tagging & Banding $22
- Tag $3
- Non-std hinge location, backset or size (per prep) $22
- Surface panic strike rein (per prep). $18
- No Dimples on Face n/c

Except where noted, above prices are PER FRAME.

Expandable Frames

Frame Options

1.Hinge Jamb Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per part	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Baron standard quantity (IE: 4 hinge preps on a 7'0" jamb or a dutch door hinge jamb)	Per hinge	$25
1c	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1d	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79

2. Strike Jamb Hardware

2a	**Surface Strike** (SURFSTR)	Reinforcing for surface panic strike	Per prep	$18
2b	**Deadlock Strike** (+ASA, +ASANL. +S/ASA, 1 1 /8" X 2 3/4" with or without lip +S/ASANL)	1 1/4" X 4 7/8" with or without lip or 1 1 /8" X 2 3/4" with or without lip	Per prep	$14
2c	**Interconnected Lock Strike** (INTSTR)	1 1/8" X 2 3/4" with lip and 1 1/8" X 2 3/4" without lip, 4" CL to CL spacing to suit interconnected lock strikes (ie: Yale 4800LN)	Per prep	$23
2d	**Electric Strike** (ELSTR)	Electric, open back or special strike prep	Per prep	$86
2e	**Blank Strike Jamb** (BLK)	Used when ordering frames that require a blank jamb instead of the standard ASA strike prep		N/C
2e	**No Silencers** (N/S)	Used when no silencer/bumper holes are required		N/C

Expandable Frames

Frame Options

3. Head Hardware

3a	**Surface Closer Rein** (CRRA,CRPA,CRRAPUSH)	Surface closer reinforcing - specify regular arm, parallel arm or regular arm on push side. For single heads, specify handing	Per closer	$18
3b	**Surface Holder Rein** (SURH)	Surface holder reinforcing. For single heads, specify handing	Per holder	$18
3c	**Flush Bolt Strike** (RFB)	Reversible prep in head for flush bolt strikes		$22
3d	**Mortised Strike or Latch Prep** (MSTR/S, MSTR/D)	Mortised strike or latch prep	Per prep	$27
3e	**Surface Strike** (SURFSTR)	Reinforcing for surface strike	Per prep	$18
3f	**DPS** (DPS)	Door position sensor prep (DPS size must be noted)	Per prep	$21

4. Width, Height

4a	**Non-Std Width**	Non standard width	per piece	$3
4b	**Non-Std Height**	Non standard height	per piece	$3
4b	**Full Width Head** (FSHD) **(add to the next highest size)**	full width double head (no undersizing)		N/C

Stick Series

General Information

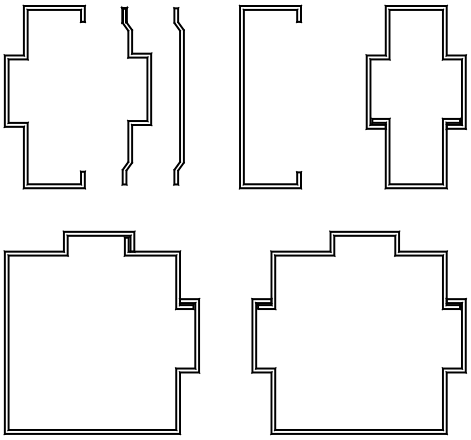

Index

Page	Description
67	General Information
68	Open Sections
69	Mullion Sections
70	Corner Posts / Filler Plates
71	Thermal Sections
72 to 74	Custom Options & Extras

Product Features

Material:

All product manufactured from A40 Paintable Galvanneal Steel.

Hinge Sticks / Hinge Mullions:

10ga High Frequency Hinge Reinforcing in all hinge locations of every Hinge Jamb.

All sticks with hinge preps for 1 3/4" doors (unless specified otherwise) receive 1 1/2" pr (2pr on sticks over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

All mullions are notched at one end.

Strike Sticks / Strike Mullions:

ASA Strike Reinforcing comes standard on all strike jambs for 1 3/4" thick doors (unless specified otherwise). This strike reinforcing for open section jambs is a 1 piece strike and dust box manufactured from 14ga steel. For closed mullion sections strike reinforcing is a 1 piece strike with no dust box manufactured from 14ga steel.

All open section Strike Sticks include bumper (silencer) holes. Mullion section sticks must use stick on bumper (silencer).

Throat Sizes:

5 3/4" Jamb Depth on open section sticks have a 4 7/8" throat. All other jamb depths have a throat opening 1" less than the jamb depth.

Non-Standard Sizes:

Standard jamb depths are listed in the general information section.

Always use next highest height or jamb depth up when pricing Non-Standard Sizes, then use add-ons for non-standard jamb depth.

Non-Standard Lengths:

For Custom Stick Lengths, they will be priced by inch and 35% will be added.

Profile:

The Fleming profile will be supplied unless Baron profile is clearly note on the purchase order.

For example:

1. 10'2" blank Mullion 5 3/4" @ $97.25
$97.25 ÷ 122" = $0.80

2. 8'4" Stick = 100"
100" x $0.80 = $80.00

2. $80.00 x 35%
= $108.00 List

Open Sections

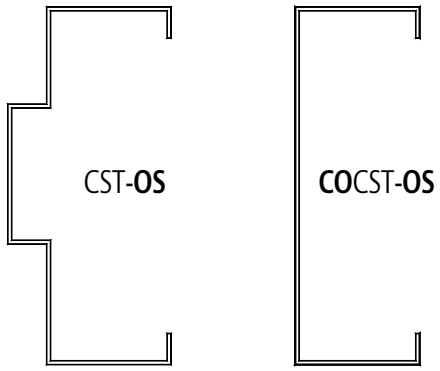

NOTES

- **Please refer to E-Business standard product.**
- **Floor Anchors included on OSH, OSS only.**
- **5 3/4 jamb depth has a 4 7/8 throat opening.**
- **Anchors must be ordered separately - see accessory section.**
- **For non-standard jamb depths use larger size and other add-ons see pages.**

Descriptions	Nominal		(JD) - Jamb Depth						
	Length	Door Height	4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
Open Section Hinge									
CST-**OSH**-16-4-10'2(68)-(**JD**)-HAND	**10' 2"**	**6' 8"**	94	94	105	105	110	120	136
CST-**OSH**-16-4-10'2(610)-(**JD**)-HAND	**10' 2"**	**6' 10"**	94	94	105	105	110	120	136
CST-**OSH**-16-4-10'2(70)-(**JD**)-HAND	**10' 2"**	**7' 0"**	94	94	105	105	110	120	136
CST-**OSH**-16-4-10'2(72)-(**JD**)-HAND	**10' 2"**	**7' 2"**	94	94	105	105	110	120	136
Open Section Strike									
CST-**OSS**-16-4-10'2-(**JD**)-HAND	**10' 2"**		73	73	84	84	89	98	114
Open Section – Perimeter / Sill									
CST-**OS**-16-4-10'2-(**JD**)	**10' 2"**		56	56	69	69	74	81	99
CST-**OS**-16-4-10'2-(**JD**);1F	**10' 2"**		62	62	73	73	79	87	104
CST-**OS**-16-4-10'2-(**JD**);4F	**10' 2"**		70	70	81	81	87	96	112
CST-**OS**-16-4-10'2-(**JD**);6F	**10' 2"**		87	87	98	98	104	112	129
CST-**OS**-16-4-10'2-(**JD**);8F	**10' 2"**		185	185	198	198	202	213	230
CST-**OS**-16-4-10'2-(**JD**);10F	**10' 2"**		213	213	225	225	231	241	258
CST-**OS**-16-4-10'2-(**JD**);12F	**10' 2"**		224	224	236	236	240	253	269
Cased Open - Open Section – Perimeter / Sill									
COST-**OS**-16-4-10'2-(**JD**)	**10' 2"**		49	49	59	59	66	74	90

Stick Series

Mullion Sections

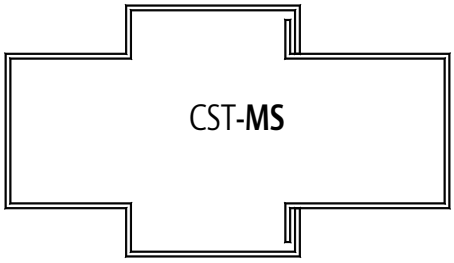

Notes:
- **Please refer to E-Business standard product.**
- **For non-standard jamb depths use larger size.**

Descriptions	Nominal		(JD) – Jamb Depth						
	Length	Door Height	4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
Mullion Section Hinge									
CST-**MSH**-16-4- 68 -(**JD**)-HAND	**6'8"**	**6'8"**	133	133	159	159	175	192	209
CST-**MSH**-16-4- 610 -(**JD**)-HAND	**6'10"**	**6'10"**	133	133	159	159	175	192	209
CST-**MSH**-16-4- 70 -(**JD**)-HAND	**7'0"**	**7'0"**	133	133	159	159	175	192	209
CST-**MSH**-16-4- 72 -(**JD**)-HAND	**7'2"**	**7'2"**	133	133	159	159	175	192	209
CST-**MSH**-16-4- 10'2 (68)-(**JD**)-HAND	**10'2"**	**6'8"**	159	159	185	185	201	220	236
CST-**MSH**-16-4- 10'2 (70)-(**JD**)-HAND	**10'2"**	**7'0"**	159	159	185	185	201	220	236
CST-**MSH**-16-4- 10'2 (72)-(**JD**)-HAND	**10'2"**	**7'2"**	159	159	185	185	201	220	236
CST-**MSHH**-16-4- 68 -(**JD**)-L/R	**6'8"**	**6'8"**	158	158	183	183	199	217	234
CST-**MSHH**-16-4- 610 -(**JD**)-L/R	**6'10"**	**6'10"**	158	158	183	183	199	217	234
CST-**MSHH**-16-4- 70 -(**JD**)-L/R	**7'0"**	**7'0"**	158	158	183	183	199	217	234
CST-**MSHH**-16-4- 72 -(**JD**)-L/R	**7'2"**	**7'2"**	158	158	183	183	199	217	234
Mullion Section Strike									
CST-**MSS**-16-4- 68 -(**JD**)-HAND	**6'8"**	**6'8"**	122	122	147	147	162	182	198
CST-**MSS**-16-4- 610 -(**JD**)-HAND	**6'10"**	**6'10"**	122	122	147	147	162	182	198
CST-**MSS**-16-4- 70 -(**JD**)-HAND	**7'0"**	**7'0"**	122	122	147	147	162	182	198
CST-**MSS**-16-4- 72 -(**JD**)-HAND	**7'2"**	**7'2"**	122	122	147	147	162	182	198
CST-**MSS**-16-4- 10'2 -(**JD**)-HAND	**10'2"**		149	149	175	175	190	208	225
CST-**MSSS**-16-4- 68 -(**JD**)-L/R	**6'8"**	**6'8"**	133	133	159	159	175	192	209
CST-**MSSS**-16-4- 610 -(**JD**)-L/R	**6'10"**	**6'10"**	133	133	159	159	175	192	209
CST-**MSSS**-16-4- 70 -(**JD**)-L/R	**7'0"**	**7'0"**	133	133	159	159	175	192	209
Mullion Section Hinge / Strike									
CST-**MSHS**-16-4- 68 -(**JD**)-HAND	**6'8"**	**6'8"**	140	140	166	166	182	201	216
CST-**MSHS**-16-4- 70 -(**JD**)-HAND	**7'0"**	**7'0"**	140	140	166	166	182	201	216
CST-**MSHS**-16-4- 72 -(**JD**)-HAND	**7'2"**	**7'2"**	140	140	166	166	182	201	216
CST-**MSHS**-16-4- 10'2(68) -(**JD**)-HAND	**10'2"**	**6'8"**	167	167	192	192	208	227	244
CST-**MSHS**-16-4- 10'2(70) -(**JD**)-HAND	**10'2"**	**7'0"**	167	167	192	192	208	227	244
CST-**MSHS**-16-4- 10'2(72) -(**JD**)-HAND	**10'2"**	**7'2"**	167	167	192	192	208	227	244
Mullion Section Blank									
CST-**MS**-16-4- 68 -(**JD**)	**6'8"**	**6'8"**	102	102	127	127	142	160	177
CST-**MS**-16-4- 610 -(**JD**)	**6'10"**	**6'10"**	102	102	127	127	142	160	177
CST-**MS**-16-4- 70 -(**JD**)	**7'0"**	**7'0"**	102	102	127	127	142	160	177
CST-**MS**-16-4- 72 -(**JD**)	**7'2"**	**7'2"**	102	102	127	127	142	160	177
CST-**MS**-16-4- 10'2 -(**JD**)	**10'2"**		128	128	154	154	170	188	205
CST-**MS**-16-4- 10'2 -(**JD**);4F	**10'2"**		145	145	171	171	186	206	222
CST-**MS**-16-4- 10'2 -(**JD**);6F	**10'2"**		392	392	418	418	434	457	473
CST-**MS**-16-4- 10'2 -(**JD**);8F	**10'2"**		417	417	444	444	460	482	499
CST-**MS**-16-4- 10'2 -(**JD**);10F	**10'2"**		431	431	457	457	472	496	512
CST-**MS**-16-4- 10'2 -(**JD**);12F	**10'2"**		445	445	471	471	487	511	526

Corner Post Sections

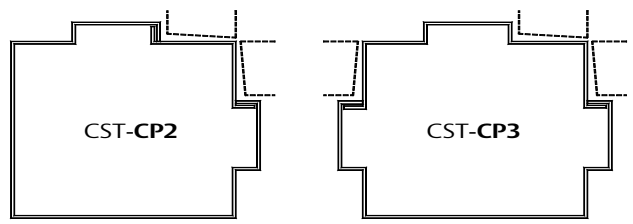

Notes:
- **Please refer to E-Business standard product.**
- **For non-standard jamb depths use larger size.**

Descriptions	Door Rebate Size	Length	(JD) – Jamb Depth						
			4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
CST-**CP2**-16-**4**- 10'2 -**(JD)**	**1 15/16"**	**10'2"**	271	271	294	297	313	334	350
CST-**CP2**-16-**8**- 10'2 -**(JD)**	**1 9/16"**	**10'2"**	271	271	294	297	313	334	350
CST-**CP3**-16-**4**- 10'2 -**(JD)**	**1 15/16"**	**10'2"**	271	271	294	297	313	334	350
CST-**CP3**-16-**8**- 10'2 -**(JD)**	**1 9/16"**	**10'2"**	271	271	294	297	313	334	350

Filler Plate Sections

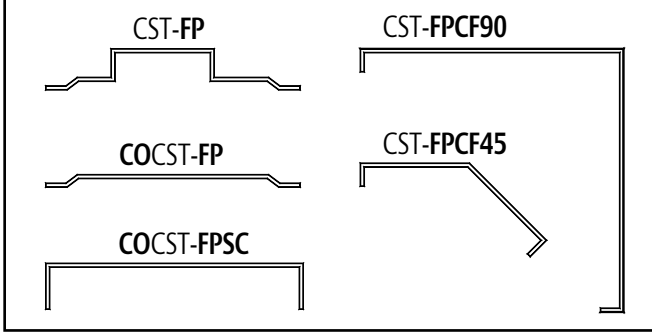

Notes:
- **Please refer to E-Business standard product.**
- **For non-standard jamb depths use the next larger size and non-standard jamb depth add-on.**

Descriptions	Length	(JD) – Jamb Depth						
		4 3/4"	5 3/4"	6 3/4"	7 3/4"	8 3/4"	10"	13"
CST-**FP**-16-**4**- 10'2 -**(JD)**	**10'2"**	36	36	48	48	54	61	78
COCST-**FP**-16- 10'2 -**(JD)**	**10'2"**	29	29	41	41	47	54	71
CST-**FPCF90**-16- 10'2 -**(JD)**	**10'2"**	54	54	54	54	54	54	54
CST-**FPCF45**-16- 10'2 -**(JD)**	**10'2"**	49	49	49	49	49	49	49
CST-**FPSC**-16- 10'2 -**(JD)**	**10'2"**	49	49	49	49	49	49	49

Stick Series

Thermal Sections

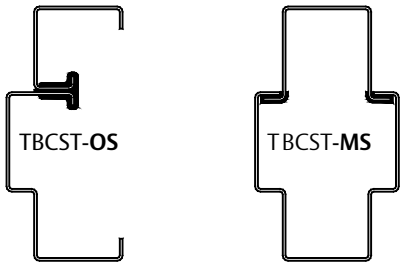

Notes:

- **Metal is separated by a PVC spline.**
- **All Thermal Material meets or exceeds the standard for Insulated Frames CGSB 82-GP-5M.**
- **For non-standard jamb depths use larger size.**
- **Thermal Sections can NOT be labeled.**

Descriptions	Length	Door Height	(JD) – Jamb Depth		
			4 3/4"	5 3/4"	6 3/4"
Open Sections					
TBCST-**OSH**-16-4- 10'2 (68 to 72)-(**JD**)-HAND	**10'2"**	**6'8" to 7'2"**	192	192	205
TBCST-**OSS**-16-4- 10'2 (68 to 72)-(**JD**)-HAND	**10'2"**	**6'8" to 7'2"**	167	167	180
TBCST-**OS**-16-4- 10'2 -(**JD**)	**10'2"**		150	150	161
TBCST-**OS**-16-4- 10'2 -(**JD**);4F	**10'2"**		162	162	175
TBCST-**OS**-16-4- 10'2 -(**JD**);6F	**10'2"**		180	180	191
TBCST-**OS**-16-4- 10'2 -(**JD**);8F	**10'2"**		279	279	289
TBCST-**OS**-16-4- 10'2 -(**JD**);10F	**10'2"**		306	306	317
TBCST-**OS**-16-4- 10'2 -(**JD**);12F	**10'2"**		317	317	328
Mullion Sections					
TBCST-**MSH**-16-4- 68 to 72 -(**JD**)-HAND	**6'8" to 7'2"**	**6'8" to 7'2"**	327	327	353
TBCST-**MSHH**-16-4- 68 to 72 -(**JD**)-L/R	**6'8" to 7'2"**	**6'8" to 7'2"**	357	357	382
TBCST-**MSS**-16-4- 68 to 72 -(**JD**)-HAND	**6'8" to 7'2"**	**6'8" to 7'2"**	314	314	340
TBCST-**MSSS**-16-4- 68 to 72 -(**JD**)-L/R	**6'8" to 7'2"**	**6'8" to 7'2"**	327	327	353
TBCST-**MSHS**-16-4- 68 to 72 -(**JD**)-HAND	**6'8" to 7'2"**	**6'8" to 7'2"**	340	340	366
TBCST-**MSH**-16-4- 10'2 (68 to 72) -(**JD**)-HAND	**10'2"**	**6'8" to 7'2"**	353	353	380
TBCST-**MSHH**-16-4- 10'2 (68 to 72) -(**JD**)-L/R	**10'2"**	**6'8" to 7'2"**	383	383	408
TBCST-**MSS**-16-4- 10'2 (68 to 72) -(**JD**)-HAND	**10'2"**	**6'8" to 7'2"**	341	341	367
TBCST-**MSSS**-16-4- 10'2 (68 to 72) -(**JD**)-L/R	**10'2"**	**6'8" to 7'2"**	354	354	380
TBCST-**MSHS**-16-4- 10'2 (68 to 72) -(**JD**)-HAND	**10'2"**	**6'8" to 7'2"**	366	366	392
TBCST-**MS**-16-4- 68 to 72 -(**JD**)	**6'8" to 7'2"**	**6'8" to 7'2"**	304	304	330
TBCST-**MS**-16-4- 10'2 -(**JD**)	**10'2"**		330	330	357
TBCST-**MS**-16-4- 10'2 -(**JD**);4F	**10'2"**		348	348	373
TBCST-**MS**-16-4- 10'2 -(**JD**);6F	**10'2"**		595	595	621
TBCST-**MS**-16-4- 10'2 -(**JD**);8F	**10'2"**		620	620	646
TBCST-**MS**-16-4- 10'2 -(**JD**);10F	**10'2"**		632	632	659
TBCST-**MS**-16-4- 10'2 -(**JD**);12F	**10'2"**		647	647	647
Filler Plates					
TBCST-**FP**-16-4- 10'2 -(**JD**)	**10'2"**		93	93	104
Corner Posts					
TBCST-**CP2**-16-4- 10'2 -(**JD**)	**10'2"**		683	683	709
TBCST-**CP3**-16-4- 10'2 -(**JD**)	**10'2"**		837	837	863

Stick Options

1. Hinge Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per part	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity (IE: 4 hinge preps on a 7'0" jamb or a dutch door hinge jamb)	Per hinge	$25
1c	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous hinge - reinforcing bar/strip only	Per part	$66
1d	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per part	$66
1e	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped		$171
1f	**Mortised Pivots** (M/PIV)	Top & Bottom pivots (not drilled and tapped) Intermediate pivots (not drilled and tapped)	Per part Per part	$66 $40
1g	**Pocket Pivots** (P/PIV)	Prep for 1 1/2" pr. pocket pivots (not drilled and tapped)	Per part	$394
1h	**SOSS Hinges** (SOSS)	Prep for 1 1/2" pr. SOSS hinges	Per part	$329
1i	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1j	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79

2. Strike Hardware

2a	**Surface Strike** (SURFSTR)	Reinforcing for surface panic strike	Per prep	$18
2b	**Deadlock Strike** (+ASA, +ASANL, +S/ASA, +S/ASANL)	1 1/4" X 4 7/8" with or without lip or 1 1/8" X 2 3/4" with or without lip	Per prep	$14
2c	**Interconnected Lock Strike** (INTSTR)	1 1/8" X 2 3/4" with lip and 1 1/8" X 2 3/4" without lip, 4" CL to CL spacing to suit interconnected lock strikes (ie: Yale 4800LN)	Per prep	$23
2d	**Electric Strike** (ELSTR)	Electric, open back or special strike prep	Per prep	$86
2e	**Blank Strike Stick** (BLK)	Used when ordering frames that require a blank stick instead of the Fleming standard ASA strike prep		N/C
2f	**No Silencers** (N/S)	Used when no silencer/bumper holes are required		N/C

Stick Options

3. Welding, Anchors and Accessories

3a	**E.W.A.** (EWA1/4, EWA3/8)	Punch & dimple for Existing Wall Anchor - 1/4" or 3/8" dia. and butterfly guide or strap & channel. **(3/8" dia. standard unless otherwise noted, bolts & shields NOT included)**	Per OS	$21
3b	**E.W.A.** (pipe and strap)	Pipe and strap prep	Per OS	$30
3c	**E.W.A. Punch & Dimple Only** (EWA1/4PDO, EWA3/8PDO)	Punch & dimple ONLY Existing Wall Anchor - 1/4" or 3/8" dia. **(3/8" dia. standard unless otherwise noted, bolts & shields NOT included)**	Per OS	$14
3d	**Z Anchors** (ZANC)	Welded in Z anchors	Per OS	$21
3e	**Fire Anchors** (FANC)	Welded in UL Fire anchors	Per OS	$21
3f	**Welded Wood Stud Anchors** (WANC)	Welded in wood stud anchors	Per OS	$21
3g	**No Floor Anchors** (NBA)	No welded in floor anchors required		N/C

4. Jamb Depth

4a	**Non-Std Jamb Depth**	Non standard jamb depth	per part	$3

(add to the next highest jamb depth)

5. Material

5a	**G90 16ga** (G90)	Custom frame parts manufactured from 16ga G90 Galvanized steel (ADD to 16ga pricing)	Per MS Per OS	$15 $15
5b	**14ga**	Custom frame parts manufactured from 14ga A40 Paintable Galvanneal steel (ADD to 16ga pricing)	Per MS Per OS	$19 $14
5c	**G90 14ga** (G90)	Custom frame parts manufactured from 14ga G90 Galvanized steel (ADD to 16ga pricing)	Per MS Per OS	Contact Factory
5d	**12ga**	Custom frame parts manufactured from 12ga A40 Paintable Galvanneal steel (ADD to 16ga pricing) (Minimum/Standard 5/8" backbend)(return)	Per MS Per OS	Contact Factory
5e	**G90 12ga** (G90)	Custom frame parts manufactured from 12ga G90 Galvanized steel (ADD to 16ga pricing) (Minimum/Standard 5/8" backbend)	Per MS Per OS	Contact Factory

Stick Options

6. Profile

6a	**Drywall Return** (DW)	Drywall or second return	Per OS	$2
6b	**Equal/Non-Std. Rabbet** (ER, NSORAB)	Both rabbets with same dimension or other than standard	Per part	$7
6c	**Non-Std stop height** (NSSTPH)	Stop height other then standard	Per part	$7
6d	**Non-Std return** (NSRET)	Return up to 1”	Per part	$21
6e	**No return** (N/RET, N/RET&CS)	No return No return and countersink 3 holes in the face for #8 drywall screws	Per part Per part	$7 $15
6f	**Single Rabbet** (SR)	One rabbet only	Per part	$7
6g	**Shadowline**	 1/2" to 1" Shadowline Over 1" to 4" Shadowline	Per OS Per OS	$12 $20
6h	**Hospital Profile** (SLPSTP)	Sloped stop part	Per OS Per MS	$45 $133
6i	**Sanitary Base** (SANI,4, SANI,5)	4" to 6" high sanitary base prep	Per OS Per MS	$87 $171
6j	**Contra Swing**	Contra swing mullion	Per MS	$100
6k	**Labelled Contra Swing**	Contra swing mullion that is eligible for labelling	Per MS	$230

Mitre & Notch

Factory Mitre & Notch Screens/Sidelights

Pricing Method: Round total unit dimensions up to the nearest foot. Calculate total linear footage and multiply by the Per Linear Foot (P.L.F.) cost shown in the table.

	Jamb Depth	18GA	16GA	Thermal 16GA
Screens/ Sidelights	4 3/4"	13	15	30
	5 3/4"	15	17	34
	6 3/4"	17	19	38
	7 3/4"	19	21	42
	8 3/4"	21	23	46
	9 3/4"	23	25	50

**glass stop is not included with Mitre and Notch units. See accessory section for removable glass stops

NOTES:
- **Use next highest size (JD, Width or Height) for pricing**
- Above pricing includes vertical & horizontal mullions, sills, and centre rails up to 4" (100mm) face
- Sills and centre over 4" (100mm) face and up to 9 1/2" (241mm) face add $11 per linear foot
- Sills and centre rails over 9 1/2" face, contact factory
- For splicing add $100 per splice
- Glass stops not included
- G90 add 30%
- 14GA add 25% to the 16GA price.

Factory Mitre & Notch Borrowed Lites

Pricing Method: Round total unit dimensions up to the nearest foot. Calculate total linear footage and multiply by the Per Linear Foot (P.L.F.) cost shown in the table.

	Jamb Depth	18GA	16GA	Thermal 16GA
Window	4 3/4"	9	11	22
	5 3/4"	11	13	26
	6 3/4"	13	15	30
	7 3/4"	15	17	34
	8 3/4"	17	19	38
	9 3/4"	19	21	42

**glass stop is not included with Mitre and Notch units. See accessory section for removable glass stops

NOTES:
- **Use next highest size (JD, Width or Height) for pricing**
- Above pricing is for 4 sided units only - units with horizontal and vertical mullions must be priced as screens
- For splicing add $100 per splice
- Perimeter face over 4" (100mm) up to 9 1/2" (241mm) add $11 per linear foot
- Glass stops not included.
- K.D. Borrowed light add $50
- G90 add 30%
- 14GA add 25% to the 16GA price.

Factory Mitre & Notch Transom Frames

Pricing Method: Round total unit dimensions up to the nearest foot. Calculate total linear footage and multiply by the Per Linear Foot (P.L.F.) cost shown in the table.

	Jamb Depth	18GA	16GA	Thermal 16GA
Transom Frames	4 3/4"	11	13	26
	5 3/4"	13	15	30
	6 3/4"	15	17	34
	7 3/4"	17	19	38
	8 3/4"	19	21	42
	9 3/4"	21	23	46

**glass stop is not included with Mitre and Notch units. See accessory section for removable glass stops

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- For removable mullions (labeled or non-labeled) add $200
- For splicing add $100 per splice
- Perimeter face over 4" (100mm) up to 9 1/2" (241mm) add $11 per linear foot
- Includes 1 horizontal mullion only - if additional mullions are required, price as sidelight
- Glass stops not included
- G90 add 30%
- 14GA add 25% to the 16GA price.

Factory Welded

Factory Welded Screens/Sidelights

Pricing Method: Round total unit dimensions up to the nearest foot. Calculate total linear footage and multiply by the Per Linear Foot (P.L.F.) cost shown in the table.

	Jamb Depth	18GA	16GA	Thermal 16GA
Screens/ Sidelights	4 3/4"	21	23	46
	5 3/4"	23	25	50
	6 3/4"	25	27	54
	7 3/4"	27	29	58
	8 3/4"	29	31	62
	9 3/4"	31	33	66

NOTES:
- **Use next highest size (JD, Width or Height) for pricing**
- Above pricing includes vertical & horizontal mullions, sills, and centre rails up to 4" (100mm) face
- Sills and centre over 4" (100mm) face and up to 9 1/2" (241mm) face add $11 per linear foot
- Sills and centre rails over 9 1/2" face, contact factory
- Screens/sidelights include glazing bead installed one side only (wide side unless specified otherwise)
- Labeled units (3/4 hr. fire rating) add $20
- For splicing add $100 per splice
- Profile weld add 20%
- G90 add 30%
- 14GA add 25% to the 16GA price.
- For 1 1/2 hr. fire rating contact factory

Factory Welded Borrowed Lites

Pricing Method: Round total unit dimensions up to the nearest foot. Calculate total linear footage and multiply by the Per Linear Foot (P.L.F.) cost shown in the table.

	Jamb Depth	18GA	16GA	Thermal 16GA
Window	4 3/4"	17	19	38
	5 3/4"	19	21	42
	6 3/4"	21	23	46
	7 3/4"	23	25	50
	8 3/4"	25	27	54
	9 3/4"	27	29	58

NOTES:
- **Use next highest size (JD, Width or Height) for pricing**
- Above pricing is for 4 sided units only - units with horizontal and vertical mullions must be priced as screens
- B. Lites include glazing bead installed one side only (wide side unless specified otherwise)
- Labelled units (3/4 hr. fire rating) add $20
- For splicing add $100 per splice
- Perimeter face over 4" (100mm) up to 9 1/2" (241mm) add $11 per linear foot
- Profile weld add 20%
- G90 add 30%
- 14GA add 25% to the 16GA price.
- For 1 1/2 hr. fire rating contact factory

Factory Welded Transom Frames

Pricing Method: Round total unit dimensions up to the nearest foot. Calculate total linear footage and multiply by the Per Linear Foot (P.L.F.) cost shown in the table.

	Jamb Depth	18GA	16GA	Thermal 16GA
Transom Frames	4 3/4"	19	21	42
	5 3/4"	21	23	46
	6 3/4"	23	25	50
	7 3/4"	25	27	54
	8 3/4"	27	29	58
	9 3/4"	29	31	62

NOTES:

- **Use next highest size (JD, Width or Height) for pricing**
- For removable mullions (labeled or non-labeled) add $200
- Transom frames include glazing bead installed one side only (wide side unless specified otherwise.
- Labelled units (3/4 hr. fire rating) add $20
- For splicing add $100 per splice
- Perimeter face over 4" (100mm) up to 9 1/2" (241mm) add $11 per linear foot
- Includes 1 horizontal mullion only - if additional mullions are required, price as sidelight
- Profile weld add 20%
- G90 add 30%
- 14GA add 25% to the 16GA price.
- For 1 1/2 hr. fire rating contact factory

D – Series Doors

General Information

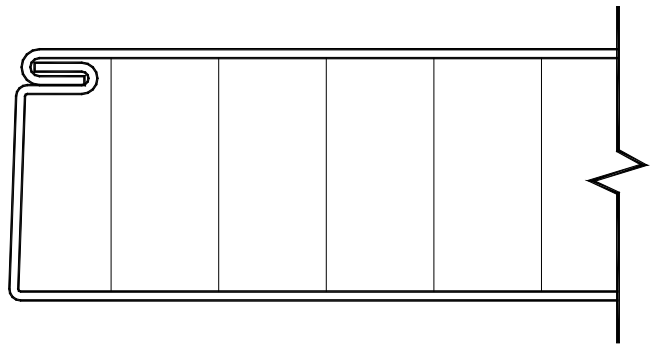

Index

Page	Description
79	General Information
80	Standard Door Types
81	Base Door Pricing
82 to 86	Custom Options and Extras

Product Features

Material:

All product is manufactured from A40 Paintable Galvanneal Steel.

Hardware Preparations:

10ga High Frequency Hinge Reinforcing in all hinge locations.

All 1 3/4" thick doors (unless specified otherwise) receive 1 1/2" pr (2pr on doors over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

16ga closer reinforcing boxes are installed in all doors. Reversible doors receive closer reinforcing at the top and the bottom of the door.

Top and Bottom:

Both the top and bottom receive inverted channels.

Seams:

D series doors have a mechanically interlocking edge seam, filled with a UL approved sealant.

Function Holes:

The factory preps the door for templated holes 1/2" and larger, except for mounting or through bolts. The exception is for holes required for the function of the lock or device (i.e. levers, thumb turns, etc.)

Door Elevations

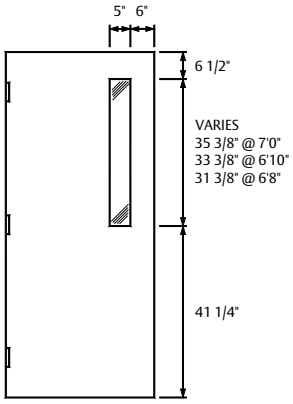

(NL1) Narrow Lite

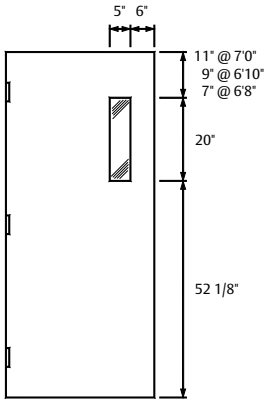

(NL2) Narrow Lite

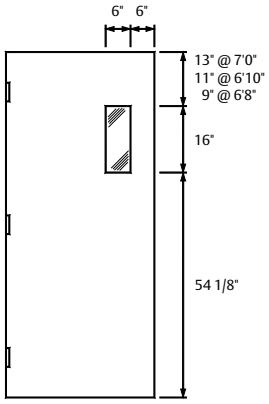

(NL3) Narrow Lite

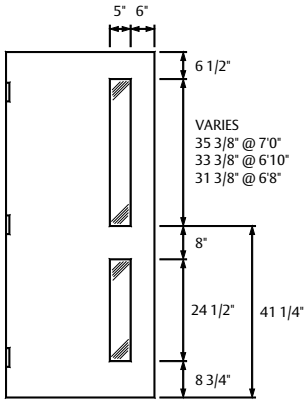

(2NL) Narrow Lite

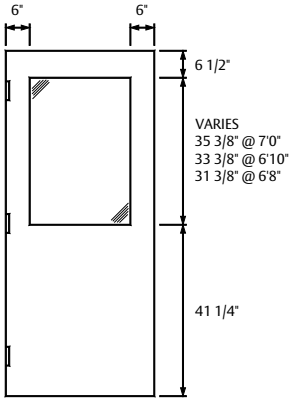

(G) Half Glass Lite

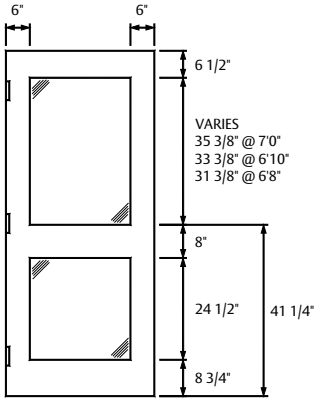

(2G) Full Glass w/Rail

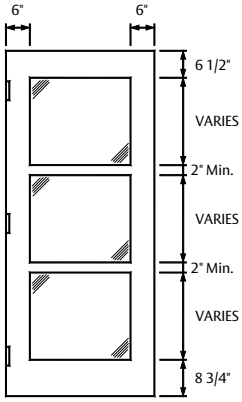

(3G) Full Glass w/2 Rails

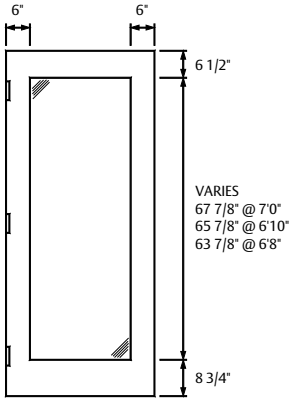

(FG) Full Glass

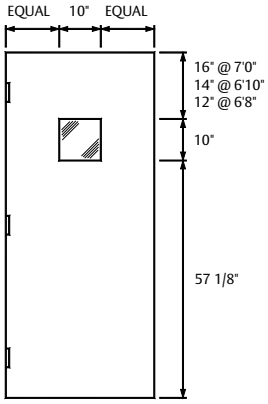

(V) View Window

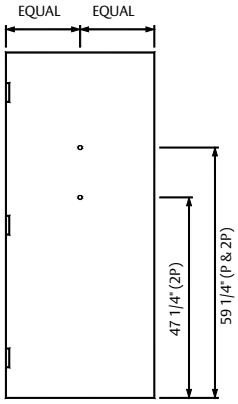

(P or 2P) Peephole

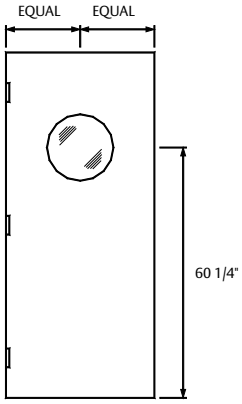

(R) Round Lite (cutout only)

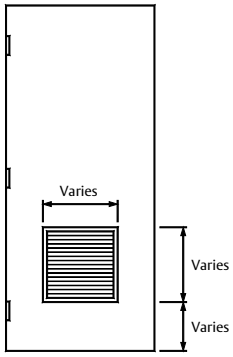

(L) Louvre (cutout only)

D – Series Doors

Base Door Pricing

Width	Height	20ga	18ga	16ga	14ga**
3'0"	7'0"	296	362	441	636
3'2"		336	401	480	677
3'6"		NA	434	513	710
4'0"		NA	526	613	824
3'0"	7'6"	NA	422	501	699
3'2"		NA	462	541	738
3'6"		NA	495	574	772
4'0"		NA	592	678	891
3'0"	8'0"	NA	471	550	748
3'2"		NA	511	590	788
3'6"		NA	543	622	822
4'0"		NA	645	731	944
3'0"	10'0"	NA	855	947	1193
3'2"		NA	894***	987***	1232***
3'6"		NA	928***	1038***	1266***
4'0"		NA	1013***	1139***	1380**

Product Features

Material:

- Maximum size for D series doors: 4'0" x 9'0" or 3'0" x 10'0"
- Larger sizes than above will be priced and fabricated as H series doors

• **14ga doors:
  - Thickness 1 25/32"
  - If the hinge backset on the frame is smaller then 3/8" contact the factory
  - 14ga door requires continuously welded vertical edges. Available in Polystyrene or Laminated Steel Stiffened core (add core and continuous weld to the base price)

***• This price is for 9'0" high. For 10'0" prices contact the factory

- For labeling requirements and capabilities refer to the Fire Labeling Specification Guide
- 3/4" undercut standard
- **Lites:**
- Standard top rail is 6 1/2"
- Minimum lite width is 4 1/2" for snap in kits and 4 1/4" for other kits.
- Light dimensions noted are nominal (see General Info for more details).
- **Approximate Weights:**
  - D20 = 83 lbs (3'0" x 7'0")
  - D18 = 98 lbs (3'0" x 7'0")
  - D16 = 119 lbs (3'0" x 7'0")
  - CW14 = 135 lbs (3'0" x 7'0")
- **Estimated Insulating Values:**

	Imperial	Metric
Polyisocyanurate	U= .082 R=12.23	U= .46 R=2.14
Polystyrene	U=.146 R=6.87	U= .83 R=1.20
Honeycomb	U=.381 R=2.62	U=2.16 R= .46

NOTES:

- **Use the next highest size (Width or Height) for pricing.**

EXTRAS:

- Polystyrene Core: $55
- Polyisocyanurate Core: $150
  Fire Rated: Contact Factory
- Laminated Steel Stiffened: $248
- Metal Label $30
- Mylar Label $16
- "G" Lite $131
- "2G" Lite $262
- "FG" Lite (16 and 14ga doors only) $179
- "NL1" Lite $131
- "NL2" Lite $131
- "V" Lite $131
- "P" Lite (peephole) $14
- "2P" Lite (two peepholes) $27
- Non-Standard width or height $18
- Deadlock prep $26
- Inactive door (ASAxFB) $65
- ASA $15
- FB $50
- Welded astragal $152
- Opening number (TAG) $3

Door Options

1. Hinge Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per door	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity IE: 4 hinge preps on a 7'0" door	Per hinge	$25
1c	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous Hinge reinforcing (steel strip for edge mounted continuous hinge)	Per door	$66
1d	**Surface Hinge Rein Channel** (S/CNL)	Surface or Continuous Hinge reinforcing (steel channel for face mounted continuous hinge)	Per door	$89
1e	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per door	$66
1f	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped	Per door	$263
1g	**Mortised Pivots** (M/PIV)	Top pivot and bottom pivot (not drilled & tapped) Intermediate pivots (drilled & tapped)	Per part Per part	$145 $79
1h	**Pocket Pivots** (P/PIV)	Prep for 1 1/2"pr pocket pivots (not drilled & tapped)	Per door	$394
1i	**SOSS Hinges** (SOSS)	Prep for 1 1/2"pr SOSS hinges	Per door	$329
1j	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge See page PBD01 (8) if conduit/raceway is required	Per prep	$16
1k	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79
1l	**Spring Hinges**	Bommer type double acting spring hinges (for spring hinges that fit the std. hinge prep – **no charge**)	Per prep	Contact Factory

2. Panic Preps

2a	**Panic Reinforcing** (BLK)	Reinforcing only for rim / vertical rod panic	Per prep	N/C
2b	**Rim Panic** (RP)	Reinforcing and function holes for rim panic	Per prep	$26
2c	**Surface Vertical Rod** (SVRP)	Reinforcing and function holes for surface vertical rod panic	Per prep	$26
2d	**Mortised Panic** (MP)	Reinforcing and function holes for mortised panic	Per prep	$26
2e	**Concealed Vertical Rod Panic** (CVRP)	Reinforcing and function holes for concealed vertical rod panic	Per prep	$284
2f	**Inset Panic** (ISP)	Reinforcing and function holes for inset panic	Per prep	Contact Factory
2g	**Auxiliary Fire Latch** (FPIN)	Prep for auxiliary fire latch	Per prep	$14

Door Options

3. Lock Preps

3a	**161 Prep** (161NS, +161)	Non standard 161 backset (other than 2 3/4") Additional 161 prep	Per prep Per prep	$26 $26
3b	**161L Prep** (161L)	161L prep (lever prep)	Per prep	N/C
3c	**Mortised Locks** (86ED, ANSI, ML)	86 edge only (8" x 1 1/4") 86 edge c/w function holes	Per prep Per prep	N/C $14
3d	**Non-std. Lock Height** (NSLH)	Applies to the above preps	Per door	$26
3e	**Deadlocks** (DL)	Deadlock prep c/w function holes	Per prep	$26
3f	**Interconnected Lock** (INT)	4" CL to CL spacing to suit interconnected locks	Per prep	$26
3g	**Mag Lock** (MAGFW)	Reinforcing for a magnetic lock	Per door	$66
3h	**Push / Pull** (BLK)	Reinforcing for a push / pull	Per prep	N/C
3i	**Roller Latch** (RL)	Reinforcing for a roller latch prep	Per prep	$24
3j	**Flush Pull** (FP)	Reinforcing for a flush pull prep	Per prep	$66
3k	**2 or 3 Point Lock**	Prep and install 2 or 3 point locks (hdwe supplied by dist)	Per prep	Contact Factory
3l	**Security Locks**	Folger Adam or other security locks and deadlocks	Per prep	

4. Strike and Flush Bolt Preps

4a	**ASA Strike** (ASA)	Reinforcing for ASA strike prep (1 1/4" x 4 7/8" w/lip)	Per prep	$15
4b	**ASA Strike w/o Lip** (ASANL)	Reinforcing for ASA strike prep (1 1/4" x 4 7/8")	Per prep	$15
4c	**Deadlock Strike** (S/ASA)	Reinforcing for ASA "T" strike prep (1 1/8" x 2 3/4" w/lip)	Per prep	$21
4d	**Deadlock Strike w/o Lip** (S/ASANL)	Reinforcing for ASA "T" strike prep (1 1/8" x 2 3/4")	Per prep	$21
4e	**Flush Bolts** (FB)	Two ASA flush bolt preps (standard 12" top down and 12" bottom up)	Per door	$50
4f	**Surface Bolts** (SB)	Reinforcing for surface mounted bolts	Per door	$17
4g	**Electric Strike** (ELSTR)	Reinforcing for electric strike prep	Per prep	$120
4h	**Open Back Strike** (OBSTR)	Reinforcing for open back or special strike prep	Per prep	$120

Door Options

5. Closers

5a	**Surface Closer**	Surface closer reinforcing included in all doors		N/C
5b	**Concealed Closer** (COHC)	Reinforcing for concealed or semi-concealed closer prep	Per prep	$164
5c	**Concealed Holder** (COHH)	Reinforcing for concealed holder prep	Per prep	$70

6. Top and Bottom Preps & Caps

6a	**Rabbeted Top** (RABCAP)	Prep for Rabbeted Door	Per door	$165
6b	**Door Bottoms**	(CONCBTM) – Prep for concealed door bottom (MORTBTM) – Prep for mortised door bottom	Per prep Per prep	$56 $79
6c	**Top Caps**	(SCRCAP) – steel top cap screw fixed (STCAP) – Steel top cap welded (tacked only) (FSTCAP) – Steel top cap welded (tacked and filled)	Per door Per door Per door	$34 $47 $57
6d	**Bottom Caps**	(SCRBTM) – Steel bottom cap screw fixed (STBTM) – Steel bottom cap welded (tacked only) (FSTBTM) – Steel bottom cap welded (tacked and filled)	Per door Per door Per door	$34 $47 $57

7. Door Edge Preps

7a	**Square** (SQ, SQL, SQH)	Either lock side or hinge side square edge (SQL, SQH) Both edges of door square (SQ)	Per edge Per door	$56 $113
7b	**Tack Weld** (TW, TWL, TWH)	Tack weld either lock side or hinge side (TWL, TWH) Tack weld both edges (TW)	Per edge Per door	$40 $62
7c	**Seam Filled** (SF)	Tack weld and seam fill both edges of the door	Per door	$105
7d	**Continuously Welded**	20ga: N/A	Per door	N/A
		18ga: Available with Poly S or Poly Iso core (slab doors only) 16ga: Available with Poly S or Poly Iso or Lam SS core 14ga: Available with Poly S or Poly Iso or Lam SS core For FG AND 2G light preps (contact factory)	Per door Per door Per door	$105 $105 $105
7e	**Double Egress** (DE)	Install 14ga channel on lock edge of door (required for labeled double egress doors over 108", label not incl.)	Per door	$86
7f	**Flat Bar Astragal** (FASTW, FASTW/ACTIVE)	Flat bar astragal	welded	$158
7g	**Z Astragal** (ZASTW)	Z astragal (inactive door prep)	welded	$158
7h	**Loose Astragal**	**Refer to accessories**		

Door Options

8. Lite Cutouts

8a	**Peep Hole** (P)	Door viewer (Peep hole)	Per prep	$14
8b	**Two Peep Holes** (2P)	Two door viewers (2 peep holes)	Per door	$27
8c	**Round Lite Cutout** (R)	Cutout for a round window	Per prep	$110
8d	**Labeled Lite/louver**	Cutout and inner channel (recessed 1/4")	Per cutout	$98
8e	**Cutout Only** (CO)	Provide cutout only in door	Per cutout	$55
8f	**Bridged Cutout** (BRCO)	Skins are pre-punched for lites except for tabs at four sides for final cutting by distributor	Per lite	$35
8g	**Mail Slot**	Cutout only for mail slot	Per cutout	$55
8h	**Multi Lite**	**Contact factory**		

9. Lite Kits Installed

9a	**NL1 Lite** (NL1)	Narrow lite prep c/w screw fixed glazing stop	Per lite	$131
9b	**NL2 Lite** (NL2)	Narrow lite prep c/w screw fixed glazing stop (used in 1 1/2 hr rated doors)	Per lite	$131
9c	**G Lite** (G)	1/2 lite window prep c/w screw fixed glazing stop	Per lite	$131
9d	**2G Lite** (2G)	2 lite prep c/w screw fixed glazing stop	Per door	$262
9e	**FG Lite** (FG)	Full lite prep c/w screw fixed glazing stop (16ga & 14ga doors only)	Per door	$179
9f	**V Lite** (V)	View window prep c/w screw fixed glazing stop	Per lite	$131

10. Lite Kit Options

	NOTE: all add-ons are in addition to the lite kit prices above			
10a	**Thermal glazing** (THGLZ)	Prep for thermal glazing unit (up to and including 1 1/8" gap)	Per lite	$16
10b	**Snap in kit**	Snap in lite kit	Per lite	$26
10c	**Flush glazing**	Rabetted lite kit	Per lite	$329
10d	**Steel Stiffened**	Add a light kit or cutout to a laminated steel stiffened door	Per lite	$126

11. Material

11a	**G90** (G90)	18ga: Available with Poly S or Poly Iso core 16ga: Available with Poly S or Poly Iso core (if Cont welded contact factory for availability)	Per door	$165

Door Options

12. Dutch Doors

12a	**Non-Labelled**	Includes preps for extra hinge and non-standard lock height (Add to price of base door)	Per door	$551
12b	**Labelled**	Includes preps for extra hinge, 2 lock preps, astragal and label (Add to price of base door)	Per door	$639
12c	**Shelf**	One sided 8" shelf c/w brackets Two sided shelf c/w brackets	Per shelf Per shelf	$447 $526

13. Double Acting Doors

13a	**Bull Nose Integral** (BNI, BNIL, BNIH)	Integral Steel Radius Edge	Per edge	$855

14. Other than 1 3/4" Thick

14a	**Over 1 3/4"**	Door over 1 3/4" thick (2" or 2 1/4" thick only) Note: polystyrene core only	Per door	Contact Factory
14b	**1 3/8" Thick**	Includes: 1 lock prep (gov't. 160 – 2 1/4" x 1")	Per door	Contact Factory

*** For windows, top caps, and special hardware preps please contact factory for pricing**

15. Miscellaneous

15a	**Conduit** (CDTP, CDTM)	Install conduit / raceway in door for electrical hardware (plastic conduit standard)	Per prep	$150
15b	**E-Lynx** (ELYNX)	E-Lynx wire	Per door	$150
15c	**Monorail Cutout**	Prep for monorail cutout (no flap)	Per leaf	Contact Factory
15d	**Door Position Sensor** (DPS)	Install reinforcing for a door position sensor in the top channel of the door (DPS size must be noted)	Per prep	$17
15e	**Magnetic Contact** (MAGC)	Install reinforcing for a magnetic contact in the top channel of the door	Per prep	$33
15f	**Non-Std. Undercut** (NSUC)	Undercut of other than 3/4"	Per prep	$18
15g	**Factory priming** (PRIME, _____)	Factory prime (A40 material only, minimum 25 doors/order)	Per door	$66

E – Series Doors

General Information

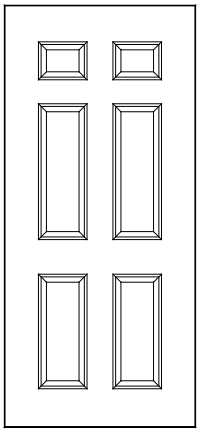

Index

Page	Description
87	General Information
88	Standard Door Types
89	Embossed Door Pricing
90 to 94	Custom Options & Extras

Product Features

Material:

All product is manufactured from 18ga A40 Paintable Galvanneal Steel.

Hardware Preparations:

10ga High Frequency Hinge Reinforcing in all hinge locations.

All 1 3/4" thick doors (unless specified otherwise) receive 1 1/2"pr (2pr on doors over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

16ga closer reinforcing boxes are installed in all doors.

Top and Bottom:

Both the top and bottom receive inverted channels.

Seams:

E series doors have a mechanically interlocking edge seam, filled with a UL approved sealant.

Reversibility:

E series doors can not be reversible because of the panel pattern.

Function Holes:

The factory preps the door for templated holes 1/2" and larger, except for mounting or through bolts. The exception is for holes required for the function of the lock or device (i.e. levers, thumb turns, etc.)

Door Elevations

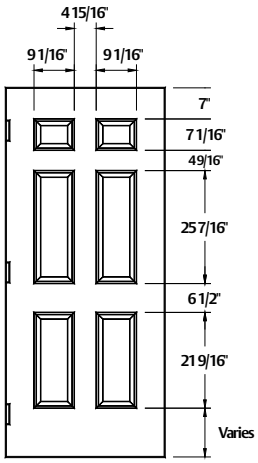

(E18;6PAN)
6 PANEL

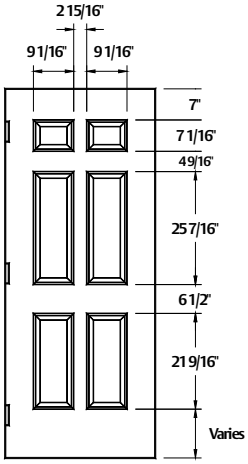

(E18;6PAN)
6 NARROW PANEL

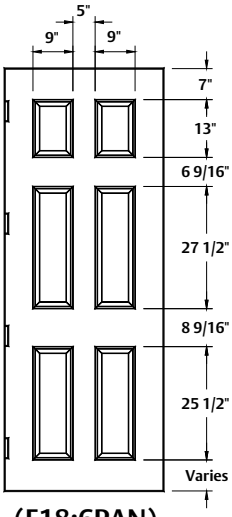

(E18;6PAN)
8'0 - 6 PANEL

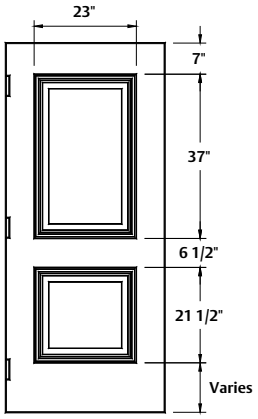

(E18;2PAN)
HIGH DEFINITION 2 PANEL

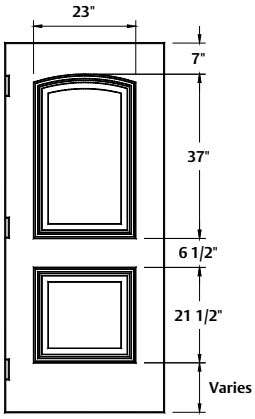

(E18;2PANAT)
HIGH DEFINITION 2 PANEL WITH ARCHED TOP

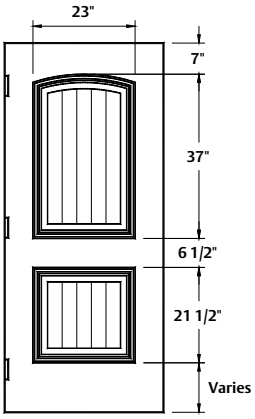

(E18;2PANPAT)
HIGH DEFINITION 2 PANEL PLANKED WITH ARCHED TOP

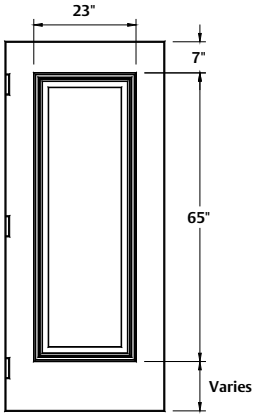

(E18;1PAN)
HIGH DEFINITION 1 PANEL

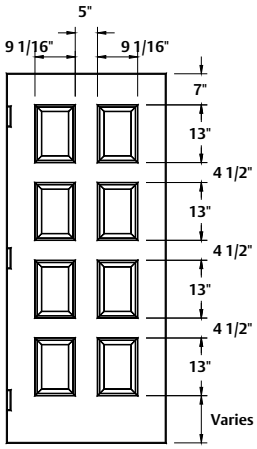

(E18;8PAN)
8 PANEL

E – Series Doors

Embossed Door Pricing

Elevation	Width	Height	18ga
narrow panel	2'6" < 2'10"	6'8" to 7'0"	493
standard 6 panel	2'10 to 3'0"		493
	3'0" to 3'6"		572
standard 6 panel	2'10" to 3'0"	8'0"	675
1, 2 or 8 panel design	2'10" to 3'0"	6'8" to 7'0"	560*

NOTES:

- **Use the next highest size (Width or Height) for pricing.**

EXTRAS:

- Metal Label $30
- Mylar Label $16
- "G" Lite $131
- "NL1" Lite $131
- "P" Lite (peephole) $14
- "2P" Lite (two peepholes) $27
- Non-standard width or height $18
- Blank door reinforcing NC
- 86 Edge prep NC
- Deadlock prep $26
- Inactive door (ASAxFB) $65
- ASA $15
- FB $50
- Welded astragal $152
- Opening Number (TAG) $3

Product Features

Available Sizes:

- **Maximum Actual Height – 6'11 5/8"**
- **Nominal width E18 – 2'8" to 3'6"**
- **Nominal width E18 (narrow panel) – 2'6" to 2'10"**
  (If 2'10" is ordered, Standard 6 panel will be supplied)
- For labelling requirements and capabilities refer to the Fire Labeling Specification Guide
- Embossed Doors available in 1 3/4" thick only
- 3/4" undercut standard

* Minimum quantity may apply.

Lites:

- Minimum lite width is 9 1/4"

- **Approximate Weights:**
  - E18 = 98 lbs (3'0" x 7'0")

- **Estimated Insulating Values:** **Imperial** **Metric**
  - Polystyrene U=.146 R=6.87 U= .83 R=1.20

Door Options

1. Hinge Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per door	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity IE: 4 hinge preps on a 7'0" door	Per hinge	$25
1c	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous Hinge reinforcing (steel strip for edge mounted continuous hinge)	Per door	$66
1d	**Surface Hinge Rein Channel** (S/CNL)	Surface or Continuous Hinge reinforcing (steel channel for face mounted continuous hinge)	Per door	$89
1e	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per door	$66
1f	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped	Per door	$263
1g	**Mortised Pivots** (M/PIV)	Top pivot and bottom pivots (not drilled & tapped) Intermediate pivots (drilled & tapped)	Per part Per part	$145 $79
1h	**Pocket Pivots** (P/PIV)	Prep for 1 1/2"pr pocket pivots (not drilled & tapped)	Per door	$394
1i	**SOSS Hinges** (SOSS)	Prep for 1 1/2"pr SOSS hinges	Per door	$329
1j	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1k	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79
1l	**Spring Hinges**	Bommer type double acting spring hinges (for spring hinges that fit the std. hinge prep – **no charge**)	Per prep	Contact Factory

2. Panic Preps

2a	**Panic Reinforcing** (BLK)	Reinforcing only for rim / vertical rod panic	Per prep	N/C
2b	**Rim Panic** (RP)	Reinforcing and function holes for rim panic	Per prep	$26
2c	**Surface Vertical Rod** (SVRP)	Reinforcing and function holes for surface vertical rod panic	Per prep	$26
2d	**Mortised Painc** (MP)	Reinforcing and function holes for mortised panic	Per prep	$26
2e	**Concealed Vertical Rod Panic** (CVRP)	Reinforcing and function holes for concealed vertical rod panic	Per prep	$284
2g	**Auxiliary Fire Latch** (FPIN)	Prep for auxiliary fire latch	Per prep	$14

Door Options

3. Lock Preps

3a	**161 Prep** (161NS, +161)	Non standard 161 backset (other than 2 3/4") Additional 161 prep	Per prep Per prep	$26 $26
3b	**161L Prep** (161L)	161L prep (lever prep)	Per prep	N/C
3c	**Mortised Locks** (86ED, ANSI, ML)	86 edge only (8" x 1 1/4") 86 edge c/w function holes	Per prep Per prep	N/C $13
3d	**Non-std. Lock Height** (NSLH)	Applies to the above preps	Per door	$14
3e	**Deadlocks** (DL)	Deadlock prep c/w function holes	Per prep	$26
3f	**Interconnected Lock** (INT)	4" CL to CL spacing to suit interconnected locks	Per prep	$26
3g	**Mag Lock** (MAGFW)	Reinforcing for a magnetic lock	Per door	$26
3h	**Push / Pull** (BLK)	Reinforcing for a push/pull	Per prep	$66
3i	**Roller Latch** (RL)	Reinforcing for a roller latch prep	Per prep	$24
3j	**Flush Pull** (FP)	Reinforcing for a flush pull prep	Per prep	$66

4. Strike and Flush Bolt Preps

4a	**ASA Strike** (ASA)	Reinforcing for ASA strike prep (1 1/4" x 4 7/8" w/lip)	Per prep	$15
4b	**ASA Strike w/o Lip** (ASANL)	Reinforcing for ASA strike prep (1 1/4" x 4 7/8")	Per prep	$15
4c	**Deadlock Strike** (S/ASA)	Reinforcing for ASA "T" strike prep (1 1/8" x 2 3/4" w/lip)	Per prep	$21
4d	**Deadlock Strike w/o Lip** (S/ASANL)	Reinforcing for ASA "T" strike prep (1 1/8" x 2 3/4")	Per prep	$21
4e	**Flush Bolts** (FB)	Two ASA flush bolt preps (standard 12" top down and 12" bottom up)	Per door	$50
4f	**Surface Bolts** (SB)	Reinforcing for surface mounted bolts	Per door	$17
4g	**Electric Strike** (ELSTR)	Reinforcing for electric strike prep	Per prep	$120
4h	**Open Back Strike** (OBSTR)	Reinforcing for open back or special strike prep	Per prep	$120

Door Options

5. Closers

5a	**Surface Closer**	Surface closer reinforcing included in all doors		N/C
5b	**Concealed Closer** (COHC)	Reinforcing for concealed or semi-concealed closer prep	Per prep	$164
5c	**Concealed Holder** (COHH)	Reinforcing for concealed holder prep	Per prep	$70

6. Top and Bottom Preps & Caps

6a	**Rabbeted Top** (RABCAP)	Prep for Rabbeted Door	Per door	$165
6b	**Door Bottoms**	(CONCBTM) – Prep for concealed door bottom (MORTBTM) – Prep for mortised door bottom	Per prep Per prep	$56 $79
6c	**Top Caps**	(SCRCAP) – steel top cap screw fixed (STCAP) – Steel top cap welded (tacked only) (FSTCAP) – Steel top cap welded (tacked and filled)	Per door Per door Per door	$34 $47 $57
6d	**Bottom Caps**	(SCRBTM) – Steel bottom cap screw fixed (STBTM) – Steel bottom cap welded (tacked only) (FSTBTM) – Steel bottom cap welded (tacked and filled)	Per door Per door Per door	$34 $47 $57

7. Door Edge Preps

7a	**Square** (SQ, SQL, SQH)	Either lock side or hinge side square edge (SQL, SQH) Both edges of door square (SQ)	Per edge Per door	$56 $113
7b	**Tack Weld** (TW, TWL, TWH)	Tack weld either lock side or hinge side (TWL, TWH) Tack weld both edges (TW)	Per edge Per door	$40 $62
7c	**Seam Filled** (SF)	Tack weld and seam fill both edges of the door	Per door	$105
7d	**Double Egress** (DE)	Install 14ga channel on lock edge of door (required for labeled double egress doors over 108", label not incl.)	Per door	$86
7e	**Flat Bar Astragal** (FASTW, FASTW/ACTIVE)	Flat bar astragal	Welded	$158
7f	**Z Astragal** (ZASTW)	Z astragal (inactive door prep)	Welded	$158
7g	**Loose Astragal**	**Refer to accessories**		

Door Options

8. Lite Cutouts

8a	**Peep Hole** (P)	Door viewer (Peep hole)	Per prep	$14
8b	**Two Peep Holes** (2P)	Two door viewers (2 peep holes)	Per door	$27
8c	**Labeled Lite/louver**	Cutout and inner channel (recessed 1/4")	Per cutout	$98
8d	**Cutout Only**	Provide cutout only in door	Per cutout	$55
8e	**Mail Slot**	Cutout only for mail slot	Per cutout	$55
8f	**Multi Lite**	**Contact factory**		

9. Lite Kits Installed

9a	**NL1 Lite** (NL1)	Narrow lite prep c/w screw fixed glazing stop	Per lite	$131
9b	**NL2 Lite** (NL2)	Narrow lite prep c/w screw fixed glazing stop (used in 1 1/2 hr rated doors)	Per lite	$131
9c	**G Lite** (G)	1/2 lite window prep c/w screw fixed glazing stop	Per lite	$131
9d	**2G Lite** (2G)	2 lite prep c/w screw fixed glazing stop	Per door	$262

10. Lite Kit Options

	NOTE: all add-ons are in addition to the lite kit prices above			
10a	**Thermal glazing** (THGLZ)	Prep for thermal glazing unit (up to and including 1 1/8" gap)	Per lite	$16
10b	**Snap in kit**	Snap in lite kit	Per lite	$26
10c	**Flush glazing**	Rabetted lite kit	Per lite	$329

Door Options

11. Dutch Doors

11a	**Non-Labelled**	Includes preps for extra hinge and non-standard lock height (Add to price of base door)	Per door	$551
11c	**Shelf**	One sided 8" shelf c/w brackets Two sided shelf c/w brackets	Per shelf Per shelf	$447 $526

12. Double Acting Doors

12a	**Bull Nose Integral** (BNI, BNIL, BNIH)	Integral Steel Radius Edge	Per edge	$855

13. Miscellaneous

13a	**Conduit** (CDTP, CDTM)	Install conduit/raceway in door for electrical hardware (plastic conduit standard)	Per prep	$150
13b	**E-Lynx** (ELYNX)	E-Lynx wire	Per door	$150
13c	**Door Position Sensor** (DPS)	Install reinforcing for a door position sensor in the top channel of the door (DPS size must be noted)	Per prep	$17
13d	**Magnetic Contact** (MAGC)	Install reinforcing for a magnetic contact in the top channel of the door	Per prep	$33
13e	**Non-Std. Undercut** (NSUC)	Undercut of other than 3/4"	Per prep	$18
13f	**Factory priming** (PRIME, _____)	Factory prime (A40 material only, Minimum 25 doors/order)	Per door	$66

H-Series Steel Stiffened Doors

General Information

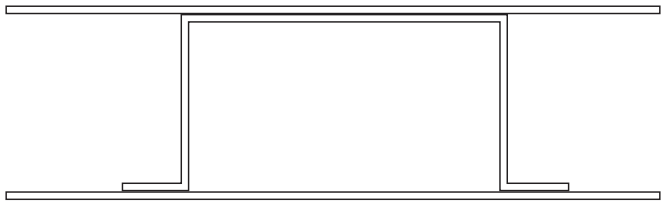

Index

Page	Description
95	General Information
96	Standard Door Types
97	Base Door Pricing
100 to 102	Custom Options and Extras

Product Features

Material:

All product manufactured from A40 Paintable Galvanneal Steel.

Hardware Preparations:

10ga High Frequency Hinge Reinforcing in all hinge locations.

All 1 3/4" thick doors (unless specified otherwise) receive 1 1/2pr (2pr on doors over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

16ga closer reinforcing boxes are installed in all doors. Reversible doors receive closer reinforcing at the top and the bottom of the door.

Top and Bottom:

Both the top and bottom receive inverted channels.

Seams:

H series doors have a continuously welded and finished edge seam.

Core:

20ga steel stiffeners spot welded to door face at 6" o.c. Voids between stiffeners filled with fiberglass insulation.

Notes:

Weld marks will be visible on the face of the door.

Function Holes:

The factory preps the door for templated holes 1/2" and larger, except for mounting or through bolts. The exception is for holes required for the function of the lock or device (i.e. levers, thumb turns, etc.)

H-Series Steel Stiffened Doors

Door Elevations

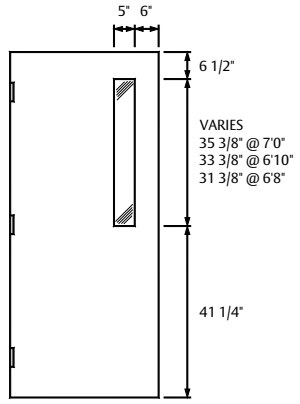

(NL1) Narrow Lite

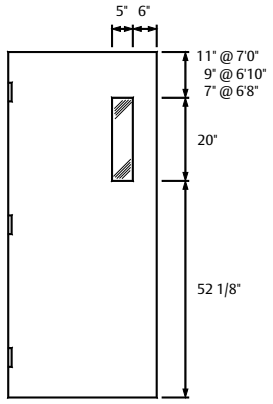

(NL2) Narrow Lite

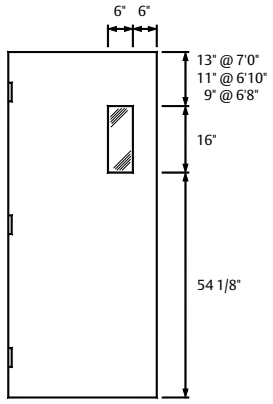

(NL3) Narrow Lite

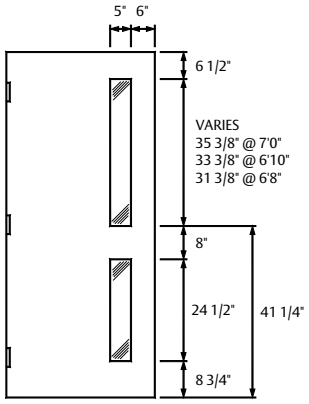

(2NL) Narrow Lite

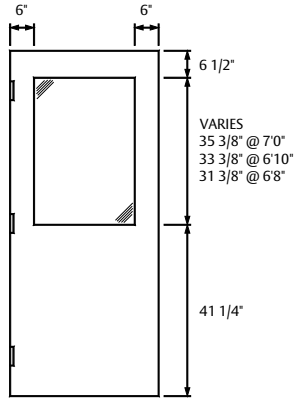

(G) Half Glass Lite

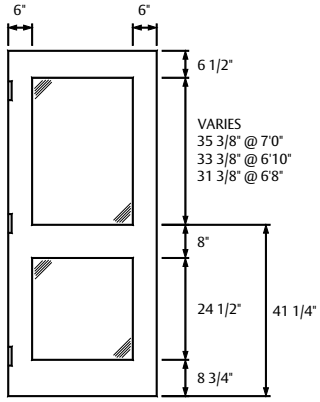

(2G) Full Glass w/Rail

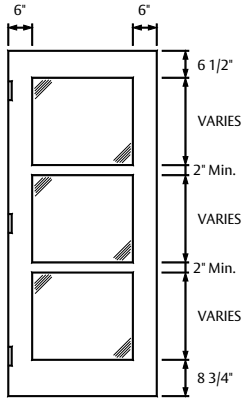

(3G) Full Glass w/2 Rails

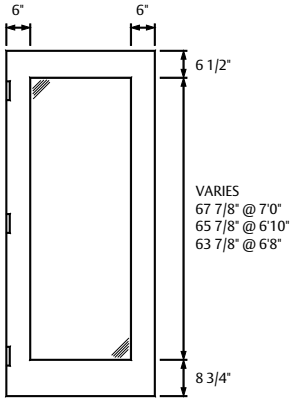

(FG) Full Glass

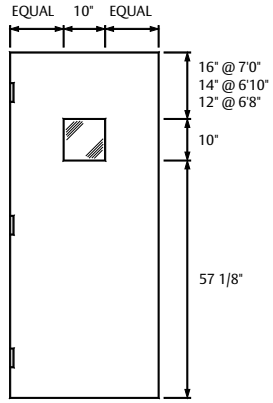

(V) View Window

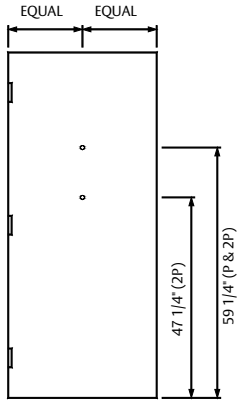

(P or 2P) Peephole

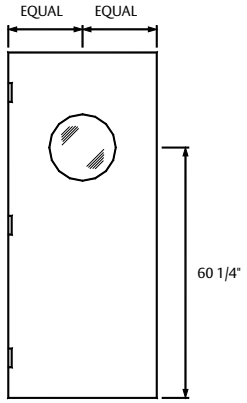

(R) Round Lite (cutout only)

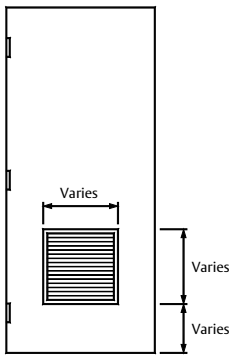

(L) Louvre (cutout only)

H-Series Steel Stiffened Doors

Width	Height	WSS	HINL		
		16ga	16ga	14ga	12ga
3'0"	7'0"	1267	1832	1958	2183
3'2"		1360	1927	2052	2279
3'6"		1503	2070	2193	2423
4'0"		1634	2200	2323	2557
3'0"	7'6"	1454	2020	2146	2373
3'2"		1548	2114	2239	2469
3'6"		1690	2257	2381	2614
4'0"		1819	2386	2511	2746
3'0"	8'0"	1502	2068	2191	2421
3'2"		1596	2162	2286	2518
3'6"		1738	2305	2429	2663
4'0"		1867	2434	2558	2986
3'0"	10'0"	N/A	2502	2626	2864
3'2"		N/A	2596	2720	2960
3'6"		N/A	2738	2864	3106
4'0"		N/A	2867	2993	3236

NOTES:
- 12ga: Standard thickness is 1 7/8"
- For labeling requirements and capabilities refer to the Fire Labeling Specification Guide
- 3/4" undercut standard
- **Lites:**
  - Standard top rail is 6 1/2"
  - Minimum lite width is 4 1/2" for snap in kits and 4 1/4" for other kits
  - Light dimensions noted are nominal (see General Info for more details)
- **Approximate Weights:**
  - H16 = 155 lbs (3'0" x 7'0")
  - H14 = 212 lbs (3'0" x 7'0")
- **Insulating Values:**

	Imperial	Metric
• Steel Stiffened	U=.855 R=1.17	U=4.85 R=.20

EXTRAS:
- **Use the next highest size (Width or Height) for pricing.**
- Metal Label $30
- Mylar Label $16
- "G" Lite $187
- "2G" Lite $374
- "FG" Lite $357
- "NL1" Lite $187
- "NL2" Lite $187
- "V" Lite $187
- "P" Lite (peephole) $14
- Blank door reinforcing NC
- 86 Edge prep NC
- Deadlock prep $26
- Inactive door (ASAxFB) $65
- ASA $15
- FB $50
- Welded astragal $158
- Opening Number (TAG) $3

H-Series Steel Stiffened Doors

Door Options

1. Hinge Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per door	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity IE: 4 hinge preps on a 7'0" door	Per hinge	$25
1c	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous Hinge reinforcing (steel strip for edge mounted continuous hinge)	Per door	$66
1d	**Surface Hinge Rein Channel** (S/CNL)	Surface or Continuous Hinge reinforcing (steel channel for face mounted continuous hinge)	Per door	$89
1e	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per door	$66
1f	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped	Per door	$263
1g	**Mortised Pivots** (M/PIV)	Top pivot and bottom pivots (not drilled & tapped) Intermediate pivots (drilled & tapped)	Per part Per part	$145 $79
1h	**Pocket Pivots** (P/PIV)	Prep for 1 1/2"pr pocket pivots (not drilled & tapped)	Per door	$394
1i	**SOSS Hinges** (SOSS)	Prep for 1 1/2"pr SOSS hinges	Per door	$329
1j	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1k	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79
1l	**Spring Hinges**	Bommer type double acting spring hinges (for spring hinges that fit the std. hinge prep – **no charge**)	Per prep	Contact Factory

2. Panic Preps

2a	**Panic Reinforcing** (BLK)	Reinforcing only for rim / vertical rod panic	Per prep	N/C
2b	**Rim Panic** (RP)	Reinforcing and function holes for rim panic	Per prep	$26
2c	**Surface Vertical Rod** (SVRP)	Reinforcing and function holes for surface vertical rod panic	Per prep	$26
2d	**Mortised Painc** (MP)	Reinforcing and function holes for mortised panic	Per prep	$26
2e	**Concealed Vertical Rod Panic** (CVRP)	Reinforcing and function holes for concealed vertical rod panic	Per prep	$284
2f	**Inset Panic** (ISP)	Reinforcing and function holes for inset panic	Per prep	Contact Factory
2g	**Auxiliary Fire Latch** (FPIN)	Prep for auxiliary fire latch	Per prep	$14

H-Series Steel Stiffened Doors

Door Options

3. Lock Preps

3a	**161 Prep** (161NS, +161)	Non standard 161 backset (other than 2 3/4") Additional 161 prep	Per prep Per prep	$26 $26
3b	**161L Prep** (161L)	161L prep (lever prep)	Per prep	N/C
3c	**Mortised Locks** (86ED, ANSI, ML)	86 edge only (8" x 1 1/4") 86 edge c/w function holes	Per prep Per prep	N/C $14
3d	**Non-std. Lock Height** (NSLH)	Applies to the above preps	Per door	$26
3e	**Deadlocks** (DL)	Deadlock prep c/w function holes	Per prep	$26
3f	**Interconnected Lock** (INT)	4" CL to CL spacing to suit interconnected locks	Per prep	$26
3g	**Mag Lock** (MAGFW)	Reinforcing for a magnetic lock	Per door	$66
3h	**Push / Pull** (BLK)	Reinforcing for a push / pull	Per prep	N/C
3i	**Roller Latch** (RL)	Reinforcing for a roller latch prep	Per prep	$24
3j	**Flush Pull**	Reinforcing for a flush pull prep	Per prep	$66
3k	**2 or 3 Point Lock**	Prep and install 2 or 3 point locks (hdwe supplied by dist)	Per prep	Contact Factory
3l	**Security Locks**	Folger Adam or other security locks and deadlocks	Per prep	Contact Factory

4. Strike and Flush Bolt Preps

4a	**ASA Strike** (ASA)	Reinforcing for ASA strike prep (1 1/4" x 4 7/8" w/lip)	Per prep	$15
4b	**ASA Strike w/o Lip** (ASANL)	Reinforcing for ASA strike prep (1 1/4" x 4 7/8")	Per prep	$15
4c	**Deadlock Strike** (S/ASA)	Reinforcing for ASA "T" strike prep (1 1/8" x 2 3/4" w/lip)	Per prep	$21
4d	**Deadlock Strike w/o Lip** (S/ASANL)	Reinforcing for ASA "T" strike prep (1 1/8" x 2 3/4")	Per prep	$21
4e	**Flush Bolts** (FB)	Two ASA flush bolt preps (standard 12" top down and 12" bottom up)	Per door	$50
4f	**Surface Bolts** (SB)	Reinforcing for surface mounted bolts	Per door	$17
4g	**Electric Strike** (ELSTR)	Reinforcing for electric strike prep	Per prep	$120
4h	**Open Back Strike** (OBSTR)	Reinforcing for open back or special strike prep	Per prep	$120

Door Options

5. Closers

5a	**Surface Closer**	Surface closer reinforcing included in all doors		N/C
5b	**Concealed Closer** (COHC)	Reinforcing for concealed or semi-concealed closer prep	Per prep	$164
5c	**Concealed Holder** (COHH)	Reinforcing for concealed holder prep	Per prep	$70

6. Top and Bottom Preps & Caps

6a	**Rabbeted Top** (RABCAP)	Prep for Rabbeted Door	Per door	$165
6b	**Door Bottoms**	(CONCBTM) – Prep for concealed door bottom (MORTBTM) – Prep for mortised door bottom	Per prep Per prep	$56 $79
6c	**Top Caps**	(SCRCAP) – steel top cap screw fixed (STCAP) – Steel top cap welded (tacked only) (FSTCAP) – Steel top cap welded (tacked and filled)	Per door Per door Per door	$34 $47 $57
6d	**Bottom Caps**	(SCRBTM) – Steel bottom cap screw fixed (STBTM) – Steel bottom cap welded (tacked only) (FSTBTM) – Steel bottom cap welded (tacked and filled)	Per door Per door Per door	$34 $47 $57

7. Door Edge Preps

7a	**Square** (SQ, SQL, SQH)	Either lock side or hinge side square edge (SQL, SQH) Both edges of door square (SQ)	Per edge Per door	$56 $113
7b	**Flat Bar Astragal** (FASTW, FASTW/ACTIVE)	Flat bar astragal	Welded	$158
7c	**Z Astragal** (ZASTW)	Z astragal (inactive door prep)	Welded	$158
7d	**Loose Astragal**	**Refer to accessories**		

H-Series Steel Stiffened Doors

Door Options

8. Lite Cutouts

8a	**Peep Hole** (P)	Door viewer (Peep hole)	Per prep	$14
8b	**Two Peep Holes** (2P)	Two door viewers (2 peep holes)	Per door	$27
8c	**Round Lite Cutout** (R)	Cutout for a round window	Per prep	$194
8d	**Cutout Only**	Provide cutout only in door	Per cutout	$98
8e	**Labeled Lite/louver**	Cutout and inner channel (recessed 1/4")	Per cutout	$98
8f	**Mail Slot**	Cutout only for mail slot	Per cutout	$98
8g	**Multi Lite**	**Contact factory**		

9. Lite Kits Installed

9a	**NL1 Lite** (NL1)	Narrow lite prep c/w screw fixed glazing stop	Per lite	$187
9b	**NL2 Lite** (NL2)	Narrow lite prep c/w screw fixed glazing stop (used in 1 1/2 hr rated doors)	Per lite	$187
9c	**G Lite** (G)	1/2 lite window prep c/w screw fixed glazing stop	Per lite	$187
9d	**2G Lite** (2G)	2 lite prep c/w screw fixed glazing stop	Per door	$374
9e	**FG Lite** (FG)	Full lite prep c/w screw fixed glazing stop	Per door	$357
9f	**V Lite** (V)	View window prep c/w screw fixed glazing stop	Per lite	$187
9g	**Viewport**	Security Viewport w/slider Viewport – pass through		Contact Factory
9h	**Food Pass**	Food Pass – cutout only Food Pass – cutout and flap		Contact Factory
9i	**Monorail**	Monorail cutout (No Flap)	Per leaf	Contact Factory

10. Lite Kit Options

	NOTE: all add-ons are in addition to the lite kit prices above			
10a	**Thermal glazing** (THGLZ)	Prep for thermal glazing unit (up to and including 1 1/8" gap)	Per lite	$16
10b	**Snap in kit**	Snap in lite kit	Per lite	$26
10c	**Flush glazing**	Rabetted lite kit	Per lite	$329

Door Options

11. Material

11a	**16ga G90** (G90)	Doors manufactured from 16ga G90 (Available with HINL only)	Per door	$165
11b	**14ga G90** (G90)	Doors manufactured from 14ga G90 (Available with HINL only)	Per door	$165
11c	**12ga G90** (G90)	Doors manufactured from 12ga G90 (Available with HINL only)	Per door	$454

12. Dutch Doors

12a	**Non-Labeled**	Includes preps for extra hinge and non-standard lock height (Add to price of base door)	Per door	$542
12b	**Labeled**	Includes preps for extra hinge, 2 lock preps, astragal and label (Add to price of base door)	Per door	$639
12c	**Shelf**	One sided 8" shelf c/w brackets Two sided shelf c/w brackets	Per shelf Per shelf	$447 $526

13. Double Acting Doors

13a	**Bull Nose Integral** (BNI, BNIL, BNIH)	Integral Steel Radius Edge	Per edge	$855

14. Other than 1 3/4" Thick

14a	**Over 1 3/4"**	Door over 1 3/4" thick (2" or 2 1/4" thick only)	Per door	Contact Factory

*** For windows, top caps, and special hardware preps please contact factory for pricing**

15. Miscellaneous

15a	**Conduit** (CDTP, CDTM)	Install conduit / raceway in door for electrical hardware (plastic conduit standard)	Per prep	$150
15b	**E-Lynx** (ELYNX)	E-Lynx wire	Per door	$150
15c	**Mandoor**	Mandoor prep – Includes prep in larger door and supply of 1 D18 door up to 3'0"x7'0" (available in H-series only)	Per door	Contact Factory
15d	**Door Position Sensor** (DPS)	Install reinforcing for a door position sensor in the top channel of the door (DPS size must be noted)	Per prep	$17
15e	**Magnetic Contact** (MAGC)	Install reinforcing for a magnetic contact in the top channel of the door	Per prep	$33
15f	**Factory priming** (PRIME, _____)	Factory prime (A40 material only, Minimum 25 doors/order)	Per door	$66

TRR – Series Doors

General Information

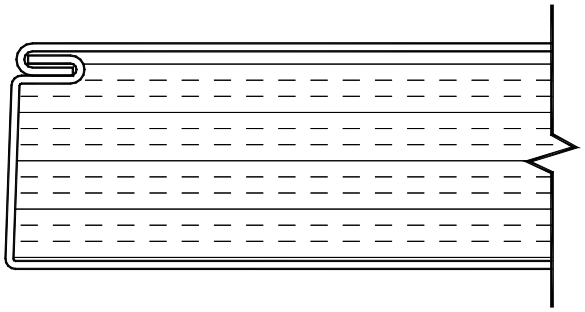

Index

Page	Description
103	General Information
104	Standard Door Types
105	Base Door Pricing
106 to 109	Custom Options and Extras

Product Features

Material:

All product manufactured from A40 Paintable Galvanneal Steel.

Hardware Preparations:

10ga High Frequency Hinge Reinforcing in all hinge locations.

All 1 3/4" thick doors (unless specified otherwise) receive 1 1/2pr (2pr on doors over 7'6") of dimpled 4 1/2" hinge reinforcing. The distributor or contractor can use a countersink bit or drill bit to remove the dimples from the reinforcing to convert standard weight hinge reinforcing to heavy weight hinge reinforcing.

16ga closer reinforcing boxes are installed in all doors. Reversible doors receive closer reinforcing at the top and the bottom of the door.

Top and Bottom:

Both the top and bottom receive inverted channels.

Seams:

TRR Series doors have a mechanically interlocking edge seam, filled with a UL approved sealant.

Core:

- Solid TRR Asbestos-Free core.
- Steel Stiffened (optional, contact factory for pricing)

Ratings:

Temperature rise ratings available are:
250°F (120°C) at 1/2 hour, 450°F (250°C) at 1/2 hour or 1 hour and 650°F (340°C) at 1/2 hour. Consult the Fire Labelling Specification Guide for more information.

Function Holes:

The factory preps the door for templated holes 1/2" and larger, except for mounting or through bolts. The exception is for holes required for the function of the lock or device (i.e. levers, thumb turns, etc.)

800.263.7515

Door Elevations

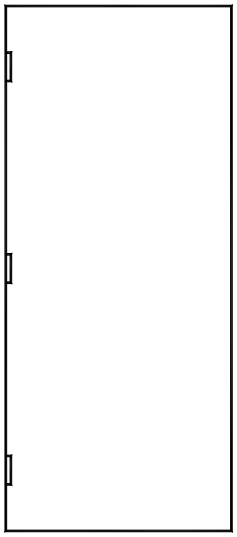

(F) Flush

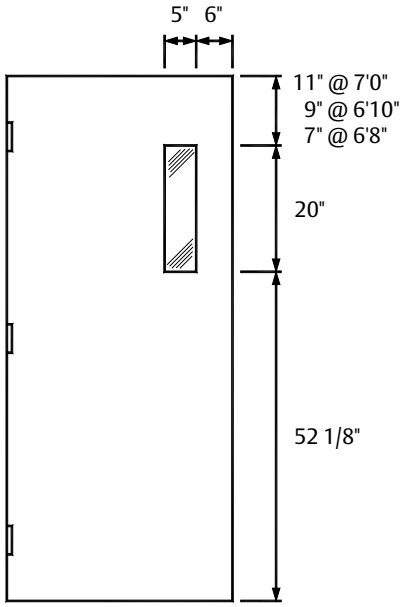

(NL2) Narrow Lite

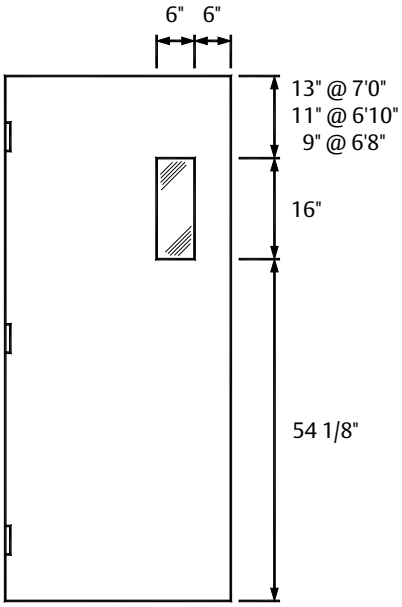

(NL3) Narrow Lite

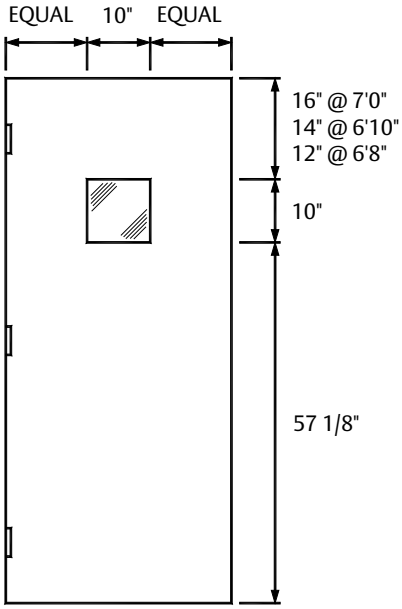

(V) View Window

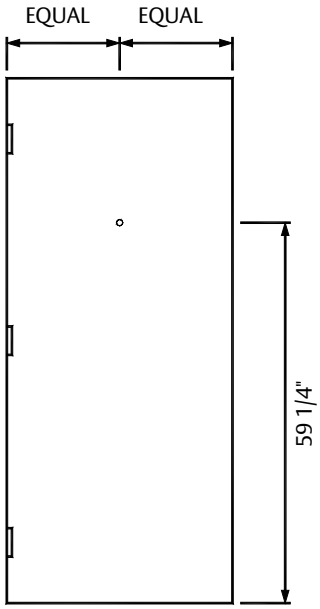

(P) Peephole

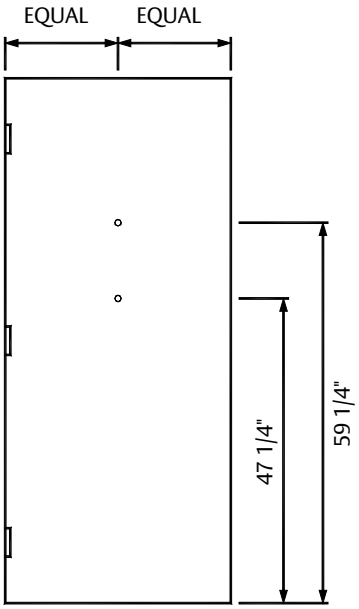

(2P) Two Peepholes

TRR – Series Doors

Base Door Pricing

Solid TRR Asbestos-Free core			
Width	**Height**	**18ga**	**16ga**
3'0"	7'0"	697	779
3'2"		737	820
3'6"		1060	1142
4'0"		1109	1191
3'0"	7'6"	1050	1134
3'2"		1092	1174
3'6"		1414	1497
4'0"		1462	1545
3'0"	8'0"	1093	1175
3'2"		1135	1217
3'6"		1456	1539
4'0"		1505	1587

Product Features

Available Sizes:

- Maximum size for TRR series doors 4'0" x 8'0"
- For labelling requirements and capabilities refer to the Fire Labeling Specification Guide
- 3/4" Undercut standard

Lites:

- Standard top rail is 6 1/2"
- Minimum lite width is 4 1/2" for snap in kits and 4 1/4" for other kits
- Maximum lite size 100 sq. in.
- Light dimension noted are nominal (see General Info for more details)
- **Approximate Weights:**
  - D18TR = 142 lbs (3'0" x 7'0")
  - D18TR = 152 lbs (3'0" x 7'0")
- UL label included in base price

NOTES:

- **Use the next highest size (Width or Height) for pricing.**

EXTRAS:

- "NL2" Lite $187
- "V" Lite $187
- "P" Lite (peephole) $14
- "2P" Lite (two peepholes) $27
- Non-standard width or height $18
- Blank door reinforcing NC
- 86 Edge prep NC
- Deadlock prep $26
- Inactive door (ASAxFB) $65
- ASA $15
- FB $50
- Welded astragal $152
- Opening Number (TAG) $3

Door Options

1. Hinge Hardware

1a	**Hinge Prep** (NSHP, NSHS,*, HWT, H+, DM, DMHWT)	Non-standard location Non-standard backset (min = 1/4", standard = 3/8") Other than 4 1/2" standard weight 5" hinge Heavyweight or double mortise **Note: Only 1 charge per jamb for any combination** Pioneer, Ceco, or Curries Locations (no charge)	Per door	$22
1b	**Extra Hinge** (NSHQ,*)	Additional hinge preps over Fleming standard quantity IE: 4 hinge preps on a 7'0" door	Per hinge	$25
1c	**Surface Hinge Rein** (S/STRIP)	Surface or Continuous Hinge reinforcing (steel strip for edge mounted continuous hinge)	Per door	$66
1d	**Surface Hinge Rein Channel** (S/CNL)	Surface or Continuous Hinge reinforcing (steel channel for face mounted continuous hinge)	Per door	$89
1e	**3/16" Hinge Rein** (3/16HR)	3/16" thick hinge reinforcing	Per door	$66
1f	**Anchor Hinge** (ANCH)	Anchor hinge at top, regular hinge preps at other locations Not drilled and tapped	Per door	$263
1g	**Mortised Pivots** (M/PIV)	Top pivot and bottom pivots (not drilled & tapped) Intermediate pivots (not drilled & tapped)	Per part Per part	$145 $79
1h	**Pocket Pivots** (P/PIV)	Prep for 1 1/2pr pocket pivots (not drilled & tapped)	Per door	$394
1i	**SOSS Hinges** (SOSS)	Prep for 1 1/2pr SOSS hinges	Per door	$329
1j	**Electric Hinge** (ELH)	Hinge reinforcing for electric hinge	Per prep	$16
1k	**EPT Prep** (EPT)	Prep for electric power transfer	Per prep	$79
1l	**Spring Hinges**	Bommer type double acting spring hinges (for spring hinges that fit the std. hinge prep – **no charge**)	Per prep	Contact Factory

2. Panic Preps

2a	**Panic Reinforcing** (BLK)	Reinforcing only for rim / vertical rod panic	Per prep	N/C
2b	**Rim Panic** (RP)	Reinforcing and function holes for rim panic	Per prep	$26
2c	**Surface Vertical Rod** (SVRP)	Reinforcing and function holes for surface vertical rod panic	Per prep	$26
2d	**Mortised Panic** (MP)	Reinforcing and function holes for mortised panic	Per prep	$26
2e	**Concealed Vertical Rod Panic** (CVRP)	Reinforcing and function holes for concealed vertical rod panic	Per prep	$284
2f	**Auxiliary Fire Latch** (FPIN)	Prep for auxiliary fire latch	Per prep	$14

TRR – Series Doors

Door Options

3. Lock Preps

3a	**161 Prep** (161NS, 161)	Non standard 161 backset (other than 2 3/4") Additional 161 prep	Per prep Per prep	$26 $26
3b	**161L Prep** (161L)	161L prep (lever prep)	Per prep	N/C
3c	**Mortised Locks** (86ED, ANSI, ML)	86 edge only (8" x 1 1/4") 86 edge c/w function holes	Per prep Per prep	N/C $14
3d	**Non-std. Lock Height** (NSLH)	Applies to the above preps	Per door	$26
3e	**Deadlocks** (DL)	Deadlock prep c/w function holes	Per prep	$26
3f	**Interconnected Lock** (INT)	4" CL to CL spacing to suit interconnected locks	Per prep	$26
3g	**Mag Lock** (MAGFW)	Reinforcing for a magnetic lock	Per door	$66
3h	**Push / Pull** (BLK)	Reinforcing for a push / pull	Per prep	N/C

4. Strike and Flush Bolt Preps

4a	**ASA Strike** (ASA)	Reinforcing for ASA strike prep (1 1/4" x 4 7/8" w/lip)	Per prep	$15
4b	**ASA Strike w/o Lip** (ASANL)	Reinforcing for ASA strike prep (1 1/4" x 4 7/8")	Per prep	$15
4c	**Deadlock Strike** (S/ASA)	Reinforcing for ASA "T" strike prep (1 1/8" x 2 3/4" w/lip)	Per prep	$21
4d	**Deadlock Strike w/o Lip** (S/ASANL)	Reinforcing for ASA "T" strike prep (1 1/8" x 2 3/4")	Per prep	$21
4e	**Flush Bolts** (FB)	Two ASA flush bolt preps (12" top down and 12" bottom up)	Per door	$50
4f	**Surface Bolts** (SB)	Reinforcing for surface mounted bolts	Per door	$17

Door Options

5. Closers

5a	**Surface Closer**	Surface closer reinforcing included in all doors		N/C
5b	**Concealed Closer** (COHC)	Reinforcing for concealed or semi-concealed closer prep	Per prep	$164
5c	**Concealed Holder** (COHH, COHS)	Reinforcing for concealed holder/stop prep	Per prep	$70

6. Top and Bottom Preps & Caps

6a	**Door Bottoms**	(CONCBTM) – Prep for concealed door bottom (MORTBTM) – Prep for mortised door bottom	Per prep Per prep	$56 $79
6b	**Top Caps**	(SCRCAP) – steel top cap screw fixed (STCAP) – Steel top cap welded (tacked only) (FSTCAP) – Steel top cap welded (tacked and filled)	Per door Per door Per door	$34 $47 $57
6c	**Bottom Caps**	(SCRBTM) – Steel bottom cap screw fixed (STBTM) – Steel bottom cap welded (tacked only) (FSTBTM) – Steel bottom cap welded (tacked and filled)	Per door Per door Per door	$34 $47 $57

7. Door Edge Preps

7a	**Square** (SQ, SQL, SQH)	Either lock side or hinge side square edge (SQL, SQH) Both edges of door square (SQ)	Per edge Per door	$56 $113
7b	**Tack Weld** (TW, TWL, TWH)	Tack weld either lock side or hinge side (TWL, TWH) Tack weld both edges (TW)	Per edge Per door	$40 $62
7c	**Seam Filled** (SF)	Tack weld and seam fill both edges of the door	Per door	$105
7d	**Double Egress** (DE)	Install 14ga channel on lock edge of door (required for labeled double egress doors, label not incl.)	Per door	$86
7e	**Flat Bar Astragal** (FASTW, FASTW/ACTIVE)	Flat bar astragal	Welded	$158
7f	**Z Astragal** (ZASTW)	Z astragal (inactive door prep)	Welded	$158
7g	**Loose Astragal**	**Refer to accessories**		

TRR – Series Doors

Door Options

8. Lite Cutouts

8a	**Peep Hole** (P)	Door viewer (Peep hole)	Per prep	$14
8b	**Two Peep Holes** (2P)	Two door viewers (2 peep holes)	Per door	$27
8c	**Labeled Lite/louver**	Cutout and inner channel (recessed 1/4")	Per cutout	$98
8d	**Bridged Cutout** (BRCO)	Skins are pre-punched for lites except for tabs at four sides for final cutting by distributor	Per lite	$35

9. Lite Kits Installed

9a	**NL2 Lite** (NL2)	Narrow lite prep c/w screw fixed glazing stop (used in 1 1/2 hr rated doors)	Per lite	$187
9b	**V Lite** (V)	View window prep c/w screw fixed glazing stop	Per lite	$187

10. Lite Kit Options

	NOTE: all add-ons are in addition to the lite kit prices above			
10a	**Thermal glazing** (THGLZ)	Prep for thermal glazing unit (up to and including 1 1/8" gap)	Per lite	$16
10b	**Snap in kit**	Snap in lite kit	Per lite	$26
10c	**Flush glazing**	Rabetted lite kit	Per lite	$329

11. Material

11a	**G90** (G90)	Doors manufactured from G90 in 18ga or 16ga	Per door	$165

12. Miscellaneous

12a	**Conduit** (CDTP, CDTM)	Install conduit / raceway in door for electrical hardware (plastic conduit standard)	Per prep	$150
12b	**E-Lynx** (ELYNX)	E-Lynx wire	Per door	$150
12c	**Door Position Sensor** (DPS)	Install reinforcing for a door position sensor in the top channel of the door (DPS size must be noted)	Per prep	$17
12d	**Magnetic Contact** (MAGC)	Install reinforcing for a magnetic contact in the top channel of the door	Per prep	$33
12e	**Non-Std. Undercut** (NSUC)	Undercut of other than 3/4"	Per prep	$18
12f	**Factory priming** (PRIME, _____)	Factory prime (A40 material only, minimum 25 doors/order)	Per door	$66

Panels

1 3/4" Thick Panels

Width	Height	20ga	18ga	16ga	H16
2'0"	2'0"	165	231	310	1701
3'0"		165	231	310	2052
4'0"		NA	395	482	2069
2'0"	3'0"	265	331	410	1801
3'0"		265	331	410	2152
4'0"		NA	495	582	2169
2'0"	4'0"	340	406	485	1876
3'0"		340	406	485	2227
4'0"		NA	570	657	2244
2'0"	5'0"	390	456	535	1926
3'0"		390	456	535	2277
4'0"		NA	620	707	2294
2'0"	6'0"	390	456	535	1926
3'0"		390	456	535	2277
4'0"		NA	620	707	2294

****1 ¾" thick panels are manufactured with the same construction as a D-series door (exposed lock seam, inverted end channels with top and bottom caps tack welded)**

NOTES:

- **Use the next highest size (Width or Height) for pricing.**

EXTRAS:

- Polystyrene
  Up to 2'0" x 3'0" $30
  Over 2'0" x 3'0" $40
- Polyisocyanurate
  Up to 2'0" x 3'0" $100
  Over 2'0" x 3'0" $135
- Rabbeted Panel Prep $135
- Removable Panel Prep (including bracket) $120
- Removable / Rabbeted Panel Prep (including bracket) $205
- Labeled transom Panel Construction (including channels & brackets) $150
- Panel Installation (tack weld) $155
- Factory priming $63

Sandwich Panels

Width	Height	3/8" THK	1/2" THK
2'0"	2'0"	182	182
3'0"		208	208
4'0"		234	234
2'0"	3'0"	208	208
3'0"		234	234
4'0"		260	260
2'0"	4'0"	234	234
3'0"		260	260
4'0"		286	286
2'0"	5'0"	260	260
3'0"		286	286
4'0"		312	312
2'0"	6'0"	286	286
3'0"		312	312
4'0"		338	338

NOTES:

- **Use the next highest size (Width or Height) for pricing.**
- 3/8" Thick panels can be used for 3, 1 1/2 and 1 hour rated sidelights and transom frames. 2 Sheets of 20ga steel laminated to 3/8" inorganic cement board (110pcf density)
- 1/2" Thick panels can be used on 3/4 hour rated sidelights and transom frames. 2 Sheets of 20ga steel laminated to 1/2" thick non-rated gypsum wall board.

Accessories

Anchors

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	Wire Anchor		3535600	$2.00	$1.75	200
	2pc Combination Stud Anchor – Small Sizes: 4 1/2, 4 3/4, 5 5/8, 5 3/4, 5 7/8, 6 1/4, 6 5/8 (per half)		3535300	$3.00	$2.50	200
	2pc Combination Stud Anchor – Large Sizes: 6 3/4, 7 1/8, 7 3/4, 8 1/4, 8 3/4, 9 1/2 (per half)		3535370	$3.25	$2.75	120
	1 pc Combination Stud Anchor for wood or steel studs	4 3/4 5 3/4 6 3/4 7 3/4 8 3/4	3535310 3535320 3535330 3535340 3535350	$7.50 $7.50 $7.50 $9.00 $9.00	$5.75 $5.75 $5.75 $6.75 $6.75	100
	Z Clip Stud Anchor	2” 3” 5” 7”	3535810 3535800 3535820 3535830	$2.00 $2.00 $2.75 $2.75	$1.75 $1.75 $2.00 $2.00	100
	UL Masonry Fire Anchor		3535720	$4.50	$3.50	50
	Existing Wall Anchor Adjustable Butterfly Guide		3536000	$3.00	$2.00	100
	Existing Wall Anchor Strap	4 3/4 5 3/4 6 3/4 7 3/4 8 3/4	3535900 3535920 3535940 3535950 3535960	$3.00	$2.00	25
	Existing Wall Anchor Spacer		3535980	$3.00	$2.00	25
	“T” Anchor Assembly	4 3/4 5 3/4 6 3/4 7 3/4 8 3/4	3535460 3535470 3535480 3535490 3535500	$4.50 $4.50 $5.25 $5.25 $6.00	$3.50 $3.50 $4.25 $4.25 $4.75	50
	Drywall Strap Anchor		3535684	$1.25	$0.50	200

To order BOX quantities add “BX” to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Anchors continued

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	Drywall Base Anchor 1" offset (fastens to stud)		3535100	$2.75	$2.00	200
	Drywall Base Anchor 1/2" offset (fastens to drywall)		3535110	$3.75	$2.75	200
	Drywall Adjustable Tension Anchor Assembly		3536230	$4.50	$3.50	50
	Floor Anchor Strap	4 3/4 5 3/4 6 3/4 7 3/4, 8 3/4	3535000 3535010 3535020 3535030	$3.00 $3.00 $3.00 $3.00	$2.00 $2.00 $2.00 $2.00	100
	Adjustable Base Anchor (4 slots) 2 screws per anchor included		3535080	$3.00	$2.00	100
	Adjustable Base Anchor (2 slots) 2 screws per anchor included		3535090	$3.00	$2.00	100
	Mullion Base Anchor	4 3/4 5 3/4 6 3/4 7 3/4 8 3/4	3555000 3555010 3555020 3555030 3555040	$9.50 $10.00 $10.75 $11.00 $11.25	$7.50 $7.75 $8.00 $8.75 $9.00	100 50
	"Armco" Jamb Anchor (for Armco Metal Buildings)		3536100	$9.00	$6.75	25
	"Armco" Head Anchor (for Armco Metal Buildings)		3536110	$9.00	$6.75	25
	Expandable Frame Sliders	Medium Large	3554910 3554914	$16.75	$13.75	25 25

To order BOX quantities add "BX" to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Accessories

Hinge and Pivot Reinforcing

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	3 1/2" Hinge Reinforcement		3542000	$8.00	$6.75	100
	4 1/2" High Frequency Hinge Reinforcement Complete with Standard to Heavy Weight Conversion Dimples		3540400	$6.00	$4.50	50
	4 1/2" High Frequency Hinge Reinforcement (Heavy Weight)		3540500			
	5" High Frequency Hinge Reinforcement (Standard Weight)		3541100	$6.00	$4.50	
	5" High Frequency Hinge Reinforcement (Heavy Weight)		3541300			
	Mortar Guard Box		3542800	$4.50	$3.50	50
	3 1/2" Full Hinge Shim		3542840	$2.50	$2.00	200
	3 1/2" Half Hinge Shim		3542841	$2.50	$2.00	
	4 1/2" Full Hinge Shim		3542861	$2.50	$2.00	
	4 1/2" Half Hinge Shim		3542862	$2.50	$2.00	
	5" Full Hinge Shim		3542870	$2.50	$2.00	
	5" Half Hinge Shim		3542871	$2.50	$2.00	
	B-B Top Pivot Reinforcing	LH	3538120	$19.75	$15.00	10
		RH	3538130			
	M19 Pivot Reinforcing	Frame	3538170	$19.75	$15.00	10
		Door	3538180			
	Rixson Pivot Reinforcing 1 Hole 1/4-20		3538140	$4.50	$3.50	10
	Rixson Pivot Reinforcing 2 Hole 12-24		3538150	$4.50	$3.50	10
	Rixson 7" & 2" Dust Box		3538160	$4.50	$3.50	10

To order BOX quantities add "BX" to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Lock and Strike Reinforcing

Illustration	Description	Part No.	Each	Box	
			List Price	List Price	Qty
	ASA Strike Reinforcing (1 1/4" x 4 7/8")	3530000	$3.75	$2.75	50
	ASA Strike Reinforcing (with no dust box)	3530070	$3.75	$2.75	50
	2 3/4" T-Strike	3530137	$5.25	$4.50	50
	Deadlock Strike Reinforcing	3530138	$4.50	$2.50	100
	Deadlock Strike Reinforcing Clips 8-32	3530210	$4.50	$3.50	50
	Deadlock Strike Reinforcing Clips 12-24	3530250	$4.50	$3.50	50
	Sargent 7500 Series Rein. 8-32 Holes (s/asa 4" apart)	3530040	$20.25	$15.00	50
	161 Lock Edge Reinforcement (edge of door)	3531163	$4.50	$3.50	50
	86 Lock Face Reinforcing (edge of door)	3530190	$4.50	$3.50	50
	Deadlock Strike Rein. Clips 10-24 (edge of door)	3530170	$4.50	$3.50	50
	Mortised Lock Centering Clip	3530830	$4.50	$3.50	100
	ASA Flush Bolt Rein. (edge of door)	3530400	$4.50	$3.50	50
	Universal Flush Bolt Guide	3530482	$4.50	$3.50	100
	Reversible Flush Bolt Strike Reinforcing (incl. rein. plate, strike plate & screws)	3533300	$19.75	$15.00	50

To order BOX quantities add "BX" to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Accessories

Filler Plates and Punch Outs

Illustration	Description	Part No.	Each	Box	
			List Price	List Price	Qty
	161 Lock Edge Filler Plate	3533500	$12.75	$9.50	25
	86 Lock Edge Filler Plate	3533510	$17.25	$13.00	25
	4 1/2" Hinge Filler Plate	3533520	$15.00	$11.50	25
	ASA Lock Edge Filler Plate	3533530	$15.00	$11.50	25
	Reversible Flush Bolt Filler Plate	3533321	$15.00	$11.50	25
	161 Lock Edge Punch Out	3533560	$3.75	$2.75	25
	161 Door Face Punch Out	3533570	$3.75	$2.75	25
	86 Lock Edge Punch Out	3533580	$3.75	$2.75	25
	4 1/2" Hinge Punch Out	3533590	$3.75	$2.75	25
	ASA Strike Punch Out	3533600	$3.50	$2.75	25

Closer and Holder Reinforcing

Illustration	Description		Part No.	Each	Box	
				List Price	List Price	Qty
	Flat Bar Reinforcing	12 ga 11 7/8 x 1 3/4 12 ga 11 7/8 x 1 1/2 16 ga 12 x 1 3/4	3530510 3530520 3562040	$7.50 $7.50 $2.50	$6.25 $6.25 $2.00	50
	Closer Reinforcing Sleeve 14ga x 12" long	4 3/4 5 5/8 5 3/4 5 7/8 6 1/4 6 5/8 6 3/4 7 1/8 7 3/4 8 1/4 8 3/4 9 1/2	3530454 3530456 3530458 3530460 3530462 3530464 3530466 3530468 3530470 3530472 3530474 3530476	$18.75 $20.25 $21.75 $23.00 $23.75 $24.75 $25.25 $25.25 $25.25 $25.25 $25.25 $27.50	$15.50 $17.25 $18.75 $19.75 $20.25 $21.25 $21.75 $21.75 $21.75 $21.75 $21.75 $23.75	10
	LCN 2013-16 Concealed Closer Reinforcing		3562050	$4.50	$2.75	10
	Holder Reinforcing GJ 100 – 100LP Series GJ 120 Series GJ 300 Series GJ 600 Series GJ 700 Series Rixson 1 Series Rixson 3 – 33 Series Rixson 5 Series		 3562400 3562420 3562440 3562460 3562480 3562200 3562210 3562210	$26.75	$20.50	50

To order BOX quantities add "BX" to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Miscellaneous Frame Accessories

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	Non-Labeled Removable Mullion Kit Contains: 2 - angle clips 2 - retaining clips 10 - #10 s.m. screws	2" Face 4" Face	3555220 3555270	$51.00 $63.00	$40.00 $48.00	10 10
	Labeled Removable Mullion Kit Contains: 1- angle clips 1- retaining clips 1 – floor assembly 10 - #10 s.m. screws	4 3/4 5 3/4 6 3/4 7 3/4 8 3/4	3555700 3555710 3555720 3555730 3555740	$65.75	$51.00	10
	2" Face Mullion or Open Section Field Splice Kits Contains: 2 – brackets, 8 – screws		3555410	$19.25	$15.00	10
	4" Face Mullion or Open Section Field Splice Kits Contains: 2 – brackets, 8 – screws		3555430	$19.25	$15.00	10
	Sill Clips (for std. sticks)	4 3/4 5 3/4 6 3/4 7 3/4 8 3/4	3555800 3555810 3555820 3555830 3555840	$2.50	$2.00	25
	Channel Extension		3555900	$22.25 /ft	$ –	TO ORDER
	Angle and Sliding Brackets for channel extensions	Angle Slider	3555910 3555920	$7.50 $30.00	$ –	TO ORDER
	KD Corner Clips	LH RH	3537020 3537030	$1.25	$0.50	200
	Rubber Bumpers (silencers) 5/16"		3538021	$0.25	$0.25	1000
	Stick on Rubber Bumpers (silencers)		3538023	$0.50	$0.25	1000
	#8 Drywall Screw		3554993	$0.25	$0.25	1000
	Shipping Bars	2'4" 2'6" 2'8" 2'10" 900mm 3'0" 3'2" 3'4" 3'6" 3'8" 4'0" 3'11 7/8" 4'11 7/8" 5'11 7/8" 6'11 7/8" 7'11 7/8"	3553021 3553031 3553041 3553051 3553431 3553061 3553071 3553081 3553091 3553101 3553121 3553122 3553182 3553242 3553302 3553362	$5.00 $5.25 $5.75 $6.00 $6.25 $6.25 $6.50 $6.75 $7.25 $7.50 $8.00 $8.00 $10.00 $12.00 $15.25 $16.75	$3.75 $4.25 $4.50 $4.50 $4.75 $4.75 $5.00 $5.25 $5.25 $5.75 $6.25 $6.25 $7.75 $9.00 $11.50 $12.50	20

To order BOX quantities add "BX" to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Accessories

End Channels and Top Caps

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	3/4" Deep End Channel	2'0" Door	3560010	$19.75	$15.00	20
		2'2" Door	3560020	$20.50	$15.75	
		2'4" Door	3560030	$22.25	$17.25	
		2'6" Door	3560040	$24.00	$18.50	
		2'8" Door	3560050	$25.50	$19.25	
		2'10" Door	3560060	$27.00	$20.50	
		3'0" Door	3560070	$28.25	$21.75	
		900mm Door	3560071	$28.25	$21.75	
		3'2" Door	3560080	$29.50	$23.25	
		950mm Door	3560081	$29.50	$23.25	
		3'4" Door	3560090	$31.50	$24.00	
		3'6" Door	3560100	$33.00	$25.25	
		3'8" Door	3560110	$34.50	$26.50	
		3'10" Door	3560120	$36.25	$27.75	
		4'0" Door	3560130	$ 37.75	$28.50	
	1 1/2" Deep End Channel	2'0" Door	3560200	$19.75	$15.00	20
		2'2" Door	3560210	$20.50	$15.75	
		2'4" Door	3560220	$22.25	$17.25	
		2'6" Door	3560230	$24.00	$18.50	
		2'8" Door	3560240	$25.50	$19.25	
		2'10" Door	3560250	$27.00	$20.50	
		3'0" Door	3560260	$28.25	$21.75	
		900mm Door	3560261	$28.25	$21.75	
		3'2" Door	3560265	$29.50	$23.25	
		950mm Door	3560266	$29.50	$23.25	
		3'4" Door	3560270	$31.50	$24.00	
		3'6" Door	3560275	$33.00	$25.25	
		3'8" Door	3560280	$34.50	$26.50	
		3'10" Door	3560285	$36.25	$27.75	
		4'0" Door	3560290	$37.75	$28.50	
	3/4" Deep Screw In Top Cap	900mm	3534011	$28.00	$21.50	20
		1100mm	3534012	$28.00	$21.50	
		1200mm	3534013	$28.00	$21.50	
		3'0"	3534014	$28.00	$21.50	
		4'0"	3534015	$28.00	$21.50	
		3'6"	3534016	$28.00	$21.50	
	1 1/2" Screw In Top Cap	900mm	3534021	$28.00	$21.50	10
		1100mm	3534022	$28.00	$21.50	
		1200mm	3534023	$28.00	$21.50	
		3'0"	3534024	$28.00	$21.50	
		4'0"	3534025	$28.00	$21.50	
		3'6"	3534026	$28.00	$21.50	

To order BOX quantities add "BX" to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

End Channels and Top Caps

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	Steel Top Cap (For 3/4" or 1 1/2" Deep End Channel)	(G90) 3'0"	3577510	$28.50	$21.75	20
		(G90) 4'0"	3577520	$37.75	$28.50	
		2' 0"	3577200	$28.00	$21.50	
		2' 10"	3577240	$28.00	$21.50	
		2' 4"	3577210	$28.00	$21.50	
		2' 6"	3577220	$28.00	$21.50	
		2' 8"	3577230	$28.00	$21.50	
		3' 0"	3577250	$28.00	$21.50	
		3' 4"	3577260	$28.00	$21.50	
		3' 6"	3577270	$28.00	$21.50	
		3' 8"	3577280	$28.00	$21.50	
		4' 0"	3577290	$28.00	$21.50	
		9' 0"	3577300	$60.50	$46.25	
		900 MM	3577400	$28.50	$21.75	
	Snap in Steel Top Cap	3'0"	3576070	$32.50	$22.25	10
		4'0"	3576130	$41.50	$31.50	
	Vinyl Top Cap	12'0"	3577605	$52.75	$40.25	20
	Double Egress Door edge channel – 14ga	7'0"	3531410	$26.50	$20.00	10
		8'0"	3531420	$30.25	$23.00	

To order BOX quantities add "BX" to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Accessories

Glazing Kits – Screwed In

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	Vertical Kits (contains 2pcs of trim and 2pcs of stop) *screws not included	10”	3569810	$25.00	$19.00	10
		12”	3569814	$30.00	$22.75	
		16”	3569818	$40.00	$30.25	
		20”	3569821	$49.75	$38.00	
		22”	3569822	$54.50	$41.75	
		23”	3569826	$57.25	$43.75	
		24 1/2”	3569830	$61.00	$46.50	
		25 3/16”	3569834	$62.75	$48.00	
		29”	3569838	$72.25	$55.25	
		31 3/8”	3569842	$78.00	$59.75	
		33 3/8”	3569846	$83.00	$63.25	
		35 3/8”	3569850	$88.00	$67.25	
		42 3/8”	3569854	$105.25	$80.50	
		44”	3569858	$109.50	$83.75	
		54”	3569862	$134.50	$102.50	
		63 7/8”	3569866	$159.00	$121.50	
		65 7/8”	3569870	$163.75	$129.00	
		67 7/8”	3569874	$169.00	$125.00	
		Cut to Length	3569890	Add 30% to next highest size		
	Horizontal Kits (contains 2pcs of trim and 2pcs of stop) *screws not included	5”	3569910	$12.25	$9.50	10
		6”	3569914	$15.00	$11.50	
		10”	3569918	$25.00	$19.00	
		12”	3569922	$30.00	$22.75	
		18”	3569926	$44.75	$34.25	
		20”	3569930	$49.75	$38.00	
		22”	3569934	$54.50	$41.75	
		24”	3569938	$59.75	$45.50	
		30”	3569942	$74.75	$57.00	
		32”	3569946	$79.50	$61.00	
		36”	3569950	$89.75	$68.50	
		Cut to Length	3569990	Add 30% to next highest size		
	Screw Fixed Glazing Trim 10’0”		3569730	$25.75	$19.75	10
	Screw Fixed Thermal Glazing Trim 10’0”		3569735	$68.00	$52.00	10
	1/2”W X 5/8”H X 10’L Glass Stop (Dimpled)		3569750	$21.50	$16.00	10
	1/2”W X 5/8”H X 10’L Glass Stop (No Dimpled)		3569755	$21.50	$16.00	10

To order BOX quantities add “BX” to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Glazing Kits – Snap In

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	Vertical Kits (contains 2pcs of trim and 2pcs of stop)	10”	3571200	$28.00	$21.50	10
		12”	3571210	$33.75	$25.50	
		16”	3571220	$45.00	$34.25	
		*18”	3571230	$50.50	$38.75	
		20”	3571235	$56.25	$42.75	
		22”	3571240	$62.00	$47.00	
		23”	3571245	$64.50	$49.50	
		*24”	3571250	$67.25	$51.50	
		*24 1/4”	3571255	$68.00	$51.75	
		24 1/2”	3571260	$68.75	$52.50	
		25 3/16”	3571270	$70.50	$54.00	
		29”	3571280	$81.50	$62.25	
		*31”	3571290	$88.00	$66.50	
		31 3/8”	3571292	$87.00	$67.00	
		*33”	3571300	$88.00	$70.75	
		33 3/8”	3571310	$92.50	$71.50	
		*35”	3571312	$98.00	$75.00	
		35 3/8”	3571320	$99.25	$76.00	
		*37”	3571323	$103.50	$79.25	
		42 3/8”	3571325	$118.75	$90.75	
		44”	3571326	$123.25	$94.00	
		*47”	3571330	$131.50	$101.00	
		54”	3571333	$151.25	$115.75	
		63 7/8”	3571337	$179.25	$136.75	
		*64 3/16”	3571340	$180.00	$137.50	
		65 7/8”	3571345	$184.50	$141.00	
		*66 3/16”	3571350	$190.25	$145.25	
		67 7/8”	3571355	$190.25	$145.25	
		*68 3/16”	3571360	$196.75	$150.25	
		*70 3/16”	3571370	$196.75	$150.25	
		*80 3/16”	3571380	$225.00	$171.50	
		Cut to Length		Add 30% to next highest size		
	Horizontal Kits (contains 2pcs of trim and 2pcs of stop)	5”	3571000	$14.00	$10.75	10
		6”	3571003	$17.00	$12.75	
		*8”	3571010	$22.25	$17.25	
		10”	3571020	$28.00	$21.50	
		12”	3571030	$33.75	$25.50	
		*16”	3571040	$45.00	$34.25	
		18”	3571050	$50.50	$38.75	
		20”	3571060	$56.25	$42.75	
		22”	3571070	$62.00	$47.00	
		24”	3571080	$67.25	$51.50	
		*24 1/4”	3571090	$62.00	$47.00	
		30”	3571094	$67.25	$51.50	
		32”	3571100	$68.00	$51.75	
		36”	3571110	$84.25	$64.25	
		Cut to Length	3571120	Add 30% to next highest size		
	Snap In Glazing Trim 10’0”		3570900	$101.00	$77.00	10
	Snap In Glazing Stop 10’0”		3570910	$42.50	$35.25	10

To order BOX quantities add “BX” to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

*old Fleming glazing kit size

Accessories

Glazing Parts

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	Steel Glass Stops (dimpling @ 10" centers)					
	1/2"W X 5/8"H X 10'L (Dimpled)		3569750	$22.25	$16.75	10
	1/2"W X 5/8"H X 10'L (No Dimpled)		3569755	$22.25	$16.75	
	G90 1/2"W X 5/8"H X 10'L (Dimpled)		3569770	$26.75	$20.50	
	3/4"W X 5/8"H X 10'L (Dimpled)		3553930	$26.75	$20.50	
	G90 3/4"W X 5/8"H X 10'L (Dimpled)		3554000	$31.50	$24.75	
	3/4"W X 5/8"H X 10'L (Not Dimpled)		3553920	$26.75	$20.50	
	1/2"W X 3/4"H X 10'L (Dimpled)		3553950	$65.75	$49.50	
	3/4"W X 3/4"H X 8'L (Dimpled)		3553970	$108.00	$82.50	
	Sealed Glazing Channel 7'0" Long	Inner	3572540	$33.75	$26.25	10
		Outer	3572550	$39.50	$30.25	
		L Stop	3572510	$29.50	$21.75	
	#6 – 20 X 1 1/4" Self Drilling Screw		3553980	$0.25	$0.25	1000
	#6 – 20 X 1" Self Drilling Screw		3554990	$0.25	$0.25	

Astragals

Illustration	Description		Part No.	Each List Price	Box List Price	Box Qty
	Flat Bar Astragals	6'8"	3575700	$112.00	$85.50	10
		7'0"	3575720	$112.00	$85.50	
		8'0"	3575740	$112.00	$97.75	
	Z Astragals – Blank (inactive doors)	6'8"	3575000	$112.00	$85.50	10
		7'0"	3575020	$112.00	$85.50	
		8'0"	3575040	$128.00	$97.75	
		2150mm	3575240	$143.75	$109.75	
	Embossed Z Astragals (inactive doors)	ASA				10
		6'8" L/R	3574050	$112.00	$85.50	
		7'0" LH	3574080	$112.00	$85.50	
		7'0" RH	3574090	$112.00	$85.50	
		8'0" LH	3574120	$143.75	$109.75	
		8'0" RH	3574130	$143.75	$109.75	
		ASAxFB				
		6'8" L/R	3574140	$112.00	$85.50	
		7'0" LH	3574170	$112.00	$85.50	
		7'0" RH	3574180	$112.00	$85.50	
		24"&12" 8'0" LH	3574210	$143.75	$109.75	
		24"&12" 8'0" RH	3574220	$143.75	$109.75	
		12"&12" 8'0" LH	3574205	$143.75	$109.75	
		12"&12" 8'0" RH	3574215	$143.75	$109.75	

To order BOX quantities add "BX" to the end of the part number
(note: when you use the box quantity part number and you order 1 you will receive 1 box of that part)

Accessories

Door Labels

Fire Rating	TRR Rating	Fleming UL Mylar	Fleming WHI Mylar	Fleming UL Metal	Baron WHI Metal	Mylar Label	Metal Label
1/3 hour	None	3520960	3520370	3520840 (*2)	3521720	$12	$13
3/4 hour		3520950					
1 hour		3520940			3521740		
1 1/2 hour		3520940					
2 hour		3520930	352360		3521760		
3 hour		3520930					
Smoke and Draft Control		3520710	NA	NA	NA		

TRR Door Labels

Fire Rating	TRR Rating	Fleming UL Mylar	Fleming WHI Mylar	Fleming UL Metal	Baron WHI Metal	Mylar Label	Metal Label
3/4 hour	650ºF, 450ºF, or 250ºF at 30 min	NA	3520380 (*3)	3520850 (*3)	3522002	$12	$13
	250ºC at 30 min (*1)						
1 1/2 hour	650ºF, 450ºF, or 250ºF at 30 min						
	250ºC at 30 min (*1)						
	250ºC at 60 min (*1)						
3 hour	650ºF, 450ºF, or 250ºF at 30 min				3521790		
	250ºC at 30 min (*1)						
	250ºC at 60 min (*1)						

*1: Required for Canadian market Only

*2: Distributors stamp rquired rating

*3: Not available for distributor application under Fleming In-Plant Labelling program (IPLP)
Doors must be ordered compete with the TRR label from the factory

**WHI labels are sold in minimum quantites of 50 per label

**Baron combo labels are still being phased out. When the inventory is depleted the part numbers may change.

Accessories

3 Sided Frames

Fire Rating		Fleming UL Mylar	Fleming WHI Mylar	Fleming UL Metal	Baron WHI Metal	Mylar Label	Metal Label
1/3 hour	3 sided	3520900	3520020(*1)	3520800	3521240	$11	$12
3/4 hour							
1 hour							
1 1/2 hour							
2 hour		NA	3520010		3522101		
3 hour							

Transom Frames

Fire Rating		Fleming UL Mylar	Fleming WHI Mylar	Fleming UL Metal	Baron WHI Metal	Mylar Label	Metal Label
1/3 hour	glazed	3520910	3520020	3520810	3522200	$11	$12
3/4 hour							
1 hour		NA	NA		NA		
1/3 hour	paneled	3520910	3520020	3520800	3522200		
3/4 hour							
1 1/2 hour					NA		
2 hour		NA	3520010		NA		
3 hour					NA		

Sidelight Frames

Fire Rating		Fleming UL Mylar	Fleming WHI Mylar	Fleming UL Metal	Baron WHI Metal	Mylar Label	Metal Label
1/3 hour	glazed	3520910	3520040	3520810	3522200	$11	$12
3/4 hour							
1 hour		NA	NA		NA		
1/3 hour	paneled	3520900	3520040	3520800	3522200		
3/4 hour							
1 1/2 hour					NA		

Window Frames

Fire Rating		Fleming UL Mylar	Fleming WHI Mylar	Fleming UL Metal	Baron WHI Metal	Mylar Label	Metal Label
1/3 hour	glazed	3520920	3520040	3520820	3522200	$11	$12
3/4 hour							
1 hour					NA		

*1: For Fleming WHI Double egress frames use part number 3520030

**WHI labels are sold in minimum quantites of 50 per label