📌Week 1 Quiz

1.

Which of the following is not a Language Processor?

a. Assembler
b. Compiler
c. Interpreter
d. Fortran

- a.
- b.
- c.
- d. ✅

2.

Which of the following is not a valid comment?

a. /** comment */
b. /* comment */
c. /* comment
d. // comment

- A.
- B.
- C. ✅
- D.

3.

Consider the following program.

```
public class Question{
      public static void main(String args[]){
            for(int a=2;a<3;a+=1){
                  System.out.print(a+++a);
            }
      }
}
```

What will be the output of the program if it is executed?

a. 5
b. 2
c. 4
d. 1

- a. ✅
- b.
- c.
- d.

4.

Which of the following can be used for a variable name in Java?

a. boolean
b. final
c. finally
d. calloc

- a.
- b.
- c.
- d. ✅

5.

Consider the following program.

```
public class Question1{
      public static void main(String args[]){
         int arr[]={0,1,2,3,4,5,6,7};
            for(int b=5;b>2;b-=2){
                  System.out.println(arr[--b]);
            }
      }
}
```

What will be the output of the program if it is executed?

a. 4
b. 2
c. 3
d. 5

- a. ✅
- b.
- c.
- d.

6.

Following is a piece of code where some parts of a statement is missing:

```
public class Question3{
      public static void main(String args[]){
            char nptel[]={'S','W','A','Y','A','M'};
            System.out.print(_________);
      }
}
```

In the following, some options are given. You have to choose the correct option for the argument in *System.out.print()* function to print the second and the last characters in the array nptel.

a. nptel[nptel.length-1] + nptel[1]
b. nptel[1] + nptel[nptel.length-1]
c. "" + nptel[1] + nptel[nptel.length-1]
d. "" + nptel[nptel.length-1] + nptel[1]

- a.
- b.
- c. ✅
- d.

7.

What is the output of this program?

```
public class Question {
        public static void main(String args[])
        {
             int i = 7;
             System.out.print(--i * 7);
        }
    }
```

a. 20
b. 25
c. 42
d. 31

- a.
- b.
- c. ✅
- d.

8.

Which of the following is used to find and fix bugs in the Java programs?

a. JVM
b. JRE
c. JDK
d. JDB

- a.
- b.
- c.
- d. ✅

9.

Which of the following is/are primitive data type(s) in Java?

a. int
b. String
c. Array
d. double

- A. ✅
- B.
- C.
- D. ✅

10.

When you compile a program written in the Java programming language, the compiler converts the human-readable source file into platform-independent code that a Java Virtual Machine can understand. What is this platform-independent code called?

a. Source code
b. Bytecode
c. Machinecode
d. Opcode

- A.
- B. ✅
- C.
- D.

📌 **Week 2 Quiz**

1.

What is the output of the following program?

```
public class Main{
	public static void main(String args[]){
		char a = '8';
		int b=010;
		System.out.println(a+b);
	}
}
```

a. 88
b. 8010
c. 64
d. 810

- a.
- b.
- c. ✅
- d.

2.

Which of the following is generate API documentation in HTML format from Java source code?

a. javac
b. javadoc
c. javap
d. java

- A.
- B. ✅
- C.
- D.

3.

Following is a program given for this question.

```
public class Main{
    public static void main(String[] args) {
                char[] copyFrom = { 'j', 'a', 'n', 'n', 'p', 't',
      'e', 'l', 'j', 'a', 'v', 'a',};
        char[] copyTo = new char[9];

        System.arraycopy(copyFrom, 3, copyTo, 0, 9);
```

What will be the output of the above program?

a. javanptel
b. npteljava
c. janjavanptel
d. jannpteljava

- a.
- b. ✅
- c.
- d.

4.

What will happen during the execution of the following code for the command line input?

```
public class Question {
    public static void main (String[] args) {
        for (String s: args) {
            System.out.println(s+args[0]);
        }
    }
}
```

Consider the following input on command line and select the options with the correct output(s).

Input:

A: "jan java nptel"

B: 1 2 3

a. A : jannptel
   javanptel
   nptelnptel

b. A : jan java nptel jan java nptel

c. B : 11
   21
   31

d. B : 1 2 3 1

- a.
- b. ✅
- c. ✅
- d.

5.

Which of the following is/are TRUE about print() and println() methods?

a. `print()` prints in a single line only and multiple lines cannot be printed in any way.
b. `print()` prints and then appends a line break.
c. `println()` prints in a single line only and multiple lines cannot be printed.
d. `println()` prints and then appends a line break.

- a.
- b.
- c.
- d. ✅

6.

What was the initial name of Java when it was first developed for embedded systems?

a. Greentalk
b. Oak
c. Java
d. Javac

- a. ✅
- b.
- c.
- d.

7.

Which of the following is a valid declaration of an object of class, say Foo?

a. Foo obj = new Foo;
b. obj = new Foo();
c. Foo obj = new Foo();
d. new Foo obj;

- a.
- b.

- c. ✅
- d.

8.

Following is a program given for this question.

```
public class Question
{
      public static void main(String[] args) {

          boolean m=Integer.valueOf(0).equals(Long.valueOf(1));
          System.out.println(m);
      }
```

What will be the output of the above program?

a. 0
b. 1
c. false
d. true

- a.
- b.
- c. ✅
- d.

9.

Which of the following can be used to take input from user during the execution of a program?

a. Using the string array provided as a parameter to the main method.
b. getText() method can be used to get user input from the command line.
c. Scanner class can be used by passing the predefined object System.in
d. Once the execution starts, there is no way to provide user input.

- A.
- B.
- C. ✅

- D.

10.

What is the output of the following program?

```
public class Question
{
      public static void main(String[] args) {

        int i = 10;
        int n = i++%2;
        int m = ++i%7;
        System.out.println(i+n+m);
      }
}
```

a. 14
b. 12
c. 15
d. 17

- A.
- B.
- C.
- D. ✅

1.

Consider the following piece of code in Java.

```
class A  {
        public int i;
        protected int j;
    }
    class B extends A
    {
        void display()
        {
            super.j = super.j-super.i ;
            System.out.println(super.i + " " + super.j);
        }
    }
    public class inheritance
    {
        public static void main(String args[])
        {
            B obj = new B();
            obj.i=3;
            obj.j=6;
            obj.display();
        }
    }
```

What is the output of the above program?

a. 2 3
b. 3 3
c. Runtime Error
d. Compilation Error

- a.
- b. ✅
- c.
- d.

2.

Consider the following piece of code in Java.

```
public class Question
{

    public static int x = 7;
    public static void main(String[] args) {

        Question a = new Question ();
         Question b = new Question ();
         a.x = 2;
         b.x = 2;
         System.out.println(a.x+b.x+Question.x);
    }
}
```

What is the output of the above program?

a) 6
b) 10
c) 21
d) error

- a. ✅
- .
- c.
- d.

3.

If a class inheriting an abstract class does not define all of its functions then it will be known as?

a) Default
b) Abstract
c) A simple class
d) Static class

- a.
- b. ✅
- c.
- d.

4.

Which among the following best describes polymorphism?

a) It is the ability for many messages/data to be processed in one way
b) It is the ability for a message/data to be processed in only 1 form
c) It is the ability for a message/data to be processed in more than one form
d) It is the ability for undefined message/data to be processed in at least one way

- a.
- b.
- c. ✅
- d.

5.

Consider the following piece of code in Java

```
class Men
{
 int walkingDistance(int weight)
 {
  System.out.println(10);
  return 10;
 }
}
class WildMen extends Men
{
 void walkingDistance(int weight)
 {
  System.out.println("20");
 }
}
public class MethodOverriding3
{
 public static void main(String[] args)
 {
  WildMen wc = new WildMen();
  wc.walkingDistance(30);
 }
}
```

Advantage(s) of inheritance in Java programming is/are

a. 30
b. 20
c. Compiler error
d. Runtime error

- a.
- b.
- c. ✅
- d.

6.

All the variables of the interface should be?
a) default and final
b) default and static
c) public, static and final
d) protect, static and final

- a.
- b.
- c. ✅
- d.

7.

Disadvantage(s) of inheritance in Java programming is/are

a) Code readability
b) two classes (base and inherited class) get tightly coupled
c) Code maintainability
d) Code reusability

- a.
- b. ✅
- c.
- d.

8.

When does method overloading is determined?

a) At run time
b) At coding time
c) At compile time
d) At execution time

- a.
- b.
- c. ✅

- d.

9.

```
public class Test1{
    Test1() {
      Test1 obj1 = new Test1();
}

public static void main(String []args) {
    Test1 obj = new Test1();
     System.out.println("Hello");
}
}
```

Which of the following statements is/ are true?

a. Output : Hello
b. Program will compile successfully.
c. There will be a compile-time error.
d. The program will give a runtime error.

- a.
- b. ✅
- c.
- d. ✅

10.

Which of the following statement(s) is/are true?

a. Hiding internal data from the outside world, and accessing it only through publicly exposed methods is known as data **encapsulation**.
b. Common behavior can be defined in a **superclass** and inherited into a **subclass** using the **extends** keyword.
C. The term "class variable" is another name for **static field**.
d. A local variable stores temporary state; it is declared inside a **method**.

- a. ✅
- b. ✅
- c. ✅

- d. ✅

📌 **Week 4 Quiz**

1.

Which of the following statement(s) is/are true?

a. The default package in the Java language is java.lang.
b. String is a final class and it is present in java.lang package.
c. Runnable is a class present in java.lang package.
d. Thread is a class present in java.lang package.

- a. ✅
- b. ✅
- c.
- d. ✅

2.

Which of the following statement(s) is/are false?

a. With the import statement, generally import only a single package member or an entire package.
b. To import all the types contained in a particular package, use the import statement with the asterisk (*) wildcard character.
import package.*;
c. import package.A*; it used to match a subset of the classes in a package starts with "A".
d. import package.A*; it generates compilation error.

- a.
- .
- c. ✅
- d.

3.

Which of the following is/are class(s) of `java.awt` package?

a. CardLayout
b. Checkbox
c. Choice
d. MenuContainer

- a. ✅
- b. ✅
- c. ✅
- d.

4.

Which of these access specifier(s) can be used for an interface?

a. Public
b. Protected
c. Private
d. Both b and c

- a. ✅
- b.
- c.
- d.

5.

Consider the program given below.

```
import static java.lang.Math.*;
public class Main{
      public static void main(String args[]){
            System.out.println(cos(3*PI));
      }
}
```

What will be the output if the above program is executed?

a. It will give compile-time error
b. It will give run-time error
c. -1.0
d. 3.14

- a.
- b.
- c. ✅
- d.

6.

Which of the following packages is used to includes utility classes like Calendar, Collections, Date?

a. java.lang
b. java.util
c. java.net
d. java.awt

- a.
- b. ✅
- c.

- d.

7.

Consider the program given below.

```
import static java.lang.System.*;
public class Question{
   public static void main(String args[])
   {
     out.println("JAVA");
   }
}
```

What will be the output if the above program is executed?

a. It will give compile-time error
b. It will give run-time error
c. JAVA
d. JAV

- a.
- b.
- c. ✅
- d.

8.

Which of the following is/are NOT valid declaration(s) of an interface?

a.
```
public interface Question {
   void method(int value) {
      System.out.println("Nptel");
   }
}
```

b.
```
public interface Question {
   void method(int value) {

   }
}
```

c.
```
public interface Question {

}
```

d.
```
public interface Question {
   default void method(int value) {
      System.out.println("Nptel");

   }
}
```

- a. ✅
- b.
- c.
- d.

9.

Which of the following is false statement about interface in java?

a. An interface can extend other interfaces.
b. The interface body can contain abstract methods, default methods, and static methods.
c. All constant values defined in an interface are implicitly public, static, and final.
d. A static method in an interface are implicitly private.

- a.
- b.
- c.
- d. ✅

10.

Which of the following statement(s) is/are true?

a. The default package in the Java language is java.lang.
b. String is a final class and it is present in java.lang package.
c. Cloneable is an interface in java.lang package.
d. Thread is a class present in java.lang package.

- a. ✅
- b. ✅
- c.
- d. ✅

📌 **Week 5 Quiz**

1.

Which of the following is **not true** about **throw**

a. Throw is used inside a function
b. Throw can be used to declare multiple exception
c. Throw is followed by an instance.
d. Throw is a keyword

- a.

- b. ✅
- c.
- d.

2.

Which of the following is not true about custom exception in java?

a.
```
class Exception extends Exp {
        public Exception () {super () ;}
        public Exception (String s) {super(s);}
}
```

b.
```
class Exception extends Exp{
        Exception(String s){
                super(s);
        }
}
```

c.
```
public class Exception extends Exp {
        public Exception(String s) {
                super(s);
        }
}
```

d.
```
class Exception extends Exp {
        public Exception () {super () ;}
```

- a.
- b.
- c.
- d. ✅

3.

Which of the following is not a property of tagged interface?

a. Serializable
b. Cloneable
c. Remote
d. Cascading

- a.
- b.
- c.
- d. ✅

4.

Which of the following is not an exception in Java?

a. SQLException
b. ArrayIndexOutOfBoundException
c. OutOfMemoryError
d. StackOverflow

- a.
- b.
- c.
- d. ✅

5.

Which of the following is type of Java Exception?

a. unchecked
b. checked
c. a & b
d. error

- a.
- b.

- c. ✅
- d.

6.

Which of the following keywords is not a part of exception handling?

a. try
b. throws
c. throw
d. thrown

- a.
- b.
- c.
- d. ✅

7.

Which of the option is correct regarding multiple catch blocks?

a. The subclass exception cannot be caught at first.
b. The superclass exception cannot be caught at first.
c. The subclass exception must be caught at last.
d. The superclass exception must be caught at first.

- a.
- b. ✅
- c.
- d.

8.

When an array element is accessed beyond the array size, then which exception occurs

a. ArrayElementOutOfBound
b. ArrayIndexOutOfBound
c. ArraySizeOutOfBound
d. None of the above

- a.
- b.
- c.
- d. ✅

9.

What is the output of this program?

```
class ExceptionHandling{
  public static void main(String args[ ]) {
    try{
      int num1, num2;
      num1=5;
      num2=num1/0;
        System.out.print("A");
    }
     catch(ArithmeticException e) {
      System.out.print("0");
    }
    finally  {
       System.out.print("B");
    }
  }
}
```

a. 0
b. A
c. 0
d. 0B

- a.
- b.
- c.

- d. ✅

10.

When does an exception occur?

a. During the time of compilation of a Java program.
b. During the time of execution of a Java program.
c. Anytime, that is, during compilation and execution of a program.
d. At the end of execution of a Java program, if there is an exception.

- a.
- b. ✅
- c.
- d.

📌 **Week 6 Quiz**

1.

Which of the following is NOT a method of the Thread class in Java?

a. public void run()
b. public void exit()
c. public void start()
d. public final int getPriority()

- a.
- b. ✅
- c.
- d.

2.

What is difference between starting thread with run() and start() method?

a. There is no difference
b. When you call start() method, main thread internally calls run() method to start newly created Thread
c. run() calls start() method internally
d. None

- a.
- b. ✅
- c.
- d.

3.

Which of the following can be used to create an instance of Thread?

a. By implementing the Runnable interface.
b. By extending the Thread class.
c. By creating a new class named Thread and calling method run().
d. By importing the Thread class from package.

- a. ✅
- b. ✅
- c.
- d.

4.

What is the output of the following program?

```
public class Question
    {
     public static void main(String[] args) {

          try {
              int a=5/0;
             System.out.print("a ");
          } catch (ArithmeticException ae) {

              System.out.print("ArithmeticException ");
              }catch (Exception e) {
                 System.out.print(" Exception ");
          }
            System.out.print("Hello World");
      }
}
```

a. Hello World
b. ArithmeticException
c. ArithmeticException Exception Hello World
d. ArithmeticException Hello World

- a.
- b.
- c.
- d. ✅

5.

Which method restarts a dead thread

a. start()
b. restart()
c. restartThread()
d. none

- a.
- b.
- c.
- d. ✅

6.

Assume the following method is properly synchronized and called from a thread A on an object B: wait(2000); After calling this method, when will the thread A become a candidate to get another turn at the CPU?

a) After thread A is notified, or after two seconds.
b) Two seconds after thread A is notified.
c) After the lock on B is released, or after two seconds.
d) Two seconds after lock B is released.

- a. ✅
- b.
- c.
- d.

7.

The following is a simple program using the concept of thread.

```
public class Question extends Thread{
 public void run(){
  for(int i=1;i<5;i++){

    System.out.println(++i);
  }
 }
 public static void main(String args[]){
    Question t1=new Question();
    t1.run();


 }
}
```

What is the output of the above program?

a. 1
   3
b. 1
   2
   3
   4
c. Runtime error
d. 2
   4

- a.
- b.
- c.
- d. ✅

8.

For the program given below, what will be the output after its execution?

```
public class Main{
public static void main(String[]args){
        Thread thread=Thread.currentThread();
        System.out.print(thread.activeCount());
        thread.run();
        System.out.print(thread.activeCount());
       }
}
```

a. 01
b. False True
c. True True
d. 11

- a.
- b.
- c.
- d. ✅

9.

Which of the following is/are not a correct constructor for a thread object?

a. Thread(Runnable a, String str);
b. Thread(Runnable a, int priority);
c. Thread(Runnable a, ThreadGroup t);
d. Thread(int priority);

- a.
- b. ✅
- c. ✅
- d. ✅

10.

Which of these keywords is not a part of exception handling?

a) try
b) finally
c) thrown
d) catch

- a. ✅
- b. ✅
- c.
- d. ✅

Week 7 Quiz

1.

Which of the following streams contains the classes which can work on character stream?

a. InputStream
b. OutputStream
c. FileReader
d. FileWriter

- a.
- b.
- c. ✅
- d. ✅

2.

In which Java APIs the classes for handling all IO-streams are defined?

a. java.lang
b. java.util
c. java.io
d. java.awt

- a.
- b.
- c. ✅
- d.

3.

```
import java.io.*;

public class Question {
    public static void main(String[] args)
    {
          try {

            PrintWriter writer = new PrintWriter(System.out);

            writer.write(9+97);

            writer.close();
        }
        catch (Exception e) {
            System.out.println(e);
        }
    }
}
```

What will be the output if the above program is executed?

a. It will give compile-time error
b. It will give run-time error
c. j
d. 106


- a.
- b.
- c. ✅
- d.

4.

```
import java.io.*;

public class Question7{
public static void main(String[]args){
            try{
                  InputStream file =new FileInputStream("./Text.txt");
                  System.out.print(file.available());
            }
            catch(Exception e){
                  System.out.print(e);
            }
}
}
```

The file **./Text.txt** when opened with the Notepad text editor, it shows the content as shown below.

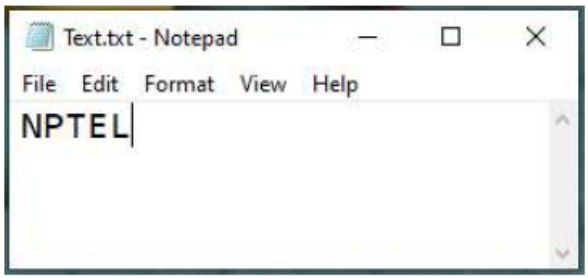

Which of the following is the correct output for the 'try' portion of the code?

a. Prints the number of bytes in the file.
b. Prints the number of characters in the file.
c. Prints 'true', if the file is present; else prints 'false'.
d. Prints nothing, as an exception will be caught.

- a. ✅
- b.
- c.
- d.

5.

Which method is used to write an array of byte to the current output stream?

a. public void write(int b)throws IOException
b. public void write(byte[ ] b)throws IOException
c. public void flush( )throws IOException
d. public void close( )throws IOException

- a.
- b. ✅
- c.
- d.

6.

Which of the following is/are Standard Stream(s)?

a. System.in
b. System.out
c. System.err
d. System.console

- a. ✅
- b. ✅
- c. ✅
- d.

7.

Which of the following method in java.io package help in clearing the contents of the buffer?

a. flush ( )
b. clear( )
c. append( )
d. exit( )

- a. ✅

- b.
- c.
- d.

8.

Which method of RandomAccessFile class reads a line from the file and returns it as a String ?

a. WriteInt( ).
b. readLine( )
c. readInt( )
d. WriteDouble( )

- a.
- b. ✅
- c.
- d.

9.

Which of the following is/are interface(s) of `java.io` package?

a. FileReader
b. ObjectInput
c. ObjectOutput
d. DataInput

- a.
- b. ✅
- c. ✅
- d. ✅

10.

Which of the following statement(s) is/are true?

a. DataStreams detects an end-of-file condition by using EOFException, instead of testing for an invalid return value.
b. DataStreams uses floating point numbers to represent monetary values.
c. Data streams support I/O of primitive data types.
d. Object streams support I/O of objects.

- a. ✅
- b. ✅
- c. ✅
- d. ✅

📌 **Week 8 Quiz**

1.

Which of the following is NOT a class of java.awt package?

a. Button
b. Component
c. Dialog
d. Paint

- a.
- b.
- c.
- d. ✅

2.

Which of the following is/are NOT an exception of java.awt package?

a. AWTError
b. AWTException
c. FontFormatException
d. all of these

- a. ✅
- b.
- c.
- d.

3.

Which of the following method is/are a class button of java.awt package ?

a. paint(Graphics g)
b. setLabel(String label)
c. getCurrent()
d. getItem(int index)

- a.
- b. ✅
- c.
- d.

4.

Which of the following container does not contain titlebar and menubar ?

a. window
b. panel
c. container
d. frame

- a.
- b. ✅
- c.
- d.

5.

Which package provides many event classes and Listener interfaces for event handling?

a. java.awt.activeevent
b. java.awt.event
c. java.awt.listener
d. none of these

- a.
- b. ✅
- c.
- d.

6.

What is the name of the method used to get the current font of an graphic in java.awt.graphics?

a. abstract FontMetrics getFontMetrics(Font f)
b. abstract Font getFont()
c. FontMetrics getFontMetrics()
d. None of these

- a.
- b. ✅
- c.
- d.

7.

Which of the following method remove all items from scrolling list in java.awt.list?

a. hide()
b. clear()
c. remove()
d. None

- a.

- b. ✅
- c.
- d.

8.

Which of the following statement is true about the update() in java.awt package?

a. Sets the color of the graphics context to be the foreground color of this component.
b. Calls this component's paint method to completely redraw this component.
c. Clears this component by filling it with the background color.
d. All of these.

- a.
- b.
- c.
- d. ✅

9.

Which of the following methods can be used to return the current size size of a `java.awt.Component` object?

a. dimension()
b. setSize()
c. area()
d. size()
e. resize()

- a.
- b.
- c.
- d. ✅

10.

When we invoke `update()` for a `java.awt.Component` object, the AWT invokes which of the following method ?

a. show( )
b. draw()
c. paint( )
d. repaint()

- a.
- b.
- c. ✅
- d.

📌 **Week 9 Quiz**

1.

Select the correct statement(s) in the following.

a. JTextField cannot be used as an alternative to JLabel.
b. JLabel cannot be used as an alternative to JTextField.
c. Button grouped radio button can be used as an alternative to JComboBox.
d. The class JPasswordField extends the class JLabel.

- a.
- b. ✅
- c.
- d.

2.

In Java AWT, TextArea **and** TextField **are subclass of:**

a. List.
b. Label.
c. TextComponent.
d. TextComponent and Label, respectively.

- a.

- b.
- c. ✅
- d.

3.

Analyze the following code.

```
import  java.awt.*;
import  javax.swing.*;
      public class Test {
            public static void main(String[ ] args) {
                JFrame frame = new JFrame("My Frame");
                frame.add(new JButton("Cancel"));
                frame.add(new JButton("OK "));
                frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
                frame.setSize(200, 200);
                frame.setVisible(true);
      }
}
```

Which button will be displayed(or can be seen by user)?

a. OK
b. Cancel
c. both
d. None

- a. ✅
- b.
- c.
- d.

4.

In JLabel(Icon, int) method/constructor, the int argument specifies the horizontal alignment of the label's contents within its drawing area.

Which of the following is/are not a valid constants for horizontal alignment?

a. RIGHT
b. LEADING
c. TRAILING
d. TOP

- a.
- b.
- c.
- d. ✅

5.

Which of the following is/ are not related with keyboard event?

a. Class KeyEvent is used to notify if any key pressed occurs or not.
b. The KeyListener should be added either in init() or the main method.
c. RequestFocus should be added either in init() or the main method.
d. The class InputEvent should be imported explicitly in the program.

- a.
- b.
- c.
- d. ✅

6.

Which of the following Listener(s) is/are supported by button (Swing component)?

a. ActionListener
b. ChangeListener
c. ItemListener
d. WindowListener

- a. ✅
- b. ✅
- c. ✅
- d.

7.

Which of the following Listener Interface does not have an Adapter Class?

a. ActionListener
b. ChangeListener
c. ComponentListener
d. ItemListener

- a. ✅
- b. ✅
- c.
- d. ✅

8.

To set a FlowLayout in a panel, say jp, which of the following method(s) that you can not use?

```
a. jp.setLayout(new FlowLayout());
b. jp.setLayout(new FlowLayout(FlowLayout.CENTER));
c. jp.setLayout(new FlowLayout(FlowLayout.center));
d. jp.setLayout(FlowLayout());
```

- a.
- b.
- c. ✅
- d. ✅

9.

Which of the following is/are interface(s) in javax.swing package?

a. MenuElement
b. BoxLayout
c. JComponent
d. Scrollable

- a. ✅
- b.
- c.
- d. ✅

10.

Which package provides many methods for graphics programming?

a. java.awt
b. java.Applet
c. java.Graphics
d. java.io

- a. ✅
- b.
- c.
- d.

📌 **Week 10 Quiz**

1.

Which of these is a protocol for breaking and sending packets to an address across a network?

a. TCP/IP
b. DNS
c. Socket
d. Proxy Server

- a. ✅
- b.
- c.
- d.

2.

Which of the following statement(s) is/are false?

a. DatagramSocket is a UDP endpoint API .
b. DatagramSocket is a TCP server API .
c. ServerSocket is a TCP server API.
d. ServerSocket is a TCP client API.

- a.
- b. ✅
- c.
- d. ✅

3.

In the socket programming, for an IP address, which can be used to find the host name and IP address of a client/ server?

a. The ServerSocket class
b. The Socket class
c. The InetAddress class
d. The Connection interface

- a.
- b.
- c. ✅
- d.

4.

Which of the following package contains classes and interfaces for networking?

a. java.io
b. java.util
c. java.net
d. javax.swing

- a.
- b.
- c. ✅
- d.

5.

In the following URL, identify the Resource name?

https://xyz.ac.in

a. https
b. xyz.ac.in
c. ac.in
d. https://xyz.ac.in

- a.
- b. ✅
- c.
- d.

6.

Which of the following is/are transport layer protocol(s)?

a. TCP
b. UDP
c. HTTP
d. FTP

- a. ✅
- b. ✅
- c.
- d.

7.

The package, which is required to be imported for the JDBC programming?

a. java.net
b. java.sql
c. java.lang
d. java.io

- a.
- b. ✅
- c.
- d.

8.

Which of the following is/are valid Data Definition Language (DDL) command(s)?

a. SELECT
b. INSERT
c. UPDATE
d. ALTER TABLE

- a.
- b.
- c.
- d. ✅

9.

In JDBC, all raw data types (including binary documents or images) should be read and uploaded to the database as an array of

a. int
b. char
c. byte
d. String

- a.
- b.
- c. ✅
- d.

10.

Once a JDBC driver has been registered, which of the following method is used to make a database connection?

a. getConnection(String url, String userID, String password)
b. setConnection(String url, String userID, String password)
c. Connect(String url, String userID, String password)
d. Connect(string url, string userID, string password).

- a. ✅
- b.
- c.
- d.

Week 11 Quiz

1.

Which of the following is not a JDBC drivers?

a. Native – API driver
b. Thin driver
c. Network protocol driver
d. Local Protocol driver

- a.
- b.
- c.
- d. ✅

2.

Which of the following is a JDBC class component?

a. Connection
b. ResultSet
c. Statement
d. Driver

- a.
- b. ✅
- c.
- d.

3.

As with Statement objects, to execute a PreparedStatement object, it need to be call an execute statement. Which of the following statement(s) is/are true regarding this?

a. executeQuery: if the query returns only one ResultSet (such as a SELECT SQL statement).
b. executeUpdate : if the query does not return a ResultSet (such as an UPDATE SQL statement).
c. execute : if the query might return more than one ResultSet object.
d. executupdateQuery : if the query does return a ResultSet (such as an UPDATE SQL statement).

- a. ✅
- b. ✅
- c. ✅
- d.

4.

Which of the following statement(s) is/are true, when the return value for executeUpdate is 0 ?

a. The statement executed was an update statement that affected zero rows.
b. The statement executed was a DDL statement.
c. The statement executed was an update statement that affected one row.
d. The statement executed was a DCL statement.

- a. ✅
- b. ✅
- c.
- d.

5.

Which of the following statement is used for executing a database stored procedure?

a. Statement
b. PreparedStatement
c. CallableStatement
d. None of these

- a.
- b.
- c. ✅
- d.

6.

Once a JDBC driver has been registered, which of the following method is used to make a database connection?

a. getConnection(String url, String userID, String password)
b. setConnection(String url, String userID, String password)
c. Connect(String url, String userID, String password)
d. Any one of the above.

- a. ✅
- b.
- c.
- d.

7.

The SQL command "USE test" implies, which of the following?

a. List all the databases those are there in the database server.
b. List all the tables those are there under the database.
c. Create a table called test.
d. Set test as the current working database, so that any SQL command bind to the test database only.

- a.
- b.
- c.

- d. ✅

8.

What happens after execution of the following code?

```
import java.sql.*;
class InsertPrepared{
      public static void main(String args[]){
            try{
                  Class.forName("com.mysql.jdbc.Driver");
                  Connection con=DriverManager.getConnection(
                  "jdbc:mysql://localhost/database","Java","july");
                  PreparedStatement stmt=con.prepareStatement("INSERT INTO
table VALUES(?,?)");
                  stmt.setInt(1,"Joe");
                  stmt.setString(2,"Dan");
                  stmt.executeUpdate();
                  con.close();
            }
            catch(Exception e){
                  System.out.println(e);
            }
      }
}
```

a. Compilation error
b. Runtime error
c. `1,"Joe"` is replaced by `2,"Dan"`
d. `"Joe"` and `"Dan"` both are inserted in different columns of same row.

- a.
- b.
- c.
- d. ✅

9.

How do you know in your Java program that a SQL warning is generated as a result of executing a SQL statement in the database?

a. You must catch the checked SQLException which is thrown by the method which executes the statement.
b. You must catch the unchecked SQLWarningException which is thrown by the method which executes the statement.
c. You must invoke the getWarnings() method on the Statement object (or a sub interface thereof).
d. You must query the ResultSet object about possible warnings generated by the database.

- a.
- b.
- c. ✅
- d.

10.

Which one of the following SQL type represent getfloat()?

a. FLOAT
b. REAL
c. INTEGER
d. DOUBLE

- a.
- b. ✅
- c.
- d.

Week 12 Quiz

1.

Execution of SQL command like SELECT * FROM myTable using JDBC program will return a ResultSet object. This object is

a. Same as the myTable.
b. All records in verbatim from the table.
c. All records in verbatim from the table but those records with null values.
d. All records in verbatim from the table but those records are not with null values.

- a.
- b. ✅
- c.
- d.

2.

Which of the following control expressions are not valid for an **if** statement?

a. Any integer expression.
b. Any Boolean expression.
c. A String object.
d. **Any** expression with mixed arithmetic.

- a. ✅
- b.
- c. ✅
- d. ✅

3.

Let's consider the following program in Java.

```
class Test extends Thread {
publicvoid run() {
        System.out.println("I am from Run…");
}
}

class MyProgram {
public  static void main(String[] args) {
        Test t = new Test();
        t.start();
   }
}
```

If you run this program the how many threads will be executed altogether?

a. One thread only.
b. Two threads only.
c. Three threads only.
d. No thread will run in this case.

- a.

- b.
- c.
- d. ✅

4.

Which of the statements are not correct about Swing programming?

a. AWT is a heavyweight programming.
b. Swing is heavyweight programming.
c. Swing is lightweight programming.
d. Both AWT and Swing are lightweight programming

- a.
- b. ✅
- c.
- d. ✅

5.

Which of the following displays components row-by-row in the order in which they were added to the JFrame?

a. CardLayout
b. FlowLayout
c. BorderLayout
d. GridLayout

- a.
- b. ✅
- c.
- d.

6.

Consider the following piece of code in Java.

```
public class Test {
  public static void aMethod() throws Exception {
    try {
     throw new Exception();
    }
    finally {
     System.out.print("finally ");
    }
  }
  public static void main(String args[]){
   try {
    aMethod();
   }
   catch (Exception e) {
    System.out.print("exception ");
   }
   System.out.print("finished ");
  }
}
```

What is the result, if the above-mentioned program is executed?

a. finally
b. exception finished
c. exception finally finished
d. finally exception finished
e. Compilation fails

- a.
- b.
- c.
- d. ✅

7.

Consider the following program:

```
public class Question
{
      public static void main(String[] args) {

          String str = "january java nptel.";

            System.out.println(str.charAt(8)+str.substring(9, 12));
      }
}
```

What is the output of the following program?

a. j ava
b. iava
c. javanptel
d. january

- a.
- b. ✅
- c.
- d.

8.

Which of the following statements would cause a compilation error?

```
a. float[] = new float(3);
b. float f2[] = new float[];
c. float[] f1 = new float[3];
d. float f3[] = new float[3];
e. float f5[]={ 1.0f, 2.0f, 2.0f };
f. float f4[] = new float[] { 1.0f, 2.0f, 3.0f};
```

- a. ✅
- b. ✅
- c.
- d.

9.

Consider the following program:

```
public class Question
{
      public static void main(String[] args) {

          String str = "april java nptel.";

            System.out.println(str.length());
      }
}
```

What is the output of the following program?

a. 16
b. 15
c. 19
d. 17

- a.
- b.
- c.
- d. ✅

10.

Which of the following method is used to set a frame, say `f` with size 200 × 300 pixels?

```
JFrame f = newJFrame();
```

a. f.setSize(300, 200);
b. f.setSize(200, 300);
c. f.paint(300, 200);
d. f.setVisible(300, 200);

- a.
- b. ✅
- c.
- d.