



DRISHTI

ENTERPRISE TECHNICAL SPECIFICATION

Drishti — Application Flow & User Journeys

Defensive Cybersecurity Platform — Complete Architecture & Reference Manual

🛡️ Graph-Powered Attack Paths

⚡ Live Watch Agent

💰 Dollar Risk Quantifier

🛠️ AI Remediation Guardrails

🌐 URL Trust Scoring

PLATFORM VERSION

v0.2 Enterprise Edition

RELEASE DATE

August 2026

ARCHITECTURE TIER

Full-Stack Multi-Tenant

🔒 RESTRICTED /// INTERNAL ARCHITECTURE & TECHNICAL SPECIFICATION /// FOR AUTHORIZED USE ONLY

Drishti — Application Flows

Reverse-engineered end-to-end journeys and data flows, as Mermaid sequence/flow diagrams. Each maps to real routes ([API_REFERENCE.md](#)) and services.

0. Navigation map

● ● ● SYSTEM ARCHITECTURE FLOW



Syntax error in text
mermaid version 10.9.8

Any `/app/*` URL without a session redirects to `/login` (`RequireAuth`).

1. Auth: register → login → refresh


● ● ● SYSTEM ARCHITECTURE FLOW




Syntax error in text
mermaid version 10.9.8

Token invalidation: `PATCH /api/auth/me` with a new password bumps `user.token_version`; every token minted earlier (which embeds the old version) then fails the `get_current_user` check — all sessions logged out at once.

2. Ingest → recompute → visualize (the core loop)

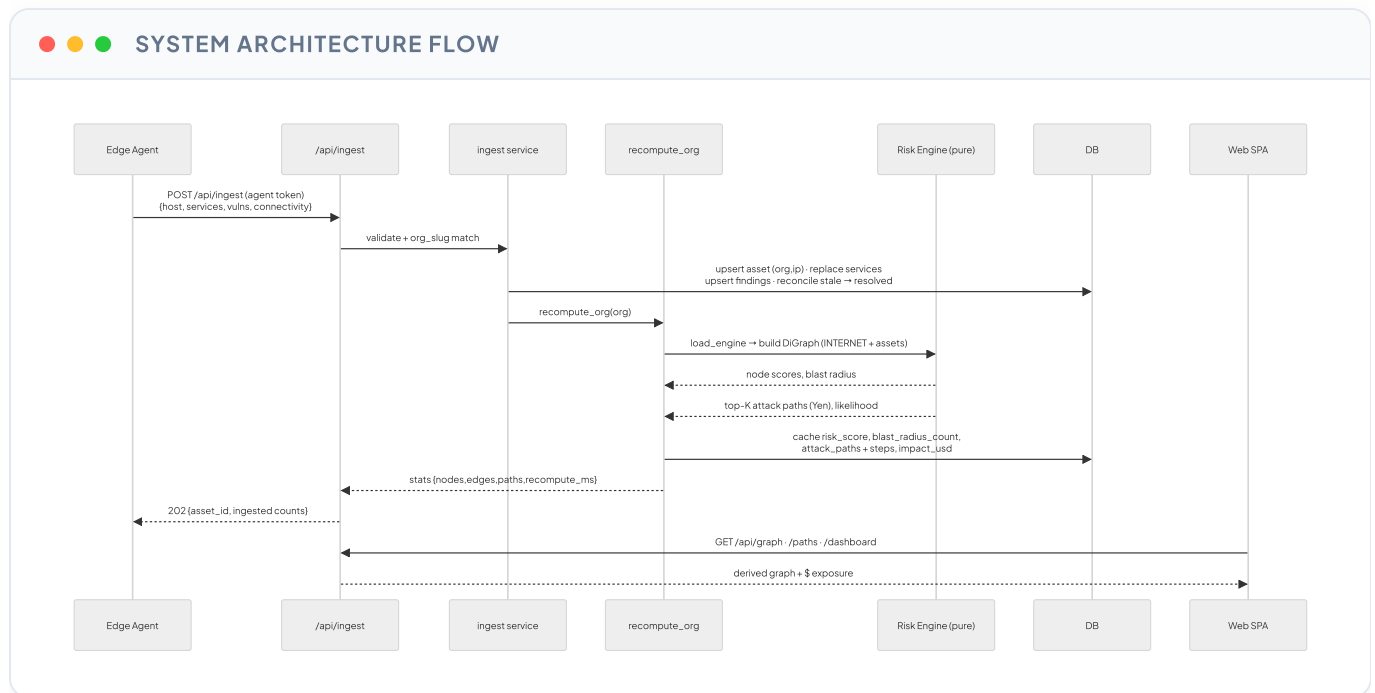

3. The hero: resolve a finding → exposure drops live

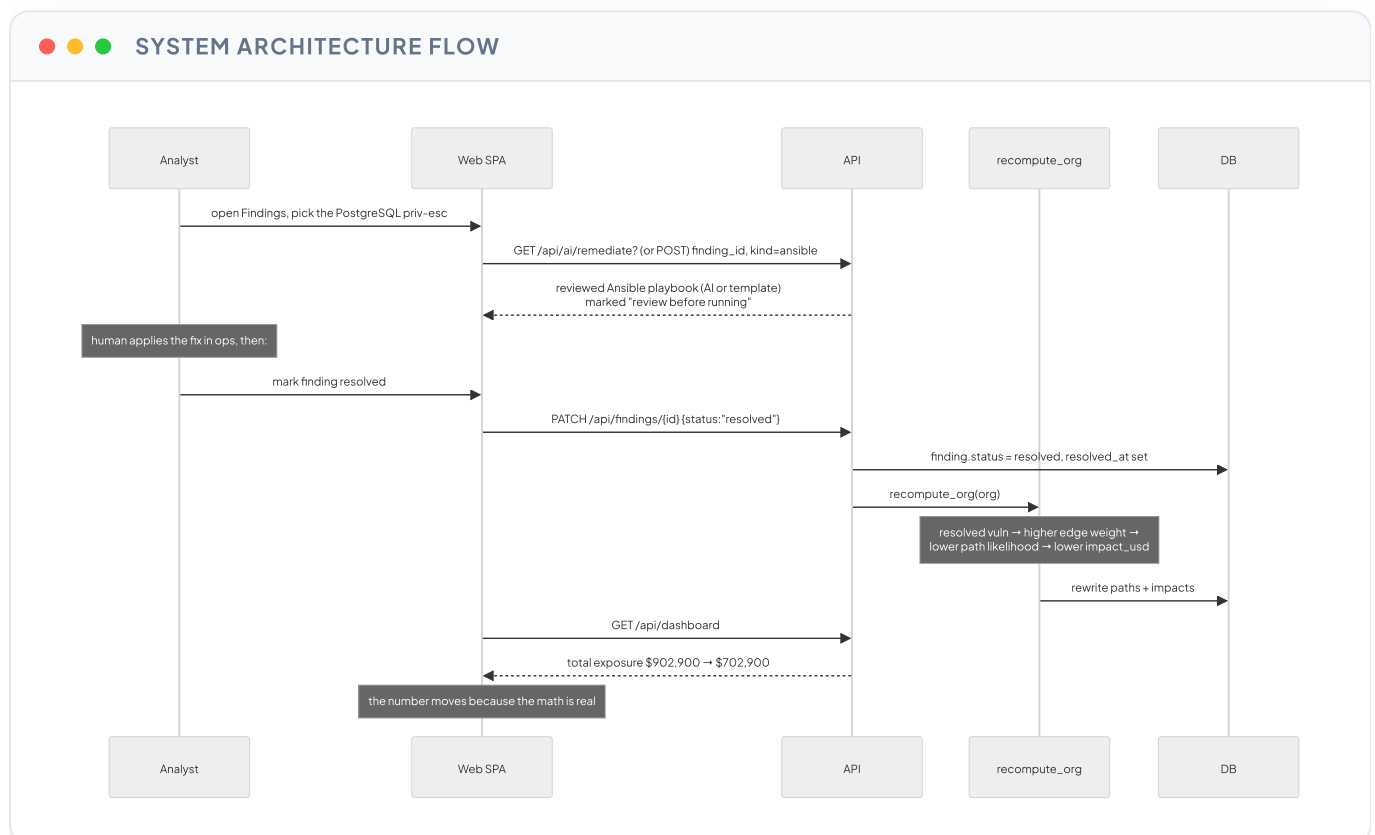

`make smoke` runs exactly this and asserts the `$200,000` drop.

4. Attack Map interaction + demo attack

● ● ● SYSTEM ARCHITECTURE FLOW



Syntax error in text
mermaid version 10.9.8

The demo intruder is clearly labeled (`DEMO-ATTACK` , MAC `de:ad:be:ef:*`) so it's never confused with a real device.

5. Live Watch: devices on the wire + threats

● ● ● SYSTEM ARCHITECTURE FLOW



Syntax error in text
mermaid version 10.9.8

WiFi-aware: each sweep reports `active_subnets` ; devices not on an active subnet (or unseen > 90 s) drop off, so switching networks clears the old network and surfaces the new one.

6. Deep Scan (consent-gated)








Autoscan runs this on a schedule: always this host; the rest of the subnet only if `scan_subnet` is explicitly authorized.

7. Network-config audit (NAT / DMZ / DHCP)


SYSTEM ARCHITECTURE FLOW

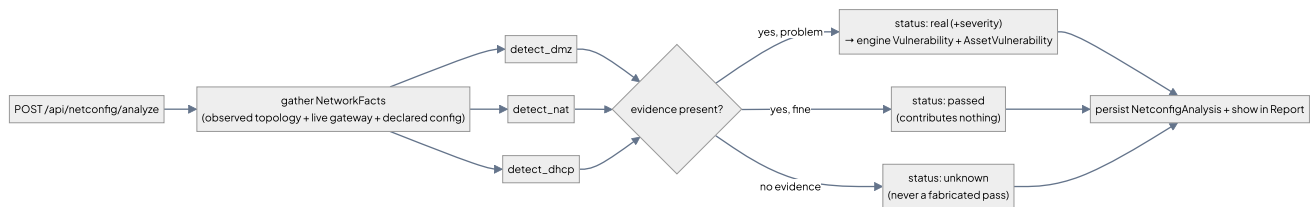

On a live network this yields **real** findings (DHCP inferred from the live gateway, flat-network/no-DMZ from the live sweep, NAT boundary), not "unknown".

8. URL Trust Analyzer (+ Web Guard extension)


SYSTEM ARCHITECTURE FLOW

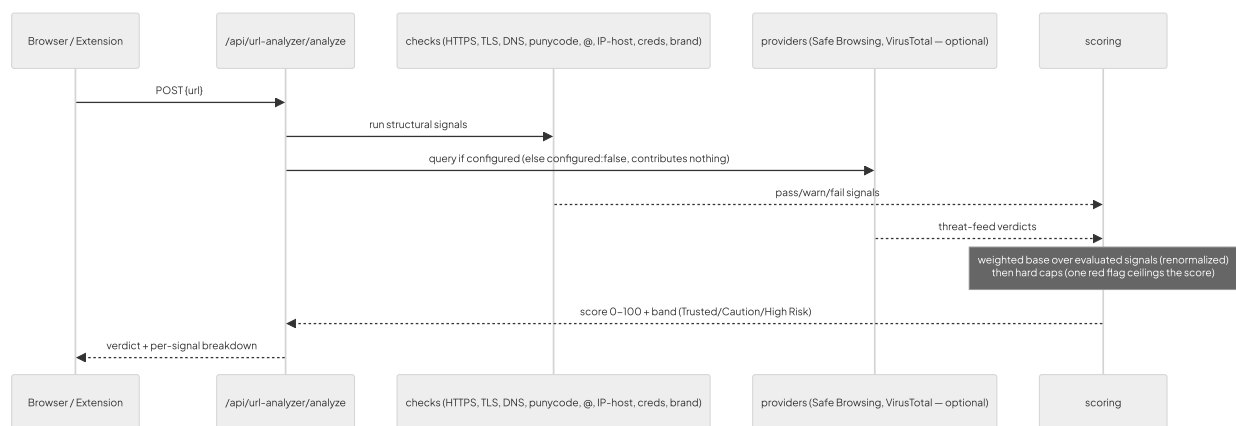

The extension blocks/ warns on High-Risk navigation; Live Watch reuses the same scoring for observed domains.


9. Breach Simulation (client-side, no exploit)

SYSTEM ARCHITECTURE FLOW



10. Data-fetching & cache invalidation (frontend)

SYSTEM ARCHITECTURE FLOW

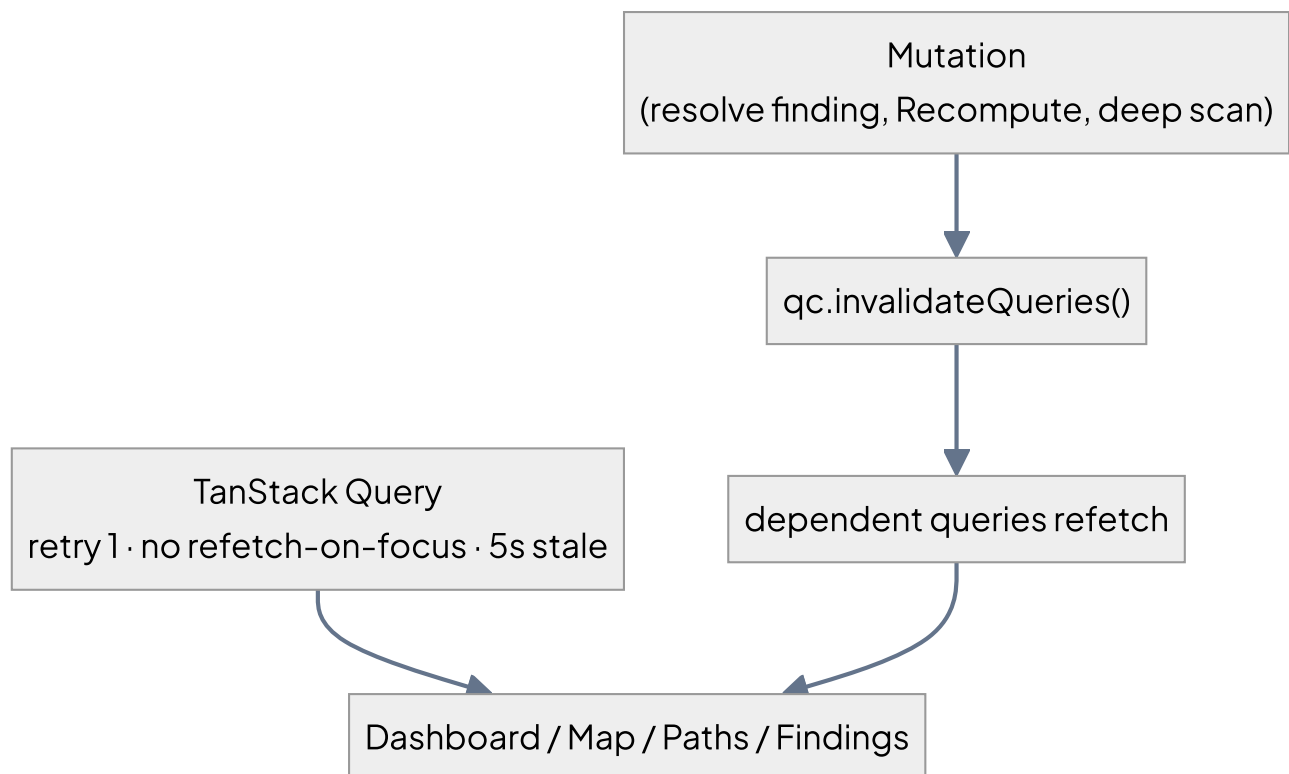

Pressing **Recompute** in the Shell calls `POST /api/recompute` then invalidates all queries, so every open view reflects the new model.