Processing Data with MapReduce




Janani Ravi CO-FOUNDER, LOONYCORN www.loonycorn.com

Overview

Setting up a MapReduce job for a simple counting task

Submitting a MapReduce job to Hadoop and monitoring it

Processing huge amounts of data

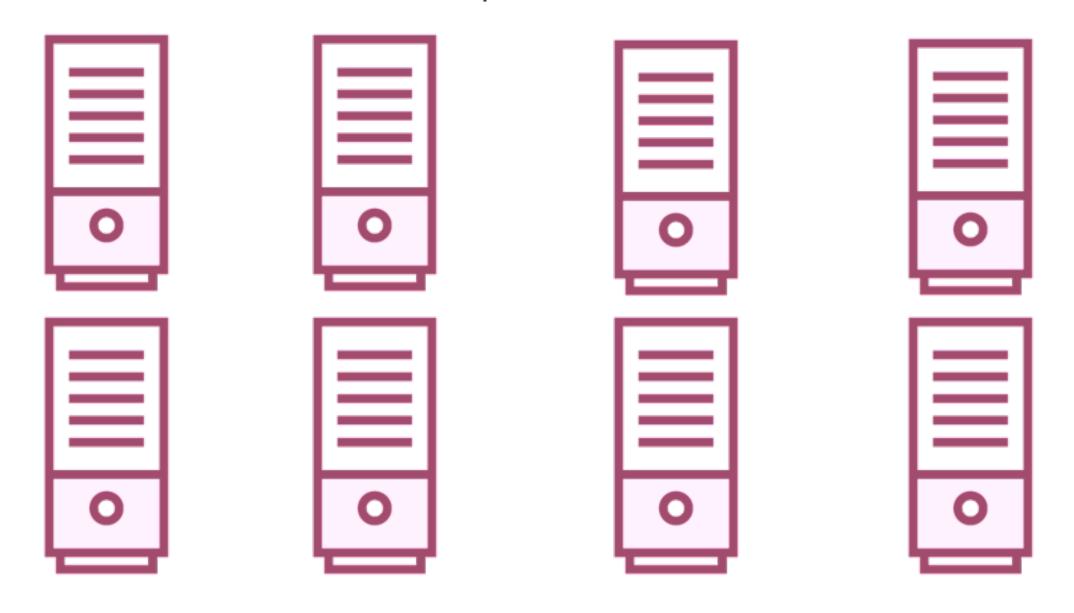

Requires running processes on many machines




A distributed system




MapReduce is a programming paradigm



Takes advantage of the inherent parallelism in data processing

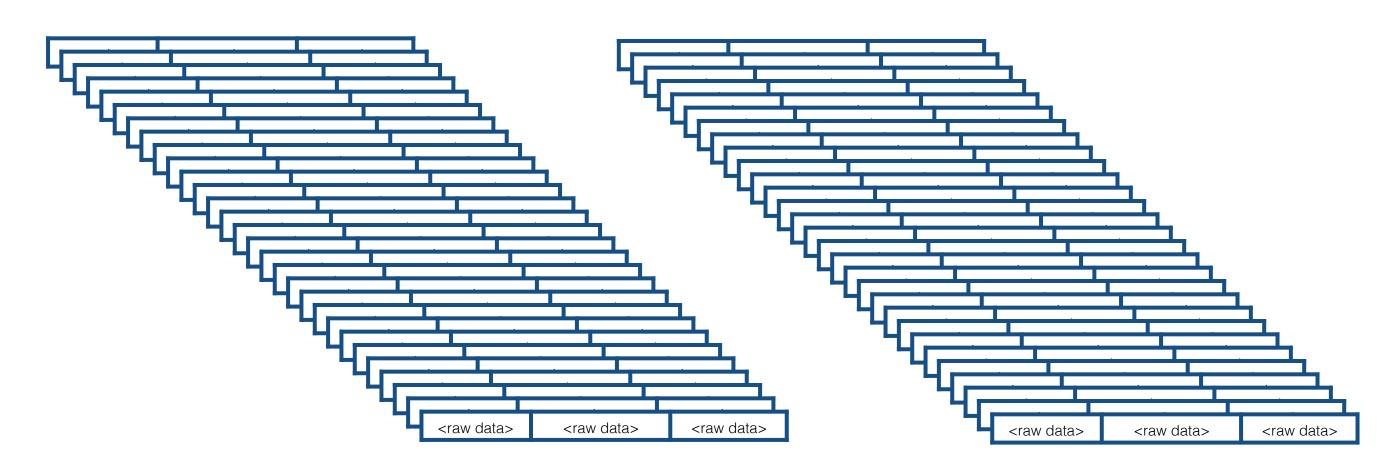


Modern systems generate millions of records of raw data

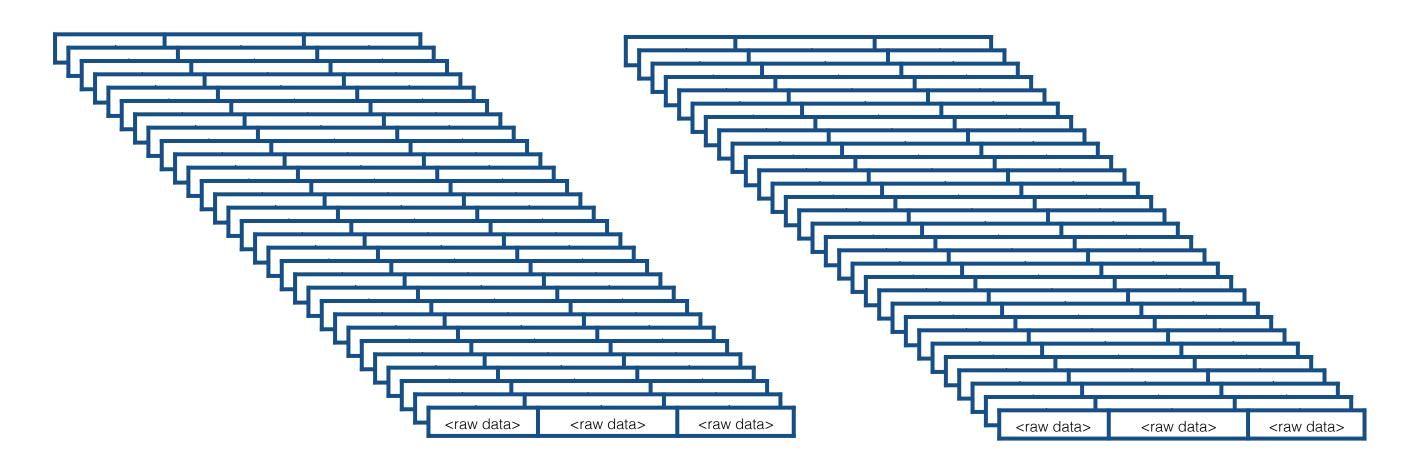

A task of this scale is processed in two stages map reduce

map

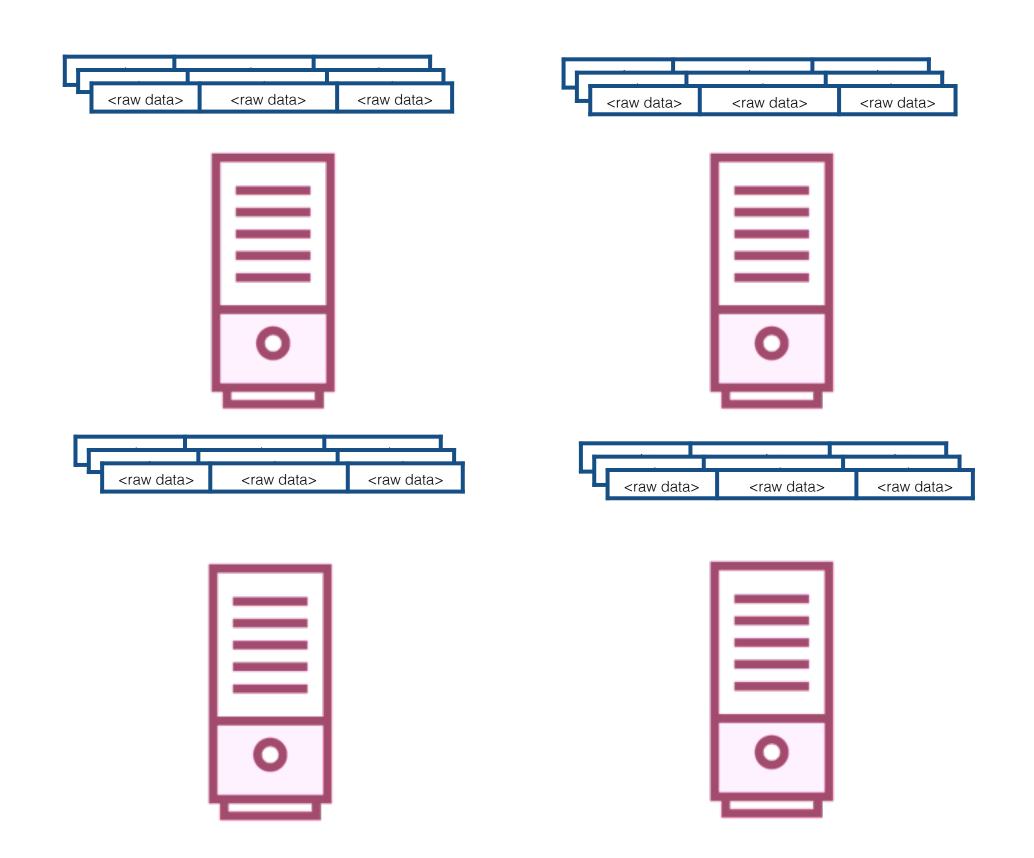

reduce







<raw data=""></raw>	<raw data=""></raw>	<raw data=""></raw>
<raw data=""></raw>	<raw data=""></raw>	<raw data=""></raw>
<raw data=""></raw>	<raw data=""></raw>	<raw data=""></raw>
<raw data=""></raw>	<raw data=""></raw>	<raw data=""></raw>



map reduce

The programmer defines these 2 functions


Hadoop does the rest - behind the scenes

map

An operation performed in parallel, on small portions of the dataset

map

One Record




Key-Value Output

reduce

An operation to combine the results of the map step

reduce

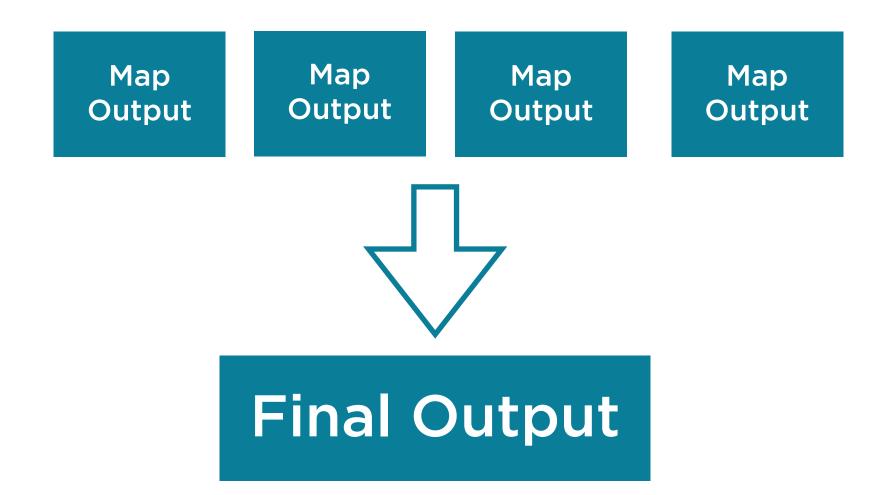


Map A step that can be performed in parallel

reduce A step to combine the intermediate results

Counting Word Frequencies

Consider a large text file

Twinkle twinkle little star		
How I wonder what you are		
Up above the world so high		
Like a diamond in the sky		
Twinkle twinkle little star		
How I wonder what you are		

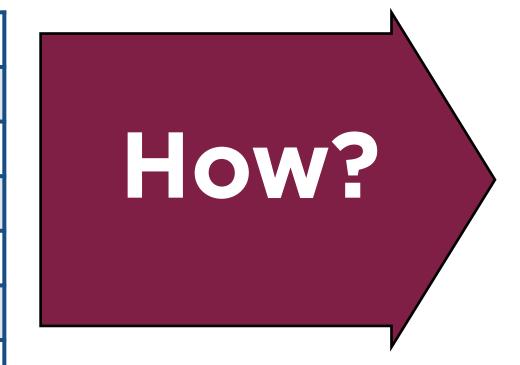

Word	Frequency
above	14
are	20
how	21
star	22
twinkle	32

Twinkle twinkle little star

How I wonder what you are

Up above the world so high

Like a diamond in the sky

Twinkle twinkle little star

How I wonder what you are

.

MapReduce Flow

The raw data is really large (potentially in PetaBytes)

It's distributed across many machines in a cluster

Each machine holds a partition of data

MapReduce Flow

Twinkle twinkle little star

How I wonder what you are



Up above the world so high

Like a diamond in the sky



Each partition is given to a different process i.e. to mappers

Twinkle twinkle little star

How I wonder what you are



MapReduce Flow


Twinkle twinkle little star

How I wonder what you are

Each mapper works in parallel


Up above the world so high

Like a diamond in the sky

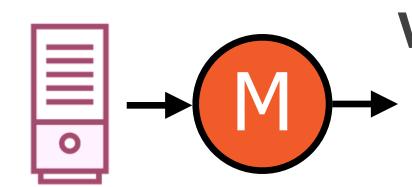

Twinkle twinkle little star


How I wonder what you are

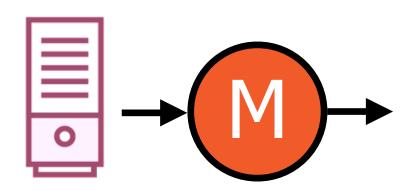

Map Flow

Twinkle twinkle little star

How I wonder what you are

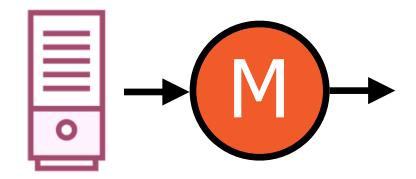


Within each mapper, the rows are processed serially

Map Flow

Twinkle twinkle little star


How I wonder what you are

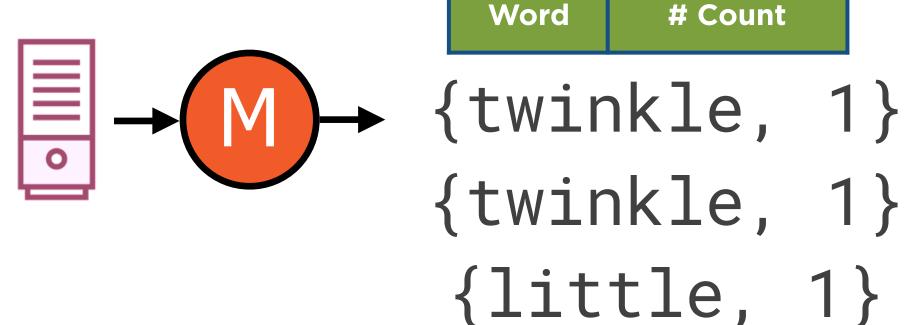



{star, 1}

Each row emits {key, value} pairs

Reduce Flow

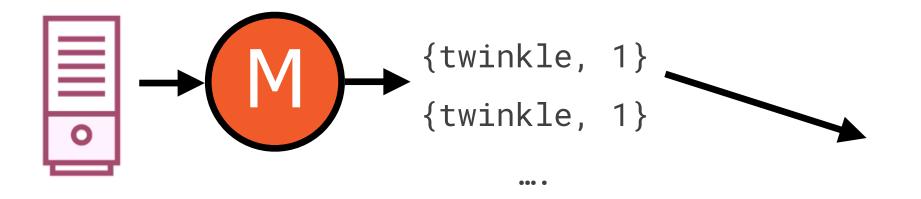


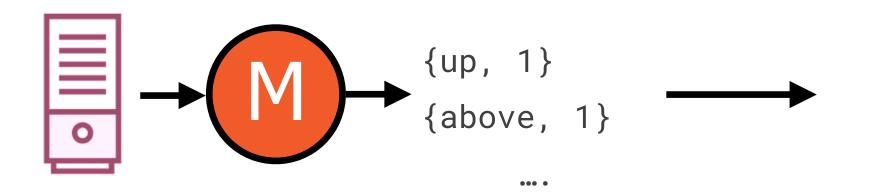


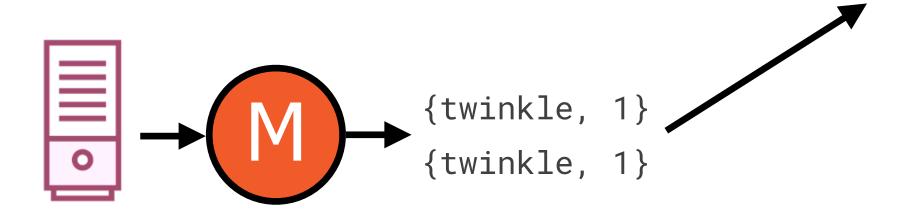


The results are passed on to another process i.e. a reducer

Reduce Flow

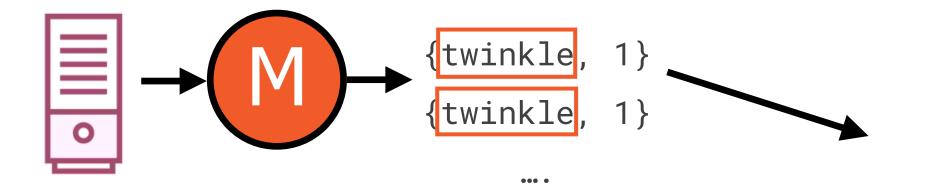

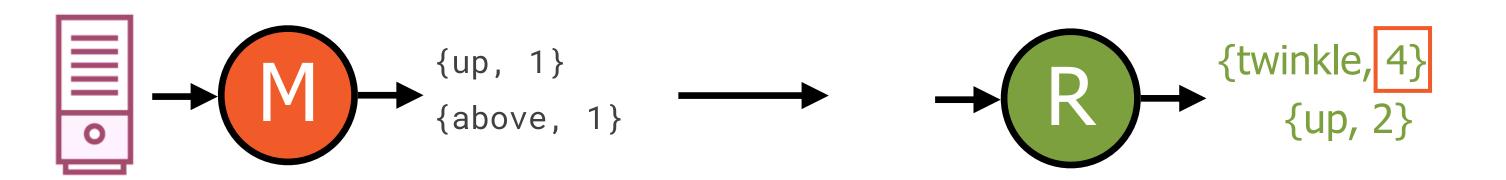

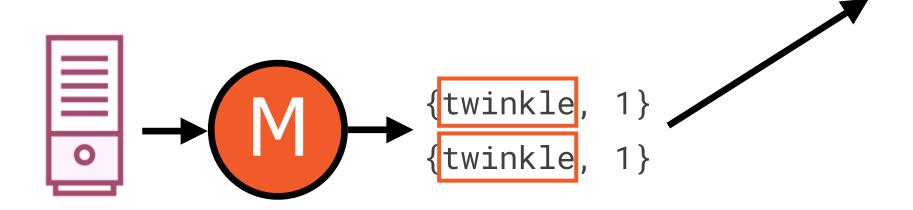


The reducer combines the values with the same key

Key Insight Behind MapReduce

Many data processing tasks can be expressed in this form

Answer Two Questions

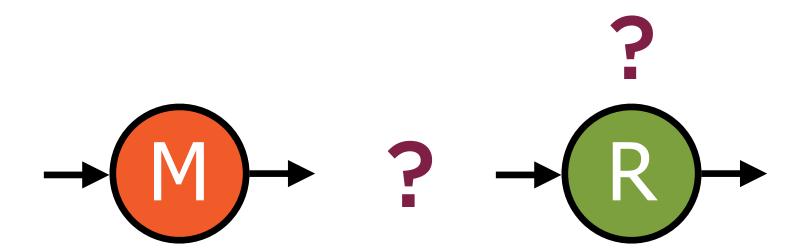

- 1. What {key, value} pairs should be emitted in the map step?
- 2. How should values with the same key be combined?

Counting Word Frequencies

Twinkle twinkle little star
How I wonder what you are
Up above the world so high
Like a diamond in the sky



Sum

Word	Count
twinkle	2
little	1

```
For each word in each line
```

```
{twinkle, 1}
{twinkle, 1}
{little, 1}
{star, 1}
```

•

••



Answer these to parallelize any task:)

Implementing in Java

Map

A class where the map logic is implemented

Reduce

A class where the reduce logic is implemented

Main

A driver program that sets up the job

Implementing in Java

Map

Reduce

Main

A class where the map logic is implemented

A class where the reduce logic is implemented

A driver program that sets up the job

Map Step

Map Class

Mapper Class

The map logic is implemented in a class that extends the Mapper Class

Map Step

Map Class

<input key type,
input value type,
output key type,
output value type>

Mapper Class

This is a generic class, with 4 type parameters

Implementing in Java

Map

Reduce

Main

A class where the map logic is implemented

A class where the reduce logic is implemented

A driver program that sets up the job

Implementing in Java

Map

A class where the map logic is implemented

Reduce

A class where the reduce logic is implemented

Main

A driver program that sets up the job

Reduce Step

Reduce Class

Reducer Class

The reduce logic is implemented in a class that extends the Reducer Class

Reduce Step

Reduce Class

<input key type,
input value type,
output key type,
output value type>

Reducer Class

This is also a generic class, with 4 type parameters

Matching Data Types

Map Class

output key type,
output value type>

Mapper Class

Reduce Class

<input key type,
input value type,</pre>

Reducer Class

The output types of the Mapper should match the input types of the Reducer

Implementing in Java

Map

A class where the map logic is implemented

Reduce

A class where the reduce logic is implemented

Main

A driver program that sets up the job

Implementing in Java

Map

Reduce

Main


A class where the map logic is implemented

A class where the reduce logic is implemented

A driver program that sets up the job

Setting up the Job

The Mapper and Reducer classes are used by a Job that is configured in the Main Class

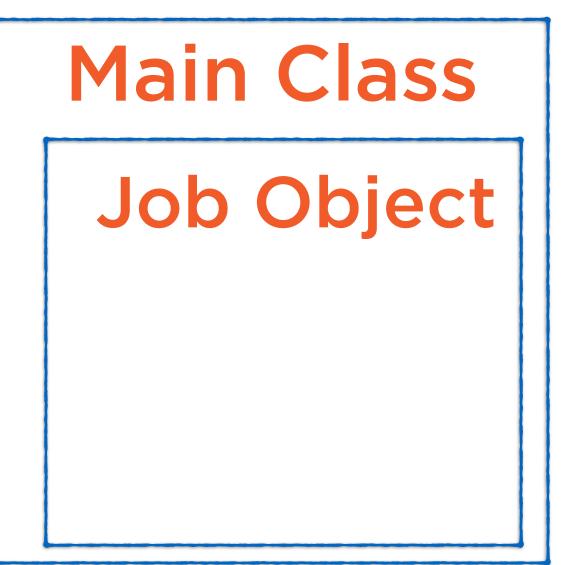

Setting up the Job

The Job has a bunch of properties that need to be configured

Main Class

Job Object

Input filepath

Output filepath

Mapper class

Reducer class

Output data types

Demo

Running a MapReduce job

Monitoring progress in the UI

Understanding the information presented in the UI

Summary

Setting up a MapReduce job for a simple counting task

Submitting a MapReduce job to Hadoop and monitoring it