

# Team Light Notebook

Sourabh, Satvik and Himanshu

Compiled on December 26, 2018

## Contents

<b>1 Maths</b>	<b>1</b>		
1.1 Game Theory	1	2.9.1 1 SAT	14
1.2 Mobius	1	2.9.2 2 SAT	14
1.3 Burnside	2	2.10 DAG	14
1.3.1 Inclusion Exclusion Principle	2	2.10.1 SSSP	14
1.4 Modulo	2	2.10.2 SSLP	14
1.5 Prob and Comb	2	2.10.3 Counting Paths in DAG	14
1.6 Euler's Totient Function	2	2.10.4 Min Path cover on DAG	15
1.7 Catalan	3	2.11 APSP Floyd Warshalls	15
1.8 Floyd Cycle Finding	3	2.12 MST (Kruskal)	15
1.9 Base Conversion	3	2.13 SSSP	15
1.10 Extended Euclid	3	2.13.1 Dijkstra	15
1.11 Linear Congruence Equation	3	2.13.2 Bellman ford	15
1.12 Sieve	3	2.14 Max Flow	16
1.13 Matrix	4	2.14.1 Edmond karp	16
1.14 Frac lib and Eqn solving	4	2.15 Minimum Cost Flow	17
1.15 Finding Power Of Factorial Divisor	5	2.16 Kirchhoff's matrix tree theorem	17
1.15.1 Prime $k$	5	2.17 Counting Labeled graphs	17
1.15.2 Composite $k$	5	2.17.1 Labeled graphs	17
1.16 GCD, LCM	5	2.17.2 Connected labeled graphs	17
1.17 Some properties of Fibonacci numbers	5	2.17.3 Labeled graphs with $k$ connected components	17
1.18 Wilson Theorem	5	2.18 Heavy Light Decomposition	17
1.19 Factorial modulo $p$ in $O(p \log n)$	5	2.19 More Problems	18
1.20 Modular Inverse	5		
1.21 Gray Code	5	<b>3 Some Basic</b>	<b>18</b>
1.21.1 Finding inverse gray code	5	3.1 Meet in the middle	21
1.22 Discrete Logarithm	6	3.2 To find subarray (contiguous) with maximum average and of length $k$	22
1.22.1 Algorithm	6	3.3 To find subarray (contiguous) with maximum average and length more than $k$	22
1.22.2 Implementation	6	3.4 Find subarray with given sum, elements are non negative	23
1.23 Chinese Remainder Theorem	6	3.5 Largest subarray with gcd one	23
1.24 Primitive Root	7	3.6 Smallest subarray with given gcd	23
1.24.1 Definition	7	3.7 LIS	24
1.24.2 Existence	7	3.8 LIS of consecutive integers	25
1.24.3 Relation with the Euler function	7	3.9 nth element	25
1.24.4 Algorithm for finding a primitive root	7	3.10 Optimal schedule of jobs given their deadlines and durations	25
1.24.5 Implementation	7	3.11 Scheduling jobs on one machine	26
1.25 Discrete Root	7	3.11.1 Linear penalty functions	26
1.25.1 The algorithm	7	3.11.2 Exponential penalty function	26
1.25.2 Implementation	7	3.11.3 Identical monotone penalty function	26
1.26 Fermats last theorem	7	3.11.4 Summary	26
1.27 Josephus Problem	7	3.12 Scheduling jobs on two machine	26
1.27.1 For $k = 2$	8	3.13 Ternary Search	26
1.27.2 For general $k \geq 1$	8	3.14 Submask Enumeration	26
1.28 Root Solving	8	3.14.1 Iterating through all masks with their submasks. Complexity $O(3^n)$	26
1.29 Integration	9	3.15 MOS Algorithm	27
1.29.1 Simpson rule	9	3.16 MOS Algorithm with updates	27
1.30 Continued Fractions	9	3.17 Important Problems	27
1.31 Pells eqn	9		
1.32 Side Notes	9	<b>4 Data Structures</b>	<b>27</b>
1.33 Important Problems	10	4.1 Segment Tree	27
<b>2 Graphs</b>	<b>10</b>		
2.1 Basic	10	<b>5 DP</b>	<b>27</b>
2.2 Articulation Points and Bridges (undirected graph)	11	5.1 Coin Change	27
2.3 Tree	11	5.2 0/1 Knapsack	28
2.3.1 LCA	11	5.3 Balanced Bracket Sequence	28
2.3.2 Important Problems	11	5.3.1 One type of bracket	28
2.3.3 MVC on Tree	11	5.3.2 MultiType	28
2.3.4 MWIS on Tree	12	5.3.3 No. of balanced Sequences	28
2.4 Terminology	12	5.3.4 Lexicographically next balanced sequence	28
2.5 Konigs Theorem	12	5.3.5 Sequence Index	28
2.6 Bipartite Matching	12	5.3.6 Finding the $k$ th sequence	28
2.6.1 Hopcroft Karp	12	5.4 Important Problems	29
2.6.2 Using max flow algo	13		
2.7 Paths	13		
2.7.1 No. of paths	13		
2.8 SCC	14		
2.8.1 Tarjan	14		
2.8.2 Kosaraju	14		
2.9 SAT	14		

<b>6</b>	<b>Strings</b>	<b>29</b>
6.1	Minimum Edit Distance . . . . .	29
6.2	Length of longest Palindrome possible by removing 0 or more characters . . . . .	29
6.3	Longest Common Subsequence . . . . .	29
6.4	Prefix Function and KMP . . . . .	30
6.4.1	Prefix Function . . . . .	30
6.4.2	KMP . . . . .	30
6.4.3	Counting number of occurrences of each prefix . . . . .	30
6.5	Notes . . . . .	30
6.6	SAM . . . . .	30
6.7	Important Problems . . . . .	32
<b>7</b>	<b>Geometry</b>	<b>33</b>
7.1	Fast application of a set of geometric operations to a set of points . . . . .	34
7.2	Klee's Algo . . . . .	34
7.3	Closest Pair Problem . . . . .	34
7.4	2D geo lib . . . . .	35
7.5	3D geo lib . . . . .	35

**Think twice code once!**

## 1 Maths

### 1.1 Game Theory

The game ends when a position is reached from which no moves are possible for the player whose turn it is to move. Under **normal play rule**, the last player to move wins. Under **misere play rule** the last player to move loses.

1. Label every terminal position as P - position
2. Position which can move to a P position is N position
3. Position whose all moves are to N position is P position.

**Note:** Every Position is either a P or N. For games using misere play all is same except that step 1 is replaced by the condition that all terminal positions are **N** positions.

Directed graph  $G = (X, F)$ , where  $X$  is positions (vertices) and  $F$  is a function that gives for each  $x \in X$  a subset of  $X$ , i.e. *followers of  $x$* . If  $F(x)$  is empty,  $x$  is called a terminal position.

$$g(x) = \min\{n \geq 0 : n \neq g(y) \text{ for } y \in F(x)\}$$

Positions  $x$  for which  $g(x)$  is 0 are P positions and all others are N positions. **Note:**  $g(x)$  is 0 if  $x$  is a terminal position

**4.1 The Sum of  $n$  Graph Games.** Suppose we are given  $n$  progressively bounded graphs,  $G_1 = (X_1, F_1), G_2 = (X_2, F_2), \dots, G_n = (X_n, F_n)$ . One can combine them into a new graph,  $G = (X, F)$ , called the **sum** of  $G_1, G_2, \dots, G_n$  and denoted by  $G = G_1 + \dots + G_n$  as follows. The set  $X$  of vertices is the Cartesian product,  $X = X_1 \times \dots \times X_n$ . This is the set of all  $n$ -tuples  $(x_1, \dots, x_n)$  such that  $x_i \in X_i$  for all  $i$ . For a vertex  $x = (x_1, \dots, x_n) \in X$ , the set of followers of  $x$  is defined as

$$\begin{aligned} F(x) = & F(x_1, \dots, x_n) = F_1(x_1) \times \{x_2\} \times \dots \times \{x_n\} \\ & \cup \{x_1\} \times F_2(x_2) \times \dots \times \{x_n\} \\ & \cup \dots \\ & \cup \{x_1\} \times \{x_2\} \times \dots \times F_n(x_n). \end{aligned}$$

**Theorem 2.** If  $g_i$  is the Sprague-Grundy function of  $G_i$ ,  $i = 1, \dots, n$ , then  $G = G_1 + \dots + G_n$  has Sprague-Grundy function  $g(x_1, \dots, x_n) = g_1(x_1) \oplus \dots \oplus g_n(x_n)$ .

**Thus,** if a position is a **N** position, we can cleverly see which position should we go to (what move of a component game to take) such that we reach **P** position.

### 1.2 Mobius

$$\mu(n) = 1 \text{ if } n = 1,$$

$$\mu(n) = 0 \text{ if } n \text{ is not square-free, i.e. } \alpha_i > 1 \text{ for some prime factor } p_i.$$

$$\mu(n) = (-1)^r \text{ if } n = p_1 \cdot p_2 \cdot \dots \cdot p_r \text{ - i.e. } n \text{ has } r \text{ distinct prime factors and exponent of each prime factor is 1.}$$

**Definition 2.** An arithmetic function  $f(n) : \mathbb{N} \rightarrow \mathbb{C}$  is *multiplicative* if for any relatively prime  $n, m \in \mathbb{N}$ :

$$f(mn) = f(m)f(n).$$

**Examples.** Let  $n \in \mathbb{N}$ . Define functions  $\tau, \sigma, \pi : \mathbb{N} \rightarrow \mathbb{N}$  as follows:

- $\tau(n)$  = the number of all natural divisors of  $n = \#\{d > 0 \mid d|n\}$ ;
- $\sigma(n)$  = the sum of all natural divisors of  $n = \sum_{d|n} d$ ;
- $\pi(n)$  = the product of all natural divisors of  $n = \prod_{d|n} d$ .

As we shall see below,  $\tau$  and  $\sigma$  are multiplicative functions, while  $\pi$  is not. From now on

$$\tau(n) = \prod_{i=1}^r (\alpha_i + 1), \quad \sigma(n) = \prod_{i=1}^r \frac{p_i^{\alpha_i+1} - 1}{p_i - 1}, \quad \pi(n) = n^{\frac{1}{2}\tau(n)}.$$

Conclude that  $\tau$  and  $\sigma$  are multiplicative, while  $\pi$  is not.

**Examples.** The following are further examples of well-known multiplicative functions.

- $\mu(n)$ , the Möbius function;
- $e(n) = \delta_{1,n}$ , the Dirichlet identity in  $\mathcal{A}$ ;
- $I(n) = 1$  for all  $n \in \mathbb{N}$ ;
- $id(n) = n$  for all  $n \in \mathbb{N}$ .

Taking the sum-functions of these, we obtain the relations:  $S_\mu = e$ ,  $S_e = I$ ,  $S_I = \tau$ , and  $S_{id} = \sigma$ . These examples suggest that the sum-function is multiplicative, provided the original function is too. In fact,

$$f \circ g(n) = \sum_{d_1 d_2 = n} f(d_1) f(d_2).$$

Note that  $f \circ g$  is also arithmetic, and that the product  $\circ$  is commutative, and associative:

$$I \circ f = f \circ I = S_f$$

**Lemma 3.** The Dirichlet inverse of  $I$  is the Möbius function  $\mu \in \mathcal{A}$ .

**PROOF:** The lemma means that  $\mu \circ I = e$ , i.e.

**Theorem 2** (Möbius inversion theorem). Any arithmetic function  $f(n)$  can be expressed in terms of its sum-function  $S_f(n) = \sum_{d|n} f(d)$  as

$$f(n) = \sum_{d|n} \mu(d) S_f\left(\frac{n}{d}\right).$$

**PROOF:** The statement is nothing else but the Dirichlet product  $f = \mu \circ S_f$  in  $\mathcal{A}$ :

$$\mu \circ S_f = \mu \circ (I \circ f) = (\mu \circ I) \circ f = e \circ f = f. \quad \square$$

1. Let the problem be to find  $G = \sum_{i=1}^n \sum_{j=i+1}^n h(gcd(i, j))$ , here  $h(n)$  should be a multiplicative function.

For example if the problem was to find  $G = \sum_{i=1}^n \sum_{j=i+1}^n gcd(i, j)^3$ , then the function  $h()$  will be  $h(n) = n^3$ .

2. Re-write the equation like this:  $G = \sum_{g=1}^n h(g) * cnt[g]$   
Where  $cnt[g]$  = number of pairs  $(i, j)$  such that  $gcd(i, j) = g$ ,  $(1 \leq i < j \leq n)$ .

3. Find the function  $f(n)$ , such that  $h(n) = \sum_{d|n} f(d)$ . This can be done using mobius inversion formula and sieve.

4. Rewrite the equation in second step like this,  
 $G = \sum_{d=1}^n f(d) * cnt2[d]$ .

5. Iterate through the  $O(\sqrt{n})$  distinct values of  $cnt2[d]$  and find the answer in  $O(\sqrt{n})$  time.

$$S_{\phi}(n) = id(n) \mu \circ id = \phi(n)$$

```
for (int i = 1; i <= N; i++) {
    for (int j = i; j <= N; j += i) {
        f[j] += h[i] * mu[j/i];
    }
}
```

$\sum_{g=1}^i h(g) * cnt[g]$  where  $cnt[g]$  = no. of arrays with  $gcd(a_1, a_2, a_3, \dots, a_n) = g$  and where each  $a_k \leq i$ . Now  $h(g) =$  Dirichlet identity function. Thus it is  $\mu \circ e = \mu$ . Ans thus we get  $\sum_{d=1}^i \mu(d) * f(d)$  where  $f(d)$  is the number of arrays with elements in range  $[1, i]$  such that  $gcd(a_1, \dots, a_n)$  is divisible by  $j$ . Obviously  $f(j) = (\lfloor i/j \rfloor)^n$ .

### 1.3 Burnside

The following is the soln of that circle problem

$n$  rotational axis and  $n$  axis of symmetry

for rotation: rotation by 0 cells, by 1 cell, by 2 cells, etc, by  $(n-1)$  cells  
Now lets apply the lemma, and find the number of stripes that are fixed by the rotation by  $K$  cells. If a stripe becomes itself after rotating by  $K$  cells, then its 1st cell must have the same color as its  $(1+K \text{ modulo } n)$ -th cell, which is in turn the same as its  $(1+2K \text{ modulo } n)$ -th cell, etc, until we get back to the 1st cell when  $m * K \text{ mod } n = 0$ . One may notice that this will happen when  $m = n/gcd(K, n)$ , thus these must have same color. and we independent choice for  $n/(n/gcd(K, n)) = gcd(K, n)$ .

for axis of symmetry:

if  $(n)$  is even then we have

$(n/2)$  axis of symmetry which pass through 2 elements, and for those 2 elements we have independent choice  $= 3^2$  and for remaining, we get a pair, i.e.  $3^{(n-2)/2}$ . Thus total is  $3^{(n+2)/2}$

$(n/2)$  axis of symmetry which passes through non of the elements and again we get a pair, thus  $3^{n/2}$  if  $(n)$  is odd then all  $n$  axis of symmetry pass through a single element and we get independent choice for that one element, and for others we get pair i.e.  $3 * 3^{(n-1)/2}$

Stirling no. of second kind obey the recurrence

$$\left\{ \begin{matrix} n+1 \\ k \end{matrix} \right\} = k * \left\{ \begin{matrix} n \\ k \end{matrix} \right\} + \left\{ \begin{matrix} n \\ k-1 \end{matrix} \right\} \forall n, k > 0$$

where  $\{0\} = 1, \{n\} = \{0\} = 0$

$$\frac{1}{k!} \sum_{j=0}^k (-1)^{k-j} \binom{k}{j} j^n$$

$\{n\}_k$  is the number of partitions of  $\{1, 2, 3, \dots, n\}$  into exactly  $k$  parts.

#### 1.3.1 Inclusion Exclusion Principle

$$\left| \bigcup_{i=1}^n A_i \right| = \sum_{\emptyset \neq J \subseteq \{1, 2, \dots, n\}} (-1)^{|J|-1} \left| \bigcap_{j \in J} A_j \right|$$

$$\left| \bigcap_{i=1}^n A_i^c \right| = total - \left| \bigcup_{i=1}^n A_i \right|$$

### 1.4 Modulo

$$(a+b) \bmod m = (a \bmod m + b \bmod m) \bmod m$$

..... - .....  
..... \* .....

```
const int m1 = (int) 1e9 + 7;
template <typename T>
inline T add(T a, T b) {
    a += b;
    if (a >= m1) a -= m1;
    return a;
}
template <typename T>
inline T sub(T a, T b) {
    a -= b;
```

```
    if (a < 0) a += m1;
    return a;
}

template <typename T>
inline T mul(T a, T b) {
    return (T) (((long long) a * b) % m1);
}

template <typename T>
inline T power(T a, T b) {
    int res = 1;
    while (b > 0) {
        if (b & 1) {
            res = mul<T>(res, a);
        }
        a = mul<T>(a, a);
        b >>= 1;
    }
    return res;
}
```

```
template <typename T>
inline T inv(T a) {
    return power<T>(a, m1 - 2);
}
```

### 1.5 Prob and Comb

- $E[X] = \sum E(X|A_i)P(A_i)$
- $k, p_a, p_b$  prob, Sol, if  $n+m \geq k \rightarrow p_b(i+j) + p_a * p_b * (i+j+1) + p_a^2 * p_b * (i+j+2) \dots = (i+j) + \frac{p_a}{p_b}$  Also

$$dp[0][0] = p_a * dp[1][0] + p_b * dp[0][0] \quad (1)$$

$$= p_a * dp[1][0] / (1 - p_b) \quad (2)$$

$$= dp[1][0] \quad (3)$$

#### • Dearrangement of n objects

$$n! * \sum_{k=0}^n (-1)^k / k! = !n$$

$$!n = (n-1) * [!(n-1) + !(n-2)] \text{ for } n \geq 2$$

- Gambler ruin's problem:** Probability that first player (p for each step) wins.  $(1 - (q/p)^{n_1}) / (1 - (q/p)^{n_1+n_2})$ .  $n_1 = \lceil ev_1/d \rceil$ ,  $n_2 = \lceil ev_2/d \rceil$ . In case  $p = q = 1/2$ , formula is  $n_1 / (n_1 + n_2)$ .

- UVA 10491,  $ans = (N_{cows} / (N_{cows} + N_{cars})) * (N_{cars} / (N_{cows} + N_{cars} - N_{shows} - 1)) + (N_{cars} / (N_{cows} + N_{cars})) * ((N_{cars} - 1) / (N_{cows} + N_{cars} - N_{shows} - 1))$

$$\binom{n}{r} = \binom{n-1}{r-1} + \binom{n-1}{r}$$

$$\binom{n}{r} = n/r * \binom{n-1}{r-1}$$

$$\sum_{r=0}^n \binom{n}{r} = 2^n$$

$$\sum_{m=0}^n \binom{m}{r} = \binom{n+1}{r+1}$$

$$\sum_{k=0}^m \binom{n+k}{k} = \binom{n+m-1}{m}$$

$$\sum_{i=0}^n \binom{n}{i}^2 = \binom{2n}{n}$$

### 1.6 Euler's Totient Function

Also known as phi-function  $\phi(n)$ , counts the number of integers between 1 and  $n$  inclusive, which are coprime to  $n$ .

If  $p$  is prime  $\phi(p) = p - 1$ .

If  $p$  is a prime number and  $k \geq 1$ , then there are exactly  $p^k/p$  numbers between 1 and  $p^k$  that are divisible by  $p$ . Which gives us:  $\phi(p^k) = p^k - p^{k-1}$ .

If  $a$  and  $b$  are relatively prime, then:  $\phi(ab) = \phi(a) \cdot \phi(b)$ . This relation is not trivial to see. It follows from the Chinese remainder theorem.

In general, for not coprime  $a$  and  $b$ , the equation

$$\phi(ab) = \phi(a) \cdot \phi(b) \cdot \frac{d}{\phi(d)}$$

with  $d = gcd(a, b)$  holds.

$$\phi(n) = \phi(p_1^{a_1}) \cdot \phi(p_2^{a_2}) \dots \phi(p_k^{a_k})$$

$$= (p_1^{a_1} - p_1^{a_1-1}) \cdot (p_2^{a_2} - p_2^{a_2-1}) \dots (p_k^{a_k} - p_k^{a_k-1})$$

$$= p_1^{a_1} \cdot \left(1 - \frac{1}{p_1}\right) \cdot p_2^{a_2} \cdot \left(1 - \frac{1}{p_2}\right) \dots p_k^{a_k} \cdot \left(1 - \frac{1}{p_k}\right)$$

$$= n \cdot \left(1 - \frac{1}{p_1}\right) \cdot \left(1 - \frac{1}{p_2}\right) \dots \left(1 - \frac{1}{p_k}\right)$$

**Eulers Theorem:**

$$a^{\phi(m)} \equiv 1 \pmod{m}$$

if  $a$  and  $m$  are relatively prime.

In the particular case when  $m$  is prime, Euler's theorem turns into Fermat's little theorem:

$$a^{m-1} \equiv 1 \pmod{m}$$

Converse of euler theorem is also true i.e. if  $a^{\phi(m)} \equiv 1 \pmod{m}$  then  $a$  and  $m$  must be coprime.

## 1.7 Catalan

$Cat(n) = \binom{2n}{n} / (n+1)$   
 $Cat(m) = (2m * (2m-1) / (m * (m+1))) * Cat(m-1)$   
 $Cat(n) =$

1. the number of ways a convex polygon with  $n+2$  sides can be cut into  $n$  triangles
2. the number of ways to use  $n$  rectangles to tile a staircase shape  $(1, 2, \dots, n^1, n)$ .
3. No. of expressions containing  $n$  pairs of parentheses which are correctly matched.
4. the number of planar binary trees with  $n+1$  leaves
5. No. of distinct binary trees with  $n$  vertices
6. No. of different ways in which  $n+1$  factors can be completely parenthesized. Like for  $\{a, b, c, d\}$ , one parenthning will be  $((ab)c)d$ .
7. the number of monotonic paths of length  $2n$  through an  $n$ -by- $n$  grid that do not rise above the main diagonal
8.  $n$  pair of people on circle can do non cross hand shakes. i.e. no of ways to connect the  $2n$  points on a circle to form  $n$  disjoint chords
9. no. of permutations of length  $n$  that can be stack sorted
10. no. of non crossing partitions of a set of  $n$  elements

**Note:** Its better to use bigint for catalan computations. Also no. of binary trees with  $n$  labelled nodes  $= cat[n] * fact[n]$

## 1.8 Floyd Cycle Finding

```
// mu = start of the cycle
// lam = its length
// O(mu + lam) time complexity
// O(1) space complexity
ii floydCycleFinding(int x0) {
    // 1st part: finding k * lam
    int tortoise = f(x0), hare = f(f(x0));
    // hare moves at twice speed
    while (tortoise != hare) {
        tortoise = f(tortoise); hare = f(f(hare));
    }
    // thus tor = x_i; hare = x_{2i}
    // i.e. x_{2i} = x_{i + k * lam}
    // i.e. k * lam = i.
    // Now if hare is set to beginning
    // i.e. hare = x_0, tor = x_i
    // thus if both now move same no. of steps and in between they become equal, i.e.
    // x_l = x_{i + l}
    // i.e. x_l = x_{l + k * lam}
    // Thus l must be the minimum index and therefore l = mu
    int mu = 0;
    hare = x0;
    while (tortoise != hare) {
        tortoise = f(tortoise); hare = f(hare); mu++;
    }
    // finding lam
    int lam = 1; hare = f(tortoise);
    while (tortoise != hare) {
        hare = f(hare); lam++;
    }
    return ii(mu, lam);
}
```

## 1.9 Base Conversion

```
// decimal no. to some base
stack<int> S;
while (q) {
    s.push(q % b);
    q /= b;
}
while (!s.empty()) {
    cout << process(s.top()) << " ";
    s.pop();
}
// base to decimal no.
ll baseToDec() {
    ll ret = 0;
    for (auto &c : num) {
        ret = (ret * base + (c - 48)); // can take mod if final answer is required
    }
    return ret;
}
```

## 1.10 Extended Euclid

$ax + by = c$  this is called diophantine eqn and is solvable only when  $d = \gcd(a, b)$  divides  $c$ . so first solve  $ax + by = d$  then multiply  $x, y$  with  $c/d$ . Also once we have found a particular soln to this eqn then their exist infinite solns of the form  $(x_0 + (b/d) * n, y_0 - (a/d) * n)$  where  $n$  is any integer, note that these infinite solutions are as well the solution to

original diophantine eqn. Assume we found the coefs  $(x_1, y_1)$  for  $(b, a \bmod b) \rightarrow b * x_1 + (a \bmod b) * y_1 = g$   
 $\rightarrow b * x_1 + (a - \lfloor a/b \rfloor * b) * y_1 = g$   
 $\rightarrow a * y_1 + b * (x_1 - \lfloor a/b \rfloor * y_1) = g$   
 $\rightarrow x = y_1 \ \& \ y = x_1 - \lfloor a/b \rfloor * y_1$

```
void extendedEuclid(int a, int b) {
    if (b == 0) { x = 1; y = 0; d = a; return; } // base case
    extendedEuclid(b, a % b); // similar as the original gcd
    int x1 = y;
    int y1 = x - (a / b) * y;
    x = x1;
    y = y1;
}
```

Prob: To find the soln with minimum value of  $x + y$  and obviously there has to be range of  $x, y$ . Sol: Now  $x + y = x_0 + y_0 + n * (b/d - a/d)$ . If  $a < b$ , select smallest possible value of  $n$ . If  $a > b$  select the largest. And if  $a = b$ , all solutions have same sum of  $x + y$

## 1.11 Linear Congruence Equation

$$a \cdot x = b \pmod{n},$$

where  $a, b$  and  $n$  are given integers and  $x$  is an unknown integer.

Let us first consider a simpler case where  $a$  and  $n$  are coprime ( $\gcd(a, n) = 1$ ).

$$x = b \cdot a^{-1} \pmod{n}$$

Now consider the case where  $a$  and  $n$  are not coprime ( $\gcd(a, n) \neq 1$ ). Then the solution will not always exist.

Let  $g = \gcd(a, n)$ , i.e. the greatest common divisor of  $a$  and  $n$  (which in this case is greater than one).

Then, if  $b$  is not divisible by  $g$ , there is no solution.

If  $g$  divides  $b$ , then by dividing both sides of the equation by  $g$  (i.e. dividing  $a, b$  and  $n$  by  $g$ ), we receive a new equation:

$$a' \cdot x = b' \pmod{n'}$$

in which  $a'$  and  $n'$  are already relatively prime, and we have already learned how to handle such an equation. We get  $x'$  as solution for  $x$ .

It can be shown that the original equation has exactly  $g$  solutions, and they will look like this:

$$x_i = (x' + i \cdot n') \pmod{n} \quad \text{for } i = 0 \dots g-1$$

## 1.12 Sieve

```
ll _sieve_size; // ll is defined as: typedef long long ll;
bitset<10000010> bs; // 10^7 should be enough for most cases
vi primes; // compact list of primes in form of vector<int>
void sieve(ll upperbound) { // create list of primes in [0..upperbound]
    _sieve_size = upperbound + 1; // add 1 to include upperbound
    bs.set(); // set all bits to 1
    bs[0] = bs[1] = 0; // except index 0 and 1
    for (ll i = 2; i <= _sieve_size; i++) if (bs[i]) {
        // cross out multiples of i starting from i * i!
        for (ll j = i * i; j <= _sieve_size; j += i) bs[j] = 0;
        primes.push_back((int)i); // add this prime to the list of
    } // call this method in main method
bool isPrime(ll N) { // a good enough deterministic prime tester
    // O(#primes < sqrt(N))
    // O(sqrt(N)/ln(sqrt(N)))
    if (N <= _sieve_size) return bs[N]; // O(1) for small primes
    for (int i = 0; i < (int)primes.size(); i++)
        if (N % primes[i] == 0) return false;
    return true; // it takes longer time if N is a large prime!
} // note: only work for N <= (last prime in vi "primes")^2

vi primeFactors(ll N) { // remember: vi is vector<int>, ll is long long
    vi factors;
    ll PF_idx = 0, PF = primes[PF_idx]; // primes has been populated by sieve
    while (PF * PF <= N) { // stop at sqrt(N); N can get smaller
        while (N % PF == 0) { N /= PF; factors.push_back(PF); } // remove PF
        PF = primes[++PF_idx]; // only consider primes!
    }
    if (N > 1) factors.push_back(N); // special case if N is a prime
    return factors; // if N does not fit in 32-bit integer and is a prime
} // then 'factors' will have to be changed to vector<ll>
```

```
memset(numDiffPF, 0, sizeof numDiffPF);
```

```
//Modified Sieve.
```

```
void pre() {
    for (int i = 2; i < MAX_N; i++)
        if (numDiffPF[i] == 0) // i is a prime number
            for (int j = i; j < MAX_N; j += i)
```

```

        numDiffPF[j]++; // increase the values of multiples of i
    }
    // Bottom up euler totient function
    for (int i = 0; i <= limit; i++) eu[i] = i;
    for (int i = 2; i <= limit; i++) {
        if (eu[i] == i) {
            for (int j = i; j <= limit; j += i) {
                eu[j] -= eu[j] / i;
            }
        }
    }
}

```

### 1.13 Matrix

To explain how gaussian elimination allows the computation of the determinant of a square matrix, we should know

- Swapping two rows multiplies the determinant by -1
- Multiplying a row by a non zero scalar multiplies the determinant by same scalar
- Adding to one row a scalar multiple of another does not change the determinant

So if d is the product of scalar by which determinant has been multiplied having matrix in row echelon form, we have  $\det(A) = (\prod \text{diag}(B))/d$

To find inverse of the matrix augment it with identity matrix and get it RREF, if left block is identity matrix  $\rightarrow$  right block is inverse.

#### 1.14 Frac lib and Eqn solving

```

struct Frac {
    long long a, b;
    Frac() {
        a = 0, b = 1;
    }
    Frac(int x, int y) {
        a = x, b = y;
        reduce(); //So we are always reducing out fractions...
    }
    Frac operator+(const Frac &y) {
        long long ta, tb;
        tb = this->b/gcd(this->b, y.b)*y.b;
        ta = this->a*(tb/this->b) + y.a*(tb/y.b);
        Frac z(ta, tb);
        return z;
    }
    Frac operator-(const Frac &y) {
        long long ta, tb;
        tb = this->b/gcd(this->b, y.b)*y.b;
        ta = this->a*(tb/this->b) - y.a*(tb/y.b);
        Frac z(ta, tb);
        return z;
    }
    Frac operator*(const Frac &y) {
        long long tx, ty, tz, tw, g;
        tx = this->a, ty = y.b;
        g = gcd(tx, ty), tx /= g, ty /= g;
        tz = this->b, tw = y.a;
        g = gcd(tz, tw), tz /= g, tw /= g;
        Frac z(tx*tw, ty*tz);
        return z;
    }
    Frac operator/(const Frac &y) {
        long long tx, ty, tz, tw, g;
        tx = this->a, ty = y.a;
        g = gcd(tx, ty), tx /= g, ty /= g;
        tz = this->b, tw = y.b;
        g = gcd(tz, tw), tz /= g, tw /= g;
        Frac z(tx*tw, ty*tz);
        return z;
    }
    bool operator == (const Frac &other) const {
        return a == other.a and b == other.b;
    }
    bool operator < (const Frac &other) const {
        if (a != other.a) return a < other.a;
        else return b > other.b;
    }
    static long long gcd(long long x, long long y) {
        return y == 0 ? x : gcd(y, x % y);
    }
    void reduce() {
        if (a == 0) { // to handle case when b == 0 (not required in this problem)
            b = 1;
            return;
        } else {
            long long g = gcd(abs(a), abs(b));

```

```

        a /= g, b /= g;
        if(b < 0) a *= -1, b *= -1;
    }
};

ostream& operator<<(ostream& out, const Frac&x) {
    out << x.a;
    if(x.b != 1)
        out << '/' << x.b;
    return out;
}

int main() { // UVA 10109
    int n, m, i, j, k, N;
    char NUM[100], first = 0;
    long long X, Y;
    Frac matrix[100][100];
    while(scanf("%d", &N) == 1 && N) {
        // m is the number of equations and n is the number of unknown
        scanf("%d %d", &n, &m);
        for(i = 0; i < m; i++) {
            for(j = 0; j <= n; j++) {
                scanf("%s", NUM);
                if(sscanf(NUM, "%lld/%lld", &X, &Y) == 2) {
                    matrix[i][j].a = X;
                    matrix[i][j].b = Y;
                } else
                    sscanf(NUM, "%lld", &matrix[i][j].a), matrix[i][j].b = 1;
            }
        }
        Frac tmp, one(1,1);
        int idx = 0, rank = 0;
        for(i = 0; i < m; i++) {
            while(idx < n) {
                int ch = -1;
                for(j = i; j < m; j++)
                    if(matrix[j][idx].a) { // found a non zero element
                        ch = j;
                        break;
                    }
                if(ch == -1) { // this if condition executes if all the elements are zero
                    idx++;
                    continue;
                }
                if(i != ch) // So if the desired pivot element is zero
                    // the closest row that has non zero pivot...
                    for(j = idx; j <= n; j++)
                        swap(matrix[ch][j], matrix[i][j]);
                break;
            }
            if(idx >= n) break;
            tmp = one/matrix[i][idx];
            rank++;
            for(j = idx; j <= n; j++)
                matrix[i][j] = matrix[i][j]*tmp; // So here we are making pivot row as 1
            for(j = 0; j < m; j++) {
                if(i == j) continue; // This condition executes means
                //pivot row...
                tmp = matrix[j][idx];
                for(k = idx; k <= n; k++) {
                    matrix[j][k] = matrix[j][k] - tmp*matrix[i][k]; //
                    //all the elements below and above pivot as zero.
                }
            }
            idx++;
        }
        if(first) puts("");
        first = 1;
        printf("Solution for Matrix System # %d\n", N);
        int sol = 0;
        for(i = 0; i < m; i++) {
            for(j = 0; j < n; j++) {
                if(matrix[i][j].a)
                    break;
            }
            if(j == n) {
                if(matrix[i][n].a == 0 && sol != 1)
                    sol = 0; // Infinite ground
                else
                    sol = 1; // No Solution.
            }
        }
    }
}

```



```

if(rank == n && sol == 0) {
    for(i = 0; i < n; i++) {
        printf("x[%d] = ", i+1);
        cout << matrix[i][n] << endl;
    }
    continue;
}
if(sol == 1)
    puts("No Solution.");
else
    printf("Infinitely many solutions containing %d arbitrary constants. Value of rank is %d", rank, rank);
return 0;
}

```

### 1.15 Finding Power Of Factorial Divisor

You are given two numbers  $n$  and  $k$ . Find the largest power of  $k$  (say  $x$ ) such that  $n!$  is divisible by  $k^x$ .

#### 1.15.1 Prime $k$

$$\left\lfloor \frac{n}{k} \right\rfloor + \left\lfloor \frac{n}{k^2} \right\rfloor + \dots + \left\lfloor \frac{n}{k^i} \right\rfloor + \dots$$

Implementation:

```

int fact_pow (int n, int k) {
    int res = 0;
    while (n) {
        n /= k;
        res += n;
    }
    return res;
}

```

#### 1.15.2 Composite $k$

The same idea can't be applied directly. Instead we can factor  $k$ , representing it as  $k = k_1^{p_1} \dots k_m^{p_m}$ . For each  $k_i$ , we find the number of times it is present in  $n!$  using the algorithm described above - let's call this value  $a_i$ . The answer for composite  $k$  will be

$$\min_{i=1\dots m} \frac{a_i}{p_i}$$

### 1.16 GCD, LCM

```

// time complexity O(log(min(a, b) / gcd(a, b)))
int gcd (int a, int b) { return b == 0 ? a : gcd(b, a % b); }
int lcm (int a, int b) { return a * (b / gcd(a, b)); }

```

- For a series of numbers if you want next no. to have gcd 1 with all previous no. then  $GCD(a_j, LCM(a_1, a_2, \dots, a_{j-1})) = 1$ .
- if  $p|N$  &  $p|M$  then  $p|gcd(N, M)$  as  $N = pk, M = pl \rightarrow N, M$  have  $p$  common so gcd will also have  $p$ .
- $N|P \& M|P \rightarrow lcm(N, M)|P$ .
- $N = gcd(N, m) \Leftrightarrow N|M$
- $M = lcm(N, M) \Leftrightarrow N|M$
- $gcd(P * N, P * M) = P * gcd(N, M)$
- $lcm(P * N, P * M) = P * lcm(N, M)$
- If  $gcd(N_1, N_2) = 1$  then  $gcd(N_1 * N_2, M) = gcd(N_1, M) * gcd(N_2, M)$  and  $lcm(N_1 * N_2, M) = lcm(N_1, M) * lcm(N_2, M) / M$
- $gcd(gcd(N, M), P) = gcd(N, gcd(M, P))$
- $lcm(lcm(N, M), P) = lcm(N, lcm(M, P))$
- $gcd(M, N, P) = gcd(gcd(M, N), P) = gcd(M, gcd(N, P))$
- $lcm(M, N, P) = lcm(lcm(M, N), P) = lcm(M, lcm(N, P))$
- for integers  $N_1, \dots, N_k$  and  $k \geq 2$ ,

$$lcm(gcd(N_1, M), gcd(N_2, M), \dots, gcd(N_k, M)) = gcd(lcm(N_1, \dots, N_k), M)$$

$$gcd(lcm(N_1, M), lcm(N_2, M), \dots, lcm(N_k, M)) = lcm(gcd(N_1, \dots, N_k), M)$$

### 1.17 Some properties of Fibonacci numbers

- $F_0 = 0, F_1 = 1, F_n = F_{n-1} + F_{n-2}$
- Cassini's identity:  $F_{n-1}F_{n+1} - F_n^2 = (-1)^n$
- The "addition" rule:  $F_{n+k} = F_k F_{n+1} + F_{k-1} F_n$
- Applying the previous identity to the case  $k = n$ , we get:  $F_{2n} = F_n(F_{n+1} + F_{n-1})$
- From this we can prove by induction that for any positive integer  $k$ ,  $F_{nk}$  is multiple of  $F_n$ . The inverse is also true: if  $F_m$  is multiple of  $F_n$ , then  $m$  is multiple of  $n$ .
- GCD identity:  $GCD(F_m, F_n) = F_{GCD(m, n)}$
- Every positive integer can be expressed uniquely as a sum of fibonacci numbers such that no two numbers are equal or consecutive fibonacci numbers. This can be done greedily by taking the highest fibonacci no. at each point.
- Fibonacci nos are periodic under modulo. The period of the fibonacci sequence modulo a positive integer  $j$  is the smallest positive integer  $m$  such that  $F_m \equiv 0(mod j) \& F_{m+1} \equiv 1(mod j)$

$$\begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix}^p = \begin{bmatrix} fib(p+1) & fib(p) \\ fib(p) & fib(p-1) \end{bmatrix}$$

Thus higher fibs can be computed in  $O(\log p)$

- $F_n = \frac{\left(\frac{1+\sqrt{5}}{2}\right)^n - \left(\frac{1-\sqrt{5}}{2}\right)^n}{\sqrt{5}}$
- You can immediately notice that the second term's absolute value is always less than 1, and it also decreases very rapidly (exponentially). Hence the value of rank 1st term alone is "almost"  $F_n$ . This can be written strictly as:

$$F_n = \left\lfloor \frac{\left(\frac{1+\sqrt{5}}{2}\right)^n}{\sqrt{5}} \right\rfloor$$

### 1.18 Wilson Theorem

States that for a prime no.  $p$ ,  $(p-1)! \mod p = p-1$ .

Note that  $n! \mod p$  is 0 if  $n \geq p$ . Suppose  $p$  is prime and is close to input number  $n$ . For example  $25! \mod 29$ . From wilson theorem, we know that  $28! \mod 29 = -1 \equiv 28$ , so we basically need to find  $(28 * inverse(28, 29) * inverse(27, 29) * inverse(26, 29)) \mod 29$

Time complexity  $O((p-n) * \log n)$

### 1.19 Factorial modulo $p$ in $O(p \log n)$

all divisors of  $p$  are 1, find mod  $p$ .

```

int factmod(int n, int p) {
    int res = 1;
    while (n > 1) {
        res = (res * ((n/p) % 2 ? p-1 : 1)) % p;
        for (int i = 2; i <= n%p; ++i)
            res = (res * i) % p;
        n /= p;
    }
    return res % p;
}

```

This implementation works in  $O(p \log_p n)$ .

### 1.20 Modular Inverse

For an arbitrary (but coprime) modulus  $m$ :  $a^{\phi(m)-1} \equiv a^{-1} \mod m$

For a prime modulus  $m$ :  $a^{m-2} \equiv a^{-1} \mod m$

```

inv[1] = 1;
for(int i = 2; i < m; ++i)
    inv[i] = (m - (m/i) * inv[m%i] % m) % m;

```

### Binomial coeff modulo large prime no

```

fact[0] = 1;
for (int i = 1; i <= maxn; i++) {
    fact[i] = (fact[i-1] * (i % m)) % m;
}
// afterwards we can compute binomial coeff in O(log m)
ll getC(int n, int k) {
    ll res = fact[n];
    ll div = fact[k] * fact[n-k] % m;
    div = pow(div, m-2, m);
    return (res * div) % m;
}

```

**Binomial Coeff modulo prime power** let  $g(x) := \frac{x!}{p^{c(x)}}$ . Then we can write the binomial coefficient as:

$$\binom{n}{k} = \frac{g(n)p^{c(n)}}{g(k)p^{c(k)}g(n-k)p^{c(n-k)}} = \frac{g(n)}{g(k)g(n-k)}p^{c(n)-c(k)-c(n-k)}$$

Now  $g(x)$  is now free from the prime divisor  $p$ . Therefore  $g(x)$  is coprime to  $m$ , and we can compute the modular inverses of  $g(k)$  and  $g(n-k)$ .

Notice, if  $c(n) - c(k) - c(n-k) \geq b$ , then  $p^b | p^{c(n)-c(k)-c(n-k)}$ , and the binomial coefficient is 0.

### 1.21 Gray Code

000, 001, 011, 010, 110, 111, 101, 100, so  $G(4) = 6$ .

```

int g (int n) {
    return n ^ (n >> 1);
}

```

#### 1.21.1 Finding inverse gray code

Given Gray code  $g$ , restore the original number  $n$ .

The easiest way to write it in code is:

```

int rev_g (int g) {
    int n = 0;
    for (; g; g >>= 1)
        n ^= g;
    return n;
}

```

## 1.22 Discrete Logarithm

The discrete logarithm is an integer  $x$  solving the equation

$$a^x \equiv b \pmod{m}$$

where  $a$  and  $m$  are relatively prime.

$$O(\sqrt{m} \log m)$$

### 1.22.1 Algorithm

Let  $x = np - q$

Obviously, any value of  $x$  in the interval  $[0; m)$  can be represented in this form, where  $p \in [1; \lceil \frac{m}{n} \rceil]$  and  $q \in [0; n]$ .

$$a^{np} \equiv ba^q \pmod{m}$$

$$n = m/n$$

### 1.22.2 Implementation

```
int solve(int a, int b, int m) {
    int n = (int) sqrt(m + .0) + 1;

    int an = 1;
    for (int i=0; i<n; ++i)
        an = (an * a) % m;

    map<int,int> vals;
    for (int i=1, cur=an; i<=n; ++i) {
        if (!vals.count(cur))
            vals[cur] = i;
        cur = (cur * an) % m;
    }

    for (int i=0, cur=b; i<=n; ++i) {
        if (vals.count(cur)) {
            int ans = vals[cur] * n - i;
            if (ans < m)
                return ans;
        }
        cur = (cur * a) % m;
    }
    return -1;
}
```

## 1.23 Chinese Remainder Theorem

Given pairwise coprime positive integers  $n_1, n_2, \dots, n_k$  and arbitrary integers  $a_1, a_2, \dots, a_k$  the system of simultaneous congruences

$$x \equiv a_1 \pmod{n_1} \quad (4)$$

$$x \equiv a_2 \pmod{n_2} \quad (5)$$

$$\vdots \quad (6)$$

$$x \equiv a_k \pmod{n_k} \quad (7)$$

has a soln and the soln is unique modulo  $N = n_1 * n_2 * \dots * n_k$

To compute that soln

1. Compute  $N = n_1 * n_2 * \dots * n_k$
2. for each  $i = 1, 2, \dots, k$  compute  $y_i = N/n_i$
3. for each  $i = 1, 2, \dots, k$  compute  $z_i = y_i^{-1} \pmod{n_i}$  exist since  $n_1, n_2, \dots, n_k$  are pairwise coprime.
4. The integer  $x = \sum_{i=1}^k a_i * y_i * z_i$  is a soln to the system of congruences and  $x \pmod{N}$  is the unique soln modulo  $N$ .

Note:

- $a \leftrightarrow (a_1, a_2, \dots, a_k)$  where  $(a_i = a \pmod{n_i})$
- $b \leftrightarrow (b_1, b_2, \dots, b_k)$  where  $(b_i = b \pmod{n_i})$
- Then

$$(a + b) \pmod{N} \leftrightarrow ((a_1 + b_1) \pmod{n_1}, \dots, (a_k + b_k) \pmod{n_k})$$

$$(a - b) \pmod{N} \leftrightarrow ((a_1 - b_1) \pmod{n_1}, \dots, (a_k - b_k) \pmod{n_k})$$

$$(a * b) \pmod{N} \leftrightarrow ((a_1 * b_1) \pmod{n_1}, \dots, (a_k * b_k) \pmod{n_k})$$

Corollary if  $n_1, n_2, \dots, n_k$  are pairwise coprime and  $n = n_1 * n_2 * \dots * n_k$ , then for all integers  $x$  and  $a$ ,  $x \equiv a \pmod{n_i}$  for  $i = 1, 2, \dots, k$  iff  $x \equiv a \pmod{n}$

Now if moduli  $n_i$ 's are not necessarily pairwise coprime. Let  $d_{i,j} = \gcd(n_i, n_j)$  for  $i \neq j$ . Then the above system has a simultaneous soln iff  $d_{i,j}$  divides  $a_i - a_j$  for all  $i \neq j$ . Further such a soln is unique module  $\text{lcm}(n_1, n_2, \dots, n_k)$ .

**Problem and solution** You are given two pairs (main goal is to solve it for  $t$  pairs) of integers  $(a_1, n_1), (a_2, n_2)$ . There is no assumption that  $n_1$  and  $n_2$  are coprime. Find an integer  $x$  that satisfies

$$\begin{cases} x \equiv a_1 \pmod{n_1} \\ x \equiv a_2 \pmod{n_2} \end{cases}$$

This system of congruences implies that

$$\begin{cases} x = a_1 + n_1 k_1 \\ x = a_2 + n_2 k_2 \end{cases}$$

for some integers  $k_1, k_2$ . Let's equate right sides of these equations. We get  $a_1 + n_1 k_1 = a_2 + n_2 k_2$ , which is the same as  $n_1(-k_1) + n_2 k_2 = a_1 - a_2$ . Since we know  $n_1, n_2, a_1, a_2$ , this is just linear diophantine equation. Let  $d = \gcd(n_1, n_2)$ . It divides left-hand side of the equation, so for this equation to have solutions,  $d$  must also divide right-hand side which is  $a_1 - a_2$ . Now, thanks to Extended Euclidean Algorithm we can find  $(x', y')$  such that  $n_1 x' + n_2 y' = d$  (by just calling  $(x', y') = \text{exGCD}(n_1, n_2)$ ).

After multiplying both sides by  $\frac{a_1 - a_2}{d}$  we get  $n_1 x' \frac{a_1 - a_2}{d} + n_2 y' \frac{a_1 - a_2}{d} = a_1 - a_2$ , so  $k_1 = -x' \frac{a_1 - a_2}{d}$  and  $k_2 = y' \frac{a_1 - a_2}{d}$ . We can now substitute  $k_1$  into  $x = a_1 + n_1 k_1$  to get our solution:  $x = a_1 + x' \frac{a_2 - a_1}{d} n_1$ .

**How many solutions are there?** Now you may think: is this the only solution? Since we're dealing with congruences, you may guess that the answer is no. Let's say we have two different solutions  $x_1$  and  $x_2$ . Now we have  $x_1 \equiv a_1 \pmod{n_1}$  and  $x_2 \equiv a_1 \pmod{n_1}$ , so from transitivity of congruences we get  $x_1 \equiv x_2 \pmod{n_1}$ . Doing the same thing for  $n_2$  we get  $x_1 \equiv x_2 \pmod{n_2}$ . These two congruences are equivalent to  $x_1 \equiv x_2 \pmod{\text{LCM}(n_1, n_2)}$ . It means that any two solutions are congruent modulo  $\text{LCM}(n_1, n_2)$ . You can actually check that every  $x$  given by our formula  $\pm u * \text{LCM}(n_1, n_2)$  satisfies the original system of congruences. So there are infinitely many solutions.

**Overflow issue** Let's look at computational aspect of  $x = a_1 + x' \frac{a_2 - a_1}{d} n_1$ . Since the numbers can get quite big, we should perform our calculations modulo  $\text{LCM}(n_1, n_2)$ , so if  $\text{lcm} = \text{LCM}(n_1, n_2)$  then  $x = (a_1 + ((x' \cdot (a_2 - a_1)/d) \pmod{\text{lcm}}) \cdot n_1 \pmod{\text{lcm}}) \pmod{\text{lcm}}$  (let's not worry about the amount of  $\text{lcm}$ 's, we'll figure it out in code). But  $\text{LCM}(n_1, n_2, \dots, n_k) \leq n_1 n_2 \dots n_k$ , so if  $n_1$  and  $n_2$  are  $\leq 10^9$  then  $\text{lcm} \leq 10^{18}$ ,  $x' \leq 10^9$ ,  $\frac{a_2 - a_1}{d} \leq 10^9$ . We can calculate  $x' \frac{a_2 - a_1}{d}$ , but since it is up to  $10^{18}$  and  $\text{lcm}$  is also up to  $10^{18}$  the final multiplication by  $n_1$  will overflow. How to handle this issue? Some 64bit compilers have special type `int128_t` that allows to store numbers up to  $2^{127} - 1$ , but 64bit compilers are not too common on competitive programming contests. Let's look at a formula for  $\text{lcm}$ . We know that  $\text{lcm} = \frac{n_2}{d} \cdot n_1$ . Modulo has a very nice property that says  $ca \pmod{cb} = c(a \pmod{b})$ , so if we take  $a = x' \frac{a_2 - a_1}{d}$ ,  $b = \frac{n_2}{d}$ ,  $c = n_1$  we get that  $(x' \frac{a_2 - a_1}{d} \pmod{\text{lcm}}) \cdot n_1 \pmod{\text{lcm}}$  is equal to  $(x' \frac{a_2 - a_1}{d} \pmod{\frac{n_2}{d}}) \cdot n_1 \pmod{\text{lcm}}$ . Since  $\frac{n_2}{d} \leq 10^9$ , the overflow issue is solved.

**Case of  $t$  congruences** The last thing to consider is how to handle case of more than 2 congruences. Let's say we have  $t$  congruences  $x \equiv a_i \pmod{n_i}$  for  $i = 1, 2, \dots, t$ . We can just merge equations one by one. After merging first two congruences we get something like  $x \equiv s \pmod{\text{LCM}(n_1, n_2)}$  and now we can merge it in the same way with  $x \equiv a_3 \pmod{n_3}$  and so on. The complexity of this algorithm is just  $O(t \log \text{LCM}(n_1, n_2, \dots, n_t))$ .

```
#include <bits/stdc++.h>
using namespace std;
const int N = 20;
long long GCD(long long a, long long b) { return (b == 0) ? a : GCD(b, a % b); }
inline long long LCM(long long a, long long b) { return a / GCD(a, b) * b; }
inline long long normalize(long long x, long long mod) { x %= mod; if (x < 0) x += mod; return x; }
struct GCD_type { long long x, y, d; };
GCD_type ex_GCD(long long a, long long b)
{
    if (b == 0) return {1, 0, a};
    GCD_type pom = ex_GCD(b, a % b);
    return {pom.y, pom.x - a / b * pom.y, pom.d};
}
int testCases;
int t;
long long a[N], n[N], ans, lcm;
int main()
{
    ios_base::sync_with_stdio(0);
    cin.tie(0);
    cin >> t;
    for (int i = 1; i <= t; ++i) cin >> a[i] >> n[i], normalize(a[i], n[i]);
    ans = a[1];
    lcm = n[1];
    for (int i = 2; i <= t; ++i)
    {
        auto pom = ex_GCD(lcm, n[i]);
        int x1 = pom.x;
        int d = pom.d;
        if ((a[i] - ans) % d != 0) return cerr << "No solutions" << endl;
        ans = normalize(ans + x1 * (a[i] - ans) / d % (n[i] / d) * lcm, lcm);
        lcm = LCM(lcm, n[i]); // you can save time by replacing above with lcm *= n[i] / d;
    }
    cout << ans << " " << lcm << endl;
    return 0;
}
```

## Remainders Game

Assume the answer of a test is No. There must exist a pair of integers  $x_1$  and  $x_2$  such that both of them have the same remainders after dividing by any  $c_i$ , but they differ in remainders after dividing by  $k$ . Find more facts about  $x_1$  and  $x_2$ !

## Solution

Consider the  $x_1$  and  $x_2$  from the hint part. We have  $x_1 - x_2 \equiv 0 \pmod{c_i}$  for each  $1 \leq i \leq n$ .

So:

$$\text{lcm}(c_1, c_2, \dots, c_n) \mid x_1 - x_2$$

We also have  $x_1 - x_2 \not\equiv 0 \pmod{k}$ . As a result:

$$k \nmid \text{lcm}(c_1, c_2, \dots, c_n) \text{ as } k \text{ does not divide } x_1 - x_2$$

We've found a necessary condition. And I have to tell you it's also sufficient!

Assume  $k \nmid \text{lcm}(c_1, c_2, \dots, c_n)$ , we are going to prove there exists  $x_1, x_2$  such that  $x_1 - x_2 \equiv 0 \pmod{c_i}$  (for each  $1 \leq i \leq n$ ), and  $x_1 - x_2 \not\equiv 0 \pmod{k}$ .

A possible solution is  $x_1 = \text{lcm}(c_1, c_2, \dots, c_n)$  and  $x_2 = 2 \times \text{lcm}(c_1, c_2, \dots, c_n)$ , so the sufficiency is also proved.

So you have to check if  $\text{lcm}(c_1, c_2, \dots, c_n)$  is divisible by  $k$ .

## 1.24 Primitive Root

### 1.24.1 Definition

In modular arithmetic, a number  $g$  is called a primitive root modulo  $n$  if every number coprime to  $n$  is congruent to a power of  $g$  modulo  $n$ . Mathematically,  $g$  is a primitive root modulo  $n$  if and only if for any integer  $a$  such that  $\gcd(a, n) = 1$ , there exists an integer  $k$  such that:

$$g^k \equiv a \pmod{n}.$$

$k$  is then called the index or discrete logarithm of  $a$  to the base  $g$  modulo  $n$ .  $g$  is also called the generator of the multiplicative group of integers modulo  $n$ .

In particular, for the case where  $n$  is a prime, the powers of primitive root runs through all numbers from 1 to  $n - 1$ .

### 1.24.2 Existence

Primitive root modulo  $n$  exists if and only if:

- $n$  is 1, 2, 4, or
- $n$  is power of an odd prime number ( $n = p^k$ ), or
- $n$  is twice power of an odd prime number ( $n = 2 \cdot p^k$ ).

This theorem was proved by Gauss in 1801.

### 1.24.3 Relation with the Euler function

Let  $g$  be a primitive root modulo  $n$ . Then we can show that the smallest number  $k$  for which  $g^k \equiv 1 \pmod{n}$  is equal  $\phi(n)$ . Thus  $\gcd(g, n) = 1$ . Moreover, the reverse is also true, and this fact will be used in this article to find a primitive root.

Furthermore, the number of primitive roots modulo  $n$ , if there are any, is equal to  $\phi(\phi(n))$ .

### 1.24.4 Algorithm for finding a primitive root

From previous section, we know that if the smallest number  $k$  for which  $g^k \equiv 1 \pmod{n}$  is  $\phi(n)$ , then  $g$  is a primitive root. Since for any number  $a$  relative prime to  $n$ , we know from Euler's theorem that  $a^{\phi(n)} \equiv 1 \pmod{n}$ , then to check if  $g$  is primitive root, it is enough to check that for all  $d$  less than  $\phi(n)$ ,  $g^d \not\equiv 1 \pmod{n}$ . However, this algorithm is still too slow.  $O(g * \phi(n))$

From Lagrange's theorem, we know that the index of any number modulo  $n$  must be a divisor of  $\phi(n)$ . Thus, it is sufficient to verify for all proper divisor  $d, \mid \phi(n)$  that  $g^d \not\equiv 1 \pmod{n}$ . This is already a much faster algorithm, but we can still do better.

Factorize  $\phi(n) = p_1^{a_1} \dots p_s^{a_s}$ . We prove that in the previous algorithm, it is sufficient to consider only the values of  $d$  which has the form  $\frac{\phi(n)}{p_j}$ . Indeed, let  $d$  be any proper divisor of  $\phi(n)$ . Then, obviously, there exists such  $j$  that  $d, \mid \frac{\phi(n)}{p_j}$ , i.e.  $d \cdot k = \frac{\phi(n)}{p_j}$ . However, if  $g^d \equiv 1 \pmod{n}$ , we would get:

$$g^{\frac{\phi(n)}{p_j}} \equiv g^{d \cdot k} \equiv (g^d)^k \equiv 1^k \equiv 1 \pmod{n}.$$

i.e. among the numbers of the form  $\frac{\phi(n)}{p_i}$ , there would be at least one such that the conditions are not met.

Now we have a complete algorithm for finding the primitive root:

- First, find  $\phi(n)$  and factorize it.
- Then iterate through all numbers  $g = 1 \dots n$ , and for each number, to check if it is primitive root, we do the following:
  - Calculate all  $g^{\frac{\phi(n)}{p_i}} \pmod{n}$ .
  - If all the calculated values are different from 1, then  $g$  is a primitive root.

Running time of this algorithm is  $O(\text{Ans} \cdot \log \phi(n) \cdot \log n)$  (assume that  $\phi(n)$  has  $\log \phi(n)$  divisors).

Shoup (1990, 1992) proved, assuming the generalized Riemann hypothesis, that  $g$  is  $O(\log^6 p)$ .

### 1.24.5 Implementation

The following code assumes that the modulo  $p$  is a prime number. To make it works for any value of  $p$ , we must add calculation of  $\phi(p)$ .

```
int generator (int p) {
    vector<int> fact;
    int phi = p-1, n = phi;
    for (int i=2; i*i<=n; ++i)
        if (n % i == 0) {
            fact.push_back (i);
            while (n % i == 0)
                n /= i;
        }
    if (n > 1)
        fact.push_back (n);

    for (int res=2; res<p; ++res) {
        bool ok = true;
        for (size_t i=0; i<fact.size() && ok; ++i)
            ok &= powmod (res, phi / fact[i], p) != 1;
        if (ok) return res;
    }
    return -1;
}
```

## 1.25 Discrete Root

The problem of finding discrete root is defined as follows. Given a prime  $n$  and two integers  $a$  and  $k$ , find all  $x$  for which:

$$x^k \equiv a \pmod{n}$$

### 1.25.1 The algorithm

We will solve this problem by reducing it to the discrete logarithm problem.

Let's apply the concept of a primitive root modulo  $n$ . Let  $g$  be a primitive root modulo  $n$ . Note that since  $n$  is prime, it must exist, and it can be found in  $O(\text{Ans} \cdot \log \phi(n) \cdot \log n) = O(\text{Ans} \cdot \log^2 n)$  plus time of factoring  $\phi(n)$ .

We can easily discard the case where  $a = 0$ . In this case, obviously there is only one answer:  $x = 0$ .

Since we know that  $n$  is a prime, any number between 1 and  $n - 1$  can be represented as a power of the primitive root, and we can represent the discrete root problem as follows:

$$(g^y)^k \equiv a \pmod{n}$$

where

$$x \equiv g^y \pmod{n}$$

This, in turn, can be rewritten as

$$(g^k)^y \equiv a \pmod{n}$$

Now we have one unknown  $y$ , which is a discrete logarithm problem. The solution can be found using Shanks' baby-step-giant-step algorithm in  $O(\sqrt{n} \log n)$  (or we can verify that there are no solutions).

Having found one solution  $y_0$ , one of solutions of discrete root problem will be  $x_0 = g^{y_0} \pmod{n}$ . Finding all solutions from one known solution

To solve the given problem in full, we need to find all solutions knowing one of them:  $x_0 = g^{y_0} \pmod{n}$ .

Let's recall the fact that a primitive root always has order of  $\phi(n)$ , i.e. the smallest power of  $g$  which gives 1 is  $\phi(n)$ . Therefore, if we add the term  $\phi(n)$  to the exponential, we still get the same value:

$$x^k \equiv g^{y_0 \cdot k + l \cdot \phi(n)} \equiv a \pmod{n} \forall l \in \mathbb{Z}$$

Hence, all the solutions are of the form:

$$x = g^{y_0 + \frac{l \cdot \phi(n)}{k}} \pmod{n} \forall l \in \mathbb{Z}.$$

where  $l$  is chosen such that the fraction must be an integer. For this to be true, the numerator has to be divisible by the least common multiple of  $\phi(n)$  and  $k$ . Remember that least common multiple of two numbers  $\text{lcm}(a, b) = \frac{a \cdot b}{\gcd(a, b)}$ ; we'll get

$$x = g^{y_0 + i \frac{\phi(n)}{\gcd(k, \phi(n))}} \pmod{n} \forall i \in \mathbb{Z}.$$

This is the final formula for all solutions of discrete root problem.

### 1.25.2 Implementation

```
int delta = phi / gcd (k, phi);
vector<int> ans;
for (int cur=any_ans % delta; cur < phi; cur += delta)
    ans.push_back (powmod (g, cur, n));
sort (ans.begin(), ans.end());
printf ("%d\n", ans.size());
for (size_t i=0; i<ans.size(); ++i)
    printf ("%d ", ans[i]);
```

## 1.26 Fermats last theorem

No 3 positive integers  $a, b, c$  satisfying the eqn  $a^n + b^n = c^n$  for any integer value of  $n$  greater than 2.

## 1.27 Josephus Problem

Given natural no.  $n$  and  $k$ , we write natural nos 1 to  $n$  along the circle. Then delete the  $k$ th no, (i.e no.  $k$  initially) and then from this position next  $k$ th no. is deleted and so on.

The process stops when there is only one no. remaining, problem asks us to find this no.



### 1.27.1 For k = 2

$$n = 1, 2, 3, 4, 5, 6 \quad (8)$$

$$f(n) = 1, 1, 3, 1, 3, 5 \quad (9)$$

Thm: if  $n = 2^m + l$  where  $0 \leq l < 2^m$  then  $f(n) = 2l + 1$ .

### 1.27.2 For general k ≥ 1

We should note that after the kth person is killed we are left with a circle of  $n - 1$  and we start the next count with the person whose no in the original problem was  $(k \bmod n) + 1$ . The position of the survivor in the remaining circle would be  $f(n - 1, k)$  if we start counting at 1; shifting this to account for the fact that we are starting at  $(k \bmod n) + 1$  yields the recurrence  $f(n, k) = ((f(n - 1, k) + k - 1) \bmod n) + 1$  with  $f(1, k) = 1$  which takes the simpler form  $g(n, k) = (g(n - 1, k) + k) \bmod n$  with  $g(1, k) = 0$ . This approach has running time  $O(n)$ .

But for small k and large n, there is another approach. The second approach also uses dp but has running time  $O(k \log n)$  and is based on considering killing kth, 2kth, ...,  $(\lfloor n/k \rfloor * k)$ th person as one step, then changing the numbering.

$$\begin{aligned} g(n, k) &= 0 \text{ if } n = 1 \text{ (because of 0 indexing)} \\ &= (g(n - 1, k) + k) \bmod n \text{ if } 1 < n < k \\ &= \lfloor k * ((g(n_m, k) - n \bmod k) \bmod n_m) / (k - 1) \rfloor \text{ where } n_m = n - \lfloor n/k \rfloor * k \end{aligned}$$

## 1.28 Root Solving

// Following is the solution for UVA 10428

```
#include <bits/stdc++.h>
```

```
using namespace std;
```

```
typedef long long int ll;
const double eps = 1e-7;
struct Polynomial {
    vector<double> coef;
    int deg;
    Polynomial() {}
    Polynomial(int dd) {
        deg = dd;
        coef.resize(deg + 1);
    }
    void fix(Polynomial &given) {
        int dec = 0;
        for (int i = given.deg; i >= 0; i--) {
            if (abs(given.coef[i]) < eps) {
                dec++;
            } else break;
        }
        dec *= -1;
        given.coef.resize(given.deg + dec + 1);
        given.deg += dec;
        return;
    }
    Polynomial operator + (const Polynomial &other) {
        Polynomial ret;
        if (deg > other.deg) {
            ret.deg = deg;
            ret.coef.resize(deg + 1);
            for (int i = deg; i > other.deg; i--) {
                ret.coef[i] = coef[i];
            }
            for (int i = other.deg; i >= 0; i--) {
                ret.coef[i] = coef[i] + other.coef[i];
            }
            fix(ret);
            return ret;
        } else {
            ret.deg = other.deg;
            ret.coef.resize(other.deg + 1);
            for (int i = other.deg; i > deg; i--) {
                ret.coef[i] = other.coef[i];
            }
            for (int i = deg; i >= 0; i--) {
                ret.coef[i] = coef[i] + other.coef[i];
            }
            fix(ret);
            return ret;
        }
    }
    Polynomial operator - (const Polynomial &other) {
        Polynomial ret;
        if (deg > other.deg) {
            ret.deg = deg;
```

```
        ret.coef.resize(deg + 1);
        for (int i = deg; i > other.deg; i--) {
            ret.coef[i] = coef[i];
        }
        for (int i = other.deg; i >= 0; i--) {
            ret.coef[i] = coef[i] - other.coef[i];
        }
        fix(ret);
        return ret;
    } else {
        ret.deg = other.deg;
        ret.coef.resize(other.deg + 1);
        for (int i = other.deg; i > deg; i--) {
            ret.coef[i] = other.coef[i];
        }
        for (int i = deg; i >= 0; i--) {
            ret.coef[i] = coef[i] - other.coef[i];
        }
        fix(ret);
        return ret;
    }
}

Polynomial operator * (const pair<double, int> u) {
    double d = u.first;
    int dega = u.second;
    Polynomial ret;
    ret.deg = deg + dega;
    ret.coef.assign(ret.deg + 1, 0);
    for (int i = deg; i >= 0; i--) {
        ret.coef[i + dega] = (coef[i] * d);
    }
    fix(ret);
    return ret;
}

bool operator != (const Polynomial &other) {
    if (deg != other.deg) return true;
    for (int i = deg; i >= 0; i--) {
        if (coef[i] != other.coef[i]) return true;
    }
    return false;
}

};

pair<Polynomial, Polynomial> polyDiv(Polynomial &n, Polynomial &d) {
    Polynomial zero;
    zero.deg = 0;
    zero.coef.push_back(0);
    if (n.deg < d.deg) {
        return make_pair(zero, n);
    }
    Polynomial q;
    q.deg = (n.deg);
    q.coef.assign(q.deg + 1, 0);
    Polynomial r = n;
    while (r != zero and r.deg >= d.deg) {
        double t = (r.coef[r.deg] / d.coef[d.deg]);
        q.coef[r.deg - d.deg] += t;
        r = r - d * make_pair(t, r.deg - d.deg);
    }
    q.fix(q); r.fix(r);
    return make_pair(q, r);
}

double f(Polynomial &a, double x) {
    double result = 0;
    for (int i = a.deg; i >= 0; i--) {
        result = result * x + a.coef[i];
    }
    return result;
}

double f_(Polynomial &a, double x) {
    double result = 0;
    for (int i = a.deg; i > 0; i--) {
        result = result * x + a.coef[i] * i;
    }
    return result;
}

double newtonsMethod(Polynomial &a, double x0) {
    double x1 = x0;
    while (true) {
        x0 = x1;
        x1 = x0 - f(a, x0) / f_(a, x0);
    }
}
```

```

        if (abs(x1 - x0) < eps) break;
    }
    return x1;
}

void findRoot(Polynomial a, vector<double> &roots, int n) {
    for (int i = 0; i < n; i++) {
        roots.push_back(newtonsMethod(a, 0));
        Polynomial d(i);
        d.coef[1] = 1;
        d.coef[0] = -roots.back();
        auto u = polyDiv(a, d);
        a = u.first;
    }
}

int main() {
    ios::sync_with_stdio(false);
    cin.tie(nullptr);
    // freopen("ina.txt", "r", stdin);
    // freopen("outa.txt", "w", stdout);
    cout << fixed << setprecision(4);
    int n;
    int caseno = 0;
    while (cin >> n and n) {
        Polynomial a(n);
        caseno++;
        for (int i = n; i >= 0; i--) {
            cin >> a.coef[i];
        }
        cout << "Equation " << caseno << ": ";
        vector<double> roots;
        findRoot(a, roots, n);
        sort(roots.begin(), roots.end());
        cout << roots[0];
        for (int i = 1; i < n; i++) {
            cout << " " << roots[i];
        }
        cout << "\n";
    }
}

```

## 1.29 Integration

### 1.29.1 Simpson rule

$$x_i = a + ih, \quad i = 0 \dots 2n,$$

$$h = \frac{b-a}{2n}.$$

$$\int_a^b f(x)dx \approx (f(x_0) + 4f(x_1) + 2f(x_2) + 4f(x_3) + 2f(x_4) + \dots + 4f(x_{2N-1}) + f(x_{2N})).$$

```

const int N = 1000 * 1000; // number of steps (already multiplied by 2)

double simpson_integration(double a, double b){
    double h = (b - a) / N;
    double s = f(a) + f(b); // a = x_0 and b = x_{2n}
    for (int i = 1; i <= N - 1; ++i) { // Refer to final Simpson's formula
        double x = a + h * i;
        s += f(x) * ((i & 1) ? 4 : 2);
    }
    s *= h / 3;
    return s;
}

```

## 1.30 Continued Fractions

the Euclidean algorithm: if  $m = nq + r$ , then  $\frac{m}{n} = q + \frac{r}{n} = q + \frac{1}{\frac{n}{r}}$ , and the process continues by dividing  $n$  by  $r$ . Here is an illustrative example.

EXAMPLE

Reduce  $-\frac{551}{802}$  to a simple continued fraction.

First, write down the Euclidean algorithm for dividing  $-551$  by  $802$ :

$$\begin{aligned}
 -551 &= 802(-1) + 251 \\
 802 &= 251 \cdot 3 + 49 \\
 251 &= 49 \cdot 5 + 6 \\
 49 &= 6 \cdot 8 + 1 \\
 6 &= 1 \cdot 6 + 0.
 \end{aligned}$$

Using this, we have

$$\begin{aligned}
 -\frac{551}{802} &= -1 + \frac{251}{802} = -1 + \frac{1}{\frac{802}{251}} \\
 &= -1 + \frac{1}{3 + \frac{49}{251}} = -1 + \frac{1}{3 + \frac{1}{\frac{251}{49}}} \\
 &= -1 + \frac{1}{3 + \frac{1}{5 + \frac{6}{49}}} = -1 + \frac{1}{3 + \frac{1}{5 + \frac{1}{\frac{49}{6}}}} \\
 &= -1 + \frac{1}{3 + \frac{1}{5 + \frac{1}{8 + \frac{1}{6}}}}.
 \end{aligned}$$

UVA 834, Sol

### 1.31 Pells eqn

### 1.32 Side Notes

- relatively prime is same as coprime.
- 2 nos  $a, b$  are said to be congruent modulo  $n$ , if their difference is an integer multiple of  $n$ , i.e. they give same remainder. We denote this as  $a \equiv b \pmod{n}$ .
- For  $(a, b)$  three operations exist:
  - If  $a, b$  are even then  $(a/2, b/2)$ .
  - $(a+1, b+1)$
  - If  $(a, b)$  exist and  $(b, c)$  exist then  $(a, c)$  exist.

Every  $(x, y)$  pair s.t.  $x < y$  can be transformed to  $(1, 1 + k \times d)$  where  $k$  is any positive integer and  $d$  is maximal odd divisor of  $y - x$ . We want to generate  $(1, a_1), (1, a_2), \dots, (1, a_n)$ . So  $d | \gcd(a_1 - 1, a_2 - 1, \dots, a_n - 1)$ . No. of pairs  $(x, y)$  which have  $d$  as their maximal odd divisors: these are cards with  $y - x = d, 2d, 4d, 8d$ , etc. as odd into odd is odd thus we can't multiply with any odd number as it will give bigger odd divisor. Don't forget that numbers  $x, y$  must not exceed  $m$ . Total no. of cards with some fixed difference  $t = y - x$  is exactly

$$m - t. \quad 1 \leq x < y \leq m$$

$$1 - x \leq 0 < t \leq m - x$$

$$1 \leq x \leq m - t$$

$$m - t \geq 1$$

$$t \leq m - 1$$

$$2^l * d \leq m - 1$$

So sum up  $m - 2^l * d$  where  $d$  is any odd divisor of  $\gcd(a_1 - 1, \dots)$  and  $l$  is such that  $2^l * d \leq m - 1$ .

- People in cycle will commit suicide.
- Every even no. greater than or equal to 4 can be expressed as a sum of 2 prime nos.
- No. of digits in a no.  $n = \lfloor \log_{10} n \rfloor + 1$
- No. of digits in  $\binom{n}{k} = \lfloor (\sum_{i=n-k+1}^n \log_{10} i - \sum_{i=1}^k \log_{10} i) \rfloor + 1$
- No. of digits of a no. in some base  $b = \text{floor}(1 + \log_b \text{no.} + \text{eps})$ . Also make sure that input no. is not 0.
- for  $\binom{n}{r}$  always do  $r = \min(r, n - r)$ . Also to compute it either we can use dp or for a specific pair, if it is guaranteed that the final solution lies within data types limit then we can compute it as.

```

ll ncr(ll n, ll r) {
    r = min(r, n - r);
    ll res = 1;
    for (int k = 1; k <= r; k++) {
        res *= n;
        res /= k;
    }
}

```

// Another way is

```

int c[maxn + 5][maxn + 5];
for (int n = 0; n <= maxn; n++) {
    c[n][0] = c[n][n] = 1;
    for (int k = 1; k < n; k++) {
        c[n][k] = c[n - 1][k - 1] + c[n - 1][k];
    }
}

```

// Or if long arithmetic is allowed, we can do  $\text{fact}[n] / \text{fact}[n - k] / \text{fact}[k]$

- $(t^a - 1) / (t^b - 1)$  is not an integer with less than 100 digits if  $t = 1$  or  $a < b$  or  $a \bmod b \neq 0$  or  $(a - b) * \log_{10} t > 99.0$

11. 

```
for (int j = 0; j < bigint_var.a.size (); j++) {
    int temp = bigint_var.a[j];
    while (temp > 9) {
        sum += temp % 10;
        temp /= 10;
    }
    sum += temp;
}
```
12. To get all divisors of a number  $n$ .
- ```
for (int i = 1; i * i <= n; i++) {
    if (n % i == 0) {
        d.push_back(i);
        if (i != n / i) d.push_back (n / i);
    }
}
```
13. We can find the  $n$ th root using pow func.
14. Some times we can generate first few terms and then look up at oeis.org
15. *// to compute (a \* b) mod m when a \* b can go above ll*
- ```
ll bmodm;
ll compute (ll a, ll &b, ll &m) {
    if (a == 1) return bmodm;
    if (a & 1) return ((2 % m) * compute (a / 2, b, m) + bmodm) % m;
    else return ((2 % m) * compute (a/2, b, m)) % m;
}
```
16. Say  $A = [a, b, c, d, e]$  and  $P = [4, 3, 2, 0, 1] \rightarrow$  final array is  $[e, d, c, a, b]$ . but if we were to get  $P^k$  applied to  $A$ , we should first represent  $P$  by matrix.

$$\begin{bmatrix} 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 \end{bmatrix}$$

And then compute it  $k$ th power and then do  $A * P^k$

### 1.33 Important Problems

- UVA 11310 Prob:  $dp[n] = dp[n-1] + 4 * dp[n-2] + 2 * dp[n-3]$
- UVA 11204 Prob: Tricky problem, it just asks *How many possible arrangements maximizing the assignment of the first priority*. Thus only first priority instrument matters, so if 2 want A, 4 want B, 3 want C, then ans is  $2 * 4 * 3$ .
- UVA 10790 Prob: If there is an intersection that means we have a quadrilateral, hence answer is the number of quadrilaterals  $= \binom{a}{2} * \binom{b}{2}$ .
- last non zero digit of fact(n), Sol. If you know multiplication limit, take mod with  $(10^{\text{no. of digits}})$
- France 98, Sol.
- How many zeros and how many digits? Sol: then iterate through factors of base and get their powers in  $n!$ , take min. of all such powers divided by power of prime factor in that base. And for how many digits part, use that log formula.
- Is  $n!$  divisible by  $m$ ? Sol: Use prime factors
- Given  $n$ , maximize (find  $x$ )  $n - p * x$  where  $p * x \leq n < (p+1) * x$  which somehow happens with  $p = 1$
- Prob:** Lengths from 1 to  $n$ , max. no. of triangles?

**Sol:**

```
void precal () {
    F[3] = P[3] = 0;
    ll var = 0;
    for (int i = 4; i <= 1000000; i++) {
        if (i % 2 == 0) {
            var++;
        }
        P[i] = P[i - 1] + var;
        F[i] = F[i - 1] + P[i];
    }
    // F[n] has ans
}
```

- Bottom right corner of a chess board must be white. If  $c == 0/1$  bottom right corner of painting is black/white.

```
if (c == 0) ans = (n - 7) * (m - 7) / 2
else ans = ((n - 7) * (m - 7) + 1) / 2
```

- for 2 nos (a, b) output 2 nos (c, d) such that  $a = \gcd(c, d)$  &  $b = \text{lcm}(c, d)$  and  $c$  is minimum. Sol: basically soln exist if  $b \bmod a = 0$  and soln is  $c = a, d = b$ .

## 2 Graphs

### 2.1 Basic

- The shortest path b/w vertices  $i$  and  $j$  after edge  $(u, v)$  is added is equal to  $\min(d_{i,j}, d_{i,u} + w_{u,v} + d_{v,j}, d_{i,v} + w_{v,u} + d_{u,j})$
- In BFS, in case of multiple sources, enqueue them all in queue and set  $\text{dist}[v] = 0$ . Some trick works in case of dijkstra.
- Also in case we are given both source and destination then we can terminate our while loop by checking whether the element we pop from queue is the destination or not. Same trick would work with weighted graph provided we have no -ve edges (dijkstra)
- Adjacency matrix equal to its transpose that implies undirected graph.
- To check whether the graph is bipartite, we can do bfs and color vertices 0/1.
- Graph Check

```
void graphcheck (int u) {
    dfs_num[u] = explored;
    for (auto &v : adjlist[u]) {
        if (dfs_num[v] == unvisited) { // tree edge
            dfs_parent[v] = u;
            graphcheck (v);
        } else if (dfs_num[v] == explored) { // back edge hence cycle
            if (v == dfs_parent[u]) cout << "two ways\n";
            else cout << "back edge\n";
        } else { // dfs_num[v] == visited
            // forward/cross edge
            // [u [v v] u] this is tree/forward
            // [v [u u] v] back
            // [v v] [u u] cross
        }
    }
}
```

- Getting any cycle

```
bool dfs(int v) {
    color[v] = 1;
    for (int u : adj[v]) {
        if (color[u] == 0) {
            parent[u] = v;
            if (dfs(u))
                return true;
        } else if (color[u] == 1) {
            cycle_end = v;
            cycle_start = u;
            return true;
        }
    }
    color[v] = 2;
    return false;
}
```

```
void find_cycle() {
    color.assign(n, 0);
    parent.assign(n, -1);
    cycle_start = -1;

    for (int v = 0; v < n; v++) {
        if (dfs(v))
            break;
    }

    if (cycle_start == -1) {
        cout << "Acyclic" << endl;
    } else {
        vector<int> cycle;
        cycle.push_back(cycle_start);
        for (int v = cycle_end; v != cycle_start; v = parent[v])
            cycle.push_back(v);
        cycle.push_back(cycle_start);
        reverse(cycle.begin(), cycle.end());

        cout << "Cycle found: ";
        for (int v : cycle)
            cout << v << " ";
        cout << endl;
    }
}
```

- Floodfill

```
int R, C;
string grid[100];
```

```

int dr[] = {1, 1, 0, -1, -1, -1, 0, 1};
int dc[] = {0, 1, 1, 1, 0, -1, -1, -1};
int floodfill (int r, int c, char c1, char c2) {
    if (r < 0 || r >= R || c < 0 || c >= C) return 0;
    if (grid[r][c] != c1) return 0;
    int ans = 0;
    grid[r][c] = c2;
    for (int d = 0; d < 8; d++) {
        ans += floodfill (r + dr[d], c + dc[d], c1, c2);
    }
    return ans;
}

```

- We can find the number of connected components by simply doing dfs (offline), and online using UFDS.
- Highest average is possible only by taking largest edge weight/s.
- We can use BFS for finding the shortest path in a graph with weights 0 or 1. This required just a little modificatio to normal BFS, if the current edge is of 0 weight and distance to the vertex is shorter than the current found distance, then add this vertex not to the back but to the front of the queue. (we can use dequeue which supports front, back, push\_back, push\_front, pop\_back, pop\_front) in O(1).
- Find the shortest path of even length from a source vertex  $s$  to a target vertex  $t$  in an unweighted graph. For this, we must construct an auxiliary graph, whose vertices are the state  $(v, c)$  where  $v$  is the current node,  $c = 0, 1$  denotes the current parity. Any edge  $(u, v)$  of the original graph in this new graph will turn into two edges  $((u, 0), (v, 1))$  and  $((u, 1), (v, 0))$ . After that we run a BFS to find the shortest path from  $(s, 0)$  to  $(t, 0)$ .
- Find all the vertices on any shortest path between a given pair of vertices  $(a, b)$ . To accomplish that, run 2 BFS: one from  $a$  and one from  $b$ . Let  $da[]$  be the array containing shortest distances obtained from first BFS (from  $a$ ) and  $db[]$  be the array containing shortest distances obtained from the second BFS (from  $b$ ). Now for every vertex it is easy to check whether it lies on any shortest path between  $a$  and  $b$ : the criterion is the condition  $da[v] + db[v] = da[b]$ .
- Similarly edge  $(u, v)$  lies on shortest path if  $da[u] + 1 + db[v] = da[b]$ .
- Finding shortest cycle in a directed unweighted graph. For each vertex  $v_i$ : do a BFS from it and if we try to go from the current vertex to an already visited vertex then it means that we have found a cycle and should stop BFS.  
Take minimum of all such cycles (one for each  $v_i$  to get the shortest length cycle.
- Using DFS, we can also tell whether vertex  $i$  is an ancestor of  $j$  by using either that subtree method or by checking if  $entry[i] < entry[j]$  and  $exit[i] > exit[j]$

## 2.2 Articulation Points and Bridges (undirected graph)

- An articulation point is defined as a vertex in a graph  $G$  whose removal (all edges incident to this vertex are also removed) disconnects  $G$ . A graph without any articulation point is called "Biconnected". Similarly, a "Bridge" is defined as an edge in a graph  $G$  whose removal disconnects  $G$ .

```

int delta = phi / gcd (k, phi);
vector<int> ans;
for (int cur=any_ans % delta; cur < phi; cur += delta)
    ans.push_back (powmod (g, cur, n));
sort (ans.begin(), ans.end());
printf ("%d\n", ans.size());
for (size_t i=0; i<ans.size(); ++i)
    printf ("%d ", ans[i]);

```

- Two way to one way UVA 610

## 2.3 Tree

Undirected, acyclic, connected,  $|V| - 1$  edges.

All edges are bridges, and internal vertices (degree  $> 1$ ) are articulation points.

It is as well a bipartite graph.

SSSP: Simply take the sum of edge weights of that unique path.  $O(|V|)$

APSP: Simply do SSSP from all vertices.  $O(|V|^2)$

```

11 ncr(11 n, 11 r) {
    r = min (r, n - r);
    11 res = 1;
    for (int k = 1; k <= r; k++, n--) {
        res *= n;
        res /= k;
    }
}

```

// Another way is

```

int c[maxn + 5][maxn + 5];
for (int n = 0; n <= maxn; n++) {

```

```

c[n][0] = c[n][n] = 1;
for (int k = 1; k < n; k++) {
    c[n][k] = c[n - 1][k - 1] + c[n - 1][k];
}
}

```

// Or if long arithmetic is allowed, we can do  $fact[n] / fact[n - k] /$

It is **impossible** to construct binary tree with just Preorder traversal.

It is **impossible** to construct binary tree with just Inorder traversal.

It is **impossible** to construct binary tree with just Postorder traversal.

### 2.3.1 LCA

- Jammie and Tree, Sol: One stop soln to understand LCA. Note that LCA of two nodes  $u, v$  is the node  $w$  that is ancestor of both  $u$  and  $v$  and that has the greatest depth in the tree.  
How to find the LCA of  $u$  and  $v$  using the precomputed LCA table that assumes the root is vertex 1? Let's separate the situation into several cases. If both  $u$  and  $v$  are in the subtree of  $r$ , then query the LCA directly is fine. If exactly one of  $u$  and  $v$  is in the subtree of  $r$ , the LCA must be  $r$ . If none of  $u$  and  $v$  is in the subtree of  $r$ , we can first find the lowest nodes  $p$  and  $q$  such that  $p$  is an ancestor of both  $u$  and  $r$ , and  $q$  is an ancestor of both  $v$  and  $r$ . If  $p$  and  $q$  are different, we choose the deeper one. If they are the same, then we query the LCA directly. Combining the above cases, one may find the LCA is the lowest vertex among  $lca(u, v), lca(u, r), lca(v, r)$ .

After we have found the origin  $w$  of update (for query, it is given), how to identify the **subtree of a vertex** and carry out updates/queries on it? Again, separate the situation into several cases. If  $w = r$ , update/query the whole tree. If  $w$  is in the subtree of  $r$ , or  $w$  isn't an ancestor of  $r$ , update/query the subtree of  $w$ . Otherwise, update/query the whole tree, then undo update/exclude the results of the subtree of  $w'$ , such that  $w'$  is a child of  $w$  and the subtree of  $w'$  contains  $r$ .

- Tarjan's offline LCA. for each query  $(a, b)$  you should do  $q[a].pb(b)$  and  $q[b].pb(a)$ .

#### 21-3 Tarjan's off-line least-common-ancestors algorithm

The **least common ancestor** of two nodes  $u$  and  $v$  in a rooted tree  $T$  is the node  $w$  that is an ancestor of both  $u$  and  $v$  and that has the greatest depth in  $T$ . In the **off-line least-common-ancestors problem**, we are given a rooted tree  $T$  and an arbitrary set  $P = \{u, v\}$  of unordered pairs of nodes in  $T$ , and we wish to determine the least common ancestor of each pair in  $P$ .

To solve the off-line least-common-ancestors problem, the following procedure performs a tree walk of  $T$  with the initial call  $LCA(T.root)$ . We assume that each node is colored WHITE prior to the walk.

LCA( $u$ )

```

1  MAKE-SET( $u$ )
2  FIND-SET( $u$ ).ancestor =  $u$ 
3  for each child  $v$  of  $u$  in  $T$ 
4      LCA( $v$ )
5      UNION( $u, v$ )
6  FIND-SET( $u$ ).ancestor =  $u$ 
7   $u.color = BLACK$ 
8  for each node  $v$  such that  $\{u, v\} \in P$ 
9      if  $v.color == BLACK$ 
10         print "The least common ancestor of"
             $u$  "and"  $v$  "is" FIND-SET( $v$ ).ancestor

```

### 2.3.2 Important Problems

- Say path length is defined as the sum of edge weights along that path. And diameter is length of the longest simple path. Given sum of edge weights 'm' we need to assign weights to edges so that diameter is minimum. Sol: Consider the center of the tree like before, now the length of all paths from this tree should be minimum, which is only possible if we assign length to be the same. code
- Diameter after merging tree  $T_1$  (center =  $v_1$ , dia =  $d_1$ ) with  $T_2$  (center =  $v_2$ , dia =  $d_2$ ) is  $\max(d_1, d_2, (d_1 + 1)/2 + (d_2 + 1)/2 + 1)$  this is written for c style. In case of odd diameter,  $v_1$  could be any of the two centers. Minimal Diameter Forest, sol. Just know that pivot should be the one having highest diameter.
- UVA 11695 Sol: Problem Desc: Find which edge to remove and add so as to minimise the number of hops to travel between flights. Problem Sol: Just link the center of diameters. Brute force which edge to remove.
- UVA 112 Sol, UVA 112 Prob: Just see how I processed the input.
- UVA 10029 Sol, UVA 10029 Prob: Edit steps, (lexicographic sequence of words)
- UVA 536 Sol, UVA 536 Prob: Construct binary tree with preorder and inorder
- UVA 10459 Sol, UVA 10459 Prob: Centers of diameters are best where as corners are worst.
- Tree Destruction, Sol:
- Tree with maximum cost, sol

### 2.3.3 MVC on Tree

```

int mvc(int at, int flag, int parent) { //You can start this from any
    if(memo[at][flag] != -1) {

```



```

    return memo[at][flag];
}
if(glist[at].size() == 1 and parent != -1) { //leaf node
    return memo[at][flag] = flag;
}
int ans = flag;
if(flag) // to take this
{
    for(auto to : glist[at]) {
        if(to != parent)
            ans += min(mvc(to, 0, at), mvc(to, 1, at));
    }
} else { //we must take its neighbours
    for(auto to : glist[at]) {
        if(to != parent)
            ans += mvc(to, 1, at);
    }
}
return memo[at][flag] = ans;
} // Similar code can be written to find MWIS.

```

### 2.3.4 MWIS on Tree

```

int mwis(int at, int flag, int parent) { //You can start this from
if(memo[at][flag] != -1) {
    return memo[at][flag];
}
if(glist[at].size() == 1 and parent != -1) { //leaf node
    flag ? ans = weight[at] : 0;
    return ans;
}
if(flag) {
    ans = weight[v];
    for (auto to : glist[at]) {
        if (to != parent)
            ans += mwis (to, 0, at);
    }
} else {
    ans = 0;
    for (auto &to : glist[at]) {
        ans += max (mwic(to, 1, at), mwic(to, 0, at));
    }
}
return memo[at][flag] = ans;
}

```

## 2.4 Terminology

- A **vertex cover** is a subset of vertices  $S$ , such that for each edge  $(u, v)$  in graph, either  $u$  or  $v$  (or both) are in  $S$ .
- An **independent set** is a subset of vertices  $S$ , such that no two vertices  $u, v$  in  $S$  are adjacent in graph.
- A subset of vertices is a vertex cover iff the complement of the set is an independent set. I.e.  $\text{MinVC} + \text{MaxIS} = V$ .
- It is easy to see why it is the case, firstly for vertices in the complement of MinVC, they can't have any edge between them as then our MinVC isn't VC. Also if we add to this IS any more vertex then it won't be an IS. Suppose it is not the maximum then there occurs an MIS with size more than this, clearly its complement is VC which would have size smaller than our MinVC which leads to contradiction.
- Complement of VC is an IS and vice versa (easy to see)
- Given an undirected graph  $G = (V, E)$  and weighting function defined on the vertex set, the minimum weighted vertex cover problem is to find a vertex set  $S \subseteq V$  whose total weight is minimum subject to every edge of  $G$  has at least one end point in  $S$ .
- In the maximum-weight independent set problem, the input is an undirected graph with weights on its vertices and the output is an independent set with maximum total weight.
- Again it happens to be the case that size of MWVC + MWIS = Total weight =  $V$ .
- A matching is a subset of edges such that each vertex is adjacent to at most one edge in the subset. Clearly Matching edges can be at most  $|V|/2$  as each edge joins two vertices and now no other matched edge can touch them.
- Note: This MVC, MIS, MM, is defined for undirected, unweighted graph.
- Once we have maximum matching. Clearly since these matching edges are as well edges of the graph and minimum vertex cover should have vertices that are adjacent to these edges. But since matching edges have no vertex in common, size of minimum vertex cover is at least the size of maximum matching.
- Maximum matchings can be found in polynomial time for any graph, while minimum vertex cover is NP complete. Thus, finding maximum independent sets is another NP-complete problem.

- The equivalence between matching and covering articulated in König's theorem allows minimum vertex covers and maximum independent sets to be computed in polynomial time for bipartite graphs, despite the NP-completeness of these problems for more general graph families.

## 2.5 Königs Theorem

Size of Min VC in a bipartite graph is equal to the size of Max Matching in that graph.

König's theorem can be proven in a way that provides additional useful information beyond just its truth: the proof provides a way of constructing a minimum vertex cover from a maximum matching.


**Proof:** Let  $G = (V, E)$  be a bipartite graph, and let the vertex set  $V$  be partitioned into left set  $L$  and right set  $R$ . Suppose that  $M$  is a maximum matching for  $G$ .

let  $U$  be the set of unmatched vertices in  $L$  (possibly empty), and let  $Z$  be the set of vertices that are either in  $U$  or are connected to  $U$  by alternating paths. Let  $K = (L \setminus Z) \cup (R \cap Z)$ .

Every edge  $e$  in  $E$  either belongs to an alternating path (and has a right endpoint in  $K$ ), or it has a left endpoint in  $K$ . For, if  $e$  is matched but not in an alternating path, then its left endpoint cannot be in an alternating path (for such a path would have had to have included  $e$ ) and thus belongs to  $L \setminus Z$ . Alternatively, if  $e$  is unmatched but not in an alternating path, then its left endpoint cannot be in an alternating path, for such a path could be extended by adding  $e$  to it. Thus,  $K$  forms a vertex cover.

Additionally, every vertex in  $K$  is an endpoint of a matched edge. For, every vertex in  $L \setminus Z$  is matched because  $Z$  is a superset of  $U$ . And every vertex in  $R \cap Z$  must also be matched, for if there existed an alternating path to an unmatched vertex then changing the matching by removing the matched edges from this path and adding the unmatched edges in their place would increase the size of the matching. However, no matched edge can have both of its endpoints in  $K$ . Thus,  $K$  is a vertex cover of cardinality equal to  $M$ , and must be a minimum vertex cover.

Small diagram to understand proof well.

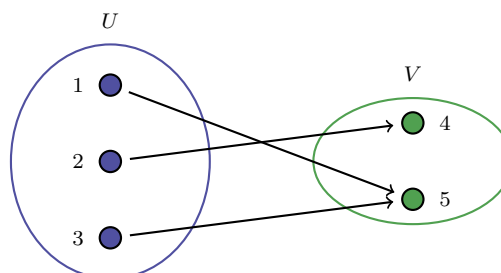

Matched edges are (2, 4) and (3, 5).

$U = \{1\}$ ,  $Z = \{1, 5, 3\}$ ,  $L = \{1, 2, 3\}$ ,  $K = \{2, 5\}$

## 2.6 Bipartite Matching

### 2.6.1 Hopcroft Karp

- Free node or vertex:** Given a matching  $M$ , a node that is not a part of matching is called a free node. Initially all vertices are free.
- Matching and not matching edges:** Given a matching  $M$ , edges that are part of matching are called matching edges and edges that are not part of  $M$  (or connect free nodes) are called non matching edges.
- Alternating Paths:** Given a matching  $M$ , an alternating path is a path in which edges belong alternatively to the matching and not matching.
- Augmenting path:** Given a matching  $M$ , an augmenting path is an alternating path that starts from and ends on free vertices.
- The Hopcroft karp algorithm is based on below concept:
- A matching  $M$  is not maximum if there exist an augmenting path. It is also true other way, i.e., a matching is maximum if no augmenting path exists.
- Hopcroft Karp Algo  $O(\sqrt{V} * E)$ :
  - Initialize maximal matching  $M$  as empty.
  - While there exists an augmenting path  $P$ , remove matching edges of  $P$  from  $M$  and add not matching edges of  $P$  to  $M$ . (This increases size of  $M$  by 1 as  $P$  starts and ends with a free vertex).
  - Return  $M$ .

The following is the sol to problem UVA 11419 where we were just required to find minimum vertex cover.

```

#include <bits/stdc++.h>
#define FOR(i, a, b) for (int i = a; i <= b; i++)
#define REP(i, n) for (int i = 0; i < n; i++)
#define pb push_back
#define INF 500000000
#define maxN 1010
using namespace std;

int n, m, matchX[maxN], matchY[maxN];

```



```

int dist[maxN];
vector<int> adj[maxN];
bool Free[maxN];

bool bfs() {
    queue<int> Q;
    FOR (i, 1, n)
        if (!matchX[i]) { // only free vertices are pushed in queue and its distance set to 0. Thus already matched vertices
            dist[i] = 0;
            Q.push(i);
        }
        else dist[i] = INF;
    dist[0] = INF; // 0 is nil
    // Thus we would always start from free vertices traverse then alternating path
    // Side Notes: If we popped an already matched vertex from queue then it won't go to its matching edges neighbor as its matchY is
    while (!Q.empty()) {
        int i = Q.front(); Q.pop();
        REP(k, adj[i].size()) {
            int j = adj[i][k];
            if (dist[matchY[j]] == INF) {
                dist[matchY[j]] = dist[i] + 1;
                Q.push(matchY[j]);
            }
        }
    }
    return dist[0] != INF;
}

bool dfs(int i) {
    if (!i) return true; // to handle nil.
    REP(k, adj[i].size()) {
        int j = adj[i][k];
        if (dist[matchY[j]] == dist[i] + 1 && dfs(matchY[j])) {
            matchX[i] = j;
            matchY[j] = i;
            return true;
        }
    }
    dist[i] = INF;
    return false;
}

int hopcroft_karp() {
    int matching = 0;
    while (bfs())
        FOR (i, 1, n)
            if (!matchX[i] && dfs(i))
                matching++;
    return matching;
}

void dfs_konig(int i) {
    Free[i] = false;
    REP(k, adj[i].size()) {
        int j = adj[i][k];
        if (matchY[j] && matchY[j] != INF) {
            int x = matchY[j];
            matchY[j] = INF; // as we have undirected edge, we don't want to traverse to it
            if (Free[x]) dfs_konig(x);
        }
    }
}

void solve() {
    printf("%d", hopcroft_karp());
    FOR (i, 1, n)
        if (!matchX[i])
            dfs_konig(i); // finding Z.
    FOR (i, 1, n)
        if (matchX[i] && Free[i]) // i.e. in L but not in Z.
            printf(" r%d", i);
    FOR (j, 1, m)
        if (matchY[j] == INF) // i.e. we traversed this edge & it's in R intersection Z.
            printf(" c%d", j);
    putchar('\n');
}

void initialize() {
    FOR (i, 1, n) {
        adj[i].clear();
        matchX[i] = 0;
        Free[i] = true;
    }
}

}

memset(matchY, 0, (m + 1) * sizeof(int));
}

int ar[5];
char buff[20];
void read_line() {
    gets(buff);
    int len = strlen(buff), i = 0, m = 0;
    while (i < len)
        if (buff[i] != ' ') {
            ar[m] = 0;
            while (i < len && buff[i] != ' ')
                ar[m] = ar[m] * 10 + buff[i] - '0';
            if (ar[m] > 0)
                adj[ar[0]].pb(ar[1]);
            else i++;
        }
    }

main() {
    int k, u, v;
    while (scanf("%d %d %d ", &n, &m, &k) != EOF) {
        if (!n && !m && !k) break;
        initialize();
        while (k--) {
            read_line();
            adj[ar[0]].pb(ar[1]);
        }
        solve();
    }
}

2.6.2 Using max flow algo
Our MM problem can be reduced to max flow problem by assigning a dummy source vertex s connected to all vertices in set 1 and all vertices in set 2 are connected to dummy sink vertex t. The edges are directed (s to u, u to v, v to t) where u belongs to set 1 and v belongs to set 2). By setting capacities of all edges in this flow graph to 1, we satisfy the criteria of matching. Thus, this max flow will be equal to the max. no. of matchings on the original graph.

2.7 Paths
• An euler path is defined as a path in a graph which visits each edge of the graph exactly once. Similarly and euler tour/cycle is an euler path which starts & ends on the same vertex. A graph which has either an euler path or an euler tour is called eulerian.
• For undirectedgraph euler tour exist iff all vertices have even deg.
• For undirectedgraph euler path exists iff all except 2 vertices have even deg. This euler path will start from one of the odd deg vertices and end in the other.
• For directedgraph, euler tour exists iff every vertex has equal indeg & outdeg.
• For directedgraph, euler path exists iff at most one vertex has (outdeg) - (indeg) = 1, atmost one vertex has (indeg) - (outdeg) = 1, every other vertex has indeg = outdeg.

// Code to find euler tour (will be able to find euler path provided u
list<int> cyc; // we need list for fast insertion in the middle
void EulerTour(list<int>::iterator i, int u) {
    for (int j = 0; j < (int)AdjList[u].size(); j++) {
        ii v = AdjList[u][j];
        if (v.second) { // if this edge can still be used/not removed
            v.second = 0; // make the weight of this edge to be 0 ('re
            for (int k = 0; k < (int)AdjList[v.first].size(); k++) {
                ii uu = AdjList[v.first][k]; // remove bi-directional
                if (uu.first == u && uu.second) {
                    uu.second = 0;
                    break;
                }
            }
            EulerTour(cyc.insert(i, u), v.first);
        }
    }
}

cyc.clear();
EulerTour(cyc.begin(), A); // cyc contains an Euler tour starting at A
for (list<int>::iterator it = cyc.begin(); it != cyc.end(); it++)
    printf("%d\n", *it); // the Euler tour

2.7.1 No. of paths
• No. of paths of length L, from a to b is stored in  $M^L[a][b]$ . Note that the graph is directed and unweighted, basically  $m_{i,j} = 1$  if there is an edge from i to j. This would work even in case of multiple edges if some

```

pair of vertices (i, j) is connected with m edges then we can record this in the adjacency matrix by setting  $M[i][j] = m$ . Also this would work if the graph contains loops (a loop is an edge that connects a vertex with itself).

Proof of this algo:  $C_{k+1}[i][j] = \sum_{p=1}^n C_k[i][p] \cdot G[p][j]$

- No. of shortest paths of fixed length: We are given a directed weighted graph G,  $G[i][j]$  = weight of an edge (i, j) and is equal to infinity if there is no edge for each pair of vertices (i, j) we have to find the length of the shortest path between i and j that consists of exactly k edges.

$$L_{k+1}[i][j] = \min_{p=1, \dots, n} (L_k[i][p] + G[p][j])$$

i.e.  $L_{k+1} = L_k \odot G$  where  $A \odot B = C \Leftrightarrow C_{i,j} = \min_{p=1, \dots, n} (A_{i,p} + B_{p,j})$ .

$L_k = G^{\odot k}$ . Note that n is the number of vertices.

- The above two solns were for fixed k. However the solns can be adapted for solving problems for which the paths are allowed to contain no more than k edges. This can be done by slightly modifying the input graph. We duplicate each vertex: for each vertex v, we create one more vertex  $\hat{v}$  and add edge (v,  $\hat{v}$ ) and the loop ( $\hat{v}, \hat{v}$ ). The no. of paths between i and j with atmost k edges is the same no. as the no. of paths between i and  $\hat{j}$  with exactly  $k+1$  edges since there is a bijection that maps every path  $[p_0 = i, p_1, \dots, p_{m-1}, p_m = \hat{j}]$  of length  $m \leq k$  to the path  $[p_0 = i, p_1, \dots, p_{m-1}, p_m = j, \hat{j}, \dots, \hat{j}]$  of length  $k+1$ .

The same trick can be applied to compute the shortest paths with atmost k edges. We again duplicate each vertex and add 2 mentioned edges with weight 0.

## 2.8 SCC

Strongly Connected Components. A directed graph is strongly connected if there is a path between all pairs of vertices. A strongly connected component (SCC) of a directed graph is a maximal strongly connected subgraph

### 2.8.1 Tarjan

```
vi dfs_num, dfs_low, S, visited; // global variables
void tarjanSCC(int u) {
    dfs_low[u] = dfs_num[u] = dfsNumberCounter++; // dfs_low[u] <= dfs_num[u]
    S.push_back(u); // stores u in a vector based on order of visitation
    visited[u] = 1;
    for (int j = 0; j < (int)AdjList[u].size(); j++) {
        ii v = AdjList[u][j];
        if (dfs_num[v.first] == UNVISITED)
            tarjanSCC(v.first);
        if (visited[v.first]) // condition for update
            dfs_low[u] = min(dfs_low[u], dfs_low[v.first]);
    }
    if (dfs_low[u] == dfs_num[u]) { // if this is a root (start) of an SCC
        printf("SCC %d:", ++numSCC); // this part is done after re-visit the help
        while (1) {
            int v = S.back(); S.pop_back(); visited[v] = 0;
            printf(" %d", v);
            if (u == v) break;
        }
        printf("\n");
    }
}
// inside int main()
dfs_num.assign(V, UNVISITED); dfs_low.assign(V, 0); visited.assign(V, 0);
dfsNumberCounter = numSCC = 0;
for (int i = 0; i < V; i++)
    if (dfs_num[i] == UNVISITED)
        tarjanSCC(i);
```

### 2.8.2 Kosaraju

- It is obvious that strongly connected components do not intersect each other, i.e. this is a partition of all graph vertices. Thus we can give a definition of condensation graph  $G^{SCC}$  as a graph containing every strongly connected component as one vertex. Each vertex of the condensation graph corresponds to the strongly connected component of the graph G. There is a directed edge b/w two vertices  $C_i$  and  $C_j$  of the condensation graph iff there are 2 vertices  $u \in C_i$  and  $v \in C_j$  such that there is an edge in initial graph, i.e.  $(u, v) \in E$ . The most important property of the condensation graph is that it is acyclic.
- Let  $C$  &  $C'$  be 2 diff SCC & there is an edge  $(C, C')$  in a condensation graph then  $tout[C] > tout[C']$ , note:  $tout[C] = \max_{v_i \in C} (tout[v_i])$ .

```
vector < vector<int> > g, gr;
vector<bool> used;
vector<int> order, component;
```

```
void dfs1 (int v) {
    used[v] = true;
    for (size_t i=0; i<g[v].size(); ++i)
        if (!used[ g[v][i] ])
```

```
        dfs1 (g[v][i]);
    order.push_back (v);
}

void dfs2 (int v) {
    used[v] = true;
    component.push_back (v);
    for (size_t i=0; i<gr[v].size(); ++i)
        if (!used[ gr[v][i] ])
            dfs2 (gr[v][i]);
}

int main() {
    int n;
    ... reading n ...
    for (;;) {
        int a, b;
        ... reading next edge (a,b) ...
        g[a].push_back (b);
        gr[b].push_back (a);
    }

    used.assign (n, false);
    for (int i=0; i<n; ++i)
        if (!used[i])
            dfs1 (i);
    used.assign (n, false);
    for (int i=0; i<n; ++i) {
        int v = order[n-1-i];
        if (!used[v]) {
            dfs2 (v);
            ... printing next component ...
            component.clear();
        }
    }
}
```

## 2.9 SAT

### 2.9.1 1 SAT

$f = x_1 \wedge x_2 \wedge \dots \wedge x_n$  is satisfiable iff there isn't both  $x_i$  &  $\bar{x}_i$  in  $f$ .

### 2.9.2 2 SAT

$f = (x_1 \vee y_1) \wedge \dots \wedge (x_n \vee y_n)$  is satisfiable iff both  $x_i$  &  $\bar{x}_i$  are not in same SCC as one them has to be true and in SCC one value is true all others must be true. For each  $(x_i \vee y_i)$  add 2 edges  $\bar{x}_i \rightarrow y_i$  and  $y_i \rightarrow x_i$ .

After seeing whether the soln exists or not, soln can be constructed with the help of Kosaraju's algo, let  $comp[v]$  denote the index of strongly connected component to which the vertex v belongs. Then, if  $comp[x] < comp[\bar{x}]$  we assign x with false and true otherwise.

## 2.10 DAG

topological sort or topological ordering of a directed graph is a linear ordering of its vertices such that for every directed edge uv from vertex u to vertex v, u comes before v in the ordering.

A topological ordering is possible if and only if the graph has no directed cycles, that is, if it is a directed acyclic graph (DAG). Any DAG has at least one topological ordering.

```
void dfs (int from) {
    visited[from] = true;
    for (int i = 0; i < adjlist[from].size (); i++) {
        if (!visited[adjlist[from][i]]) dfs (adjlist[from][i]);
    }
    ts.pb (from);
}
// in main
for (int i = 0; i < V; i++) {
    if (!visited[i]) {
        dfs(i);
    }
}
reverse (ts.begin (), ts.end ());
```

### 2.10.1 SSSP

Do topological sort then relax edges according to this order.

### 2.10.2 SSLP

Simply negate all the edge weights and run SSSP as above.

Pay attention on the word "we are not allowed to go back" so don't use normal SSSP algo but relax edges according to the required order.

### 2.10.3 Counting Paths in DAG

find toposort. Set  $numPaths[firstElement] = 1$ . Then we process the remaining vertices one by one acc. to toposort. When processing a vertex u, we update each neighbour v of u by setting  $numPaths[v] += numPaths[u]$ .

### 2.10.4 Min Path cover on DAG

This is described as a problem of finding the min. no. of paths to cover each vertex on DAG. The start of each path can be arbitrary, we are just interested in min. no. of paths.

Construct a bipartite graph  $G' = (V_{out} \cup V_{in}, E')$  from  $G$  where  $V_{out/in} = \{v \in V : v \text{ has poitive out/in degree}\}$

$E' = \{(u, v) \in (V_{out}, V_{in}) : (u, v) \in E\}$

$G'$  is a bipartite graph, do max. matching on it. Say answer obtained is  $m$  that means ans is  $|V| - m$  as initially  $|V|$  vertices can be covered with  $|V|$  paths of length 0 (the vertices themselves). One matching b/w vertex  $a$  and  $b$  using edge  $(a, b)$  says that we can use one less path as edge  $(a, b)$  in  $E'$  can cover path  $a \in V_{out} \& b \in V_{in}$

### 2.11 APSP Floyd Warshalls

```
for (int k = 0; k < V; k++) {
    for (int i = 0; i < V; i++) {
        for (int j = 0; j < V; j++) {
            if (adjmat[i][j] > adjmat[i][k] + adjmat[k][j]) {
                adjmat[i][j] = adjmat[i][k] + adjmat[k][j];
                path[i][j] = path[k][j];
            }
        }
    }
}

void printPath (int u) {
    if (u == i) cout << i << " ";
    else {
        printPath (path[i][u]);
        cout << u << " ";
    }
}

// in main printPath(j).
// Initially path[i][j] = i for edge (i, j);
// in APSP problems, always do
cin >> u >> v >> wt;
adjmat[u][v] = min (graph[u][v], wt);
// very initially
if (i != j) adjmat[i][j] = inf;
else adjmat[i][j] = 0;
```

- If diagonal (initially 0) becomes negative  $\Rightarrow$  negative cycle
- This algo will still work correctly for all pair of  $i$  and  $j$  for which there doesn't exist a pth starting at  $i$ , visiting a negative cycle and end at  $j$ .
- i.e. Shortest path between 2 vertices  $i, j$  does not exist (due to presence of negative cycle) iff there exist a vertex  $t$  that is reachable from  $i$  and also from  $j$  and for which  $d[t][t] < 0$ .
- If diagonal (initially inf) becomes finite  $\Rightarrow$  cycle
- The smallest non negative  $\text{adjmat}[i][i]$  for all  $i$  is the cheapest cycle
- Transitive closure to determine if  $i$  is connected to  $j$  or not.

$\text{adjmat}[i][j] |= (\text{adjmat}[i][k] \& \text{adjmat}[k][j])$

- Diameter of a graph is maximum shortest path distance between any pair of vertices of that graph. So do simply  $\max (\text{adjmat}[i][j])$  for all  $i, j$  after doing APSP.
- SCC of a directed graph (aliter): first do transitive closure then to find all members of an SCC that contains vertex  $i$ , check all vertices  $j$ , if  $(\text{adjmat}[i][j] \&\& \text{adjmat}[j][i])$  is true then vertex  $i$  and  $j$  belong to same SCC.
- Minimax: Minimax path problem of finding the minimum of maximum edge weight among all possible paths between two vertices  $i$  to  $j$ . The reverse problem maximin is defined similarly.

$\text{adjmat}[i][j] = \min (\text{adjmat}[i][j], \max (\text{adjmat}[i][k], \text{adjmat}[k][j]))$

### 2.12 MST (Kruskal)

```
// O (ElogV)
// Connected, undirected weighted graph
vector<pair<int, ii> > edgelist;
for (int i = 0; i < E; i++) {
    cin >> u >> v >> w;
    edgelist.pb (make_pair(w, ii (u, v)));
}
sort(edgelist.begin (), edgelist.end ());
int mstCost = 0;
UFDS uf (V);
for (int i = 0; i < E and uf.numSets > 1; i++) {
    auto front = edgelist[i];
    if (!uf.isSameSet (front.second.first, front.second.second)) {
        mstCost += front.first;
        uf.unionSet (front.second.first, front.second.second);
    }
}
cout << mstCost;
```

- If maximum instead of minimum, simply sort by dec. edge weights
- Minimum spanning subgraph: first union all these fixed edges, then run MST as normal
- Minimum spanning forest (we want to form a forest of  $k$  connected components ( $k$  subtrees)) in the least cost way; soln: run kruskal until no. of connected components (numsets) equals  $k$ .
- Second best ST  $O(VE)$ . While doing this also check that in resultant ST,  $\text{numdisjointset} == 1$  or not.
- MST does not change if we add a const. weight in all edges of the graph

### 2.13 SSSP

#### 2.13.1 Dijkstra

*// Subpaths of shortest paths from  $u$  to  $v$  are shortest paths*  
*// This implementation would work even if the graph has negative edge*  
*//  $O(E \log V)$*

```
struct node {
    int cost, vertex;
    node () {}
    node (int n, int c) {
        vertex = n; cost = c;
    }
    bool operator < (const node &node) const {
        return cost > node.cost; // as priority queue is max heap
    }
}

int dijkstra (int s, int e) {
    memset (dist, inf, sizeof (dist));
    dist[s] = 0;
    priority_queue<node> pq;
    pq.push (node (s, 0));
    int from, to, wt, cost;
    while (!pq.empty ()) {
        from = pq.top ().vertex;
        cost = pq.top ().cost;
        pq.pop ();
        if (from == e) return dist[e];
        if (cost == dist[from]) { // lazily deleting
            for (int i = 0; i < adjlist[from].size (); i++) {
                to = adjlist[from][i].first;
                wt = adjlist[from][i].second;
                if (dist[to] > dist[from] + wt) {
                    dist[to] = dist[from] + wt;
                    p[to] = from;
                    pq.push (node (to, dist[to]));
                }
            }
        }
    }
}
```

- Hotel Booking Problem, sol
- Fuel Tank problem, sol
- Logical Expression, Sol: pr denotes from what grammer it is derived. Also number of functions on  $n$  variables  $= 2^{2^n}$ .

#### 2.13.2 Bellman ford

*// For negative edge weights provided we have no negative cycles.*  
*// Idea: Shortest path must have atmost  $|V| - 1$  edges.*  
*// Thus if we relax each edge  $|V| - 1$  times then we would have got*

```
vi dist (V, inf);
dist[s] = 0;
bool modified = true;
for (int i = 0; i < V - 1 and modified; i++) {
    modified = false;
    for (int u = 0; u < V; u++) {
        for (int j = 0; j < adjlist[u].size (); j++) {
            ii v = adjlist[u][j];
            if (dist[v.first] > dist[u] + v.second) {
                dist[v.first] = dist[u] + v.second;
                p[v.first] = u;
                modified = true;
            }
        }
    }
}

// to check for negative cycle
void solve() {
    vector<int> d(n);
    vector<int> p(n, -1);
    int x;
    for (int i = 0; i < n; ++i) {
        x = -1;
```

```

    for (Edge e : edges) {
        if (d[e.a] + e.cost < d[e.b]) {
            d[e.b] = d[e.a] + e.cost;
            p[e.b] = e.a;
            x = e.b;
        }
    }
}

if (x == -1) {
    cout << "No negative cycle found.";
} else {
    for (int i = 0; i < n; ++i)
        x = p[x];

    vector<int> cycle;
    for (int v = x;; v = p[v]) {
        cycle.push_back(v);
        if (v == x && cycle.size() > 1)
            break;
    }
    reverse(cycle.begin(), cycle.end());

    cout << "Negative cycle: ";
    for (int v : cycle)
        cout << v << ' ';
    cout << endl;
}

// To check for negative cycle, run this one more time
int x = -1;
for (int u = 0; u < V; u++) {
    for (int j = 0; j < adjlist[u].size(); j++) {
        int v = adjlist[u][j];
        if (dist[v.first] > dist[u] + v.second) {
            dist[v.first] = dist[u] + v.second;
            p[v.first] = u;
            x = v.first;
        }
    }
}

if (x != -1) { // negative cycle
    int y = x;
    for (int i = 0; i < n; ++i)
        y = p[y];
    vector<int> path;
    for (int cur = y; ; cur = p[cur]) {
        path.push_back(cur);
        if (cur == y && path.size() > 1)
            break;
    }
    reverse(path.begin(), path.end());
    cout << "Negative cycle: ";
    for (size_t i = 0; i < path.size(); ++i)
        cout << path[i] << ' ';
}
}

```

- Hopeless/winnable UVA 10557: Basically check for positive cycle and see if it is connected from that.
- Stop problem UVA 11280.

## 2.14 Max Flow

### 2.14.1 Edmond karp's

```

// O (V * E^2)
void augment(int v, int minEdge) { // traverse BFS spanning tree from s
    if (v == s) { f = minEdge; return; } // record minEdge in a global
    else if (p[v] != -1) { augment(p[v], min(minEdge, res[p[v]][v]));
        res[p[v]][v] -= f; res[v][p[v]] += f; }
}

// in main
mf = 0; // mf stands for max_flow
while (1) { // O(VE^2) (actually O(V^3 E) Edmonds Karp's algorithm)
    f = 0;
    // run BFS
    vi dist(MAX_V, INF); dist[s] = 0; queue<int> q; q.push(s);
    p.assign(MAX_V, -1); // record the BFS spanning tree, from s to t
    while (!q.empty()) {
        int u = q.front(); q.pop();
        if (u == t) break; // immediately stop BFS if we already reached t
        for (int v = 0; v < MAX_V; v++) // note: this part is slow
            if (res[u][v] > 0 && dist[v] == INF)
                dist[v] = dist[u] + 1, q.push(v), p[v] = u; // 3 levels
    }
}


```

```

    }
    augment(t, INF); // find the min edge weight 'f' in this path,
    if (f == 0) break; // we cannot send any more flow ('f' = 0),
    mf += f; // we can still send a flow, increase the max flow!
}

```

- Reason why we need to consider back flow: so that if by back flow we reach destination then that means we could have done it in straight way.

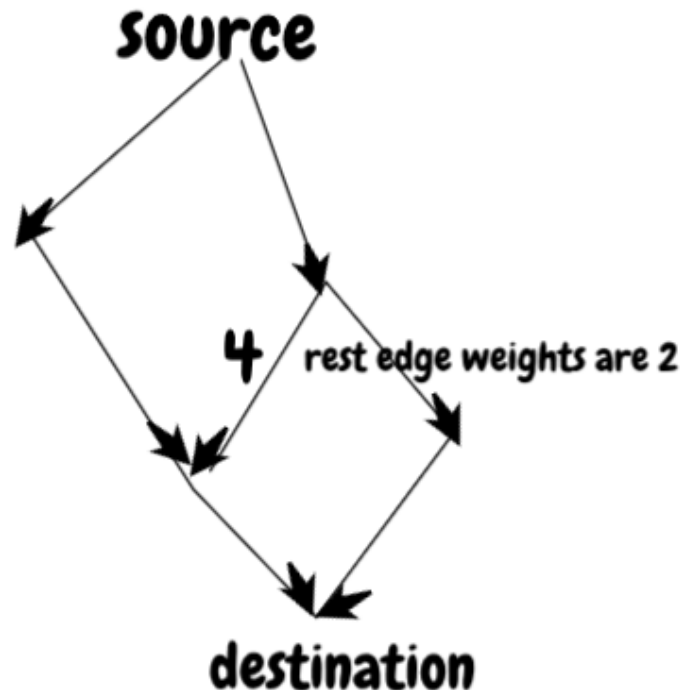

- VIMP Note: if you are traversing through all 'v' like in the code above then its fine but otherwise if you do glist[u].pb(v) you **must** also do glist[v].pb(u) but only set res[u][v].
- Lets define an s-t cut  $C = (s\text{-component}, t\text{-component})$  as a partition of  $V$  s.t. source  $s$  belongs to  $s$ -component and sink  $t$  belongs to  $t$ -component. Lets also define a cut-set to be set  $\{(u, v) \in E | u \in s\text{-comp}, v \in t\text{-comp}\}$  such that if all edges in cut-set of  $C$  are removed, max flow from  $s$  to  $t$  is 0. (i.e.  $s$  and  $t$  are disconnected). The cost of an s-t cut  $C$  is defined by the sum of capacities of edges in cut-set of  $C$ . The min cut problem (min cut) is to minimize the amount of capacity of an s-t cut. Sol: After running max flow algo, do bfs/dfs from  $s$ , all vertices reachable from  $s$  using positive weighted edges in the residual graph belong to  $s$ -comp. and remaining belong to  $t$ -comp. and  $mf = \text{min cut value}$ . This is max-flow min-cut theorem.
- Multisource/multisink: Create a supersource  $ss$  and super sink  $st$ . Connect  $ss$  with all  $s$  with infinite capacity and also connect all  $t$  with  $st$  with infinite capacity, then run edmonds karp's as per normal.
- Vertex capacities: Network flow variant where capacities are not just defined along the edges but also on the vertices. Split each  $v$  to  $vin$  and  $vout$ , reassigning its incoming/outgoing edges to  $vin/vout$  resp. and finally putting the original vertex  $v$ 's weight as the weight of edge  $vin \rightarrow vout$ . Note that this will double the number of vertices
- Max Independent paths: two paths are said to be independent if they do not share any vertex apart from  $s$  and  $t$ . Soln: construct a flow network  $N = (V, E)$  from  $G$  with vertex capacities, where  $N$  is the carbon copy of  $G$  except that the capacity of each  $v$  in  $V$  is 1 (i.e. each vertex can only be used once) and the capacity of each edge  $e$  in  $E$  is also 1. Then run edmonds karp's algo as per normal.
- Max edge disjoint paths: finding the maximum number of edge disjoint paths from  $s$  to  $t$  is similar to finding max independent paths. The only difference is that this time we do not have any vertex capacity (i.e. 2 edge disjoint paths can still share the same vertex)
- Crimewave, sol

### • MWIS on a bipartite graph

Problem is equivalent to finding the minimum weight vertex cover in the graph. The latter can be solved using maximum flow techniques: introduce a super-source  $S$  and a super-sink  $T$ . connect the nodes on the left side of the bipartite graph to  $S$ , via edges that have their weight as capacity. Do the same thing for the right side and sink  $T$ . Assign infinite capacity to the edges of the original graph. Now find the minimum  $S$ - $T$  cut in the constructed network. The value of the cut is the weight of the minimum vertex cover. To see why this is true, think about the cut edges: They can't be the original

edges, because those have infinite capacity. If a left-side edge is cut, this corresponds to taking the corresponding left-side node into the vertex cover. If we do not cut a left-side edge, we need to cut all the right-side edges from adjacent vertices on the right side.

Thus, to actually reconstruct the vertex cover, just collect all the vertices that are adjacent to cut edges, or alternatively, the left-side nodes not reachable from  $S$  and the right-side nodes reachable from  $S$ .

## 2.15 Minimum Cost Flow

Given a network  $G$  consisting of  $n$  vertices and  $m$  edges. For each edge (generally speaking, oriented edges, but see below), the capacity (a non-negative integer) and the cost per unit of flow along this edge (some integer) are given. Also the source  $s$  and the sink  $t$  are marked.

For a given value  $K$ , we have to find a flow of this quantity, and among all flows of this quantity we have to choose the flow with the lowest cost. This task is called minimum-cost flow problem.

Sometimes the task is given a little differently: you want to find the maximum flow, and among all maximal flows we want to find the one with the least cost. This is called the minimum-cost maximum-flow problem.

Both these problems can be solved effectively with the algorithm of successive shortest paths.

First we only consider the simplest case, where the graph is oriented, and there is at most one edge between any pair of vertices (e.g. if  $(i, j)$  is an edge in the graph, then  $(j, i)$  cannot be part in it as well).

Let  $U_{ij}$  be the capacity of an edge  $(i, j)$  if this edge exists. And let  $C_{ij}$  be the cost per unit of flow along this edge  $(i, j)$ . And finally let  $F_{i,j}$  be the flow along the edge  $(i, j)$ . Initially all flow values are zero.

We modify the network as follows: for each edge  $(i, j)$  we add the reverse edge  $(j, i)$  to the network with the capacity  $U_{ji} = 0$  and the cost  $C_{ji} = -C_{ij}$ . Since, according to our restrictions, the edge  $(j, i)$  was not in the network before, we still have a network that is not a multigraph (graph with multiple edges). In addition we will always keep the condition  $F_{ji} = -F_{ij}$  true during the steps of the algorithm.

We define the residual network for some fixed flow  $F$  as follow (just like in the Ford-Fulkerson algorithm): the residual network contains only unsaturated edges (i.e. edges in which  $F_{ij} < U_{ij}$ ), and the residual capacity of each such edge is  $R_{ij} = U_{ij} - F_{ij}$ .

Now we can talk about the algorithms to compute the minimum-cost flow. At each iteration of the algorithm we find the shortest path in the residual graph from  $s$  to  $t$ . In contrary to Edmonds-Karp we look for the shortest path in terms of the cost of the path, instead of the number of edges. If there doesn't exist a path anymore, then the algorithm terminates, and the stream  $F$  is the desired one. If a path was found, we increase the flow along it as much as possible (i.e. we find the minimal residual capacity  $R$  of the path, and increase the flow by it, and reduce the back edges by the same amount). If at some point the flow reaches the value  $K$ , then we stop the algorithm (note that in the last iteration of the algorithm it is necessary to increase the flow by only such an amount so that the final flow value doesn't surpass  $K$ ).

It is not difficult to see, that if we set  $K$  to infinity, then the algorithm will find the minimum-cost maximum-flow. So both variations of the problem can be solved by the same algorithm.

The case of an undirected graph or a multigraph doesn't differ conceptually from the algorithm above. The algorithm will also work on these graphs. However it becomes a little more difficult to implement it.

An undirected edge  $(i, j)$  is actually the same as two oriented edges  $(i, j)$  and  $(j, i)$  with the same capacity and values. Since the above-described minimum-cost flow algorithm generates a back edge for each directed edge, so it splits the undirected edge into 4 directed edges, and we actually get a multigraph.

How do we deal with multiple edges? First the flow for each of the multiple edges must be kept separately. Secondly, when searching for the shortest path, it is necessary to take into account that it is important which of the multiple edges is used in the path. Thus instead of the usual ancestor array we additionally must store the edge number from which we came from along with the ancestor. Thirdly, as the flow increases along a certain edge, it is necessary to reduce the flow along the back edge. Since we have multiple edges, we have to store the edge number for the reversed edge for each edge.

There are no other obstructions with undirected graphs or multigraphs. Sample Prob: UVA 10594, sol

## 2.16 Kirchhoff's matrix tree theorem

Problem: You are given a connected undirected graph (with possible multiple edges) represented using an adjacency matrix. Find the number of different spanning trees of this graph.

Let  $A$  be the adjacency matrix of the graph:  $A_{u,v}$  is the number of edges between  $u$  and  $v$ . Let  $D$  be the degree matrix of the graph: a diagonal matrix with  $D_{u,u}$  being the degree of vertex  $u$  (including multiple edges and loops - edges which connect vertex  $u$  with itself). The Laplacian matrix of the graph is defined as  $L = D - A$ . According to Kirchhoff's theorem, all cofactors of this matrix are equal to each other, and they are equal to the number of spanning trees of the graph. The  $(i, j)$  cofactor of a matrix is

the product of  $(-1)^{i+j}$  with the determinant of the matrix that you get after removing the  $i$ -th row and  $j$ -th column.

Thus we can get answer in  $O(n^3)$ .

## 2.17 Counting Labeled graphs

### 2.17.1 Labeled graphs

Let the number of vertices in a graph be  $n$ . We have to compute the number  $G_n$  of labeled graphs with  $n$  vertices (labeled means that the vertices are marked with the numbers from 1 to  $n$ ). The edges of the graphs are considered undirected, and loops and multiple edges are forbidden.

We consider the set of all possible edges of the graph. For each edge  $(i, j)$  we can assume that  $i < j$  (because the graph is undirected, and there are no loops). Therefore the set of all edges has the cardinality  $\binom{n}{2}$ , i.e.  $\frac{n(n-1)}{2}$ .

Since any labeled graph is uniquely determined by its edges, the number of labeled graphs with  $n$  vertices is equal to:

$$G_n = 2^{\frac{n(n-1)}{2}}$$

### 2.17.2 Connected labeled graphs

Here, we additionally impose the restriction that the graph has to be connected.

Let's denote the required number of connected graphs with  $n$  vertices as  $C_n$ .

We will first discuss how many disconnected graphs exist. Then the number of connected graphs will be  $G_n$  minus the number of disconnected graphs. Even more, we will count the number of disconnected, rooted graphs. A rooted graph is a graph, where we emphasize one vertex by labeling it as root. Obviously we have  $n$  possibilities to root a graph with  $n$  labeled vertices, therefore we will need to divide the number of disconnected rooted graphs by  $n$  at the end to get the number of disconnected graphs.

The root vertex will appear in a connected component of size  $1, \dots, n-1$ . There are  $k \binom{n}{k} C_k G_{n-k}$  graphs such that the root vertex is in a connected component with  $k$  vertices (there are  $\binom{n}{k}$  ways to choose  $k$  vertices for the component, these are connected in one of  $C_k$  ways, the root vertex can be any of the  $k$  vertices, and the remainder  $n-k$  vertices can be connected/disconnected in any way, which gives a factor of  $G_{n-k}$ ). Therefore the number of disconnected graphs with  $n$  vertices is:

$$\frac{1}{n} \sum_{k=1}^{n-1} k \binom{n}{k} C_k G_{n-k}$$

And finally the number of connected graphs is:

$$C_n = G_n - \frac{1}{n} \sum_{k=1}^{n-1} k \binom{n}{k} C_k G_{n-k}$$

### 2.17.3 Labeled graphs with $k$ connected components

Based on the formula from the previous section, we will learn how to count the number of labeled graphs with  $n$  vertices and  $k$  connected components.

This number can be computed using dynamic programming. We will compute  $D[i][j]$  - the number of labeled graphs with  $i$  vertices and  $j$  components - for each  $i \leq n$  and  $j \leq k$ .

Let's discuss how to compute the next element  $D[n][k]$  if we already know the previous values. We use a common approach, we take the last vertex (index  $n$ ). This vertex belongs to some component. If the size of this component be  $s$ , then there are  $\binom{n-1}{s-1}$  ways to choose such a set of vertices, and  $C_s$  ways to connect them. After removing this component from the graph we have  $n-s$  remaining vertices with  $k-1$  connected components. Therefore we obtain the following recurrence relation:

$$D[n][k] = \sum_{s=1}^n \binom{n-1}{s-1} C_s D[n-s][k-1]$$

## 2.18 Heavy Light Decomposition

We will divide the tree into vertex-disjoint chains (Meaning no two chains has a node in common) in such a way that to move from any node in the tree to the root node, we will have to change at most  $\log N$  chains. Now the path from any node  $A$  to any node  $B$  can be broken into two paths:  $A$  to  $LCA(A, B)$  and  $B$  to  $LCA(A, B)$ .

We already know that queries in each chain can be answered with  $O(\log N)$  complexity and there are at most  $\log N$  chains we need to consider per path. So on the whole we have  $O(\log^2 N)$  complexity solution.

Special Child : Among all child nodes of a node, the one with maximum sub-tree size is considered as Special child. Each non leaf node has exactly one Special child.

Special Edge : For each non-leaf node, the edge connecting the node with its Special child is considered as Special Edge.

What happens if you go to each node, find the special child and special edge and mark all special edges with green color and other edges are



still black? Well, what happens is HLD. What would the graph look like then? Colorful yes. Not just colorful. Green edges actually forms vertex disjoint chains and black edges will be the connectors between chains. Let us explore one chain, start at root, move to the special child of root (there is only one special child, so easy pick), then to its special child and so on until you reach a leaf node, what you just traveled is a chain which starts at root node. Let us assume that root node has  $m$  child nodes. Note that all  $m-1$  normal child nodes are starting nodes of some other chains.

When you move from a node to any of its normal child, the sub-tree size is at most half the sub-tree size of current node.

Changing a chain means we are moving from a node to a normal child, so each time we change chain we are at least halving the sub-tree size. For a tree with size  $N$ , we can halve it at most  $\log N$  times.

Timus 1553, Sol

## 2.19 More Problems

- UVA 928: just bfs with dp
- That worst feast problem UVA 10246, sol
- Atcoder
- 986C AND graph, Sol

## 3 Some Basic

- To save memory don't use c++ things like string, vector, map, etc.
- In case of vector, string it's better to reserve some size before hand as otherwise size gets incremented by a factor of 2.
- Doing cout five million times is far worse than storing the results in array and doing cout only once.

• `#pragma GCC optimize("Ofast")` // tells the compiler to optimize the code for speed to make it as fast as possible (and not look for the better way is, considering a set of numbers from 1 to  $n$ . The first combination will be 1, 2, ...,  $k$ . Now let's see how to find the combination that immediately follows this, lexicographically. To do so, we consider our current combination, and find the rightmost element that has not yet reached its highest possible value. Once finding this element, we increment it by 1, and assign the lowest valid value to all subsequent elements.

```
// Backtracking
void bktk () {
    if (state == complete ) {
        // process it
    } else {
        for each possible next move P {
            apply move P;
            bktk ();
            undo move P;
        }
    }
}

// ex1: generating permutations  $O(n! * n)$ 
// better use next_permutation.
// think of doing such things for  $n \leq 11$ .  $11! \sim 4 * 10^7$ 
void bktk () {
    if (perm.size () == n) {
        // process permutation
    } else {
        for (int i = 0; i < n; i++) {
            if (!chosen[i]) {
                chosen[i] = true;
                perm.push_back (i);
                bktk ();
                perm.pop_back ();
                chosen[i] = false;
            }
        }
    }
}

// ex2: generating subsets
void bktk (int k) {
    if (k == n) {
        // process subset
    } else {
        // Move one is to not push it and move 2 is to consider it.
        bktk (k + 1);
        subset.push_back(k);
        bktk (k + 1);
        subset.pop_back();
    }
}

// better way to generate subsets  $O(2^n)$  so valid for  $n \leq 25$ .
//  $1 \ll 0 = 1$ .
for (int i = 0; i < (1 << n); i++) {
    for (int b = 0; b < n; b++) {
        if (i & (1 << b)) {
            subset.pb (b);
        }
        // process subset
    }
}
}
```

- $\leq 10^8 \Rightarrow 2$  sec.

- Remember that just like we could have solved this using binary search (other than simple DP), we can actually solve many problems which ask to find optimal value using binary search.
- Outputting a double or even int may have an exponential form so it is better to do  $\ll$  fixed  $\ll$  s...(0).
- Range of double is  $10^{15}$
- Range of int64 is  $9 * 10^{18}$
- Inbuilt swap can be used to basically swap anything.
- $\text{ceil}(m/a) = (m + a - 1)/m$
- Consider  $m*n$  surface, you have a sq. of size  $a*a$ . Min. no. of squares to cover completely the surface? Ans:  $\text{ceil}(m/a) * \text{ceil}(n/a)$
- Not necessary to cover the border cells? Ans:  $m/a * n/a$
- Note: Sides of the square must be parallel to grid.
- lower\_bound Returns an iterator pointing to the first element in the range [first,last) which does not compare less than val. Unlike upper\_bound, the value pointed by the iterator returned by this function may also be equivalent to val, and not only greater. If all the element in the range compare less than val, the function returns last.
- upper\_bound Returns an iterator pointing to the first element in the range [first,last) which compares greater than val. If no element in the range compares greater than val, the function returns last.

• `/* we need to do binary search for range [st + 1, en - 1], i.e.`  
`if (binary_search (arr.begin() + st + 1, arr.begin() + en`

- If you want to iterate through subsets of fixed size  $k$ , you may want to use  $k$  for loops.

• For a better way is, considering a set of numbers from 1 to  $n$ . The first combination will be 1, 2, ...,  $k$ . Now let's see how to find the combination that immediately follows this, lexicographically. To do so, we consider our current combination, and find the rightmost element that has not yet reached its highest possible value. Once finding this element, we increment it by 1, and assign the lowest valid value to all subsequent elements.

```
bool next_combination(vector<int>& a, int n) {
    int k = (int)a.size();
    for (int i = k - 1; i >= 0; i--) {
        if (a[i] < n - k + i + 1) {
            a[i]++;
            for (int j = i + 1; j < k; j++)
                a[j] = a[j - 1] + 1;
            return true;
        }
    }
    return false;
}
```

- UVA 410 Load Balancing, sol
- ferry loading, sol, just know that best time is last cars arrival +  $t/2$ , so just achieve it.

One can write  $i = (m \% n == 0 ? n - 1 : m \% n - 1)$  as  
 $i = (m + n - 1) \% n$ .

We can use `cin.peek ()` to see the next available character

- `1011101010000000 >>= 8 => num is 10111010` similarly `num <<= 8`
- tictactoe game starts by placing 'X' so if in between  $O_{cnt} = X_{cnt}$  and X has win that means invalid game. And if  $O_{cnt} + 1 = X_{cnt}$  and O has win that means not a valid game.
- 

$$24_{\text{hours}} = 10_{\text{decimalHours}} \quad (13)$$

$$24 * 60 * 60 * 100_{\text{normalCC}} = 10 * (100^3)_{\text{decimalCC}} \quad (14)$$

$$1_{\text{decimalCC}} = 0.864_{\text{normalCC}} \quad (15)$$

that means  $1_{nCC} * (1_{dCC}/0.864_{nCC})$  Would give us dCC

- XOR is associative and commutative
- $x \wedge x = 0$ ,  $x \wedge 0 = x$ .
- $x \wedge (\text{string of 1's, i.e. } (0)) = \sim x$
- $x \wedge y = x \wedge z$  implies  $y = z$ . (how? just take xor with  $x$  on both sides)
- Swapping 2 nos with XOR

So whenever you see this, think of iterating through subsets

```
x = x ^ y;
y = x ^ y; // i.e. (A ^ B) ^ B = A
x = x ^ y; // i.e. (A ^ B) ^ A = B
```

- UVA 10309 Lights off:

This problem is solved using complete search technique. Notice

- `while (first || cin >> temp) { // something }`
- **Interval Covering:** Tell the minimum no. of intervals to cover the entire big interval.



3. Reverse postfix and output it.

- **Algorithm to convert from postfix to infix:**

1. If the symbol is an operand, push it onto stack
2. Else, if there are fewer than two values in stack, show error. Else, pop top 2 expressions from stack (say e1, e2), put the operator (op) between them and push to stack ((e1 op e2))
3. After reading postfix expression, Stack should have only one item which is our answer

- **Merge Sort**

```
// IMP NOTE: In both bubble sort and merge sort we are getting minimum no. of swaps to sort an array (i.e. by swapping adjacent elements)
void merge(int arr[], int l, int m, int r)
{
    int i, j, k;
    int n1 = m - l + 1;
    int n2 = r - m;

    /* create temp arrays */
    int L[n1], R[n2];

    /* Copy data to temp arrays L[] and R[] */
    for (i = 0; i < n1; i++)
        L[i] = arr[l + i];
    for (j = 0; j < n2; j++)
        R[j] = arr[m + 1 + j];

    /* Merge the temp arrays back into arr[l..r]*/
    i = 0; // Initial index of first subarray
    j = 0; // Initial index of second subarray
    k = l; // Initial index of merged subarray
    while (i < n1 && j < n2)
    {
        if (L[i] <= R[j])
        {
            arr[k] = L[i];
            i++;
        }
        else // i.e we need to swap
        {
            arr[k] = R[j];
            swaps += n1 - i; // Most important line. basically once we are doing arr[k] = R[j] that means we are
            // putting R[j] before each of n1-i elements thus there are that many swaps.
            j++;
        }
        k++;
    }

    /* Copy the remaining elements of L[], if there are any */
    while (i < n1)
    {
        arr[k] = L[i];
        i++;
        k++;
    }

    /* Copy the remaining elements of R[], if there are any */
    while (j < n2)
    {
        arr[k] = R[j];
        j++;
        k++;
    }
}

/* l is for left index and r is right index of the sub-array of arr to be sorted */
void mergeSort(int arr[], int l, int r)
{
    if (l < r)
    {
        // Same as (l+r)/2, but avoids overflow for // large l and h
        int m = l + (r - l) / 2;

        // Sort first and second halves
        mergeSort(arr, l, m);
        mergeSort(arr, m + 1, r);

        merge(arr, l, m, r);
    }
}
```

```
}
```

- set is like min heap. Only unique elements are present.
- On a line you are given the x coordinates of various houses, tell the house of vito (h) such that  $\sum |h_i - h|$  is minimised. **Obs1:** h could be any of  $h_i$  so  $O(n^2)$  algo. will work. **Obs2:** Taking derivative we get  $i - j = 0$  i.e.  $i = j = n/2$ , that means simply sort and output the middlemost house.

**Note:** Some times the math become cumbersome, in such cases, use **ternary search**

- **Prob:** n people have to cross the bridge, one torch, atmost 2 can travel **Sol:** if  $n = 3 \Rightarrow \text{time} = x + y + z$ , if  $n \geq 4$  let A, B, a, b be the fastest, second fastest, slowest, second slowest resp. **Goal:** Get the slowest members to the other side. So choose the best among the two options.

**option 1:** Fastest member does back and forth.

**option 2:** The two fastest members go, allowing the two slowest two to go together.

- **Inversions:** From a permutation, parity of number of swaps needed to get to the identical permutation is same as parity of inversion count of this permutation.

Parity of inversions can be calculated in  $O(n)$  by finding the number of cycles. Consider the permutation [5, 2, 4, 3, 6, 1], if we view the permutation as a mapping from [1, 2, 3, 4, 5, 6] to [5, 2, 4, 3, 6, 1] the permutation can be decomposed into disjoint cycles. A cycle is a subset of elements that map to each other. For example, 1 gets mapped to 5, which gets mapped to 6, which gets mapped back to 1. So one cycle is [1, 5, 6]. The other cycles are [2] and [3, 4]. Thus the no. of cycles for this permutation is 3. Parity of  $n - \text{no. of cycles} = \text{parity of inversions}$ .

```
for (int i = 1; i <= n; i++) { // 1 indexed
    if (was[i]) continue;
    cyc++;
    int p = i;
    while (!was[p]) {
        was[p] = 1;
        p = a[p];
    }
}
```

- Exact value of number of inversions can be calculated in  $(n \log(n))$  by using segment trees.

- **Prob:** You are given two positive integer numbers a and b. Permute (change order) of the digits of a to construct maximal number not exceeding b.

**Sol:** Take the number as string. sort string a, then for each  $i \in [1, n]$  swap it with j trying from n to i+1 such that it is  $\leq b$  (normal string comparison can be used).

- **Prob:** From a digraph, remove atmost one edge so that it becomes DAG.

**Sol:** Get any one cycle then iteratively try to remove each edge and see if it makes it DAG or not.

- **UFDS**

```
struct UFDS {
    vector<int> p, rank, setSizes;
    int numSets;
    UFDS(int N) {
        numSets = N;
        rank.assign(N, 0);
        p.assign(N, 0);
        for (int i = 0; i < N; i++)
            p[i] = i;
        setSizes.assign(N, 1);
    }
    int findSet(int i) {
        return (p[i] == i) ? i : p[i] = findSet(p[i]);
    }
    bool isSameSet(int i, int j) {
        return findSet(i) == findSet(j);
    }
    void unionSet(int i, int j) {
        if (!isSameSet(i, j)) {
            int x = findSet(i), y = findSet(j);
            if (rank[x] > rank[y]) {
                setSizes[x] += setSizes[y];
                p[y] = x;
            } else {
                setSizes[y] += setSizes[x];
                p[x] = y;
                if (rank[x] == rank[y])
                    rank[y]++;
            }
        }
    }
}
```

```

    }
    numSets--;
}
}
int setSize(int i) {
    return setSizes[findSet(i)];
}
int numDisjointSets() {
    return numSets;
}
};

```

- UVA 10158 Prob, UVA 10158 Sol
- Imbalance of a tree, Sol, summation(max - min) is same as summation(max) - summation(min).
- Party Lemonade, Sol
- Jamie and binary sequence, Sol.
- Prime gift, Sol. awesome 2 pointers problem.
- Fishes, Sol.
- Max 1D Range Sum (kadane)

```

sum = ans = 0;
finish = -1;
local_start = 0;
for (int i = 0; i < n; i++) {
    sum += A[i];
    if (sum > ans) {
        ans = sum;
        start = local_start;
        finish = i;
    }
    if (sum < 0) {
        sum = 0;
        local_start = i + 1;
    }
}

```

// if instead of maximum you want to find minimum, simply negate all terms. As suppose maximum sum is (ak, a\_{k+1}, ..., a\_{k+l}) and remove it from S.

- Max 2D range sum, algo1

```

// grid need not be square
// O(n^4)
// Commented part shows for torus
cin >> n;
for (int i = 0; i < n; i++) { // < 2n
    for (int j = 0; j < n; j++) { // < 2n
        cin >> A[i][j];
        /*
        if (i < n and j < n) {
            cin >> A[i][j];
            A[i + n][j] = A[i][j + n] = A[i + n][j + n] = A[i][j];
        }
        */
        if (i) A[i][j] += A[i - 1][j];
        if (j) A[i][j] += A[i][j - 1];
        if (i and j) A[i][j] -= A[i - 1][j - 1];
    }
    int maxSubRect = -127 * 100 * 100;
    for (int i = 0; i < n; i++) {
        for (int j = 0; j < n; j++) {
            for (int k = i; k < n; k++) { // < i + n
                for (int l = j; l < n; l++) { // < j + n
                    subRect = A[k][l];
                    if (i) subRect -= A[i - 1][l];
                    if (j) subRect -= A[k][j - 1];
                    if (i and j) subRect += A[i - 1][j - 1];
                    maxSubRect = max(maxSubRect, subRect);
                }
            }
        }
    }
}
// "No tree" => make tree (1) = -inf
// no tree (0) = 1.
}

```

- Max 2D range sum, algo1

```

// O(n^3)
int maxSum2D () {
    int maxsum = INT_MIN, finallleft, finalright, finaltop, finalbottom;
    for (int leftc = 0; leftc < COL; leftc++) {
        vector<int> temp (ROW, 0);
        for (int rightc = leftc; rightc < COL; rightc++) {
            for (int i = 0; i < ROW; i++) {
                temp[i] += M[i][rightc]
            }
        }
    }
}

```

```

}
int rstart, rend;
sum = kadane (temp, rstart, rend);
// kadane will give us rstart and rend
if (sum > maxsum) {
    maxsum = sum;
    finallleft = left;
    finalright = right;
    finaltop = rstart;
    finalbottom = rend;
}
}
}
}
}

```

- Given an  $n*m$  grid with each cell containing either 0 or 1, count how many rectangles can be formed by using the 1s (UVA 10502), Precalculate array  $sum[i][j]$ , the numbers of 1 from  $graph[1][1]$  to  $graph[i][j]$  (index starting from 1 would be easier to deal with around edges) using  $sum[i][j] = sum[i - 1][j] + sum[i][j - 1] - sum[i - 1][j - 1] + graph[i][j] - '0'$ . Thus use algo1 of max 2d range. Then we could iterate through all possible rectangle in the given size in  $O(n^4)$
- A problem is said to have optimal substructure if an optimal solution can be constructed from optimal solutions of its subproblems.
- A problem must exhibit these two properties in order for a greedy algorithm to work.

- It has optimal substructures

- It has the greedy property (if we make a choice that seems like the best at the moment and proceed to solve the remaining subproblem, we reach the optimal soln. We will never have to reconsider our previous choices)

- **Stack Sorting:** If there exist a way to perform the operations such that array b is sorted in non descending order in the end then array a is called stack sortable. Operations available:

1. Take the first element of a, push it into S and remove it from a.
2. Take the top element from S, append it to the end of array b and remove it from S.

If you think about it you can see that problem occurs if we have sequence (x, y, z) where  $z < x < y$ . So after an element we want either all elements which are smaller than it to come first then elements which are bigger than it or all elements bigger than it. So say if we are given prefix of some permutation as [6, 3, 1] and asked to find lexicographic sequence to append such that it is stack sortable then we can read prefix number one by one and do

6 + A(1, 5) + A(7, 7)

6 + 3 + A(1, 2) + A(4, 5) + A(7, 7)

6 + 3 + 1 + 2 + 5 + 4 i.e. reverse each A(l, r) + 7

And if at any time we couldn't proceed as desired that means soln does not exist.

- stoi, stol, stoll, stod

- to.string

- `int __builtin_clz(int x);` // number of leading zero
- `int __builtin_ctz(int x);` // number of trailing zero
- `int __builtin_clzll(long long x);` // number of leading zero
- `int __builtin_ctzll(long long x);` // number of trailing zero
- `int __builtin_popcount(int x);` // number of 1-bits in x
- `int __builtin_popcountll(long long x);` // number of 1-bits in x

`lsb(n): (n & -n);` // last bit (smallest)

`floor(log2(n)): 31 - __builtin_clz(n | 1);`

`floor(log2(n)): 63 - __builtin_clzll(n | 1);`

// Suppose we have a pattern of N bits set to 1 in an integer and

`unsigned int v;` // current permutation of bits

`unsigned int w;` // next permutation of bits

`unsigned int t = v | (v - 1);` // t gets v's least significant 0 bit  
 // Next set to 1 the most significant bit to change,  
 // set to 0 the least significant ones, and add the necessary 1 bit  
`w = (t + 1) | (((~t & -~t) - 1) >> (__builtin_ctz(v) + 1));`

### 3.1 Meet in the middle

Given a set of n integers where  $n \leq 40$ . Each of them is at most  $10^{12}$ , determine the maximum sum subset having sum less than or equal S where  $S \leq 10^{13}$ .

Example:

Input : set[] = 45, 34, 4, 12, 5, 2 and S = 42 Output : 41 Maximum possible subset sum is 41 which can be obtained by summing 34, 5 and 2.

Input : Set[] = 3, 34, 4, 12, 5, 2 and S = 10 Output : 10 Maximum possible subset sum is 10 which can be obtained by summing 2, 3 and 5.

A Brute Force approach to solve this problem would be find all possible subset sums of N integers and check if it is less than or equal S and keep track of such a subset with maximum sum. The time complexity using

this approach would be  $O(2^n)$  and  $n$  is at most 40.  $2^{40}$  will be quite large and hence we need to find more optimal approach.

Meet in the middle is a search technique which is used when the input is small but not as small that brute force can be used. Like divide and conquer it splits the problem into two, solves them individually and then merge them. But we can't apply meet in the middle like divide and conquer because we don't have the same structure as the original problem.

Split the set of integers into 2 subsets say A and B. A having first  $n/2$  integers and B having rest. Find all possible subset sums of integers in set A and store in an array X. Similarly calculate all possible subset sums of integers in set B and store in array Y. Hence, Size of each of the array X and Y will be at most  $2^{n/2}$ . Now merge these 2 subproblems. Find combinations from array X and Y such that their sum is less than or equal to S. One way to do that is simply iterate over all elements of array Y for each element of array X to check the existence of such a combination. This will take  $O((2^{n/2})^2)$  which is equivalent to  $O(2^n)$ . To make it less complex, first sort array Y and then iterate over each element of X and for each element  $x$  in X use binary search to find maximum element  $y$  in Y such that  $x + y \leq S$ . Binary search here helps in reducing complexity from  $2^n$  to  $2^{n/2} \log 2^{n/2}$  which is equivalent to  $2^{n/2} * n$ .

```
// C++ program to demonstrate working of Meet in the
// Middle algorithm for maximum subset sum problem.
#include <bits/stdc++.h>
using namespace std;
typedef long long int ll;
ll X[2000005], Y[2000005];

// Find all possible sum of elements of a[] and store
// in x[]
void calcsubarray(ll a[], ll x[], int n, int c)
{
    for (int i=0; i<=(1<<n); i++)
    {
        ll s = 0;
        for (int j=0; j<n; j++)
            if (i & (1<<j))
                s += a[j+c];
        x[i] = s;
    }
}

// Returns the maximum possible sum less or equal to S
ll solveSubsetSum(ll a[], int n, ll S)
{
    // Compute all subset sums of first and second
    // halves
    calcsubarray(a, X, n/2, 0);
    calcsubarray(a, Y, n-n/2, n/2);

    int size_X = 1<<(n/2);
    int size_Y = 1<<(n-n/2);

    // Sort Y (we need to do doing binary search in it)
    sort(Y, Y+size_Y);

    // To keep track of the maximum sum of a subset
    // such that the maximum sum is less than S
    ll max = 0;

    // Traverse all elements of X and do Binary Search
    // for a pair in Y with maximum sum less than S.
    for (int i=0; i<size_X; i++)
    {
        if (X[i] <= S)
        {
            // lower_bound() returns the first address
            // which has value greater than or equal to
            // S-X[i].
            int p = lower_bound(Y, Y+size_Y, S-X[i]) - Y;

            // If S-X[i] was not in array Y then decrease
            // p by 1
            if (p == size_Y || Y[p] != (S-X[i]))
                p--;

            if ((Y[p]+X[i]) > max)
                max = Y[p]+X[i];
        }
    }
    return max;
}
```

```
// Driver code
int main()
{
    ll a[] = {3, 34, 4, 12, 5, 2};
    int n=sizeof(a)/sizeof(a[0]);
    ll S = 10;
    printf("Largest value smaller than or equal to given "
           "sum is %lld\n", solveSubsetSum(a,n,S));
    return 0;
}
```

Output: Largest value smaller than or equal to given sum is 10

### 3.2 To find subarray (contiguous) with maximum average and of length k

It doesn't make sense to introduce average here as our length is fixed, so it just asks to find maximum sum subarray of length  $k$ . Which is easy to compute by simply using sliding window.

```
// C++ program to find maximum average subarray
// of given length.
#include <bits/stdc++.h>
using namespace std;

// Returns beginning index of maximum average
// subarray of length 'k'
int findMaxAverage(int arr[], int n, int k)
{
    // Check if 'k' is valid
    if (k > n)
        return -1;

    // Compute sum of first 'k' elements
    int sum = arr[0];
    for (int i=1; i<k; i++)
        sum += arr[i];

    int max_sum = sum, max_end = k-1;

    // Compute sum of remaining subarrays
    for (int i=k; i<n; i++)
    {
        int sum = sum + arr[i] - arr[i-k];
        if (sum > max_sum)
        {
            max_sum = sum;
            max_end = i;
        }
    }

    // Return starting index
    return max_end - k + 1;
}

// Driver program
int main()
{
    int arr[] = {1, 12, -5, -6, 50, 3};
    int k = 4;
    int n = sizeof(arr)/sizeof(arr[0]);
    cout << "The maximum average subarray of "
           "length "<< k << " begins at index "
           << findMaxAverage(arr, n, k);
    return 0;
}
```

### 3.3 To find subarray (contiguous) with maximum average and length more than k

Clearly we could have done this in  $O(n^2)$  but I'll describe  $O(n \log n)$  soln below.

1. Binary search for the maximum average (let it be  $x$ )
2. Subtract  $x$  from every element of array  
Now the problem reduces to finding longest subarray with sum  $\geq 0$  as then average would be  $\geq 0$ .
3. Replace  $a_i$  by the partial sums  $S_i = \sum_{j=1}^i a_j$   
Now we are looking for a pair  $0 \leq l \leq r \leq N$  s.t.  $S_r - S_{l-1} \geq 0$  and  $r - (l - 1) \geq k$ .
4. Mark the positions of minimas of  $S_i$  from left to right in array A and position for maximums  $S_i$  from right to left in array B of an array containing S.
5. Do 2 pointers technique now.



```
// This is the code for steps 2-5.
int maxIndexDiff(int arr[], int n)
{
    int maxDiff;
    int i, j;

    int LMin[n], RMax[n];

    // Construct LMin[] such that LMin[i]
    // stores the minimum value
    // from (arr[0], arr[1], ... arr[i])
    LMin[0] = arr[0];
    for (i = 1; i < n; ++i)
        LMin[i] = min(arr[i], LMin[i - 1]);

    // Construct RMax[] such that RMax[j]
    // stores the maximum value
    // from (arr[j], arr[j+1], ... arr[n-1])
    RMax[n - 1] = arr[n - 1];
    for (j = n - 2; j >= 0; --j)
        RMax[j] = max(arr[j], RMax[j + 1]);

    // Traverse both arrays from left to right
    // to find optimum j - i
    // This process is similar to merge()
    // of MergeSort
    i = 0, j = 0, maxDiff = -1;
    while (j < n && i < n) {
        if (LMin[i] < RMax[j]) {
            maxDiff = max(maxDiff, j - i);
            j = j + 1;
        }
        else
            i = i + 1;
    }

    return maxDiff + 1;
}

// utility Function which subtracts X from all
// the elements in the array
void modifyarr(int arr[], int n, int x)
{
    for (int i = 0; i < n; i++)
        arr[i] = arr[i] - x;
}

// Calculating the prefix sum array
// of the modified array
void calcprefix(int arr[], int n)
{
    int s = 0;
    for (int i = 0; i < n; i++) {
        s += arr[i];
        arr[i] = s;
    }
}

// Function to find the length of the longest
// subarray with average >= x
int longestsubarray(int arr[], int n, int x)
{
    modifyarr(arr, n, x);
    calcprefix(arr, n);

    return maxIndexDiff(arr, n);
}

// Driver code
int main()
{
    int arr[] = { 1, 1, 2, -1, -1, 1 };
    int x = 1;
    int n = sizeof(arr) / sizeof(int);
    cout << longestsubarray(arr, n, x) << endl;

    return 0;
}
```

### 3.4 Find subarray with given sum, elements are non negative

```
/* An efficient program to print subarray with sum as given sum */
#include<stdio.h>

/* Returns true if there is a subarray of arr[] with sum equal to
otherwise returns false. Also, prints the result */
int subArraySum(int arr[], int n, int sum)
{
    /* Initialize curr_sum as value of first element
    and starting point as 0 */
    int curr_sum = arr[0], start = 0, i;

    /* Add elements one by one to curr_sum and if the curr_sum exceeds
    sum, then remove starting element */
    for (i = 1; i <= n; i++)
    {
        // If curr_sum exceeds the sum, then remove the starting element
        while (curr_sum > sum && start < i-1)
        {
            curr_sum = curr_sum - arr[start];
            start++;
        }

        // If curr_sum becomes equal to sum, then return true
        if (curr_sum == sum)
        {
            printf ("Sum found between indexes %d and %d", start, i-1);
            return 1;
        }

        // Add this element to curr_sum
        if (i < n)
            curr_sum = curr_sum + arr[i];
    }

    // If we reach here, then no subarray
    printf("No subarray found");
    return 0;
}

// Driver program to test above function
int main()
{
    int arr[] = {15, 2, 4, 8, 9, 5, 10, 23};
    int n = sizeof(arr)/sizeof(arr[0]);
    int sum = 23;
    subArraySum(arr, n, sum);
    return 0;
}
```

### 3.5 Largest subarray with gcd one

if any two elements have GCD equals to one, then whole array has GCD one. So the output is either -1 or length of array.

### 3.6 Smallest subarray with given gcd

The idea is to use Segment Tree and Binary Search to achieve time complexity  $O(n(\log n)^2)$ .

1. If we have any number equal to 'k' in the array then the answer is 1 as GCD of k is k. Return 1.
2. If there is no number which is divisible by k, then GCD doesn't exist. Return -1.
3. If none of the above cases is true, the length of minimum subarray is either greater than 1 or GCD doesn't exist. In this case, we follow following steps.
  - (a) Build segment tree so that we can quickly find GCD of any subarray.
  - (b) After building Segment Tree, we consider every index as starting point and do binary search for ending point such that the subarray between these two points has GCD k

```
/* Returns size of smallest subarray of arr[0..n-1]
// with GCD equal to k.
int findSmallestSubarr(int arr[], int n, int k)
{
    // To check if a multiple of k exists.
    bool found = false;

    // Find if k or its multiple is present
    for (int i=0; i<n; i++)
    {
        // If k is present, then subarray size is 1.
        if (arr[i] == k)
```

```

        return 1;

        // Break the loop to indicate presence of a
        // multiple of k.
        if (arr[i] % k == 0)
            found = true;
    }

    // If there was no multiple of k in arr[], then
    // we can't get k as GCD.
    if (found == false)
        return -1;

    // If there is a multiple of k in arr[], build
    // segment tree from given array
    constructSegmentTree(arr, n);

    // Initialize result
    int res = n+1;

    // Now consider every element as starting point
    // and search for ending point using Binary Search
    for (int i=0; i<n-1; i++)
    {
        // a[i] cannot be a starting point, if it is
        // not a multiple of k.
        if (arr[i] % k != 0)
            continue;

        // Initialize indexes for binary search of closest
        // ending point to i with GCD of subarray as k.
        int low = i+1;
        int high = n-1;

        // Initialize closest ending point for i.
        int closest = 0;

        // Binary Search for closest ending point
        // with GCD equal to k.
        while (true)
        {
            // Find middle point and GCD of subarray
            // arr[i..mid]
            int mid = low + (high-low)/2;
            int gcd = findRangeGcd(i, mid, arr, n);

            // If GCD is more than k, look further
            if (gcd > k)
                low = mid;

            // If GCD is k, store this point and look for
            // a closer point
            else if (gcd == k)
            {
                high = mid;
                closest = mid;
                break;
            }

            // If GCD is less than, look closer
            else
                high = mid;

            // If termination condition reached, set
            // closest
            if (abs(high-low) <= 1)
            {
                if (findRangeGcd(i, low, arr, n) == k)
                    closest = low;
                else if (findRangeGcd(i, high, arr, n) == k)
                    closest = high;
                break;
            }
        }

        if (closest != 0)
            res = min(res, closest - i + 1);
    }

    // If res was not changed by loop, return -1,
    // else return its value.
    return (res == n+1) ? -1 : res;

```

```

}

```

This same idea can be extended to find largest subarray with given gcd

### 3.7 LIS

//  $O(n^2)$

```

int LIS () {
    vi L (n, 1);
    for (int i = 0; i < n; i++) {
        for (int j = i + 1; j < n; j++) {
            if (sequence[j] > sequence[i]) {
                L[j] = max (L[j], L[i] + 1);
            }
        }
    }
    return *max_element(L.begin (), L.end ());
}

```

```

vi getLIS (int ans) {
    vi lis;
    for (int i = n - 1; i >= 0; i--) {
        if (L[i] == ans) {
            lis.pb (sequence[i]);
            ans--;
        }
    }
    reverse (lis.begin (), lis.end ());
    return lis;
}

```

//-----  
//  $O(n \log k)$  - k is the length of LIS.

```

int LIS (vi &seq) {
    vi L(n, 1);
    vi I;
    for (int i = 0; i < seq.size (); i++) {
        int pos = lower_bound (I.begin (), I.end (), seq[i]) - I.begin();
        if (pos == I.size ()) {
            I.pb (seq[i]);
        } else {
            I[pos] = num;
        }
        L[i] = pos + 1;
        ans = max (ans, L[i]);
    }
    return ans;
}

```

// LIS with segment trees,  $O(n \log n)$   
// function to compare two pairs

```

int compare(pair<int, int> p1, pair<int, int> p2)
{

```

*/\* For same values, element with the higher index appear earlier in the sorted array. This is for strictly increasing subsequence. For increasing subsequence, the lower index appears earlier in the sorted array. \*/*

```

    if (p1.first == p2.first)
        return p1.second > p2.second;

```

*// Sorting the array according to their values.*  
 return p1.first < p2.first;
}

*// Building the entire Segment tree, the root of which contains the length of the LIS*

```

void buildTree(int* tree, int pos, int low, int high,
              int index, int value)
{

```

*// index is the original index of current element  
// If the index is not present in the given range,  
// then simply return*  
 if (index < low || index > high)
 return;

*// If low == high then the current position should be updated to the value*  
 if (low == high) {
 tree[pos] = value;
 return;
 }

```

    int mid = (high + low) / 2;

```

*// Recursively call the function on the*

```

// child nodes
buildTree(tree, 2 * pos + 1, low, mid, index, value);
buildTree(tree, 2 * pos + 2, mid + 1, high, index, value);

// Assign the current position the max of the 2 child
// nodes
tree[pos] = max(tree[2 * pos + 1], tree[2 * pos + 2]);
}

// Function to query the Segment tree and return the
// value for a given range
int findMax(int* tree, int pos, int low, int high,
            int start, int end)
{
    // Query: Same as the query function of Segment tree
    // If the current range is totally inside the query
    // range, return the value of current position
    if (low >= start && high <= end)
        return tree[pos];

    // If it is out of bound, return the minimum which
    // would be 0 in this case
    if (start > high || end < low)
        return 0;

    // Partial overlap
    int mid = (high + low) / 2;

    // Call findMax on child nodes recursively and
    // return the maximum of the two
    return max(findMax(tree, 2 * pos + 1, low, mid,
                        start, end),
               findMax(tree, 2 * pos + 2, mid + 1,
                        high, start, end));
}

int findLIS(int arr[], int n)
{
    // The array of pairs stores the integers and
    // indices in p[i]
    pair<int, int> p[n];
    for (int i = 0; i < n; i++) {
        p[i].first = arr[i];
        p[i].second = i;
    }

    // Sorting the array in increasing order
    // of the elements
    sort(p, p + n, compare);

    // Calculating the length of the segment-tree
    int len = pow(2, (int)ceil(sqrt(n))) + 1 - 1;
    int tree[len];

    // Initializing the tree with zeroes
    memset(tree, 0, sizeof(tree));

    // Building the segment-tree, the root node of
    // which contains the length of LIS for the n
    // elements
    for (int i = 0; i < n; i++) {
        buildTree(tree, 0, 0, n - 1, p[i].second,
                  findMax(tree, 0, 0, n - 1, 0, p[i].second) + 1);
    }

    return tree[0];
}

// Driver code
int main()
{
    int arr[] = { 10, 22, 9, 33, 21, 50, 41, 60 };
    int n = sizeof(arr) / sizeof(arr[0]);
    cout << "Length of the LIS: " << findLIS(arr, n);
    return 0;
}

```

LIS of reverse sequence gives LDS starting from pos after reversing L.  
 LIS of reverse negative sequence gives LIS starting from pos after reversing L.

LIS of sequence, Sol: Concept: Let  $F_i$  be the length of LIS ending

exactly at  $a_i$  of sequence  $\{a_1, a_2, \dots, a_i\}$ .

Let  $F_{2i}$  be the length of LIS beginning exactly at  $a_i$  of sequence  $\{a_i, a_{i+1}, \dots, a_n\}$

First, calculate  $F_{1i}$  and  $F_{2i}$  for all  $i$ . Obviously, if  $F_{1i} + F_{2i} - 1 \neq 1$  then answer for  $i$  is 1, otherwise it is 2 or 3.

Then, assume there are two elements  $i$  and  $j$  with answer different from 1 such that  $F_{1i} = F_{1j}$ . You can prove that in this case  $a_i$  or  $a_j$  does not belong to every LIS.

Proof: Case1: if  $a[i]$  equal  $a[j]$  and thus  $a_i$  is not needed in lis of  $a[j]$  and vice versa.

Case2: if  $a[i] > a[j]$  and thus  $a[j]$ 's lis will not contain  $a[i]$  and vice versa

Case3: if  $a[i] < a[j]$  in this case all elements in the lis of  $a[i]$  and greater than  $a[i]$  and in position less than  $j$  have to be greater than  $a[j]$  too as suppose this was not the case then all these could have been incorporated in LIS of  $a[j]$  giving us bigger LIS.

Hence proved.

Thus the answer for  $i$  is 2 (and for  $j$  it is 2 too, of course). It can also be shown that if  $F_{1i}$  is unique among all  $F_1$  then the answer for  $i$  is 3.

Say  $y$  = smallest no. of non inc. subsequences covering this seq. then  $y$  = length of LIS.

Proof: see this

### 3.8 LIS of consecutive integers

```

void solve (vi &arr) {
    map<int, int> hsh;
    int ans = 1, last = 0;
    for (int i = 0; i < arr.size (); i++) {
        hsh[arr[i]] = hsh[arr[i] - 1] + 1;
        if (ans < hsh[arr[i]]) {
            ans = hsh[arr[i]];
            last = arr[i];
        }
    }
    cout << ans << "\n";
    if (ans == 1) {
        cout << "1\n"; return;
    }
    int start = last - ans + 1;
    for (int i = 0; i < arr.size (); i++) {
        if (arr[i] == start) {
            cout << i + 1 << " ";
            start++;
        }
    }
}

```

### 3.9 nth element

Rearranges the elements in the range [first,last), in such a way that the element at the nth position is the element that would be in that position in a sorted sequence.

The other elements are left without any specific order, except that none of the elements preceding nth are greater than it, and none of the elements following it are less.

Time complexity is  $O(\text{last} - \text{first})$ .

```

for (int i = 0; i < 15; i++) data.pb(i);
random_shuffle (data.begin (), data.end());
nth_element(data.begin (), data.begin() + 1, data.end ()); // data[1]
random_shuffle (data.begin (), data.end());
nth_element(data.begin (), data.begin() + 1, data.end (), cmp); // da
bool cmp (int a, int b) return a > b;

```

### 3.10 Optimal schedule of jobs given their deadlines and durations

The execution of a job cannot be interrupted prior to its ending. It is required to create such a schedule to accomplish the biggest number of jobs (thus we may not be able to finish all the jobs).

We have greedy algorithm for this which works in  $O(n \log n)$

```

struct Job {
    int deadline, duration, idx;

    bool operator<(Job o) const {
        return deadline < o.deadline;
    }
};

```

```

vector<int> compute_schedule(vector<Job> jobs) {
    sort(jobs.begin(), jobs.end());

```

```

    set<pair<int,int>> s;
    vector<int> schedule;
    for (int i = jobs.size()-1; i >= 0; i--) {
        int t = jobs[i].deadline - (i ? jobs[i-1].deadline : 0);

```

```

s.insert(make_pair(jobs[i].duration, jobs[i].idx));
while (t && !s.empty()) {
    auto it = s.begin();
    if (it->first <= t) {
        t -= it->first;
        schedule.push_back(it->second);
    } else {
        s.insert(make_pair(it->first - t, it->second));
        t = 0;
    }
    s.erase(it);
}
}
return schedule;
}

```

### 3.11 Scheduling jobs on one machine

This task is about finding an optimal schedule for  $n$  jobs on a single machine, if the job  $i$  can be processed in  $t_i$  time, but for the  $t$  seconds waiting before processing the job a penalty of  $f_i(t)$  has to be paid.

Thus the task asks to find such a permutation of the jobs, so that the total penalty is minimal. If we denote by  $\pi$  the permutation of the jobs ( $\pi_1$  is the first processed item,  $\pi_2$  the second, etc.), then the total penalty is equal to:

$$F(\pi) = f_{\pi_1}(0) + f_{\pi_2}(t_{\pi_1}) + f_{\pi_3}(t_{\pi_1} + t_{\pi_2}) + \dots + f_{\pi_n}\left(\sum_{i=1}^{n-1} t_{\pi_i}\right)$$

Solutions for special cases

#### 3.11.1 Linear penalty functions

First we will solve the problem in the case that all penalty functions  $f_i(t)$  are linear, i.e. they have the form  $f_i(t) = c_i \cdot t$ , where  $c_i$  is a non-negative number. Note that these functions don't have a constant term. Otherwise we can sum up all constant term, and resolve the problem without them.

Let us fixate some permutation  $\pi$ , and take an index  $i = 1 \dots n - 1$ . Let the permutation  $\pi'$  be equal to the permutation  $\pi$  with the elements  $i$  and  $i + 1$  switched. Let's see how much the penalty changed.

$$F(\pi') - F(\pi) =$$

It is easy to see that the changes only occur in the  $i$ -th and  $(i + 1)$ -th summands:

$$\begin{aligned}
 &= c_{\pi'_i} \cdot \sum_{k=1}^{i-1} t_{\pi'_k} + c_{\pi'_{i+1}} \cdot \sum_{k=1}^i t_{\pi'_k} - c_{\pi_i} \cdot \sum_{k=1}^{i-1} t_{\pi_k} - c_{\pi_{i+1}} \cdot \sum_{k=1}^i t_{\pi_k} \\
 &= c_{\pi_{i+1}} \cdot \sum_{k=1}^{i-1} t_{\pi'_k} + c_{\pi_i} \cdot \sum_{k=1}^i t_{\pi'_k} - c_{\pi_i} \cdot \sum_{k=1}^{i-1} t_{\pi_k} - c_{\pi_{i+1}} \cdot \sum_{k=1}^i t_{\pi_k} \\
 &= c_{\pi_i} \cdot t_{\pi_{i+1}} - c_{\pi_{i+1}} \cdot t_{\pi_i}
 \end{aligned}$$

It is easy to see, that if the schedule  $\pi$  is optimal, than any change in it leads to an increased penalty (or to the identical penalty), therefore for the optimal schedule we can write down the following condition:

$$c \cdot t_{\pi_{i+1}} - c_{\pi_{i+1}} \cdot t_{\pi_i} \geq 0 \quad \forall i = 1 \dots n - 1$$

And after rearranging we get:

$$\frac{c_{\pi_i}}{t_{\pi_i}} \geq \frac{c_{\pi_{i+1}}}{t_{\pi_{i+1}}} \quad \forall i = 1 \dots n - 1$$

Thus we obtain the optimal schedule by simply sorting the jobs by the fraction  $\frac{c_i}{t_i}$  in non-ascending order.

It should be noted, that we constructed this algorithm by the so-called permutation method: we tried to swap two adjacent elements, calculated how much the penalty changed, and then derived the algorithm for finding the optimal method.

#### 3.11.2 Exponential penalty function

Let the penalty function look like this:

$$f_i(t) = c_i \cdot e^{\alpha \cdot t},$$

where all numbers  $c_i$  are non-negative and the constant  $\alpha$  is positive.

By applying the permutation method, it is easy to determine that the jobs must be sorted in non-ascending order of the value:

$$v_i = \frac{1 - e^{\alpha \cdot t_i}}{c_i}$$

#### 3.11.3 Identical monotone penalty function

In this case we consider the case that all  $f_i(t)$  are equal, and this function is monotone increasing.

It is obvious that in this case the optimal permutation is to arrange the jobs by non-ascending processing time  $t_i$ .

#### 3.11.4 Summary

The Livshits-Kladov theorem establishes, that the permutation method is only applicable for the above mentioned three cases, i.e.:

- Linear case:  $f_i(t) = c_i(t) + d_i$ , where  $c_i$  are non-negative constants,
- Exponential case:  $f_i(t) = c_i \cdot e^{\alpha \cdot t} + d_i$ , where  $c_i$  and  $\alpha$  are positive constants,
- Identical case:  $f_i(t) = \phi(t)$ , where  $\phi$  is a monotone increasing function.

Time complexity  $O(n \log n)$

### 3.12 Scheduling jobs on two machine

Just see relevant part of that pdf.

### 3.13 Ternary Search

```

// finding maximum in case of double, similarly we can do for minimum
double ternary_search(double l, double r) { // 300 iterations are enough
    double eps = 1e-9; //set the error limit here
    while (r - l > eps) {
        double m1 = l + (r - l) / 3;
        double m2 = r - (r - l) / 3;
        double f1 = f(m1); //evaluates the function at m1
        double f2 = f(m2); //evaluates the function at m2
        if (f1 < f2)
            l = m1;
        else
            r = m2;
    }
    return f(l); //return the maximum of f(x) in [l, r]
}

```

Once  $(r - l) < 3$ , the remaining pool of candidate points  $(l, l + 1, \dots, r)$  needs to be checked to find the point which produces the maximum/minimum value  $f(x)$ .

prob, sol

Given a sorted array, you want to have a subset  $S$ , s.t.  $\max(S) - \min(S)$  is maximum. For this take maximum element of array as  $\max(S)$ , take remaining element from 0 to some index for which you need to do ternary search.

### 3.14 Submask Enumeration

```

for (int s=m; ; s=(s-1)&m) {
    ... you can use s ...
    if (s==0) break;
}

```

Let us examine why the above code visits all submasks of  $m$ , without repetition, and in descending order.

Suppose we have a current bitmask  $s$ , and we want to move on to the next bitmask. By subtracting from the mask  $s$  one unit, we will remove the rightmost set bit and all bits to the right of it will become 1. Then we remove all the "extra" one bits that are not included in the mask  $m$  and therefore can't be a part of a submask. We do this removal by using the bitwise operation  $(s-1) \& m$ . As a result, we "cut" mask  $s-1$  to determine the highest value that it can take, that is, the next submask after  $s$  in descending order.

Thus, this algorithm generates all submasks of this mask in descending order, performing only two operations per iteration.

A special case is when  $s = 0$ . After executing  $s - 1$  we get a mask where all bits are set (bit representation of -1), and after  $(s-1) \& m$  we will have that  $s$  will be equal to  $m$ .

#### 3.14.1 Iterating through all masks with their submasks. Complexity $O(3^n)$

In many problems, especially those that use bitmask dynamic programming, you want to iterate through all bitmasks and for each mask, iterate through all of its submasks:

```

for (int m=0; m<(1<<n); ++m)
    for (int s=m; s; s=(s-1)&m)
        ... s and m ...

```

Let's prove that the inner loop will execute a total of  $O(3^n)$  iterations.

First proof: Consider the  $i$ -th bit. There are exactly three options for it: it is not included in the mask  $m$  (and therefore not included in submask  $s$ ); it is included in  $m$ , but not included in  $s$ , or it's included in both  $m$  and  $s$ . As there are a total of  $n$  bits, there will be  $3^n$  different combinations.

Second proof: Note that if mask  $m$  has  $k$  enabled bits, then it will have  $2^k$  submasks. As we have a total of  $\binom{n}{k}$  masks with  $k$  enabled bits (see "binomial coefficients"), then the total number of combinations for all masks will be:

$$\sum_{k=0}^n \binom{n}{k} \cdot 2^k$$

To calculate this number, note that the sum above is equal to the expansion of  $(1 + 2)^n$  using the binomial theorem. Therefore, we have  $3^n$  combinations, as we wanted to prove.

### 3.15 MOS Algorithm

Just read this. Powerful Array, Sol

### 3.16 MOS Algorithm with updates

For now survive with HLD.

### 3.17 Important Problems

- BookShelves, Sol
- See problem D1, D2, sol

## 4 Data Structures

### 4.1 Segment Tree

- Construction of segment tree is  $O(n)$  (by masters theorem) and height of segment tree is  $O(\log n)$ . Also time complexity of each query is  $O(\log n)$ .
- freq, sol
- simple update, sol
- lazy range update, sol
- In similar way segment tree can be used to answer queries regarding gcd/lcm.
- Sereja and brackets, sol
- Addition on Segments, sol
- Jamie and to do list, Sol: Just basic application of Persistent segment tree. When updating some element, at most  $O(\log n)$  nodes in the segment tree get changed: the nodes along the path from root to the updated leaf. For each timepoint, instead of creating a copy of the entire segment tree, copy only nodes on the path to be updated and update them. Therefore total storage is  $O(n + t \log n)$ .

*/\* Basic Segment Tree \*/*

```
struct segmentTree {
    struct seg {
        int val;
        seg () { val = 0; }
    };
    vector<seg> st;
    segmentTree () {}
    segmentTree (int n) {
        st.resize (4 * n);
    }
    int left(int at) { return at << 1; }
    int right(int at) { return at << 1 | 1; }
    void build (int at, int start, int end) {
        if (start == end) {
            st[at].val = s[start] - 'a' + 1;
        } else {
            int mid = (start + end) >> 1;
            build (left (at), start, mid);
            build (right (at), mid + 1, end);
            st[at].val = add<int> (st[left(at)].val, mul<int> (st[right (at)].val, pow1[mid - start + 1]));
        }
    }
    void update(int at, int start, int end, int l, int r, char c) {
        if (r < start || end < l || start > end) return;
        if (start == end) {
            st[at].val = c - 'a' + 1;
            return;
        }
        int mid = (start + end) >> 1;
        update(left(at), start, mid, l, r, c);
        update(right(at), mid + 1, end, l, r, c);
        st[at].val = add<int> (st[left(at)].val, mul<int> (st[right (at)].val, pow1[mid - start + 1]));
    }
    pair<int, ii> query(int at, int start, int end, int l, int r) {
        if (start >= l and end <= r) return make_pair (st[at].val, ii (start, end));
        int mid = (start + end) >> 1;
        if (r <= mid) return query (left (at), start, mid, l, r);
        else if (l > mid) return query (right (at), mid + 1, end, l, r);
        auto lf = query(left(at), start, mid, l, r);
        auto ri = query(right(at), mid + 1, end, l, r);
        int ret = add<int> (lf.first, mul<int> (ri.first, pow1[lf.second.first + 1]));
        return make_pair (ret, ii (lf.second.first, ri.second.second));
    }
};
```

## 5 DP

Following are the two main properties of a problem that suggests that the given problem can be solved using Dynamic programming.

1. Overlapping Subproblems: Like Divide and Conquer, Dynamic Programming combines solutions to sub-problems. Dynamic Programming is mainly used when solutions of same subproblems are needed again and again.
2. Optimal Substructure

### 5.1 Coin Change

```
/*No. of ways in which we can make change of that money O(N*V)*/
// Recurrence: dp[value] = dp[value - type1] + ... + dp[value - typen]
int N = 5, V, coinValue[5] = {1, 5, 10, 25, 50};
long long int memo[6][30000];
long long int ways(int type, int value) {
    if (value == 0) return 1;
    if (value < 0 || type == N) return 0;
    if (memo[type][value] != -1) return memo[type][value];
    return memo[type][value] = ways(type + 1, value) + ways(type, value);
}
/*Bottom up version of the above solution*/
long long int solve() {
    dp[0] = 1; //rest all are 0;
    for(i = 0; i < coinTypes; ++i){
        for(j = coins[i]; j <= value; ++j)
            dp[j] += dp[j - coins[i]];
    }
}
/*Of problem above, in case you want dp[i][j] where it means, no. of ways to make sum j using coins [0...i]*/
void solve() {
    dp[0][0] = 1; //rest all are 0;
    for(int i = 0; i < coinType; i++){
        if(i) {
            for(int j = 0; j <= maxVal; j++) {
                dp[i][j] = dp[i - 1][j];
            }
            for(int j = coinValue[i]; j <= maxVal; ++j)
                dp[i][j] += dp[i][j - coinValue[i]];
        }
    }
}
/* Minimum no. of coins/bills given to fullfill an amount >= x when each coin/bill is of value coins[i] */
// Recurrence: dp[value] = min_i{dp[value - type_i] + 1}
void solve() {
    vector<long long int> dp;
    dp.assign(30000, INT_MAX);
    dp[0] = 0;
    for(int i = 0; i < 5; i++) {
        for(int j = coinValue[i]; j <= V; j++) {
            if(dp[j - coinValue[i]] != INT_MAX) {
                dp[j] = min(dp[j], dp[j - coinValue[i]] + 1);
            }
        }
    }
    res = dp[V];
    print (at).val, pow1[mid - start + 1]);
}
/*Minimum no. of coins/bills given to fullfill an amount >= x when each coin/bill is of value coins[i] */
void solve() {
    int dp [10000 + 10];
    for ( int i = 0; i < 10010; i++ )
        dp [i] = INT_MAX;
    dp [0] = 0;
    for ( int i = 0; i < coinNumber; i++ ) {
        for ( int j = 10000 - coins[i]; j >= 0; j-- ) {
            if ( dp[j] != INT_MAX && dp[j + coins[i]] > dp[j] + 1 )
                dp[j + coins[i]] = dp[j] + 1;
        }
    }
    for ( int i = x; i <= 10000; i++ ) {
        if ( dp [i] != INT_MAX ) {
            print ("%d %d\n", i, dp [i]);
            break;
        }
    }
}
/*Minimum no. of coins/bills given to fullfill an amount >= x when each coin/bill is of value coins[i] */
void solve() {
    vector<ll> buyer(505, LLONG_MAX);
    buyer[0] = 0;
    for (int i = 0; i < 6; i++) {
        for(int k = 0; k < cnt[i]; k++) {
            for (int j = 500 - coinValue[i]; j >= 0; j--) {
                if (buyer[j] != LLONG_MAX && buyer[j + coinValue[i]] > buyer[j] + 1)
                    buyer[j + coinValue[i]] = buyer[j] + 1;
            }
        }
    }
}
```



## 5.2 0/1 Knapsack

Given weights and values of  $n$  items, put these items in a knapsack of capacity  $W$  to get the maximum total value in the knapsack. You cannot break an item, either pick the complete item, or don't pick it (thus we cannot use greedy algorithm)

```
int value (int id, int w) {
    if (id == N || w == 0) return 0;
    if (memo[id][w] != -1) return memo[id][w];
    int a = (w[id] > w) ? 0 : v[id] + value (id + 1, w - w[id]);
    int b = value(id + 1, w);
    taken[id][w] = a > b;
    return memo[id][w] = max(a, b);
}

void printSol () {
    i = 0;
    j = MW;
    while (i < N) {
        if (take[i][j]) {
            track.pb (i);
            cnt++;
            j = j - w[i];
        }
        i++;
    }
    // something
}
```

## 5.3 Balanced Bracket Sequence

A Balanced bracket sequence is a string consisting of only brackets, such that this sequence, when certain numbers and  $+$  is inserted gives a valid mathematical expression.

### 5.3.1 One type of bracket

Let depth be the current no. of open brackets, initially depth = 0. We iterate over all character of the string; if the current bracket character is an opening bracket then we increment depth, o/w we decrement it. If at any time the variable depth gets negative, or at the end it is different from 0, then the string is not a balanced sequence otherwise it is.

### 5.3.2 MultiType

Maintain a stack, in which we will store all opening brackets that we meet. If the current bracket character is an opening one, we put it onto the stack. If it is a closing one, then we check if the stack is non empty, and if the top element is of the same type as the current closing bracket, if both conditions are fulfilled, then we remove the opening bracket from the stack. If at any time one of the conditions is not fulfilled or at the end the stack is non empty, then the string is not balanced otherwise it is.

### 5.3.3 No. of balanced Sequences

The number of balanced bracket sequences with only one bracket type can be calculated using the Catalan numbers. The number of balanced bracket sequences of length  $2n$  ( $n$  pairs of brackets) is:

$$\frac{1}{n+1} \binom{2n}{n}$$

If we allow  $k$  types of brackets, then each pair be of any of the  $k$  types (independently of the others), thus the number of balanced bracket sequences is:

$$\frac{1}{n+1} \binom{2n}{n} k^n$$

On the other hand these numbers can be computed using dynamic programming. Let  $d[n]$  be the number of regular bracket sequences with  $n$  pairs of bracket. Note that in the first position there is always an opening bracket. And somewhere later is the corresponding closing bracket of the pair. It is clear that inside this pair there is a balanced bracket sequence, and similarly after this pair there is a balanced bracket sequence. So to compute  $d[n]$ , we will look at how many balanced sequences of  $i$  pairs of brackets are inside this first bracket pair, and how many balanced sequences with  $n-1-i$  pairs are after this pair. Consequently the formula has the form:

$$d[n] = \sum_{i=0}^{n-1} d[i] \cdot d[n-1-i]$$

The initial value for this recurrence is  $d[0] = 1$ .

### 5.3.4 Lexicographically next balanced sequence

```
// Idea: "dep" indicates the imbalance in the string s[0..n-1]
bool next_balanced_sequence(string & s) {
    int n = s.size();
    int depth = 0;
    for (int i = n - 1; i >= 0; i--) {
        if (s[i] == '(')
            depth--;
        else
            depth++;
    }
    if (depth == 0)
        return true;
    return false;
}
```

depth++;

```
if (s[i] == '(' && depth > 0) {
    depth--;
    int open = (n - i - 1 - depth) / 2;
    int close = n - i - 1 - open;
    string next = s.substr(0, i) + ')' + string(open, '(') + s.substr(i+1, n-i-1);
    s.swap(next);
    return true;
}
return false;
}
```

If it is required to find and output all balanced bracket sequences of a specific length  $n$ .

To generate them, we can start with the lexicographically smallest sequence  $((\dots((\dots)))\dots))$ , and then continue to find the next lexicographically sequences with the algorithm described above.

### 5.3.5 Sequence Index

Given a balanced bracket sequence with  $n$  pairs of brackets. We have to find its index in the lexicographically ordered list of all balanced sequences with  $n$  bracket pairs.

Let's define an auxiliary array  $d[i][j]$ , where  $i$  is the length of the bracket sequence (semi-balanced, each closing bracket has a corresponding opening bracket, but not every opening bracket has necessarily a corresponding closing one), and  $j$  is the current balance (difference between opening and closing brackets).  $d[i][j]$  is the number of such sequences that fit the parameters. We will calculate these numbers with only one bracket type.

For the start value  $i = 0$  the answer is obvious:  $d[0][0] = 1$ , and  $d[0][j] = 0$  for  $j > 0$ . Now let  $i > 0$ , and we look at the last character in the sequence. If the last character was an opening bracket  $($ , then the state before was  $(i-1, j-1)$ , if it was a closing bracket  $)$ , then the previous state was  $(i-1, j+1)$ . Thus we obtain the recursion formula:

$$d[i][j] = d[i-1][j-1] + d[i-1][j+1]$$

$d[i][j] = 0$  holds obviously for negative  $j$ . Thus we can compute this array in  $O(n^2)$ .

Now let us generate the index for a given sequence.

First let there be only one type of brackets. We will use the counter depth which tells us how nested we currently are, and iterate over the characters of the sequence. If the current character  $s[i]$  is equal to  $($ , then we increment depth. If the current character  $s[i]$  is equal to  $)$ , then we must add  $d[2n-i-1][depth+1]$  to the answer, taking all possible endings starting with a  $($  into account (which are lexicographically smaller sequences), and then decrement depth.

Now let there be  $k$  different bracket types.

Thus, when we look at the current character  $s[i]$  before recomputing depth, we have to go through all bracket types that are smaller than the current character, and try to put this bracket into the current position (obtaining a new balance  $ndepth = depth \pm 1$ ), and add the number of ways to finish the sequence (length  $2n-i-1$ , balance  $ndepth$ ) to the answer:

$$d[2n-i-1][ndepth] \cdot k^{\frac{2n-i-1-ndepth}{2}}$$

This formula can be derived as follows: First we "forget" that there are multiple bracket types, and just take the answer  $d[2n-i-1][ndepth]$ . Now we consider how the answer will change if we have  $k$  types of brackets. We have  $2n-i-1$  undefined positions, of which  $ndepth$  are already predetermined because of the opening brackets. But all the other brackets  $((2n-i-1-ndepth)/2$  pairs) can be of any type, therefore we multiply the number by such a power of  $k$ .

### 5.3.6 Finding the kth sequence

Let  $n$  be the number of bracket pairs in the sequence. We have to find the  $k$ -th balanced sequence in lexicographically sorted list of all balanced sequences for a given  $n$ .

As in the previous section we compute the auxiliary array  $d[i][j]$ , the number of semi-balanced bracket sequences of length  $i$  with balance  $j$ .

First, we start with only one bracket type.

We will iterate over the characters in the string we want to generate. As in the previous problem we store a counter depth, the current nesting depth. In each position we have to decide if we use an opening or a closing bracket. To put an opening bracket character, if  $d[2n-i-1][depth+1] \geq k$ . We increment the counter depth, and move on to the next character. Otherwise we decrement  $k$  by  $d[2n-i-1][depth+1]$ , put a closing bracket and move on.

```
string kth_balanced(int n, int k) {
    vector<vector<int>> d(2*n+1, vector<int>(n+1, 0));
    d[0][0] = 1;
    for (int i = 1; i <= 2*n; i++) {
        d[i][0] = d[i-1][1];
    }
}
```

```

    for (int j = 1; j < n; j++)
        d[i][j] = d[i-1][j-1] + d[i-1][j+1];
    d[i][n] = d[i-1][n-1];
}

string ans;
int depth = 0;
for (int i = 0; i < 2*n; i++) {
    if (depth + 1 <= n && d[2*n-i-1][depth+1] >= k) {
        ans += '(';
        depth++;
    } else {
        ans += ')';
        if (depth + 1 <= n)
            k -= d[2*n-i-1][depth+1];
        depth--;
    }
}
return ans;
}

```

Now let there be  $k$  types of brackets. The solution will only differ slightly in that we have to multiply the value  $d[2n-i-1][ndepth]$  by  $k^{(2n-i-1-ndepth)/2}$  and take into account that there can be different bracket types for the next character.

Here is an implementation using two types of brackets: round and square:

```

    string kth_balanced2(int n, int k) {
        vector<vector<int>> d(2*n+1, vector<int>(n+1, 0));
        d[0][0] = 1;
        for (int i = 1; i <= 2*n; i++) {
            d[i][0] = d[i-1][1];
            for (int j = 1; j < n; j++)
                d[i][j] = d[i-1][j-1] + d[i-1][j+1];
            d[i][n] = d[i-1][n-1];
        }

        string ans;
        int depth = 0;
        stack<char> st;
        for (int i = 0; i < 2*n; i++) {
            // '('
            if (depth + 1 <= n) {
                int cnt = d[2*n-i-1][depth+1] << ((2*n-i-1-depth-1) / 2);
                if (cnt >= k) {
                    ans += '(';
                    st.push('(');
                    depth++;
                    continue;
                }
                k -= cnt;
            }

            // ')'
            if (depth && st.top() == '(') {
                int cnt = d[2*n-i-1][depth-1] << ((2*n-i-1-depth+1) / 2);
                if (cnt >= k) {
                    ans += ')';
                    st.pop();
                    depth--;
                    continue;
                }
                k -= cnt;
            }

            // '['
            if (depth + 1 <= n) {
                int cnt = d[2*n-i-1][depth+1] << ((2*n-i-1-depth-1) / 2);
                if (cnt >= k) {
                    ans += '[';
                    st.push('[');
                    depth++;
                    continue;
                }
                k -= cnt;
            }

            // ']'
            if (depth && st.top() == '[') {
                int cnt = d[2*n-i-1][depth-1] << ((2*n-i-1-depth+1) / 2);
                if (cnt >= k) {
                    ans += ']';
                    st.pop();
                    depth--;
                    continue;
                }
                k -= cnt;
            }
        }
    }
}

```

```

    return ans;
}

```

## 5.4 Important Problems

- dividing coins sol
- TSP, Sol
- Square, Sol
- Pebble Solitaire, sol
- Forming Quiz Teams, sol
- Simple tree coloring, sol

## 6 Strings

To map keyboard etc, it is better to create 2 strings then loop through and map.

To transform complete string to lowercase:

```
transform(word.begin(), word.end(), word.begin(), ::tolower);
```

To concatenate two vectors:

```
vector1.insert(vector1.end(), vector2.begin(), vector2.end());
```

```
string.substr(startposn, length); // Where startposn is 0 indexed.
str.erase(posn); // erase single character
str.erase(posn, length);
str.insert(pos, anotherString_orCharacter);
```

```
int pos1 = line.find("U=");
if (pos1 != -1) { // process }
line.replace(pos, len, newString); // pos = line.find(f), len = f.s
```

We can iterate through all substrings of string  $O(n^2)$  and see which all of them are palindromes in  $O(n^3)$  or in  $O(n^2)$  by using dp ( $dp[startpos][endpos] = (s[startpos] == s[endpos]) \& \& dp[startpos + 1][endpos - 1]$ ) or hash.

### 6.1 Minimum Edit Distance

```

void fillmem() {
    for (int j = 0; j <= a.size(); j++) mem[0][j] = j;
    for (int i = 0; i <= b.size(); i++) mem[i][0] = i;
    for (int i = 1; i <= b.size(); i++) {
        for (int j = 1; j <= a.size(); j++) {
            if (a[j-1] == b[i-1]) mem[i][j] = mem[i-1][j-1];
            else mem[i][j] = min(mem[i-1][j-1], min(mem[i-1][j], mem[i][j-1]));
        }
    }
    // mem[b.size()][a.size()] contains the answer

void print() {
    int i = b.size(), j = a.size();
    while (i || j) {
        if (i and j and a[j-1] == b[i-1]) { i--; j--; continue; }
        if (i and j and mem[i][j] == mem[i-1][j-1] + 1) {
            cout << "C" << b[i-1]; if (j <= 9) cout << "0";
            cout << j;
            i--; j--;
            continue;
        }
        if (i and mem[i][j] == mem[i-1][j] + 1) {
            cout << "I" << b[i-1];
            if (j <= 9) cout << "0";
            cout << j + 1;
            i--;
            continue;
        }
        else if (j) {
            cout << "D" << a[j-1];
            if (j <= 9) cout << "0";
            cout << j;
            j--;
        }
    }
    cout << "E\n";
}
}

```

### 6.2 Length of longest Palindrome possible by removing 0 or more characters

```
dp[startpos][endpos] = s[startpos] == s[endpos] ? 2 + dp[startpos + 1][endpos - 1] : max(dp[startpos][endpos - 1], dp[startpos + 1][endpos]);
```

### 6.3 Longest Common Subsequence

```

memset(mem, 0, sizeof(mem));
for (int i = 1; i <= b.size(); i++) {
    for (int j = 1; j <= a.size(); j++) {
        if (b[i-1] == a[j-1]) mem[i][j] = mem[i-1][j-1] + 1;
        else mem[i][j] = max(mem[i-1][j], mem[i][j-1]);
    }
}

```

```

}
void printsol (int ui, int li) {
    ui--; li--;
    vector<string> ans;
    while (ui || li) {
        if (a[ui] == b[li]) {
            ans.push_back (a[ui]);
            ui--; li--;
            continue;
        }
        if (ui and mem[ui][li] == mem[ui - 1][li]) {
            ui--;
            continue;
        }
        if (li and mem[ui][li] == mem[ui][li - 1]) {
            li--;
            continue;
        }
    }
    reverse (ans.begin (), ans.end ());
    cout << ans << "\n";
}

```

## 6.4 Prefix Function and KMP

### 6.4.1 Prefix Function

The prefix function for this string is defined as an array  $\pi$  of length  $n$ , where  $\pi[i]$  is the length of the longest proper prefix of the substring  $s[0 \dots i]$  which is also a suffix of this substring. A proper prefix of a string is a prefix that is not equal to the string itself. By definition,  $\pi[0] = 0$ . Example:   
`abcbabchejfabcbaca`  
`00012300001234564`

**Note:**  $\pi[i + 1] \leq \pi[i] + 1$  as if  $\pi[i + 1] > \pi[i] + 1$  then consider this suffix ending at position  $i + 1$  & having length  $\pi[i + 1]$  - removing the last character we get a suffix ending in position  $i$  & having length  $\pi[i + 1] - 1$  that is better than  $\pi[i]$ . Should be able to reason the following code.

```

vector<int> prefix_function(string &s) { // O(n)
    int n = (int)s.length();
    vector<int> pi(n, 0);
    for (int i = 1; i < n; i++) {
        int j = pi[i-1];
        while (j > 0 && s[i] != s[j])
            j = pi[j-1];
        if (s[i] == s[j])
            j++;
        pi[i] = j;
    }
    return pi;
}

```

### 6.4.2 KMP

Given a text  $t$  and a string  $s$ , we want to find and display the positions of all occurrences of the string  $s$  in the text  $t$ .

For convenience we denote with  $n$  the length of the string  $s$  and with  $m$  the length of the text  $t$ .

We generate the string  $s\#t$ , where  $\#$  is a separator that doesn't appear in  $s$  and  $t$ . Let us calculate the prefix function for this string. Now think about the meaning of the values of the prefix function, except for the first  $n+1$  entries (which belong to the string  $s$  and the separator). By definition the value  $\pi[i]$  shows the longest length of a substring ending in position  $i$  that coincides with the prefix. But in our case this is nothing more than the largest block that coincides with  $s$  and ends at position  $i$ . This length cannot be bigger than  $n$  due to the separator. But if equality  $\pi[i]=n$  is achieved, then it means that the string  $s$  appears completely in at this position, i.e. it ends at position  $i$ . Just do not forget that the positions are indexed in the string  $s\#t$ .

Thus if at some position  $i$  we have  $\pi[i]=n$ , then at the position  $i - (n + 1) \dots i - 2n$  in the string  $t$  the string  $s$  appears.

As already mentioned in the description of the prefix function computation, if we know that the prefix values never exceed a certain value, then we do not need to store the entire string and the entire function, but only its beginning. In our case this means that we only need to store the string  $s\#$  and the values of the prefix function for it. We can read one character at a time of the string  $t$  and calculate the current value of the prefix function.

```

void kmp() {
    auto pref = prefix_function(p);
    int j = 0;
    int cnt = 0;
    // Note: pi[n] = 0, hence j = 0.
    for (int i = 0; i < t.size(); i++) {
        while (j > 0 and t[i] != p[j]) {

```

```

            j = pref[j - 1];
        }
        if (t[i] == p[j]) j++;
        if (j == p.size()) { // j == n, that means we must dec. j.
            // And remember that if s[0...n - 1] == s[1...n - 1]s[0]
            cnt++; // occurrence found
            j = pref[j - 1];
        }
    }
}

```

### 6.4.3 Counting number of occurrences of each prefix

```

vector<int> ans(n + 1);
for (int i = 0; i < n; i++) // Longest prefix is favored and will have
    ans[pi[i]]++;
for (int i = n-1; i > 0; i--) // here i is prefix length. Thus we are
    ans[pi[i-1]] += ans[i];
for (int i = 0; i <= n; i++) // as only intermediate strings were con
    ans[i]++;

```

## 6.5 Notes

- In case of hashing a string, we follow polynomial rolling hash function, with  $p$  as a prime number roughly equal to the size of character domain and  $m$  as a huge prime number.
- If  $s$  is palindrome and if  $s[0 \dots n - 2]$  is palindrome, that means all characters are same thus if all characters are not same then the longest non palindromic substring is  $s[0 \dots n - 2]$  or  $s[1 \dots n - 1]$

## 6.6 SAM

A suffix automaton for a given string  $s$  is a minimal DFA that accepts all the suffixes of the string  $s$ .

- A suffix automaton is an oriented acyclic graph.
- One of the states  $t_0$  is the initial state
- All transitions originating from a state must have different labels
- One or multiple states are marked as terminal states. If we start from the initial state  $t_0$  and move along transitions to a terminal state, then the labels of the passed transitions must spell one of the suffixes of the string  $s$ . Each of the suffixes of  $s$  must be spellable using a path from  $t_0$  to a terminal state.
- Note that terminal states can also have outgoing arrows.

Consider any non-empty substring  $t$  of the string  $s$ . We will denote with  $\text{endpos}(t)$  the set of all positions in the string  $s$ , in which the occurrences of  $t$  end. For instance, we have  $\text{endpos}(\text{"bc"}) = \{2, 4\}$  for the string  $\text{"abcbc"}$ . We will call two substrings  $t_1$  and  $t_2$   $\text{endpos-equivalent}$ , if their ending sets coincide i.e.  $\text{endpos}(t_1) = \text{endpos}(t_2)$ . Thus all non-empty substrings of the string  $s$  can be decomposed into several equivalence classes according to their sets  $\text{endpos}$ .

It turns out, that in a suffix machine  $\text{endpos-equivalent}$  substrings correspond to the same state. In other words the number of states in a suffix automaton is equal to the number of equivalence classes among all substrings, plus the initial state.

**Lemma 1:** Two non-empty substrings  $u$  and  $w$  (with  $\text{length}(u) \leq \text{length}(w)$ ) are  $\text{endpos-equivalent}$ , if and only if the string  $u$  occurs in  $s$  only in the form of a suffix of  $w$ . (Proof is obvious)

**Lemma 2:** Consider two non-empty substrings  $u$  and  $w$  (with  $\text{length}(u) \leq \text{length}(w)$ ). Then their sets  $\text{endpos}$  either don't intersect at all, or  $\text{endpos}(w)$  is a subset of  $\text{endpos}(u)$ . And it depends on if  $u$  is a suffix of  $w$  or not. (Proof is obvious)

**Lemma 3:** Consider an  $\text{endpos-equivalence}$  class. Sort all the substrings in this class by non-increasing length. Then in the resulting sequence each substring will be one shorter than the previous one, and at the same time will be a suffix of the previous one. In other words the substrings in the same equivalence class are actually each others suffixes, and take all possible lengths in a certain interval  $[x, y]$ .

Consider some state  $v \neq t_0$  in the automaton. As we know, the state  $v$  corresponds to the class of strings with the same  $\text{endpos}$  values. And if we denote by  $w$  the longest of these strings, then all the other strings are suffixes of  $w$ . **suffix link**  $\text{link}(v)$  leads to the state that corresponds to the longest suffix of  $w$  that is another  $\text{endpos-equivalent}$  class.

**Lemma 4:** Suffix links form a tree with the root  $t_0$ .

**Lemma 5:** If we build a  $\text{endpos}$  tree from all the existing sets (according to the principle "the set-parent contains as subsets of all its children"), then it will coincide in structure with the tree of suffix references. **Note:**  $\text{endpos}(t_0) = \{-1, 0, \dots, \text{length}(s) - 1\}$

**Note:** For each state  $v$  one or multiple substrings match. We denote by  $\text{longest}(v)$  the longest such string, and through  $\text{len}(v)$  its length. We denote by  $\text{shortest}(v)$  the shortest such substring, and its length with  $\text{minlen}(v)$ . Then all the strings corresponding to this state are different suffixes of the string  $\text{longest}(v)$  and have all possible lengths in the interval  $[\text{minlength}(v); \text{len}(v)]$ . For each state  $v \neq t_0$  a suffix link is defined as a link, that leads to a state that corresponds to the suffix of the string  $\text{longest}(v)$  of length  $\text{minlen}(v) - 1$ .  $\text{minlen}(v) = \text{len}(\text{link}(v)) + 1$

Number of states in suffix automaton of the string  $s$  of length  $n$  doesn't

exceed  $2n - 1$  (for  $n \geq 2$ )  
Number of transitions  $\leq 3n - 4$ .

```
#include <bits/stdc++.h>

using namespace std;

typedef pair<int, int> ii;
typedef long long int int;
// Learning in depth about suffix automaton.
struct state {
    int len, link;
    map<char, int> next;
    int cnt;
    int firstpos;
    bool is_clon;
    vector<int> inv_link;
};

const int MAXLEN = 250005;
vector<state> st;
int sz, last;
vector<vector<int>> > tcntdata;
vector<int> nsubs, d, lw;
vector<bool> isterminal;
void sa_init(unsigned int size) {
    nsubs.assign(2 * size, 0);
    isterminal.assign(2 * size, false);
    tcntdata.clear();
    tcntdata.resize(2 * size);
    lw.assign(2 * size, 0);
    d.assign(2 * size, 0);
    st.clear();
    st.resize(2 * size);
    sz = last = 0;
    st[0].len = 0;
    st[0].cnt = 0;
    st[0].link = -1;
    st[0].firstpos = -1;
    st[0].is_clon = false;
    ++sz;
    tcntdata[0].push_back(0);
}

void sa_extend(char c) {
    int cur = sz++;
    st[cur].cnt = 1;
    st[cur].len = st[last].len + 1;
    st[cur].firstpos = st[cur].len - 1;
    st[cur].is_clon = false;
    tcntdata[st[cur].len].push_back(cur);
    int p;
    for (p = last; p != -1 && !st[p].next.count(c); p = st[p].link)
        st[p].next[c] = cur;
    if (p == -1) // In case we came to the root, every non-empty suffix is accepted by state cur hence we can make link(cur) = 0
        st[cur].link = 0;
    else // Otherwise we found such state p, which already has transition by character c. It means that all suffixes of length  $\leq \text{len}(p)$  are accepted by state cur. The largest string accepted by state cur is of length  $\text{len}(p) + 1$ . It is a clone of state p.
        int q = st[p].next[c];
        if (st[p].len + 1 == st[q].len) // The largest string accepted by state cur is of length  $\text{len}(p) + 1$ . It is a clone of state p.
            st[cur].link = q;
        else {
            int clone = sz++;
            st[clone].len = st[p].len + 1;
            st[clone].next = st[q].next;
            st[clone].link = st[q].link;
            st[clone].cnt = 0;
            st[clone].firstpos = st[q].firstpos;
            st[clone].is_clon = true;
            tcntdata[st[clone].len].push_back(clone);
            for (; p != -1 && st[p].next[c] == q; p = st[p].link)
                st[p].next[c] = clone;
            st[q].link = st[cur].link = clone;
        }
    }
    last = cur;
}

// A state v will correspond to set of endpos equivalent strings,
void processcnt() {
    int maxlen = st[last].len;
    for (int i = maxlen; i >= 0; i--) {
        for (auto v : tcntdata[i]) {
            st[st[v].link].cnt += st[v].cnt;
        }
    }
}

// Clearly suffixes should be marked as terminal
void processterminal() {
    isterminal[last] = true;
    int p = st[last].link;
    while (p != -1) {
        isterminal[p] = true;
        p = st[p].link;
    }
}

// Gives the number of substrings (not necessarily distinct). Clearly
int processnumsubs(int at) {
    if (nsubs[at] != 0) return nsubs[at];
    nsubs[at] = st[at].cnt;
    for (auto to : st[at].next) {
        nsubs[at] += processnumsubs(to.second);
    }
    return nsubs[at];
}

void constructSA(string ss) {
    sa_init(ss.size());
    for (int i = 0; i < ss.size(); i++) {
        sa_extend(ss[i]);
    }
    processterminal();
    processcnt();
    for (int v = 1; v < sz; ++v)
        st[st[v].link].inv_link.push_back(v);
    processnumsubs(0);
}

// -----After SA Construction
//
int getcorrstate(string &tosearch) {
    int at = 0;
    for (int i = 0; i < tosearch.size(); i++) {
        if (!st[at].count(tosearch[i])) return -1;
        at = st[at].next[tosearch[i]];
    }
    return at;
}

bool exist(string &tosearch) {
    int at = getcorrstate(tosearch);
    return at == -1 ? false : true;
}

// Returns number of different substrings = number of paths in DAG. And
//  $d[v] = 1 + \text{summation}(d[w])$ 
// this same recurrence will give the size of subtree in case of a tree
int numdiffsub(int at) {
    if (d[at] != 0) return d[at];
    d[at] = 1;
    for (auto to : st[at].next) {
        d[at] += numdiffsub(to.second);
    }
    return d[at];
}

// Returns total length of all distinct substrings = summation_path(n)
//  $\text{ans}[v] = \text{summation}(d[w] + \text{ans}[w])$  basically, once we know  $\text{ans}[w]$ ,
int totlength(int at) {
    if (lw[at] != 0) return lw[at];
    for (auto to : st[at].next) {
        lw[at] += d[to.second] + totlength(to.second);
    }
    return lw[at];
}

// Find Lexicographically K-th Substring (here repeated substring is also counted)
void kthlexo(int at, int k, string &as) {
    if (k <= 0) return;
    for (auto to : st[at].next) {
        if (nsubs[to.second] >= k) {
            as.push_back(to.first);
            kthlexo(to.second, k - st[to.second].cnt, as);
            break;
        } else {
            k -= nsubs[to.second];
        }
    }
}
```

```
}

// Clearly suffixes should be marked as terminal
void processterminal() {
    isterminal[last] = true;
    int p = st[last].link;
    while (p != -1) {
        isterminal[p] = true;
        p = st[p].link;
    }
}

// Gives the number of substrings (not necessarily distinct). Clearly
int processnumsubs(int at) {
    if (nsubs[at] != 0) return nsubs[at];
    nsubs[at] = st[at].cnt;
    for (auto to : st[at].next) {
        nsubs[at] += processnumsubs(to.second);
    }
    return nsubs[at];
}

void constructSA(string ss) {
    sa_init(ss.size());
    for (int i = 0; i < ss.size(); i++) {
        sa_extend(ss[i]);
    }
    processterminal();
    processcnt();
    for (int v = 1; v < sz; ++v)
        st[st[v].link].inv_link.push_back(v);
    processnumsubs(0);
}

// -----After SA Construction
//
int getcorrstate(string &tosearch) {
    int at = 0;
    for (int i = 0; i < tosearch.size(); i++) {
        if (!st[at].count(tosearch[i])) return -1;
        at = st[at].next[tosearch[i]];
    }
    return at;
}

bool exist(string &tosearch) {
    int at = getcorrstate(tosearch);
    return at == -1 ? false : true;
}

// Returns number of different substrings = number of paths in DAG. And
//  $d[v] = 1 + \text{summation}(d[w])$ 
// this same recurrence will give the size of subtree in case of a tree
int numdiffsub(int at) {
    if (d[at] != 0) return d[at];
    d[at] = 1;
    for (auto to : st[at].next) {
        d[at] += numdiffsub(to.second);
    }
    return d[at];
}

// Returns total length of all distinct substrings = summation_path(n)
//  $\text{ans}[v] = \text{summation}(d[w] + \text{ans}[w])$  basically, once we know  $\text{ans}[w]$ ,
int totlength(int at) {
    if (lw[at] != 0) return lw[at];
    for (auto to : st[at].next) {
        lw[at] += d[to.second] + totlength(to.second);
    }
    return lw[at];
}

// Find Lexicographically K-th Substring (here repeated substring is also counted)
void kthlexo(int at, int k, string &as) {
    if (k <= 0) return;
    for (auto to : st[at].next) {
        if (nsubs[to.second] >= k) {
            as.push_back(to.first);
            kthlexo(to.second, k - st[to.second].cnt, as);
            break;
        } else {
            k -= nsubs[to.second];
        }
    }
}
```

```

    }
}
// Repeated substring not allowed
void kthlexo2(int at, int k, string &as) {
    if(k <= 0) return;
    for(auto to : st[at].next) {
        if(d[to.second] >= k) {
            as.push_back(to.first);
            kthlexo2(to.second, k - 1, as);
            break;
        } else {
            k -= d[to.second];
        }
    }
}
// Returns true is the given string is the suffix of T
bool issuffix(string &tosearch) {
    int at = getcorrstate (tosearch);
    return isterminal[at];
}

// Returns how many times P enters in T (occurences can overlap)
/* for each state v of the machine calculate a number 'cnt[v]' which is equal to the size of the set endpos(v). In fact, all the strings corresponding to the same state v enter the T same number of times which is equal to the number of positions in the set endpos. */
int numoccur(string &tosearch) {
    int at = getcorrstate (tosearch);
    return at == -1 ? 0 : st[at].cnt;
}

// Return position of the first occurrence of substring in T
int firstpos(string &tosearch) {
    int at = getcorrstate (tosearch);
    return st[at].firstpos - tosearch.size() + 1;
}

// Returns Positions of all occurrences of substring in T
void output_all_occurrences (int v, int P_length) {
    if (!st[v].is_clon)
        cout << st[v].firstpos - P_length + 1 << "\n";
    for (size_t i=0; i<st[v].inv_link.size(); ++i)
        output_all_occurrences(st[v].inv_link[i], P_length);
}

void smallestcyclicshift(int n) {
    int at = 0;
    string anss;
    int length = 0;
    while(length != n) {
        for (auto it : st[at].next) {
            anss.push_back(it.first);
            at = it.second;
            length++;
            break;
        }
    }
    cout << anss << "\n";
    // cout << st[at].firstpos - n + 1 << "\n"; may give the index for that shift
}

int main() {
    string s;
    cin >> s;
    constructSA(s);
    int choice;
    cout << "Choose your option:\n1: Substring exist in T or not\n2: Number of different substring of T\n";
    cout << "3: To find total length of distinct substrings\n";
    cout << "4: To check whether the given string is suffix or not\n";
    cout << "5(5.1): To print the K-th lexicographic substring (Repeated substrings are allowed)\n";
    cout << "6: To see how many times, given string occurs in T\n";
    cout << "7: To find the position of the first occurrence of substring in T\n";
    cout << "8: To find position of all the occurrences of substring in T\n";
    cout << "9(5.2): To print the K-th lexicographic substring (Repeated substrings are not allowed)\n";
    cout << "10: To find the smallest cyclic shift\n";

    cout << "15: to exit\n";
    cin >> choice;
    if(choice == 15) break;
    string ss, ns;
    int k, v;

    switch(choice) {
        case 1:
            cout << "Enter your string\n";
            cin >> ss;
            if (exist(ss)) {
                cout << "yes it exist\n";
            } else {
                cout << "no it does not exist\n";
            }
            //cout << "Enter new to string to search for\n";
            break;
        case 2:
            cout << numdiffsub(0) - 1 << "\n";
            break;
        case 3:
            numdiffsub(0);
            cout << totlength(0) << "\n";
            break;
        case 4:
            cout << "Enter the string\n";
            cin >> ss;
            if(issuffix(ss)) cout << "yes\n";
            else cout << "no\n";
            break;
        case 5:
            cout << "Enter k\n";
            cin >> k;
            ss.clear();
            kthlexo(0, k, ss);
            if(ss.empty()) {
                ss = "No such line.";
            }
            cout << ss << "\n";
            break;
        case 6:
            cout << "Enter string\n";
            cin >> ss;
            cout << numoccur(ss) << "\n";
            break;
        case 7:
            cout << "Enter string\n";
            cin >> ss;
            cout << firstpos(ss) << "\n";
            break;
        case 8:
            cout << "Enter string\n";
            cin >> ss;
            /*for(v = 0; v < s.size(); v++) {
                cout << setw(2) << v;
            }
            cout << "\n";
            for(v = 0; v < s.size(); v++) {
                cout << setw(2) << s[v];
            }
            cout << "\n";*/
            v = getcorrstate(ss);
            if(v != -1) {
                output_all_occurrences(v, ss.size());
            }
            break;
        case 9:
            cin >> k;
            numdiffsub(0);
            kthlexo2(0, k, ss);
            if(ss.empty()) {
                ss = "No such line.";
            }
            cout << ss << "\n";
            break;
        case 10:
            cout << "Enter S\n";
            string >= allowed\n";
            s = ss + ss;
            constructSA(s);
            smallestcyclicshift(ss.size ());
            break;
        case 15:
            return 0;
    }
}

```

## 6.7 Important Problems

Review: cf 631D



- UVA 10739 Sol, UVA 10739 Prob: String to palindrome, just see the minimum edit distance between this string and its reverse but need to divide by 2 later as both strings are it itself.

- Queries for the number of palindromic substrings within given range, **See this soln to see power of hashing.**

**Note:** Strings and arrays are considered 0-based in the following solution.

Let  $isPal[i][j]$  be 1 if  $s[i..j]$  is palindrome, otherwise, set it 0. Let's define  $dp[i][j]$  to be number of palindrome substrings of  $s[i..j]$ . Let's calculate  $isPal[i][j]$  and  $dp[i][j]$  in  $O(|S|^2)$ . First, initialize  $isPal[i][i] = 1$  and  $dp[i][i] = 1$ . After that, loop over  $len$  which states length of substring and for each specific  $len$ , loop over  $start$  which states starting position of substring.  $isPal[start][start + len - 1]$  can be easily calculated by the following formula:

```
isPal[start][start+len-1] = isPal[start+1][start+len-2] & (s[start] == s[start+len-1])
```

After that,  $dp[start][start + len - 1]$  can be calculated by the following formula which is derived from [Inc-Exc Principle](#).

```
dp[start][start+len-1] = dp[start][start+len-2] + dp[start+1][start+len-1] - dp[start+1][start+len-2] + isPal[start][start+len-1]
```

After preprocessing, we get queries  $l_i$  and  $r_i$  and output  $dp[l_i - 1][r_i - 1]$ . Overall complexity is  $O(|S|^2)$ .

One more problem to see how to use hashing.


- Timus 1989 Subpalindromes, Sol
- UVA 11107 Sol - simple, UVA 11107 Sol - complicated but more powerful: Problem is to find the longest substring shared by more than half of given strings.

## 7 Geometry

- for given 3 points of a valid parallelogram, there are 3 possible locations for the 4th point.
- we have a hexagon with integral sides and all interior angles equal to 120 deg. we draw lines parallel to the side of the hexagon, such that we get equilateral triangles of side 1 unit, how many equilateral triangles did we get? Sol: Let's consider regular triangle with sides of  $k$ . Let's split it to regular triangles with sides of 1 by lines parallel to the sides. Big triangle area  $k^2$  times larger than small triangles area and therefore big triangle have splitted by  $k^2$  small triangles.

If we join regular triangles to sides  $a_1, a_3$  and  $a_5$  of hexagon we get a triangle sides of  $a_1 + a_2 + a_3$ . Then  $\text{hexagon area}$  is equals to  $(a_1 + a_2 + a_3)^2 - a_1^2 - a_3^2 - a_5^2$ .

45



- An inscribed angle is an angle formed by 2 chords in a circle which have a common endpoint. This common endpoint form the vertex of the inscribed angle. The other 2 endpoints define what we call an intercepted arc.
- Measure of intercepted arc of a unit circle is  $2/\pi$  that of inscribed angle.

Angles In A Circle	
Inscribed angles subtended by the same arc are equal.	
Angles subtended by the diameter (or semi-circle) is 90°.	
Central angle is twice any inscribed angle subtended by the same arc.	

- Circles will certainly not touch or intersect iff the dist. between their center is greater than the sum of their radii.
- A circle 'a' contains a circle 'b' iff the distance between their centers is less than the absolute value of their radii difference.
- let the bottom left/top right corner point be denoted as a/c resp. Then rectangles intersect iff  $\max(a1.x, a2.x) < \min(c1.x, c2.x)$  and  $\max(a1.y, a2.y) < \min(c1.y, c2.y)$ .
- Similarly in case of 3d, vol of intersection of all cuboids is given by  $(ux - lx)(uy - ly)(uz - lz)$  where  $lx = \max(x1, x2, ..., xn)$  and  $ux = \min(...)$ .
- To get unique points

```
sort(cops.begin(), cops.end());
cops.resize (distance(cops.begin(), unique (cops.begin(), cops.end()), cops.end()));
```

- Remember that we can apply bisection method ( $while(abs(hi - lo) < eps)$ ) and ternary search in geometry.
- for a quadrilateral drawn inside circle sum of opposite angles is 180 deg.
- Sum of all angles of a quadrilateral is always 360 deg.
- Center of mass of pts =  $\sum m_i \vec{r}_i / \sum m_i$ . This is same as centre of mass of union of mutually exclusive objects where each  $\vec{r}_i$  is that objects COM and  $m_i$  is that objects mass.
- COM of a line is its midpoint
- COM of  $\Delta = (\vec{r}_1 + \vec{r}_2 + \vec{r}_3)/3$  but this is not the case for general polygon.
- For a general convex polygon, we may triangulate it, find that triangles area and COM and the combine to get COM of original figure.
- Similarly in case of 3D, COM of tetrahedron =  $\sum_{i=1}^4 \vec{r}_i / 4$  and a general 3d object can be again divided into tetrahedrons.
- For general polygon we can do  $\vec{r}_c = (\sum_i \vec{r}_{z, p_i} \cdot \vec{r}_{z, p_{i+1}}) / \sum_i S_{z, p_i, p_{i+1}}$  where S term denotes triangles area with sign.

### • Some properties of triangles

- $s = p/2$
- $A = \sqrt{s * (s - a) * (s - b) * (s - c)}$
- $a / \sin A = b / \sin B = c / \sin C = 2 * R$
- $R = abc / (4 * A)$
- $c^2 = a^2 + b^2 - 2 * a * b * \cos(C)$
- Inscribed circle (incircle),  $r = A/s$
- Center of incircle is the meeting point of angle bisectors.
- Medians divide a triangle into 6 triangles of equal area and area of original triangle is  $4/3 * \sqrt{s * (s - a) * (s - b) * (s - c)}$ , here a, b, c is the length of medians.
- For valid  $\Delta$  sum of any 2 sides should be greater than third. If the three lengths are sorted, we can simply check whether  $a + b > c$ . For quadrangle sum of any 3 sides should be greater than 4th.
- The center of circumcircle is the meeting point of  $\Delta$ 's perpendicular bisector.
- Triangle angle bisector property:  $|AB|/|AC| = |BD|/|DC|$  where AD is the angle bisector of angle BAC.

- Given sides of triangle, sort them, then see 3 consecutive sides, if the area is positive (using herons formula), they form a valid triangle,  $mx = \max(mx, \text{area})$ .


- Kite is a quadrilateral which has two pair of sides of same length which are adjacent to each other. The area of kits is  $\text{diagonal}_1 * \text{diagonal}_2 / 2$ . Diagonals of kite are perpendicular.
- Rhombus is a special parallelogram where every side has equal length. It is also a special case of kits where every side has equal length.
- Convex Polygon: All interior angles should be less than 180 deg. Polygon which is not Convex is Concave
- Concave polygon has critical point (point from which entire polygon is not visible).
- Pick's Theorem.**  $A = i + \frac{b}{2} - 1$ , where:  $P$  is a simple polygon whose vertices are grid points,  $A$  is area of  $P$ ,  $i$  is # of grid points in the interior of  $P$ , and  $b$  is # of grid points on the boundary of  $P$ . If  $h$  is # of holes of  $P$  ( $h + 1$  simple closed curves in total),  $A = i + \frac{b}{2} + h - 1$ .

// way to get boundary points


```
ll getb (vector<point> &poly) {
    ll b = 0;
    int n = P.size () - 1;
    for (int i = 0; i < n; i++) {
        int j = i + 1;
        ll ret = gcd (abs(poly[i].x - poly[j].x), abs (poly[i].y - poly[j].y));
        // for point to be on lattice its x and y coordinate has to be a multiple of gcd.
        b += ret;
    }
    return b;
}
```

- To check whether a point is on or inside a convex polygon that area method is best.
- Centroid of a polygon,  $C_x = 1/(6*A) * \sum_{i=0}^{n-1} (x_i + x_{i+1}) * (x_i * y_{i+1} - x_{i+1} * y_i)$   
 $C_y = 1/(6*A) * \sum_{i=0}^{n-1} (y_i + y_{i+1}) * (x_i * y_{i+1} - x_{i+1} * y_i)$   
**Here:**  $(x_n, y_n) = (x_0, y_0)$ . And dont given absolute value to A.

$$A = 1/2 \begin{vmatrix} x_0 & y_0 \\ x_1 & y_1 \\ \vdots & \vdots \\ x_n & y_n \end{vmatrix} = 1/2 * ((x_0 * y_1 + x_1 * y_2 + \dots + x_{n-2} * y_{n-1}) - (x_1 * y_0 + \dots))$$



$$P = \left( \frac{mx_2 + nx_1}{m+n}, \frac{my_2 + ny_1}{m+n} \right).$$



$$P = \left( \frac{mx_2 - nx_1}{m-n}, \frac{my_2 - ny_1}{m-n} \right).$$

- Area of union of triangles
- Finding common tangents to two circles
- Minimum Bounding Rectangle, Sol: basically use atan2 and rotate wrt that point.
- Given a set of points, to determine whether a point lies inside a triangle formed by any 3 points, it is enough to check whether the given point lies inside the convex hull of given data points.

## 7.1 Fast application of a set of geometric operations to a set of points

- Given  $n$  points  $p_i = [x_i, y_i, z_i]$ , apply  $m$  transformations to each of these points. Each transformation can be a shift, a scaling or a rotation around a given axis by a given angle. There is also a "loop" operation which applies a given list of transformations  $k$  times. ("loop" operations can be nested) All the operations should be applied faster than  $O(n * \text{length})$ , where length is the total no. of transformations to be applied (after unrolling "loop" operations).  
Sol. Each of the transformation can be written as a linear combination of old coordinates giving us a 4x4 matrix.
- point is represented as  $[x, y, z, 1]$  and here I am multiplying operation to the right of the point (actually I should have done it as a transpose of whole thing)

- Shift  $x$  by 5,  $y$  by 7,  $z$  by 9.

$$\begin{bmatrix} 1 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 5 & 7 & 9 & 1 \end{bmatrix}$$

- Scale  $x$  by 10 other two by 5.

$$\begin{bmatrix} 10 & 0 & 0 & 0 \\ 0 & 5 & 0 & 0 \\ 0 & 0 & 5 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

- Rotate  $\theta$  deg. around  $x$  axis.

$$\begin{bmatrix} 1 & 1 & 0 & 0 \\ 0 & \cos \theta & -\sin \theta & 0 \\ 0 & \sin \theta & \cos \theta & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

- Now, once every transformation is described as a matrix, the sequence of transformations can be described as a product of these matrices and a "loop" of  $k$  repetitions can be described as the matrix raised to the power  $k$  (which can be calc. using binary exponentiation). Time complexity  $O(n + m * \log k)$ .

## 7.2 Klee's Algo

Given  $n$  segments on a line, each described by a pair of coordinates  $(a_{i1}, a_{i2})$ . We have to find the length of their union. It works in  $O(n \log n)$  and has been proven to be the asymptotically optimal.

// Returns sum of lengths covered by union of given segments

```
int segmentUnionLength(const vector <pair <int,int> > &seg) {
    int n = seg.size();
    // Create a vector to store starting and ending points
    vector <pair <int, bool> > points(n * 2);
    for (int i = 0; i < n; i++) {
        points[i*2] = make_pair(seg[i].first, false);
        points[i*2 + 1] = make_pair(seg[i].second, true);
    }
}
```

// Sorting all points by point value  
sort(points.begin(), points.end());

int result = 0; // Initialize result

// To keep track of counts of current open segments  
// (Starting point is processed, but ending point is not)  
int Counter = 0;

// Trverse through all points

```
for (int i=0; i<n*2; i++) {
```

// If there are open points, then we add the difference between previous and current point.  
// This is interesting as we don't check whether current point is opening or closing,

```
if (Counter)
    result += (points[i].first - points[i-1].first);
```

// If this is an ending point, reduce, count of open points.  
(points[i].second)? Counter-- : Counter++;

```
}
return result;
```

}

## 7.3 Closest Pair Problem

To be revised.

// First sort the points by their x coordinates. Do whatever if there  
// I have to write the correct implementation following the idea menti  
// Commented section shows how to solve the problem:

// Find out the maximum size such that if you draw such size quared ar

```
double dvac(int low, int high) {
```

```
    if(low < high) {
```

```
        if(low == high - 1) {
```

```
            return dist(data[low], data[high]); // return maz (data[h
```

```
        }
```



```

int mid = (low + high) / 2;
double d1 = dvac(low, mid);
double d2 = dvac(mid + 1, high);
double dp = min(d1, d2);
double d3 = 10000;
// It is guaranteed that there can be at most 6 points
for(int i = mid; i >= low; i--) {
    double temp = dist(point(data[i].x, 0), point(data[mid].x, 0));
    if(temp > dp - EPS) break;
    for(int j = mid + 1; j <= high; j++) {
        double temp2 = dist(point(data[i].x, 0), point(data[j].x, 0));
        if(temp2 > dp - EPS) break;
        d3 = min(d3, dist(data[i], data[j]));
        // d3 = min (d3, max (data[j].x - data[i].x, abs(...))
    }
}
return min(dp, d3);
}
return 10000;
}
}

```

## 7.4 2D geo lib

2D geo lib  
Circle line intersection, same as sphere line intersection.

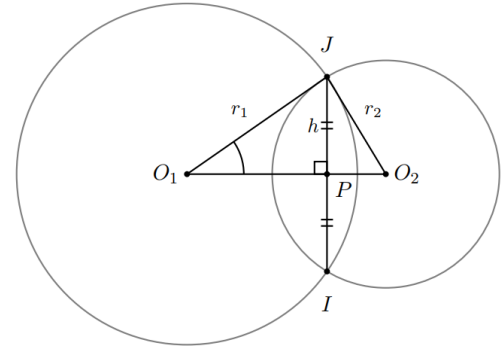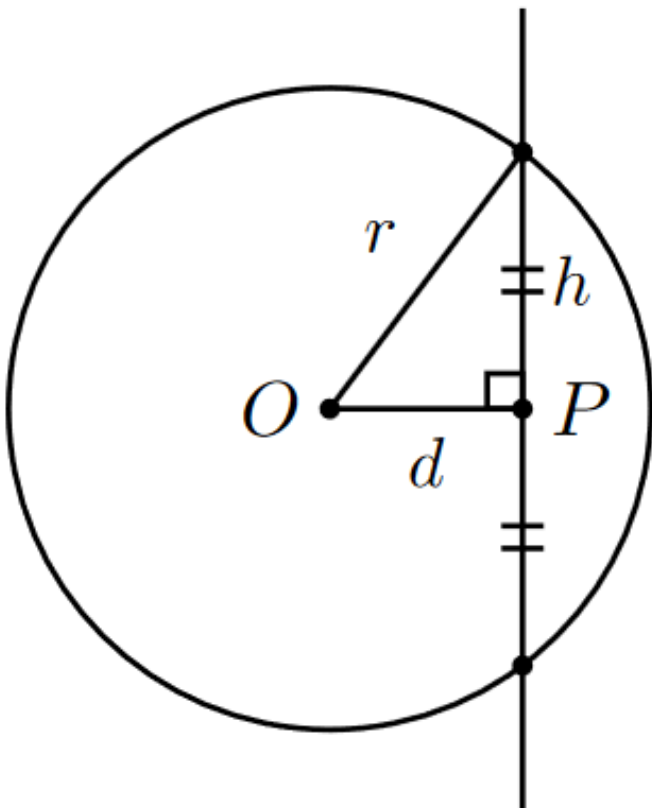

Let  $d = |O_1O_2|$ . We know from the law of cosines on  $O_1O_2J$  that

$$\cos(\angle O_2O_1J) = \frac{d^2 + r_1^2 - r_2^2}{2dr_1}$$

and since  $O_1PJ$  is a right triangle,

$$|O_1P| = r_1 \cos(\angle O_2O_1J) = \frac{d^2 + r_1^2 - r_2^2}{2d}$$

which allows us to find  $P$ .

Now to find  $h = |PI| = |PJ|$ , we apply the Pythagorean theorem on triangle  $O_1PJ$ , which gives  $h = \sqrt{r_1^2 - |O_1P|^2}$ .

## 7.5 3D geo lib

3D Geo Lib

Same orientation	Different orientation


We can reformulate the sum in the same way:

$$\begin{aligned} \vec{AB} \times \vec{AC} + \vec{AC} \times \vec{AD} &= (A \times B + B \times C + C \times A) \\ &\quad + (A \times C + C \times D + D \times A) \\ &= A \times B + B \times C + C \times D + D \times A \end{aligned}$$

If we continue with more and more vertices, we can make the following general conclusion. Given a polygon  $P_1 \dots P_n$ , we can compute the *vector area*

$$\vec{S} = \frac{P_1 \times P_2 + P_2 \times P_3 + \dots + P_n \times P_1}{2}$$


This vector is perpendicular to the polygon, and  $\|\vec{S}\|$  gives its area. It




If the sphere is centered at the origin, the position represented by coordinates  $(\varphi, \lambda)$  is

$$(r \cos \varphi \cos \lambda, r \cos \varphi \sin \lambda, r \sin \varphi)$$

Given two spherical segments  $[AB]$  and  $[CD]$ , we would like to figure out if they intersect, and what their intersection is. This is part of a more general problem: given two segments  $[AB]$  and  $[CD]$  in space, if we view them from an observation point  $O$ , does one of them hide part of the other, that is, is there a ray from  $O$  that touches them both?



common point on sphere




common ray from  $O$

We will solve the general problem, and make sure that our answer is always exact when points  $A, B, C, D$  are integer points. To do this, we will separate cases just like we did for 2D segment intersection in section 2.5.2:

1. Segments  $[AB]$  and  $[CD]$  intersect *properly*, that is, their intersection is one single point which is not an endpoint of either segment. For the general problem this means that there is a single ray from  $O$  that touches both  $[AB]$  and  $[CD]$ , and it doesn't touch any of  $A, B, C, D$ .
2. In all other cases, the intersection, if it exists, is determined by the endpoints. If it is a single point, it must be one of  $A, B, C, D$ , and if it is a whole segment, it will necessarily start and end with points in  $A, B, C, D$ .


For the rest of explanation, we will consider the case of spherical segment intersection, because it's easier to visualize, but it should be easy to verify that this also applies to the general problem



We can check this with mixed product. We have to verify that

- $o_A = (C \times D) \cdot A$  and  $o_B = (C \times D) \cdot B$  have opposite signs;
- $o_C = (A \times B) \cdot C$  and  $o_D = (A \times B) \cdot D$  have opposite signs.

However, this time it's not enough. Sometimes, even though the conditions above are verified, there is no intersection, because the segments are on opposite sides of the sphere:




$C$  and  $D$  are on the other side of the sphere


To eliminate this kind of case, we also have to check that  $o_A$  and  $o_C$  have opposite signs (this is clearly not the case here).

## Improper intersections


To deal with the second case, we will do as for 2D segments and test for every point among  $A, B, C, D$  if it is on the other segment. If it is, we add it to a set  $S$ .  $S$  will contain 0, 1, or 2 distinct points, describing an empty intersection, a single intersection point or an intersection segment.



$S = \emptyset$   
no intersection



$S = \{C\}$   
intersection point




$S = \{B, C\}$   
intersection segment


To check whether a point  $P$  is on spherical segment  $[AB]$ , we need to check that  $P$  is on plane  $OAB$ , but also that  $P$  is “between” rays  $[OA]$  and  $[OB]$  on that plane.

Let  $\vec{n} = A \times B$ , a normal of plane  $OAB$ . Checking that  $P$  is on plane  $OAB$  is easy:  $\vec{n} \cdot P$  should be 0. If  $P$  is indeed on plane  $OAB$ , then we can check if it is to the “right” of  $[OA]$  by looking at cross product  $A \times P$ . It should be perpendicular to plane  $OAB$ . If it is in the same direction as  $\vec{n}$ , then  $P$  is to the right of  $OA$ , and if it is in the opposite direction, then  $P$  is to the left of  $OA$ . So we need to check  $\vec{n} \cdot (A \times P) \geq 0$ . Similarly, to check that  $P$  is to the left of  $OB$ , we should check  $\vec{n} \cdot (B \times P) \leq 0$ .

If instead of values in  $[0, \pi]$ , we want to know the oriented angle<sup>3</sup> between  $[AB]$  and  $[AC]$ , that is, how much we rotate if we go from  $B$  to  $C$  around  $A$  counterclockwise, then we need to know on which side of plane  $OAB$  point  $C$  lies. If  $C$  lies “to the left” of plane  $OAB$ , the angle given by `angle()` is correct, but if  $C$  lies “to the right”, we should subtract it from  $2\pi$ .




$\text{angleSph}(a, b, c) \approx 30^\circ$   
 $\text{orientedAngleSph}(a, b, c) \approx 30^\circ$




$\text{angleSph}(a, b, c) \approx 30^\circ$   
 $\text{orientedAngleSph}(a, b, c) \approx 330^\circ$

Given points  $P_1, \dots, P_n$  on a sphere, let's call spherical polygon  $P_1 \dots P_n$  the region on the sphere delimited by spherical segments  $[P_1P_2]$ ,  $[P_2P_3]$ ,  $\dots$ ,  $[P_nP_1]$ , and which is on the left when travelling from  $P_1$  to  $P_2$ . The counterclockwise order is important here because both “sides” on the contour are valid candidates.



area of  $ABCD$



area of  $DCBA$