


pluggable

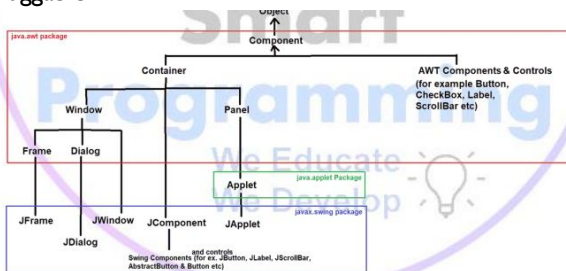

The screenshot shows an IDE window titled 'lang/jre6 - NetBeans CE 6.2.1'. The menu bar includes 'File', 'Edit', 'Source Editor', 'Run', 'Debug Profile', 'Team Tools', 'Window', and 'Help'. The toolbar contains icons for file operations and running. The 'Project' pane on the left shows a project named 'lang_jre6' with sub-projects 'lang_jre6.jar' and 'lang_jre6.jar'. The main editor displays a Java file named 'Test.java'. The code is as follows:


```

1 package oracle.jrockit.jfr;
2
3 JFRInputEvent (com.sun.java.fx.logging)
4
5 /**
6  * JFRState (oracle.jrockit.jfr)
7  */
8 JFXPanel (java.fx.embed.swing)
9 public JFXPanelBuilder<J> (java.fx.embed.swing)
10 {
11     JFileChooser (java.fx.swing)
12     pub JFormattedTextField (java.fx.swing)
13     {
14         JFrame (java.fx.swing)
15     }
16 }
17
18 if
19
20 Please wait...


```

Annotations are present in the code:

- class**: Points to the `JFXPanel` class definition.
- Package**: Points to the `package oracle.jrockit.jfr;` statement.
- Interface**: Points to the `JFXPanelBuilder` interface definition.

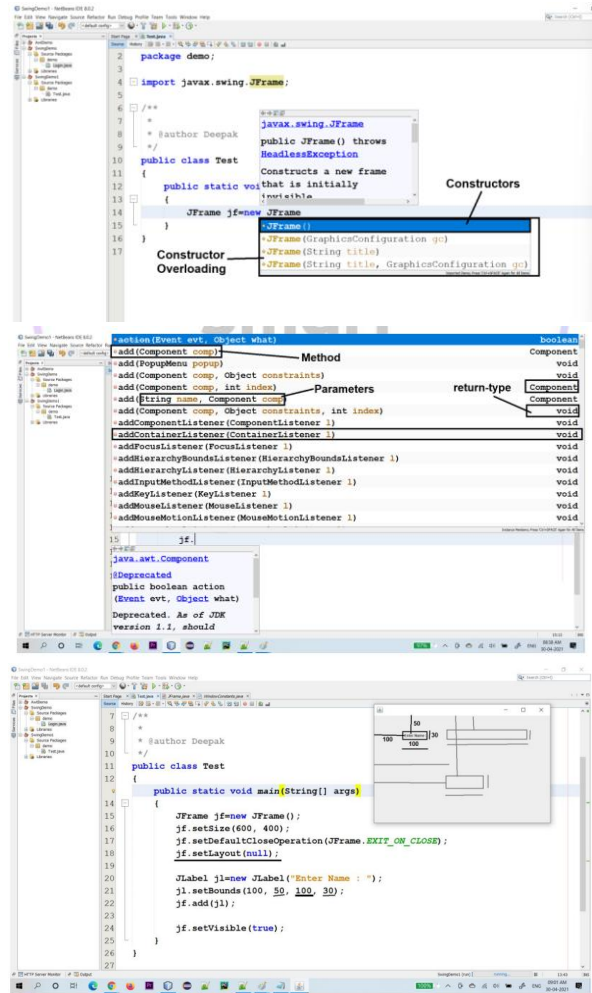

=> Event Handling :- -> Changing the state of an object is known as event. -> For example clicking on button, focus on textfield, mouse event on any component etc -> To perform any event java provides an package i.e. java.awt.event -> Hierarchy of Event Handling in AWT :-

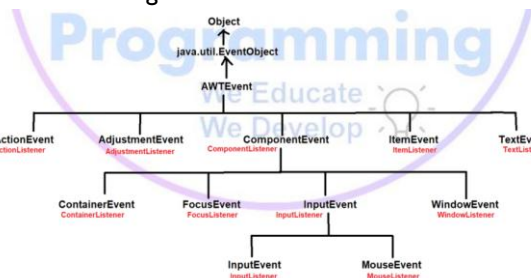

-> NOTE : Whenever we have to perform any event on component then we have to register that component for event and for this java provide registration methods

[Document Title]

[Type the Document Subtitle]