WhatsApp | sowmya2024 | task3.py - Col | task2.py - Col | task4.py - Col | Insurance Cha | New Tab

colab.research.google.com/drive/1lKGFbq_O0R0xKAyP9BtAvWyHSaYFDiqk

task2.py

File Edit View Insert Runtime Tools Help

Commands + Code + Text ▷ Run all Share Gemini Connect

```
print(df.groupby('Sex')['Survived'].mean())
```

```
◆ First 5 Rows of the Dataset:
   PassengerId  Survived  Pclass                         Name     Sex   Age  \
1            0         3   Allen       Mr. William Henry    male  35.0
2            1         1 Bonnell        Miss. Elizabeth  female  58.0
3            1         3 Johnson               Mr. James    male  27.0
4            1         1 Cumings       Mrs. John Bradley  female  38.0
5            0         3 Palsson   Master. Gosta Leonard    male   2.0

   SibSp  Parch     Ticket     Fare Cabin Embarked
1      0      0     373450   8.0500   NaN        S
2      0      0     113783  53.1000  C103        C
3      0      0     345763   8.4583   NaN        S
4      1      0   PC 17599  71.2833   C85        C
5      3      1     349909  21.0750   NaN        S

◆ Dataset Info:
<class 'pandas.core.frame.DataFrame'>
Index: 10 entries, 1 to 10
Data columns (total 12 columns):
 #   Column       Non-Null Count  Dtype
---  ------       --------------  -----
 0   PassengerId  10 non-null     int64
 1   Survived     10 non-null     int64
 2   Pclass       10 non-null     object
```

{} Variables Terminal

Type here to search 24°C ENG IN 18:33 23/07/2025

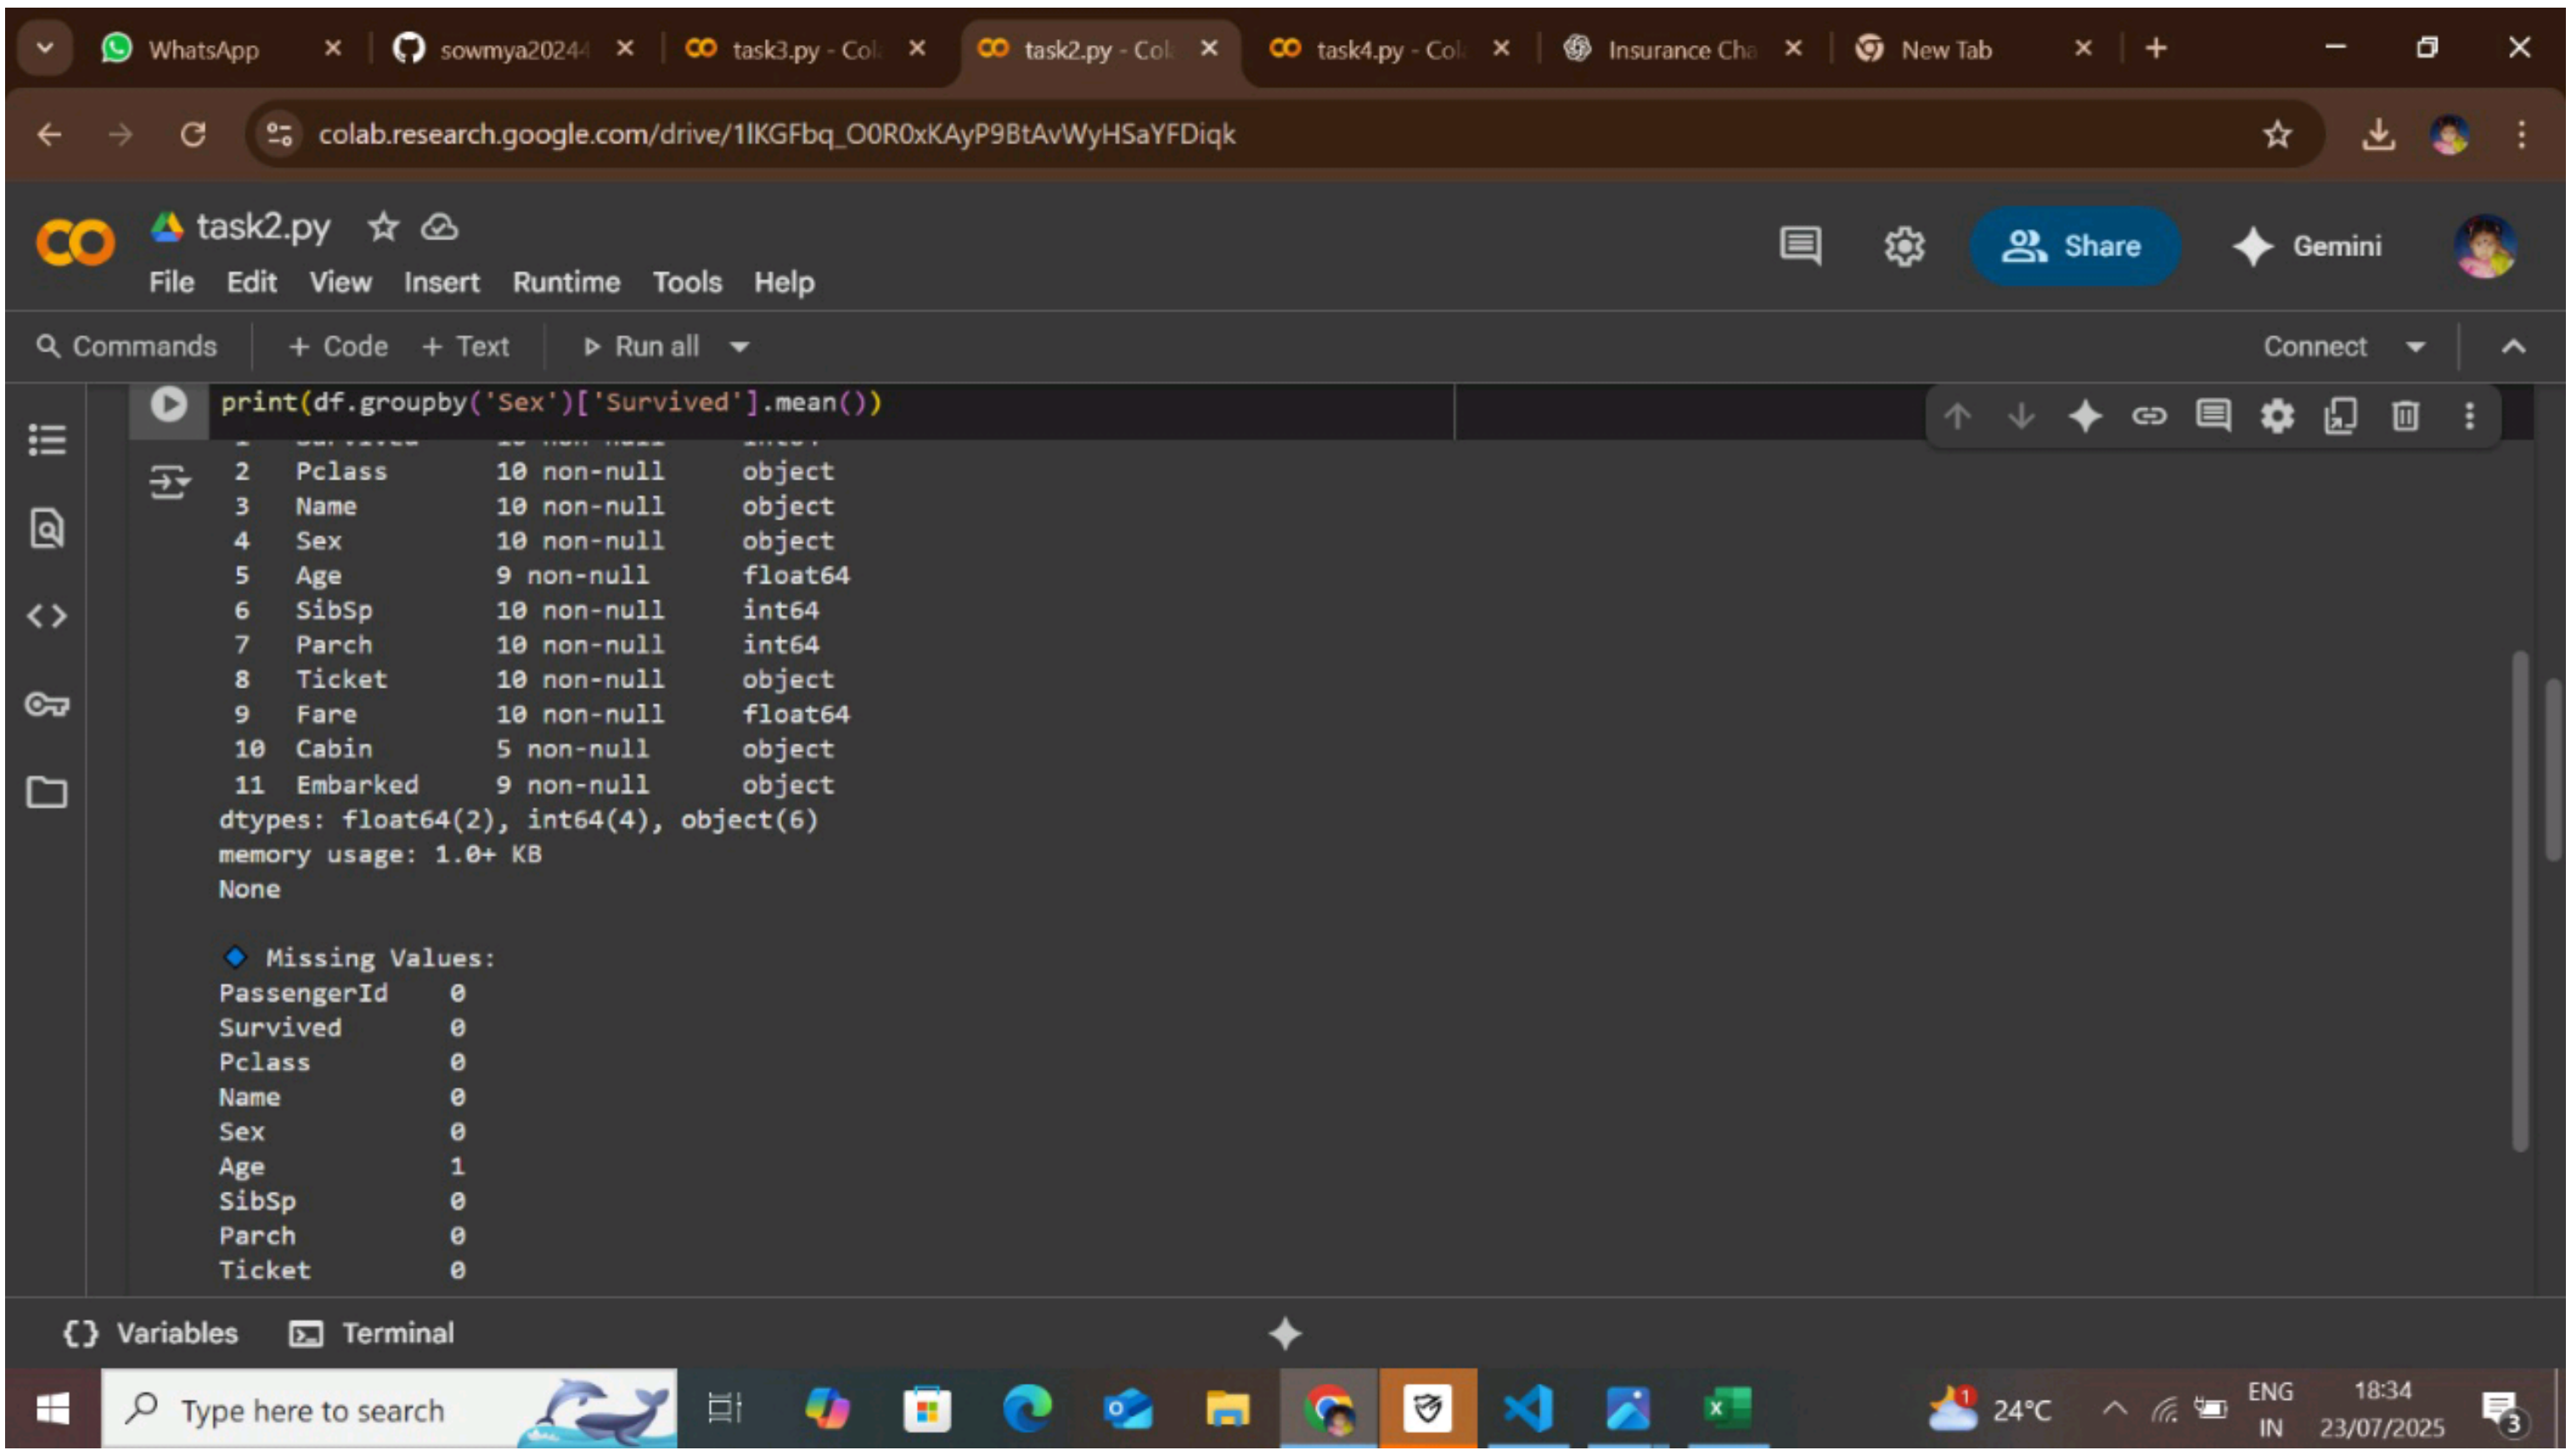
WhatsApp
sowmya2024
task3.py - Col
task2.py - Col
task4.py - Col
Insurance Cha
New Tab
colab.research.google.com/drive/1lKGFbq_O0R0xKAyP9BtAvWyHSaYFDiqk
task2.py
File Edit View Insert Runtime Tools Help
Share
Gemini
Commands + Code + Text Run all
Connect
print(df.groupby('Sex')['Survived'].mean())
2 Pclass 10 non-null object
3 Name 10 non-null object
4 Sex 10 non-null object
5 Age 9 non-null float64
6 SibSp 10 non-null int64
7 Parch 10 non-null int64
8 Ticket 10 non-null object
9 Fare 10 non-null float64
10 Cabin 5 non-null object
11 Embarked 9 non-null object
dtypes: float64(2), int64(4), object(6)
memory usage: 1.0+ KB
None
Missing Values:
PassengerId 0
Survived 0
Pclass 0
Name 0
Sex 0
Age 1
SibSp 0
Parch 0
Ticket 0
Variables
Terminal
Type here to search
24°C
ENG
IN
18:34
23/07/2025

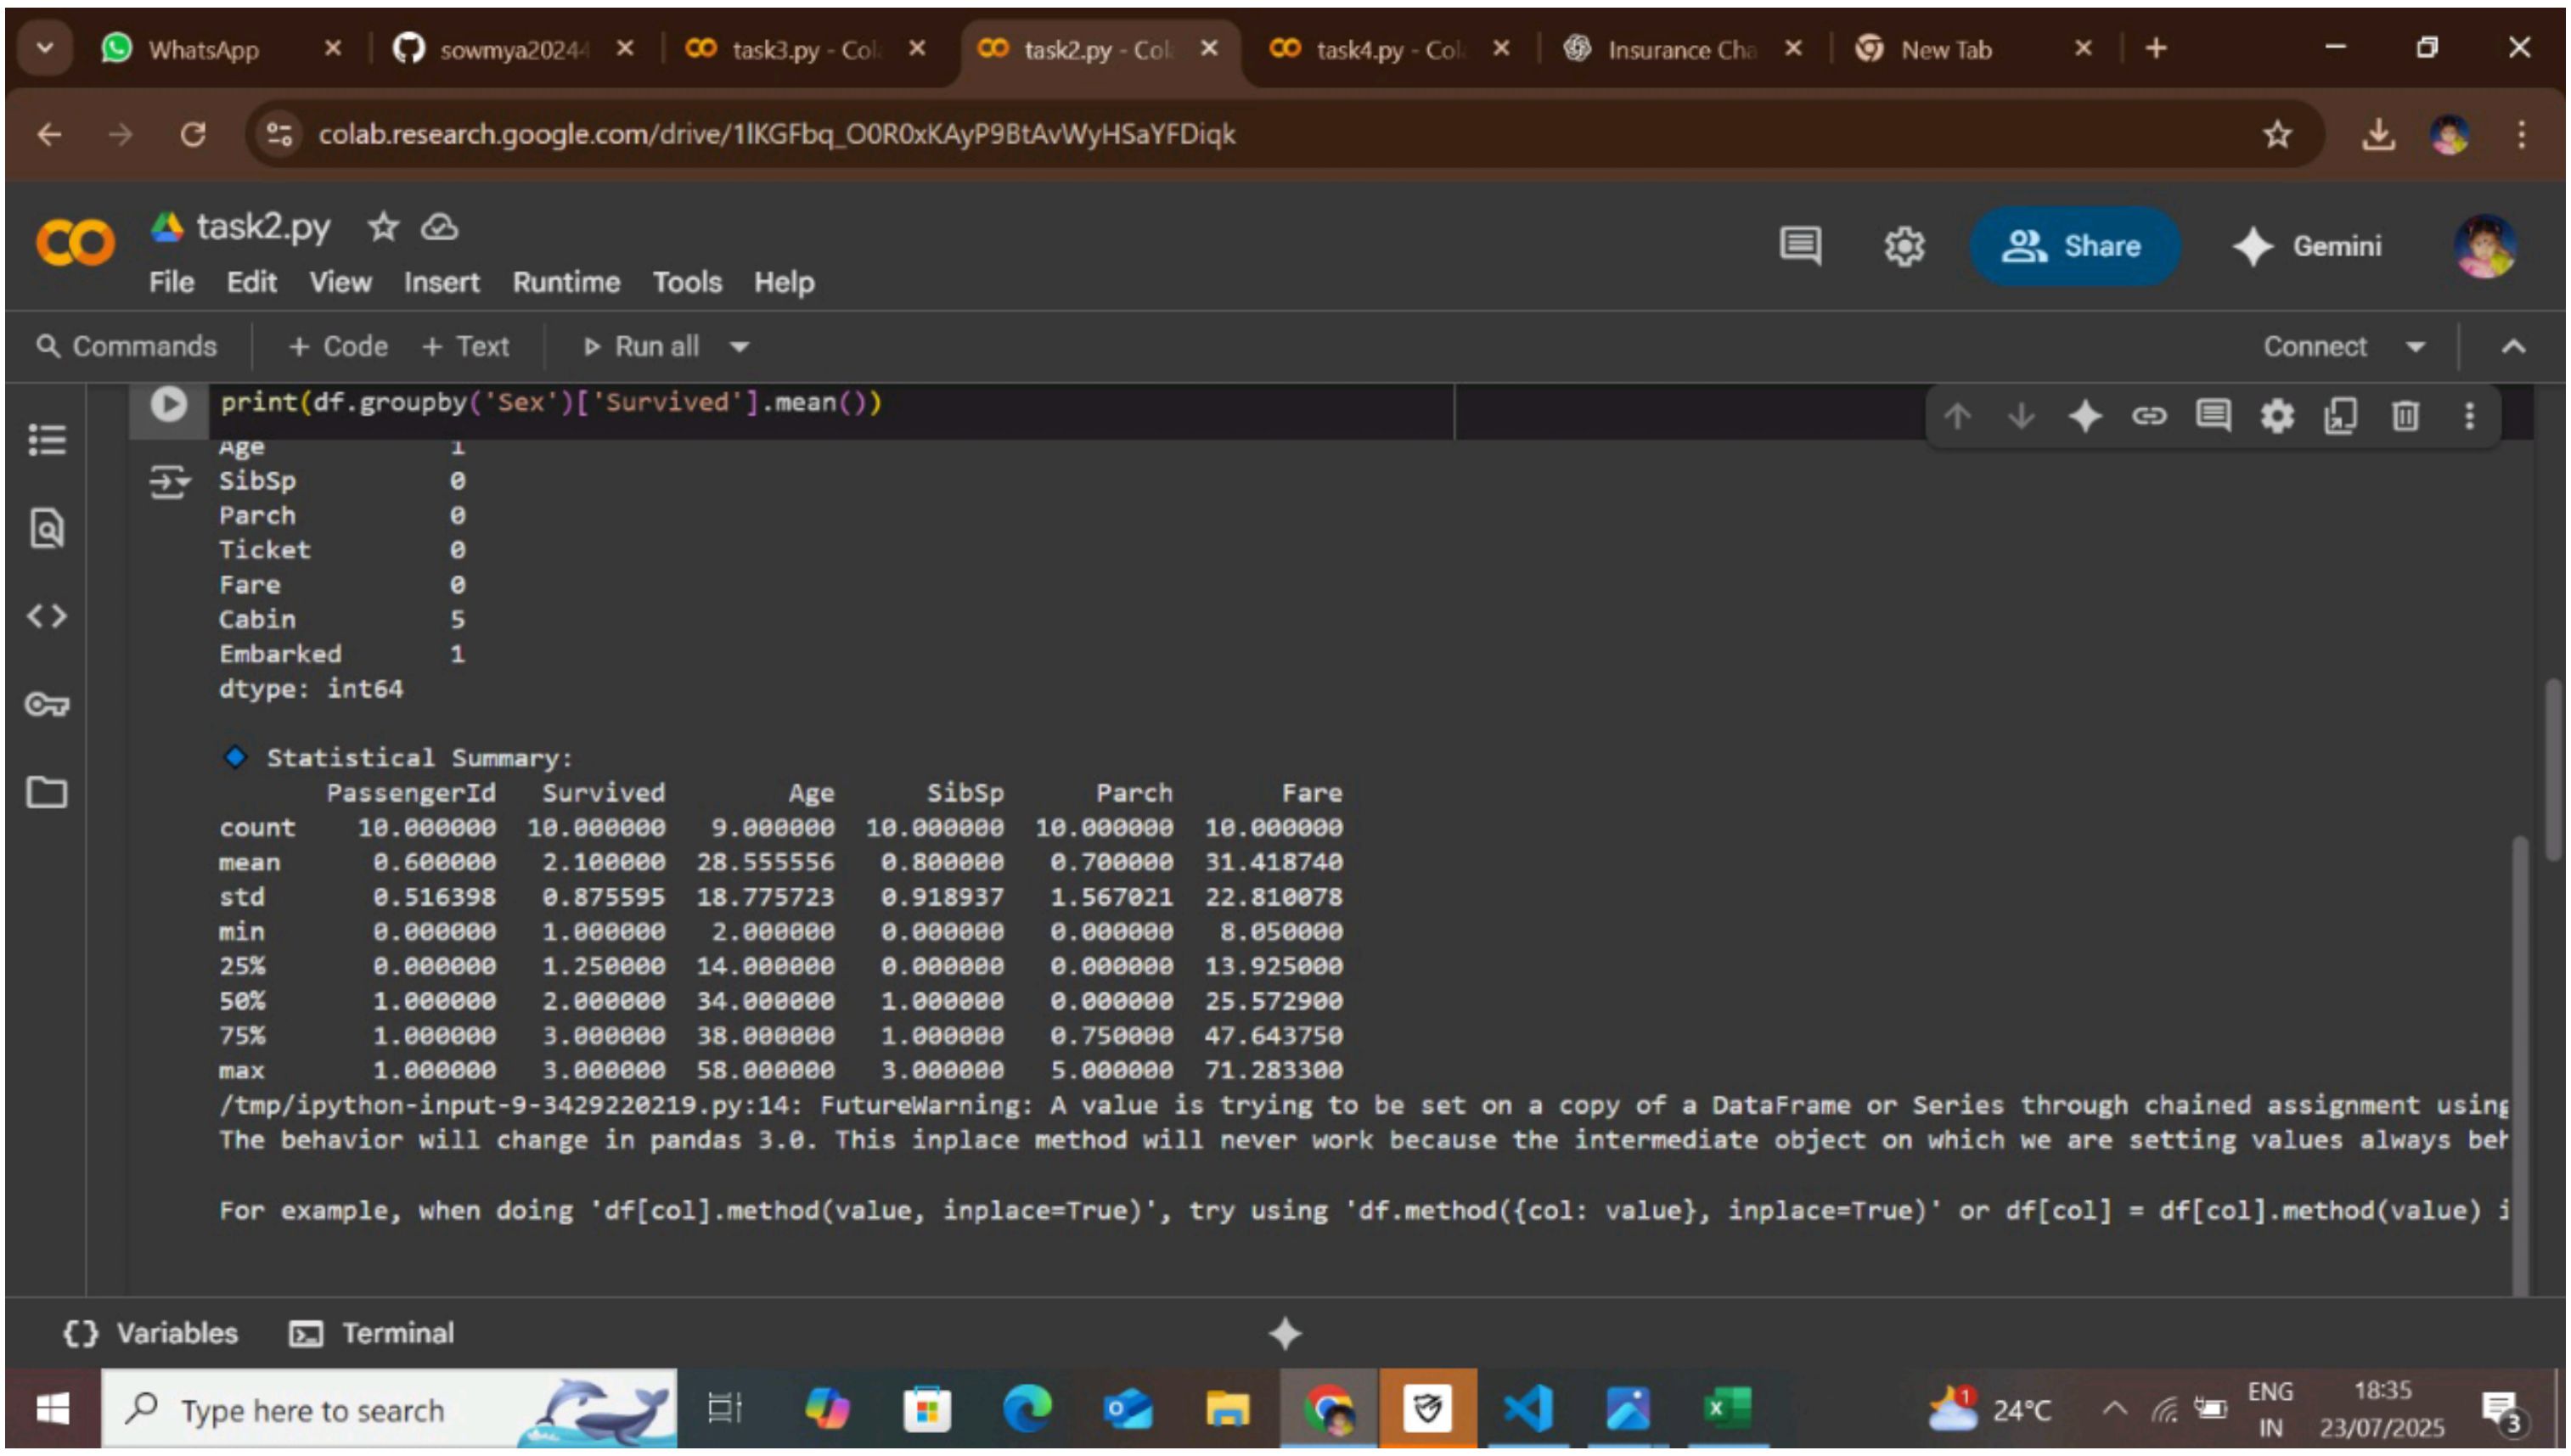

WhatsApp
sowmya2024
task3.py - Col
task2.py - Col
task4.py - Col
Insurance Cha
New Tab
colab.research.google.com/drive/1lKGFbq_O0R0xKAyP9BtAvWyHSaYFDiqk
task2.py
File Edit View Insert Runtime Tools Help
Share
Gemini
Commands + Code + Text Run all
Connect
print(df.groupby('Sex')['Survived'].mean())
Age 1
SibSp 0
Parch 0
Ticket 0
Fare 0
Cabin 5
Embarked 1
dtype: int64
Statistical Summary:
PassengerId Survived Age SibSp Parch Fare
count 10.000000 10.000000 9.000000 10.000000 10.000000 10.000000
mean 0.600000 2.100000 28.555556 0.800000 0.700000 31.418740
std 0.516398 0.875595 18.775723 0.918937 1.567021 22.810078
min 0.000000 1.000000 2.000000 0.000000 0.000000 8.050000
25% 0.000000 1.250000 14.000000 0.000000 0.000000 13.925000
50% 1.000000 2.000000 34.000000 1.000000 0.000000 25.572900
75% 1.000000 3.000000 38.000000 1.000000 0.750000 47.643750
max 1.000000 3.000000 58.000000 3.000000 5.000000 71.283300
/tmp/ipython-input-9-3429220219.py:14: FutureWarning: A value is trying to be set on a copy of a DataFrame or Series through chained assignment using
The behavior will change in pandas 3.0. This inplace method will never work because the intermediate object on which we are setting values always beh
For example, when doing 'df[col].method(value, inplace=True)', try using 'df.method({col: value}, inplace=True)' or df[col] = df[col].method(value) i
Variables Terminal
Type here to search
24°C
ENG IN
18:35 23/07/2025

```
print(df.groupby('Sex')['Survived'].mean())
```

```
df['Embarked'].fillna(df['Embarked'].mode()[0], inplace=True)
```

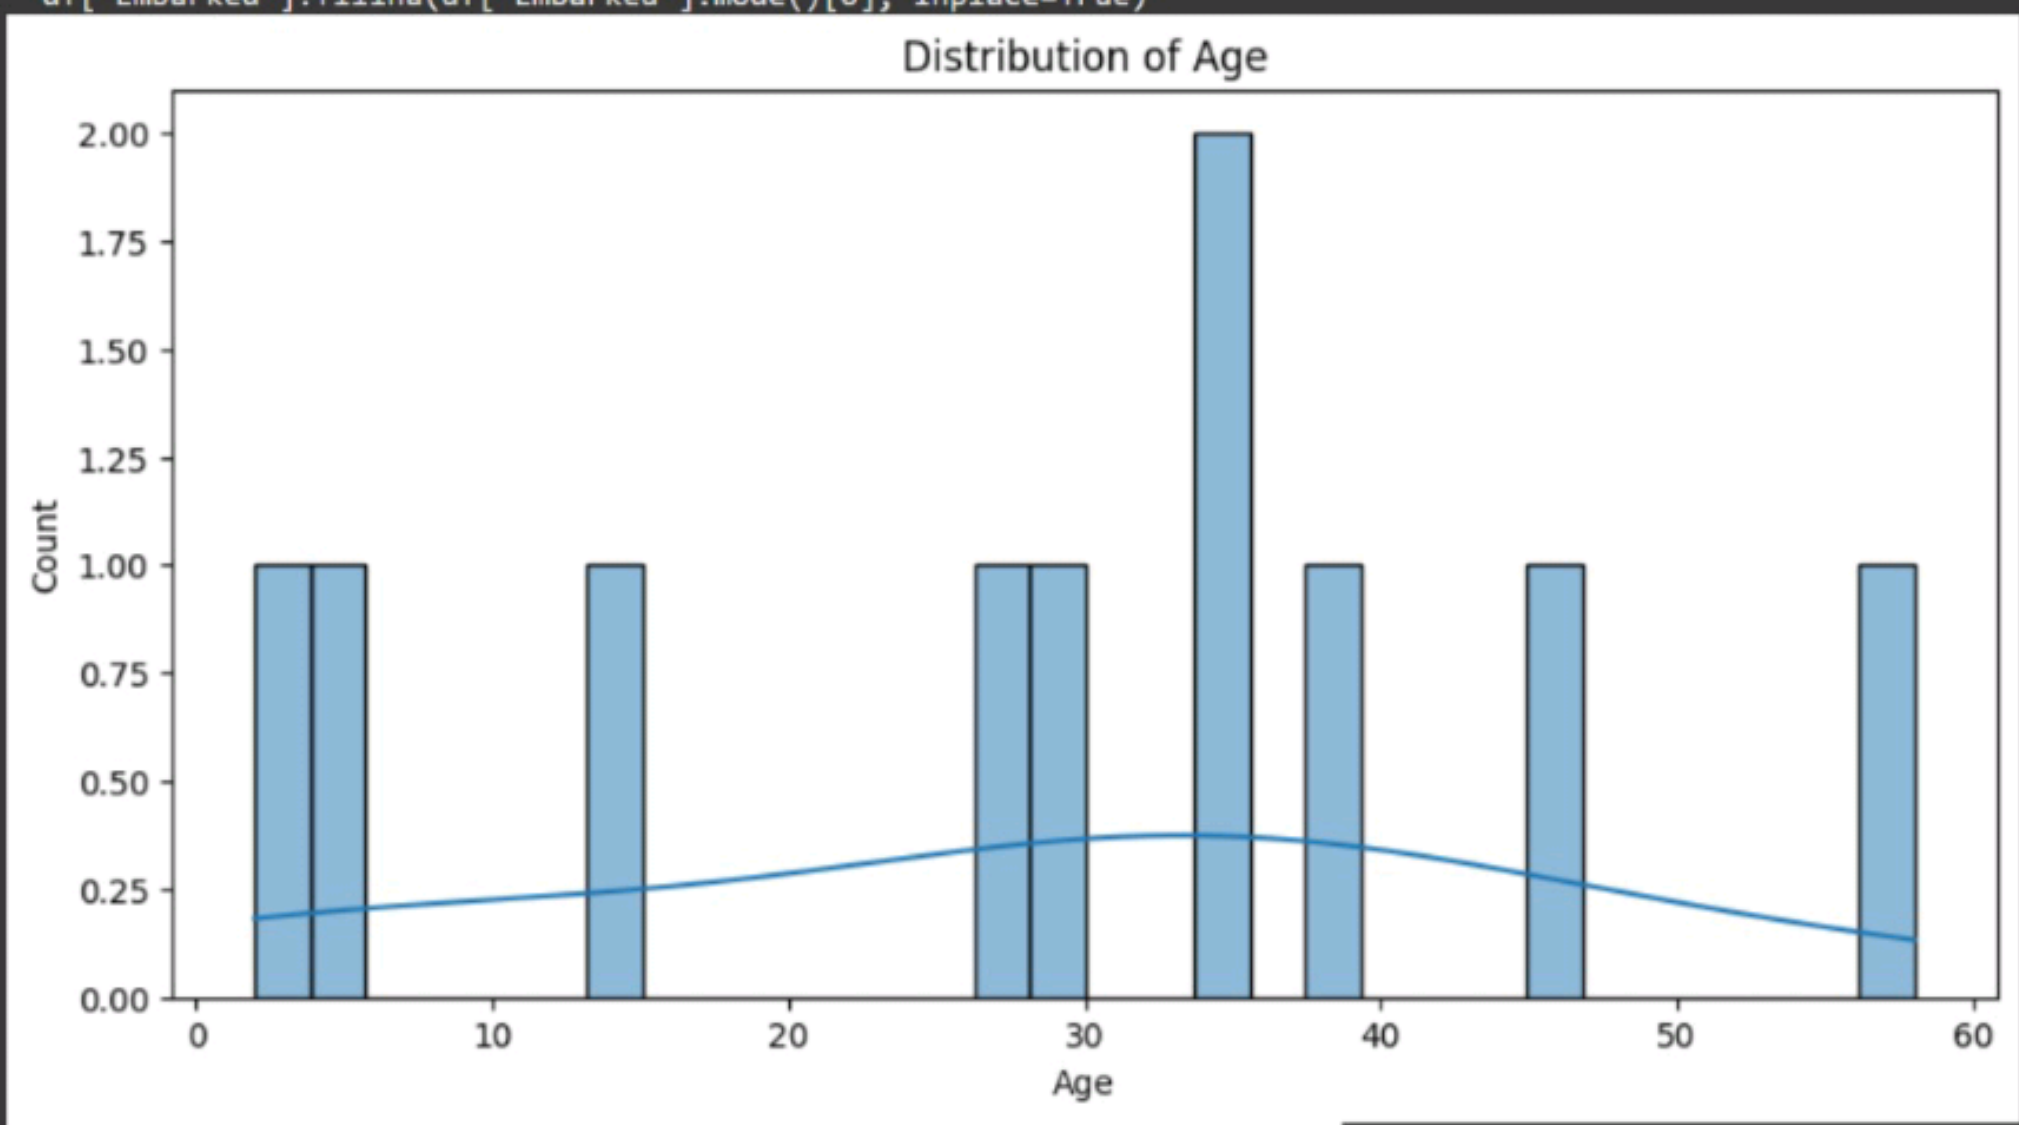


WhatsApp
sowmya2024
task3.py - Col
task2.py - Col
task4.py - Col
Insurance Cha
New Tab
colab.research.google.com/drive/1lKGFbq_O0R0xKAyP9BtAvWyHSaYFDiqk
Commands
+ Code
+ Text
Run all
Connect
print(df.groupby('Sex')['Survived'].mean())
Age
Survival Count (0 = Not Survived, 1 = Survived)
count
4.0
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
1
2
3
Survived
Variables
Terminal
Type here to search
24°C
ENG
IN
18:36
23/07/2025

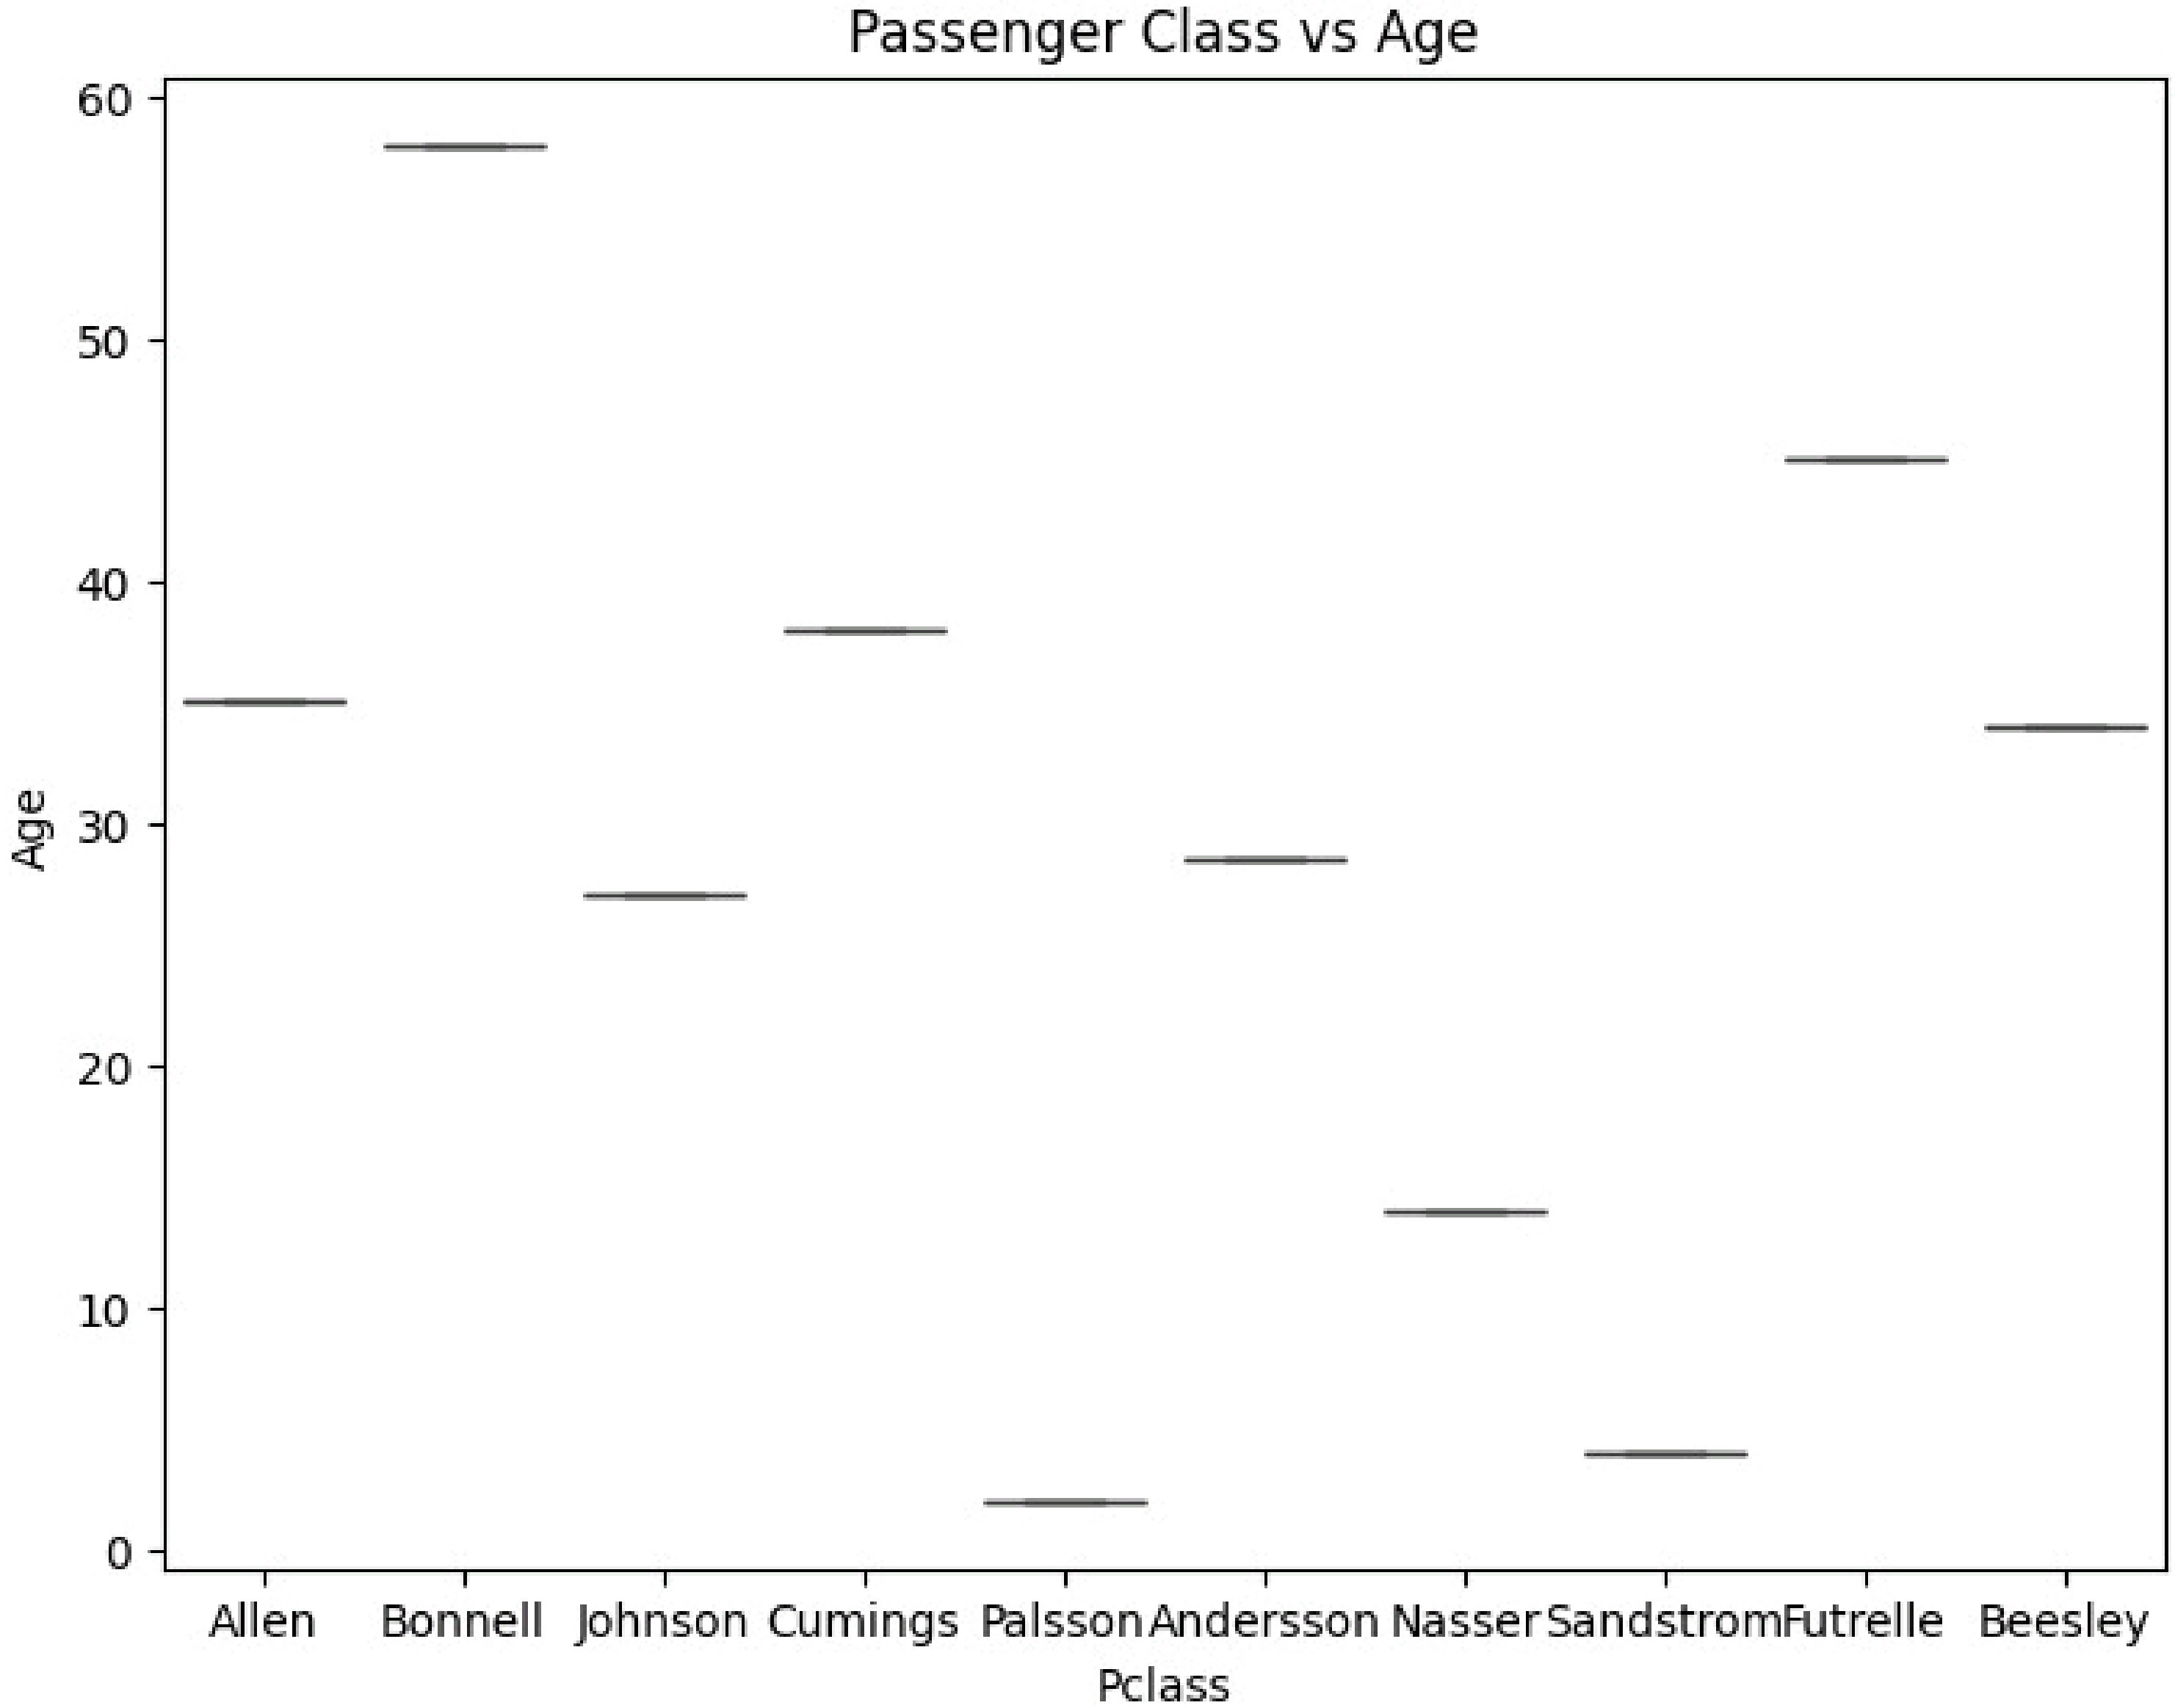

Passenger Class vs Age
60
50
40
30
20
10
0
Age
Allen
Bonnell
Johnson
Cumings
Palsson
Andersson
Nasser
Sandstrom
Futrelle
Beesley
Pclass

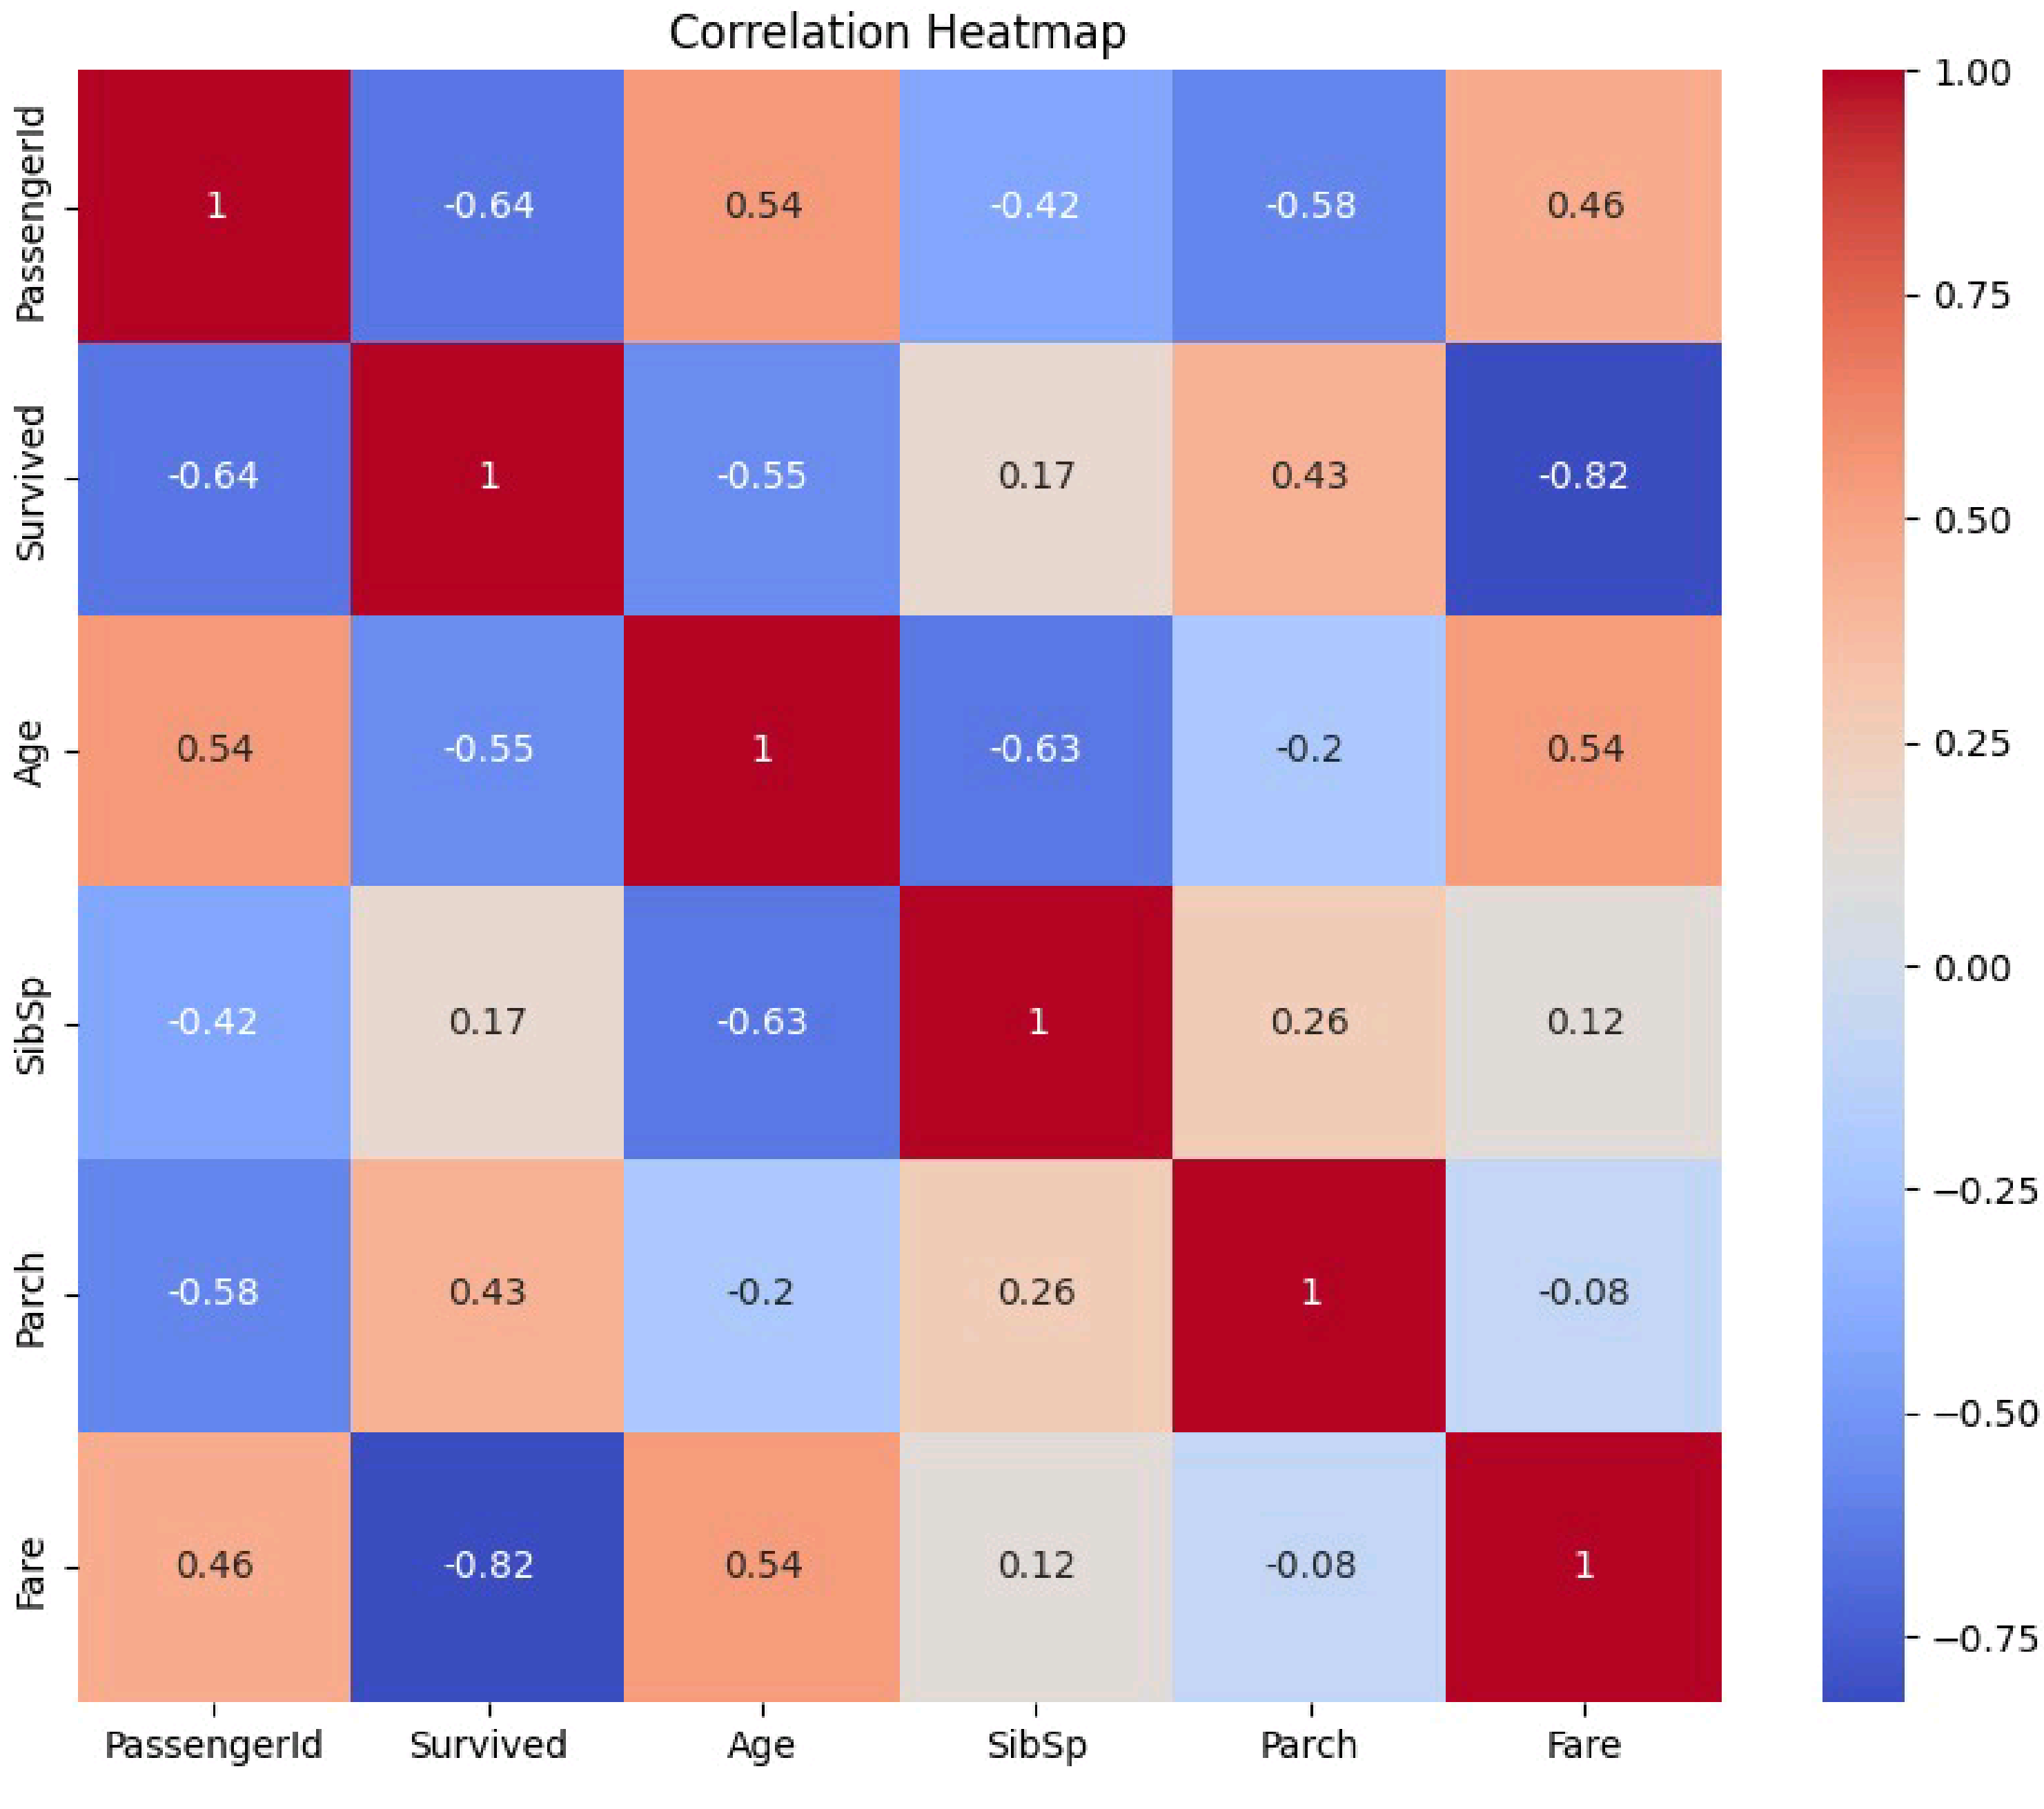
Correlation Heatmap
PassengerId
Survived
Age
SibSp
Parch
Fare
1 -0.64 0.54 -0.42 -0.58 0.46
-0.64 1 -0.55 0.17 0.43 -0.82
0.54 -0.55 1 -0.63 -0.2 0.54
-0.42 0.17 -0.63 1 0.26 0.12
-0.58 0.43 -0.2 0.26 1 -0.08
0.46 -0.82 0.54 0.12 -0.08 1
1.00
0.75
0.50
0.25
0.00
−0.25
−0.50
−0.75

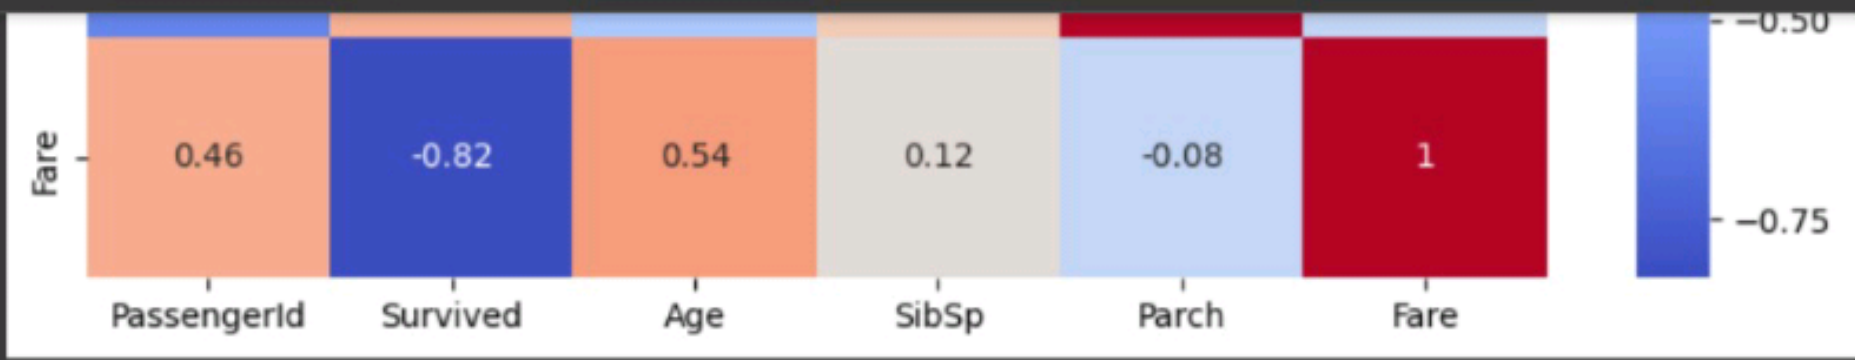


```
🔹 Survival Rate by Passenger Class:
Pclass
Allen        3.0
Andersson    3.0
Beesley      2.0
Bonnell      1.0
Cumings      1.0
Futrelle     1.0
Johnson      3.0
Nasser       2.0
Palsson      3.0
Sandstrom    2.0
Name: Survived, dtype: float64

🔹 Survival Rate by Gender:
Sex
female    1.4
male      2.8
Name: Survived, dtype: float64
```