

ASSIGNMENT 1

CS5691 Pattern Recognition and Machine Learning

CS5691 Assignemnt 1


Team Members:

BE17B007 N Sowmya Manojna

PH17B010 Thakkar Riya Anandbhai

PH17B011 Chaithanya Krishna Moorthy

Indian Institute of Technology, Madras

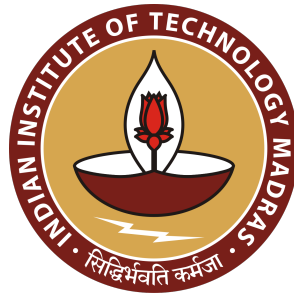

Contents

1 Task 1	2
1.1 Mathematical Formulation	2
1.2 Training and Validation Accuracies	2
1.3 Model Fits	2
1.3.1 Sample Size: 10	2
1.3.1.1 Inference	3
1.3.2 Sample Size: 200	3
1.3.2.1 Inference	4
1.3.3 Effects of Regularization	4
1.3.3.1 Inference	6
1.4 Best Model	6
2 Task 2	7
2.1 Degree of complexity = 2	7
2.1.1 Surface plots of Approximated function	8
2.1.2 Erms over Train, Validation and Test data	8
2.1.3 Observation	8
2.2 Degree of complexity = 3	9
2.2.1 Surface plots of the approximated function	9
2.2.2 Erms over Train, Validation and Test data	9
2.2.3 Observation	10
2.3 Degree of complexity = 6	10
2.3.1 Surface plots of the approximated function	10
2.3.2 Erms over Train, Validation and Test data	11
2.3.3 Observations	11
2.4 Scatter plot of Model output vs Target output	12
3 Task 3	14
3.1 Dataset 2	14
3.2 Dataset 3	14
3.2.1 No Regularization	15
3.2.1.1 Predicting: Next_Tmin	15
3.2.1.2 Predicting: Next_Tmax	16
3.2.2 Quadratic Regularization	18
3.2.2.1 Predicting: Next_Tmin	18
3.2.2.2 Predicting: Next_Tmax	20
3.2.3 Tikhonov Regularization	21
3.2.4 Inference	24

1 Task 1

1.1 Mathematical Formulation

The data for univariate polynomial regression is obtained by raising it to the required degree. In case of univariate polynomial regression of degree d , the dependent variable, of size $(d, 1)$ is assumed to have the form

$$\vec{y}_{n \times 1} = \phi_{n \times d} W_{d \times 1} \quad (1)$$

The weights corresponding to a given degree is then calculated by using the closed form solution for univariate polynomial regression:

$$W = (\phi^T \phi + \lambda I)^{-1} \phi^T \vec{y} \quad (2)$$

Where, λI is the regularization term.

1.2 Training and Validation Accuracies

In order to pick the parameters that best fit the dataset, a grid search was performed on the dataset. Prior to this, the dataset was split into training set, validation set and the testing set, in the ratio 70:10 (from the training data) :30. The results obtained is as follows:

d	λ	Train Error	Validation Error
6	0.0	0.044889	0.159636
3	0.0	0.672882	1.001484
9	0.5	0.750020	1.469413
2	0.0	1.014199	1.883134
9	1.0	1.040132	1.929033
9	2.0	1.354363	2.165779
9	10.0	2.281929	1.857270
9	50.0	3.342110	1.447933
9	100.0	3.782560	1.380623
9	0.0	5.063475	92.085167

Table 1: Results obtained for Task 1, with sample size of 10

d	λ	Train Error	Validation Error
6	0.0	0.094536	0.094379
9	0.0	0.093581	0.100752
9	0.5	0.134226	0.152565
9	1.0	0.186479	0.209008
9	2.0	0.289107	0.311716
9	10.0	0.766298	0.776521
3	0.0	0.934079	0.862605
2	0.0	1.591842	1.421021
9	50.0	1.620063	1.707757
9	100.0	2.138200	2.310223

Table 2: Results obtained for Task 1, with sample size of 200

Regularization was only applied in case of degree 9.

From the table above, we see that the best fit for the data is obtained for degree: 6 and $\lambda : 0$.

1.3 Model Fits

1.3.1 Sample Size: 10

The polynomial models and the corresponding fits obtained for sample size of 10 are as follows:

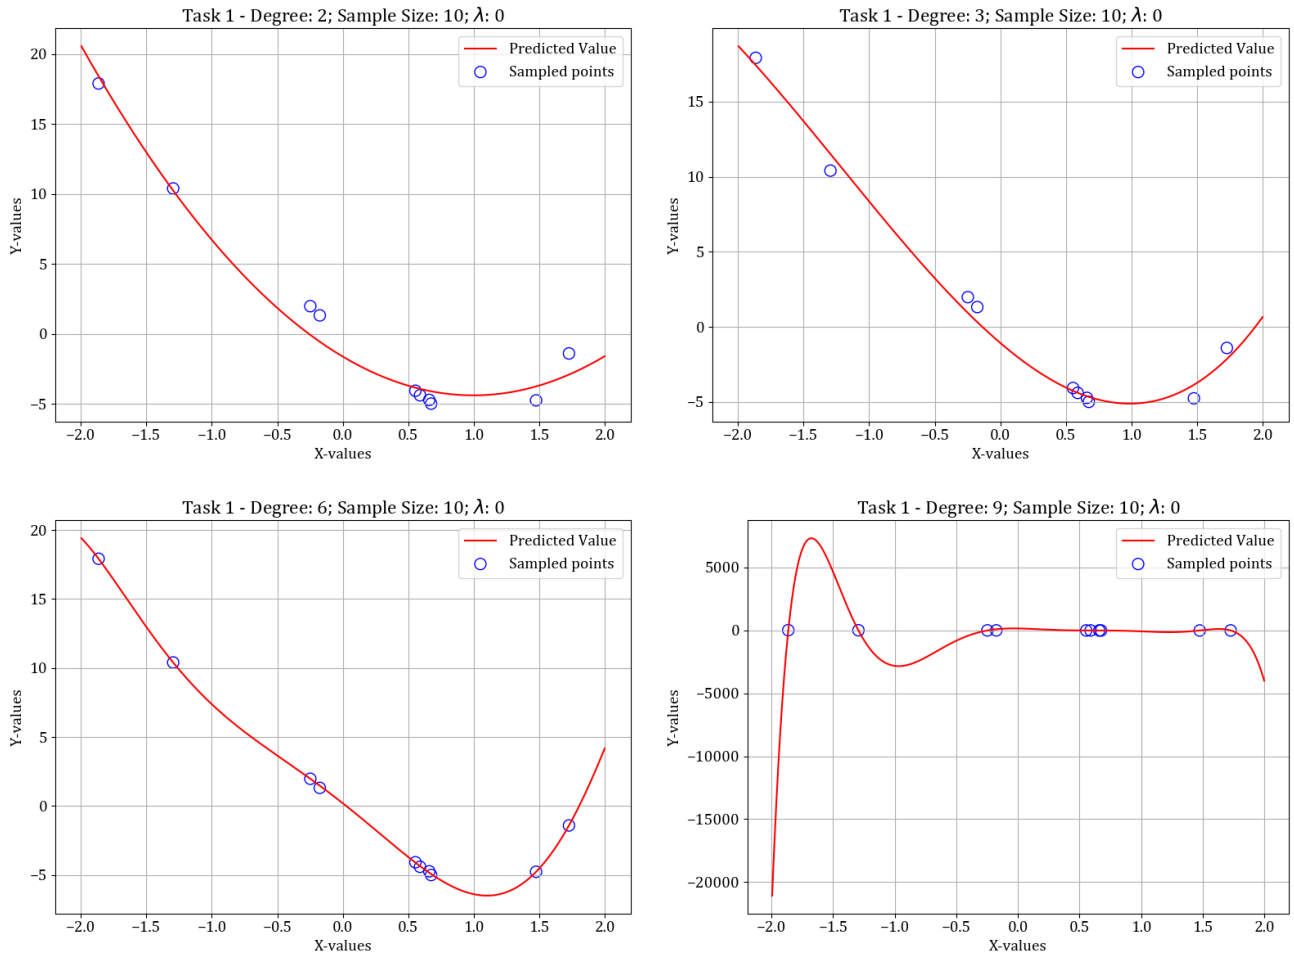


Figure 1: Task 1 - Polynomial fits, Sample size: 10

1.3.1.1 Inference

From the above plots, we can see that:

- Lower degree polynomial curves aren't able to model the dataset well (i.e.) the curve doesn't pass through all the data points.
- Higher degree polynomials are able to fit the dataset well. The curves pass through all the data points.
- However, the polynomial degree 9 curve seems to have a lot more variance along the y-axis than the remaining polynomial degrees.

1.3.2 Sample Size: 200

The polynomial models and the corresponding fits obtained for sample size of 200 are as follows:

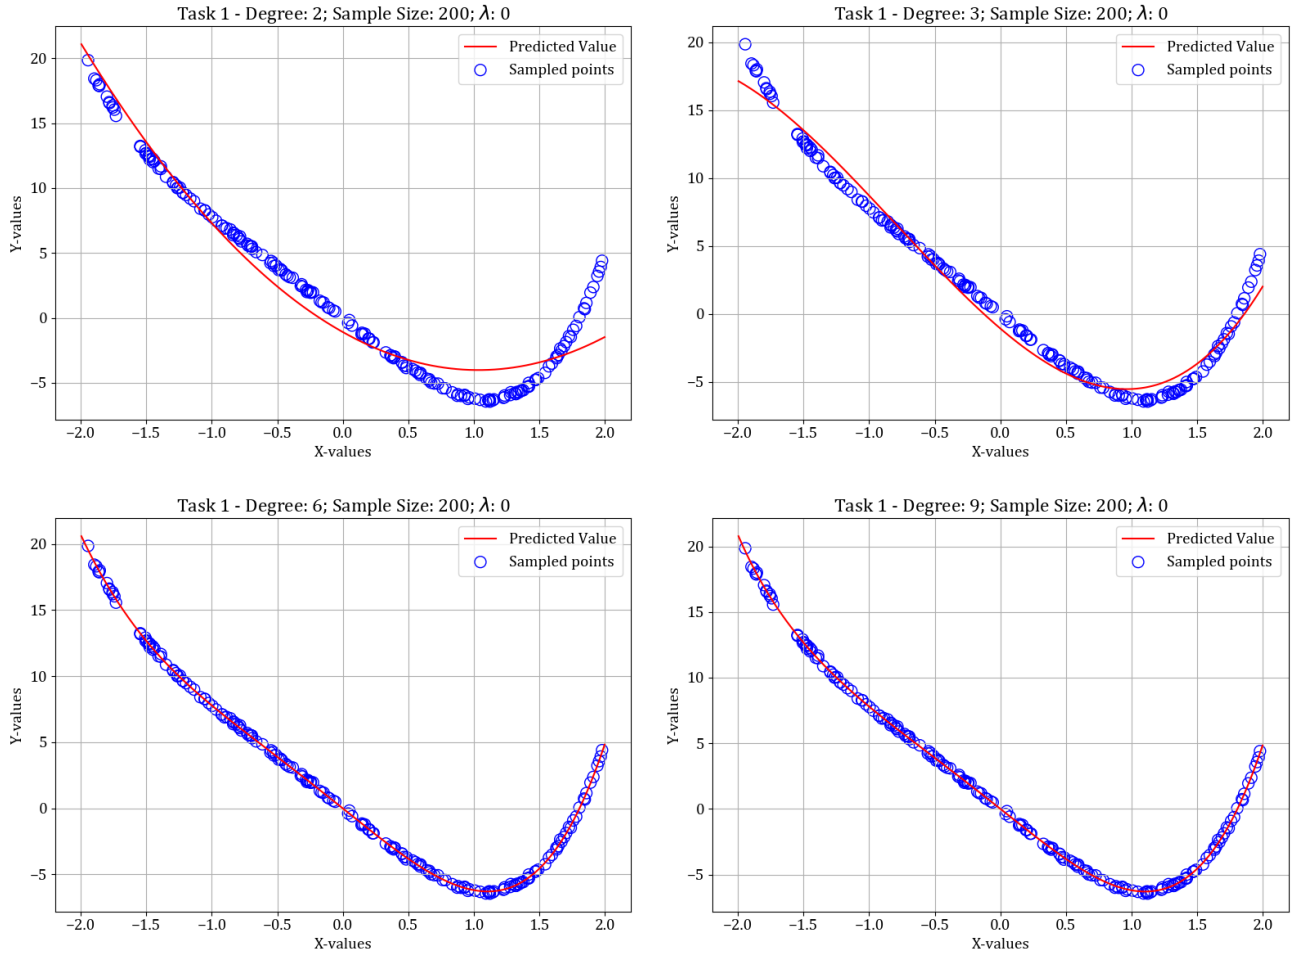


Figure 2: Task 1 - Polynomial fits, Sample size: 200







1.3.2.1 Inference

From the above plots, we can see that:

- Lower degree polynomial curves aren't able to model the dataset well (i.e.) the curve doesn't pass through all the data points.
- Higher degree polynomials are able to fit the dataset well. The curves pass through all the data points.
- We can see a clear difference between the degree 9 fit when the dataset size was 10 to that when the dataset size is 200. The increase in dataset size helped decrease the variance and potential overfitting.

1.3.3 Effects of Regularization

The polynomial models and the corresponding fits obtained for degree 9, sample size of 10, across different λ values are as follows:

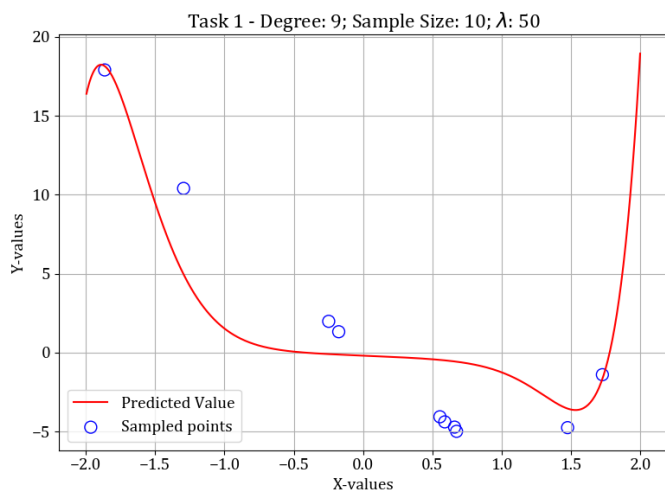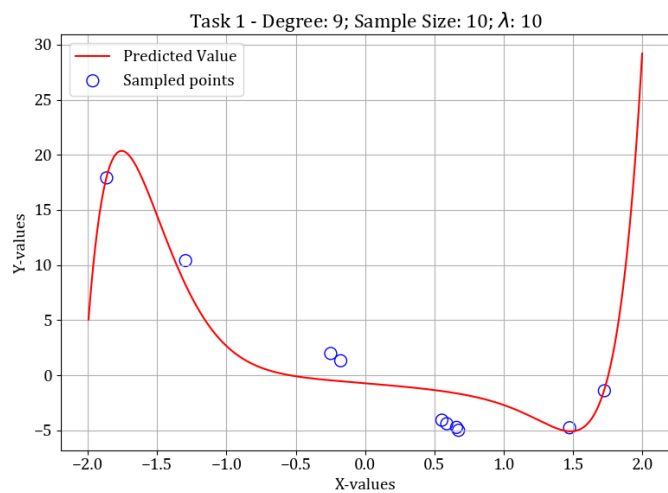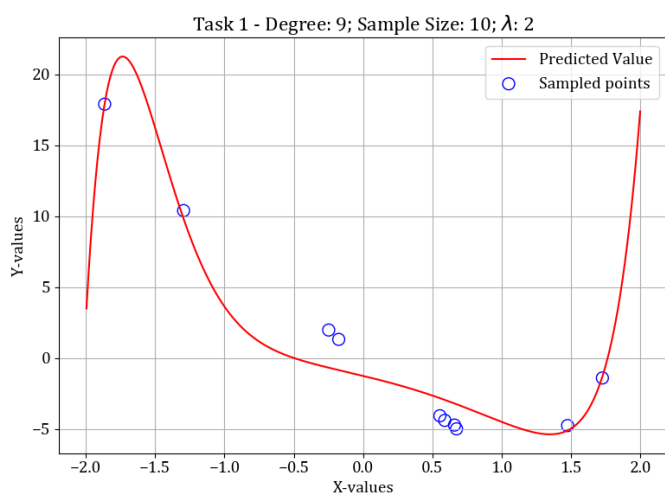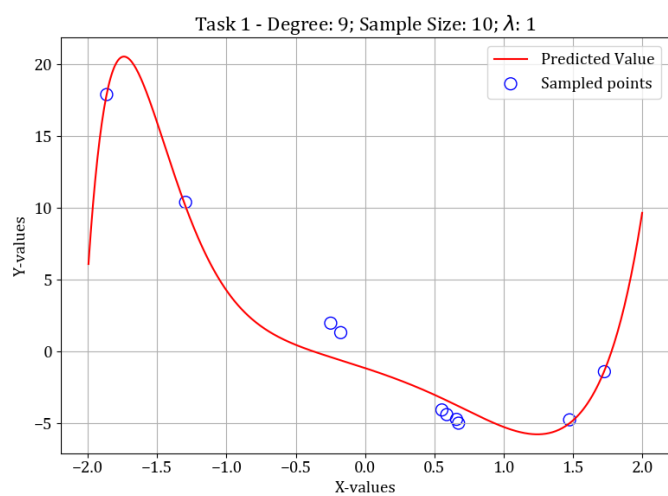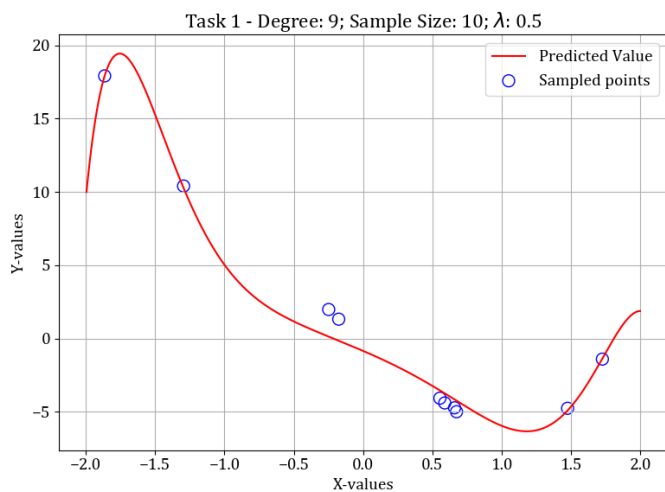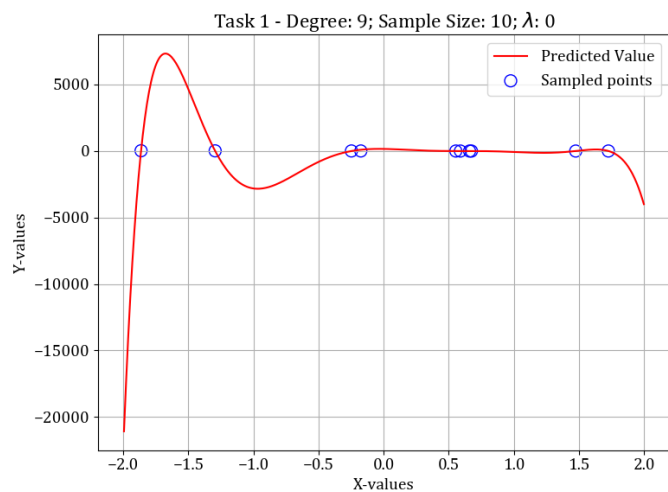

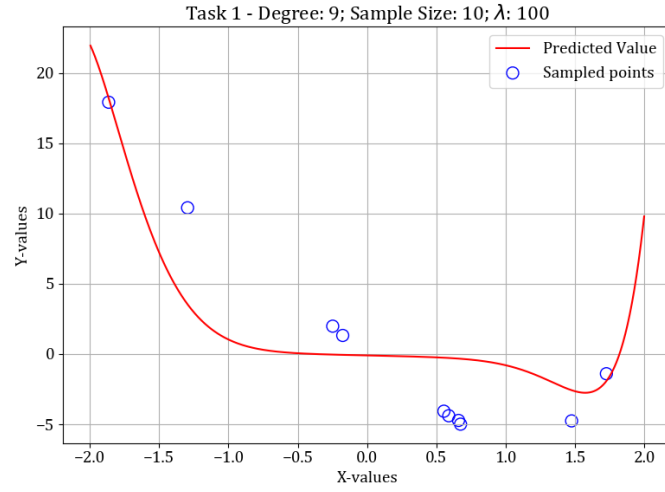


Figure 3: Task 1 - 9th Degree Polynomial fit, Sample size: 10

1.3.3.1 Inference

From the above plots, we can see that:

- Regularization was only applied to the degree 9 polynomial, with 10 data points as it had the same number of data points and parameters.
- We can see that, the curve starts becoming more flatter with increasing value of the regularization parameter λ .
- This could be because, the weights corresponding to higher degrees would become smaller.

1.4 Best Model

The best fit, $d : 6$ and $\lambda : 0$ is visualized as follows:

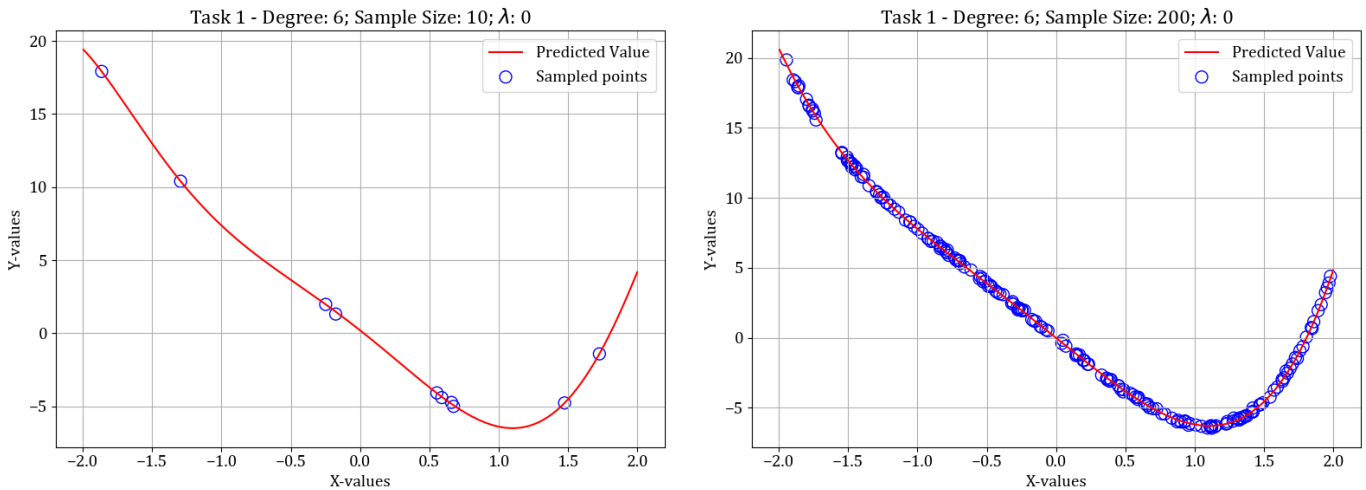


Figure 4: Task 1 - Best fit, Sample size: 10 (to the left) and Sample size: 200 (to the right)

The final training and testing error obtained is as follows:

- Training Error: 0.09974659089780814
- Testing Error: 0.09793071099285168

2 Task 2

The dataset allotted to our group for task 2 is `function1_2d.csv`, which has a 2 dimensional feature vector and 1 dimensional target output to be predicted. We assume that the target variable is of the form:

$$y = \sum_{i=0} \omega_i \phi_i(x1, x2) + \epsilon \quad (3)$$

Where ω_i are the parameters to be found through regression, $\phi_i(x1, x2)$ is a polynomial in x1 and x2 and ϵ is the normally distributed error.

A breakdown of the steps undertaken is:

- The function `create_phi` generates the design matrix $\phi(x1, x2)$ for the required degree of complexity. The number of attributes in the generated design matrix is given by:

$$D = \frac{(M + d)!}{M! d!} \quad (4)$$

where d is the dimension of the original feature vector (=2 for Task 2) and M is the degree of complexity of the model.

- To avoid overfitting, as a general rule $N > 10 * D$
- The design matrix is passed to the function `regularized_pseudo_inv`, which generates the moore-penrose inverse of the given design matrix(X) and specified value of regularization parameter λ .

$$(\lambda I + X^T X)^{-1} X^T \quad (5)$$

- The function `opt_regularized_param` is then used to obtain optimum values of $\vec{\omega}$

$$\vec{\omega} = [(\lambda I + X^T X)^{-1} X^T] \cdot y \quad (6)$$

Where y is the output as defined in the equation 3.

- The optimum parameter vector thus obtained can be used to predict the variable y for new inputs.

$$y_{prediction} = X \vec{\omega} \quad (7)$$

The results obtained for various degrees of complexities are discussed below.

2.1 Degree of complexity = 2

With degree of complexity set to 2, the number of parameters in our model are:

$$\begin{aligned} D &= \frac{(d + M)!}{d! M!} \\ &= \frac{(4!)}{2! 2!} \\ &= 6 \end{aligned} \quad (8)$$

Since the number of parameters to be estimated is very less compared to our sample sizes, we do not expect to see over fitting, and hence regularisation is not used.

2.1.1 Surface plots of Approximated function

Surface plots obtained for various train sizes are as follows:

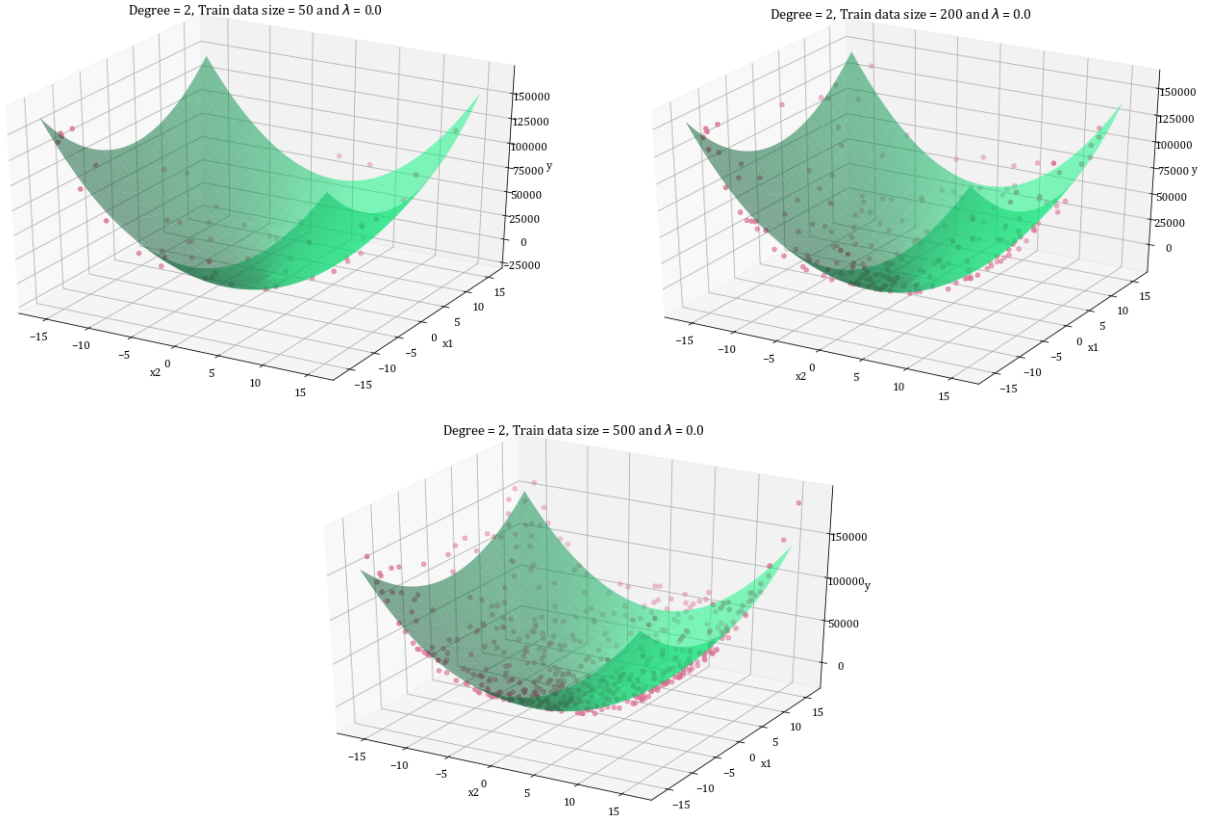


Figure 5: Surface Plot of the approximated function for different training sizes, Degree: 2

2.1.2 Erms over Train, Validation and Test data

The Erms over train, validation and test data is obtained to be:

Train size	λ	Erms Train	Erms Validation	Erms Test
50	0	$9.34 \cdot 10^3$	$1.06 \cdot 10^4$	$1.14 \cdot 10^4$
200	0	$1.06 \cdot 10^4$	$1.14 \cdot 10^4$	$1.15 \cdot 10^4$
500	0	$1.13 \cdot 10^4$	$1.12 \cdot 10^4$	$1.08 \cdot 10^4$

Table 3: Erms for different train sizes for degree of complexity 2

2.1.3 Observation

- While the magnitude of E_{rms} is nearly same over train, validation and test data, it does not reduce on increasing the sample size.
- The surface plot of approximated function is simple and poorly fits both the training as well as test data.
- From the above two points, we conclude that we have an oversimplified model with a high bias. Increasing the complexity would be beneficial.

2.2 Degree of complexity = 3

The number of parameters to be estimated for this model are:

$$D = \frac{(2 + 3)!}{2! 3!} = 10 \quad (9)$$

Since for train data size 50, $50 < 10 \times 10$, we apply regularization. As reported in the E_{rms} table, the errors increases on applying regularization. Regularization need not be applied for train data size 200 and 500.

2.2.1 Surface plots of the approximated function

The surface plots of approximated function for various train data sizes is:

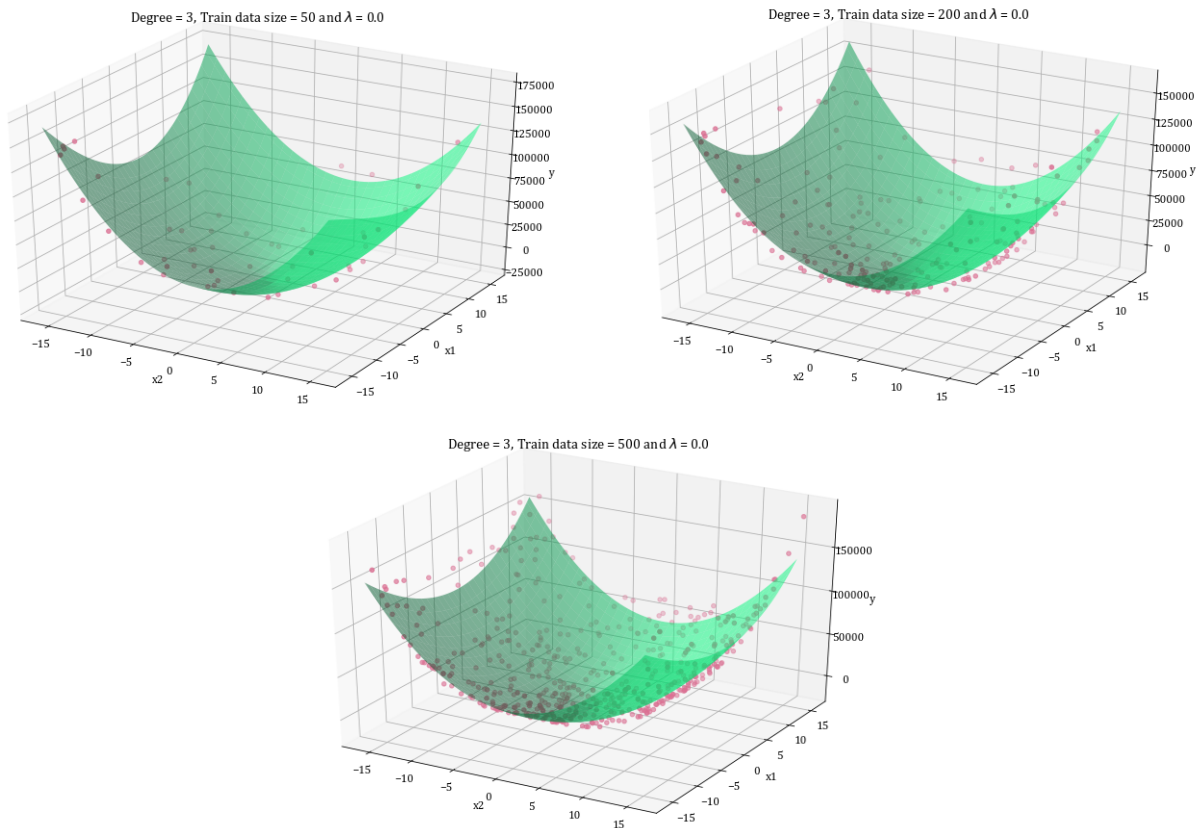


Figure 6: Surface plot of approximated function for different train sizes, Degree: 3

2.2.2 Erms over Train, Validation and Test data

The E_{rms} over Train, Validation and Test data is obtained to be:

Train size	λ	Erms Train	Erms Validation	Erms Test
50	0	$8.40*10^3$	$1.19*10^4$	$1.23*10^4$
50	1	$8.43*10^3$	$1.19*10^4$	$1.22*10^4$
50	10	$9.24*10^3$	$1.07*10^3$	$1.31*10^4$
200	0	$1.03*10^4$	$1.14*10^4$	$1.15*10^4$
500	0	$1.11*10^4$	$1.11*10^4$	$1.11*10^4$

Table 4: Erms for different train sizes for degree of complexity 3

2.2.3 Observation

- The E_{rms} values are nearly same as that for degree of complexity 2.
- Increasing the sample size does not affect the E_{rms} significantly.
- While E_{rms} Train is lower for sample size 50, it is due to inadequate number of data samples. E_{rms} Train, E_{rms} Validation and E_{rms} Test converge as the train data size increases to 500.
- From the above points we conclude that this model too is oversimplified and thus fails to perform well over Train, Validation as well as Test data. Our model thus has a high bias error similar to model of complexity 2.

2.3 Degree of complexity = 6

The number of parameters to be estimated are-

$$D = \frac{(2+6)!}{2!6!} = 28 \quad (10)$$

For train data size 50, $N < 28 * 10$, hence regularization is applied to the model. However, regularization is not needed for training data sizes of 200 and 500.

2.3.1 Surface plots of the approximated function

The surface plots of the approximated function for various train data sizes are:

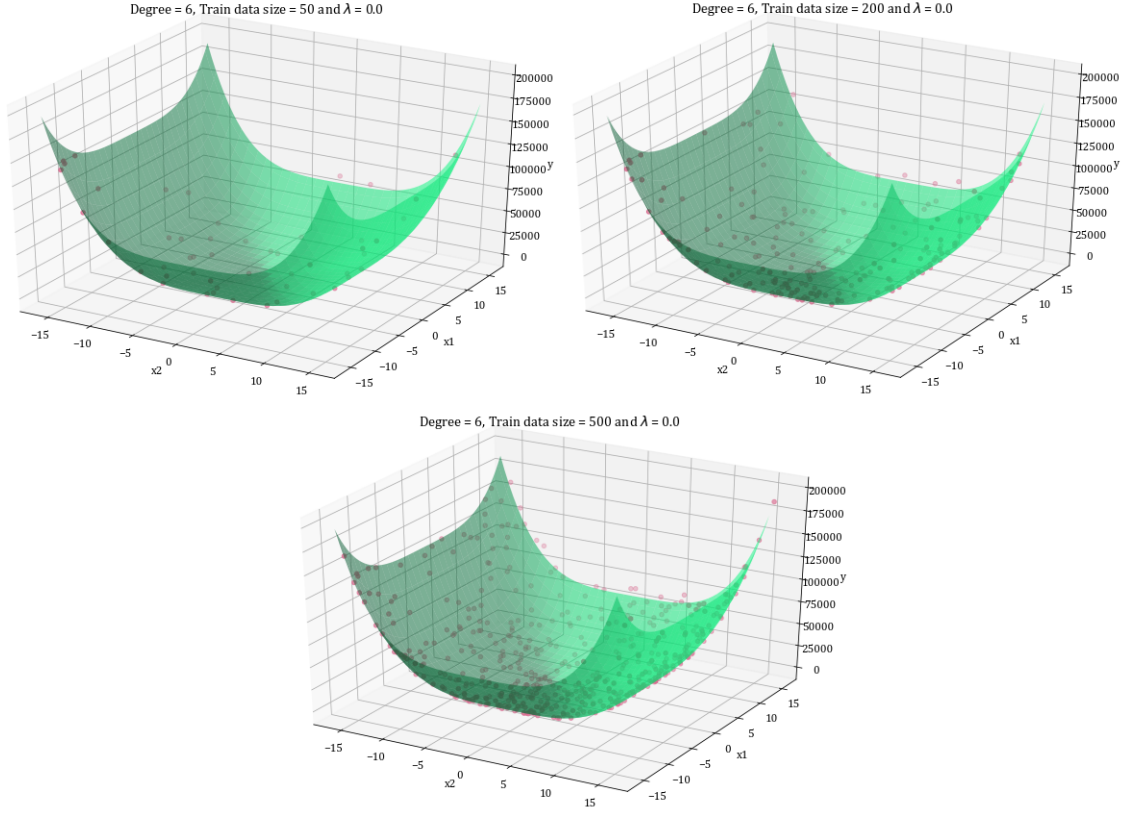


Figure 7: Surface plots of approximated function for different train size, Degree = 6

2.3.2 Erms over Train, Validation and Test data

The E_{rms} values obtained over Train, Validation and Test data are as follows:

Train size	λ	Erms Train	Erms Validation	Erms Test
50	0	$7.78 \cdot 10^{-8}$	$3.72 \cdot 10^{-7}$	$6.17 \cdot 10^{-7}$
50	1	$1.02 \cdot 10^{-4}$	$1.25 \cdot 10^{-3}$	$2.27 \cdot 10^{-3}$
200	0	$1.31 \cdot 10^{-8}$	$1.39 \cdot 10^{-8}$	$1.44 \cdot 10^{-8}$
500	0	$3.47 \cdot 10^{-8}$	$3.66 \cdot 10^{-8}$	$3.39 \cdot 10^{-8}$

Table 5: Erms for different train sizes for degree of complexity 6

2.3.3 Observations

- The complexity of surface in [Figure 7](#) has increased significantly compared to that in [Figure 5](#) and [Figure 6](#)
- The E_{rms} values over all the data sets has decreased drastically as compared to the previous models.
- While the E_{rms} train is less compared to E_{rms} Validation and E_{rms} Test for train data size = 50, increasing the training data size alleviates this.

- On increasing the train data size to 200, E_{rms} over Train, Validation and Test data all converge to a lower value, signifying an optimum trade off between bias and variance error. Regularization is therefore not required.
- On further increasing the Train data size, the E_{rms} increases insignificantly.
- From the above points and cross-validation method, we conclude that the degree of complexity 6 and Train data size of 200 is the optimal model to describe our data, achieving an upper bound Root Mean Squared Error of $1.5 * 10^{-8}$ over Train, Validation as well as Test data.
- None of the models need to be regularized. On applying regularization, even for very small values of the hyperparameter λ , the E_{rms} errors increase.

2.4 Scatter plot of Model output vs Target output

Using the optimal model of degree 6 and train data size 200, model output vs target output was plotted for both Train and Test data, we find it to closely follow $y - x = 0$ line.

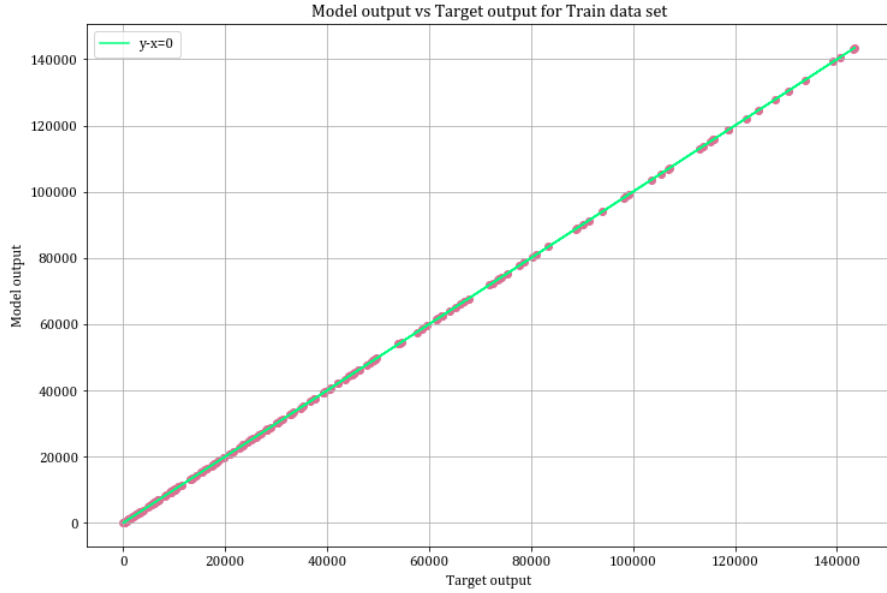


Figure 8: Model output against Target output for train dataset.

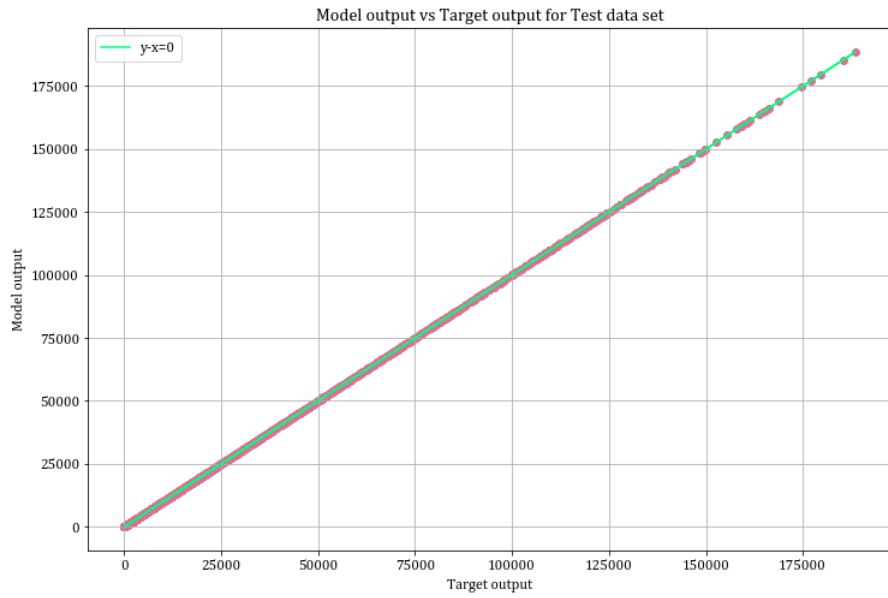


Figure 9: Model output against Target output for test dataset.

3 Task 3

Linear regression using Gaussian basis function is given as

$$y(\vec{x}, \vec{w}) = \sum_{i=0}^{D-1} \omega_i \phi_i(\vec{x}) \quad (11)$$

, where D is a hyperparameter. The basis function

$$\phi_i = \exp\left(\frac{-|\vec{x} - \vec{\mu}_i|^2}{\sigma^2}\right) \quad (12)$$

where $i = 1, 2, \dots, D - 1$. The μ are the mean vectors for $D - 1$ kernels made from the data set. The value of the mean vectors are found using the KMeans clustering algorithm. In this work, the sklearn KMeans function was used. The optimum number of clusters for the dataset 2 - "function_12d.csv" was found to be 10 clusters. For the dataset 3 - "1_bias_clean.csv", the optimum number of clusters are 9.

3.1 Dataset 2

3.2 Dataset 3

As the dataset was a real world dataset, the following preprocessing steps were carried out.

- NaN values: All datapoints that had NaN values in any of the columns were removed.

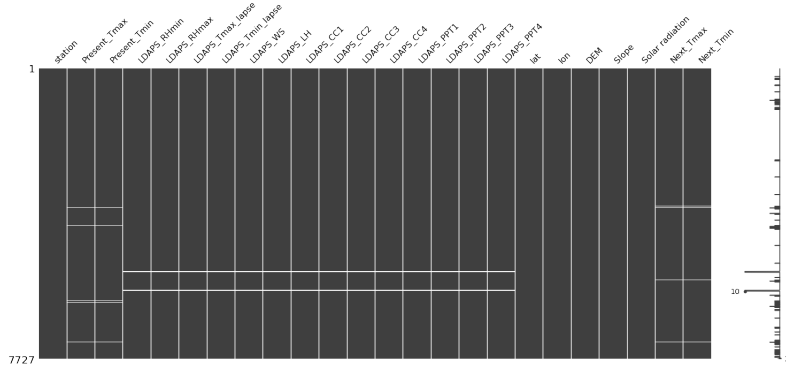


Figure 10: Visualization of the original dataset. White lines indicate NaNs.

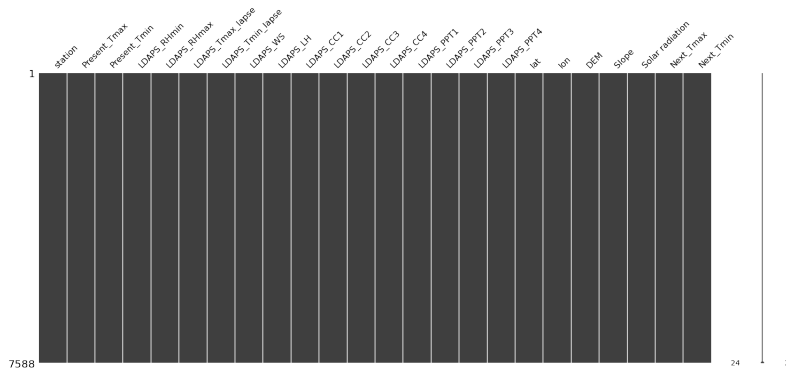


Figure 11: Visualization of the dataset after the removal of NaNs.

- Highly correlated factors were removed. A threshold of 0.75 was used to identify highly correlated features and they were sequentially removed.
- Features that resulted in a high Variance Inflation Factor (VIF) were also removed.
- The analysis involving correlated features and VIF was performed on the training data and was then extended to the validation and testing data.

3.2.1 No Regularization

The hyperparameter - number of clusters was swept and the value that resulted in the lowest validation SSE was chosen. The following cluster numbers were swept for: [1, 2, 3, 4, 5, 6, 7, 8, 9, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100].

3.2.1.1 Predicting: Next_Tmin

The Erms on the training and validation dataset and the SSE distances of samples to their closest cluster center obtained across the number of clusters is as follows:

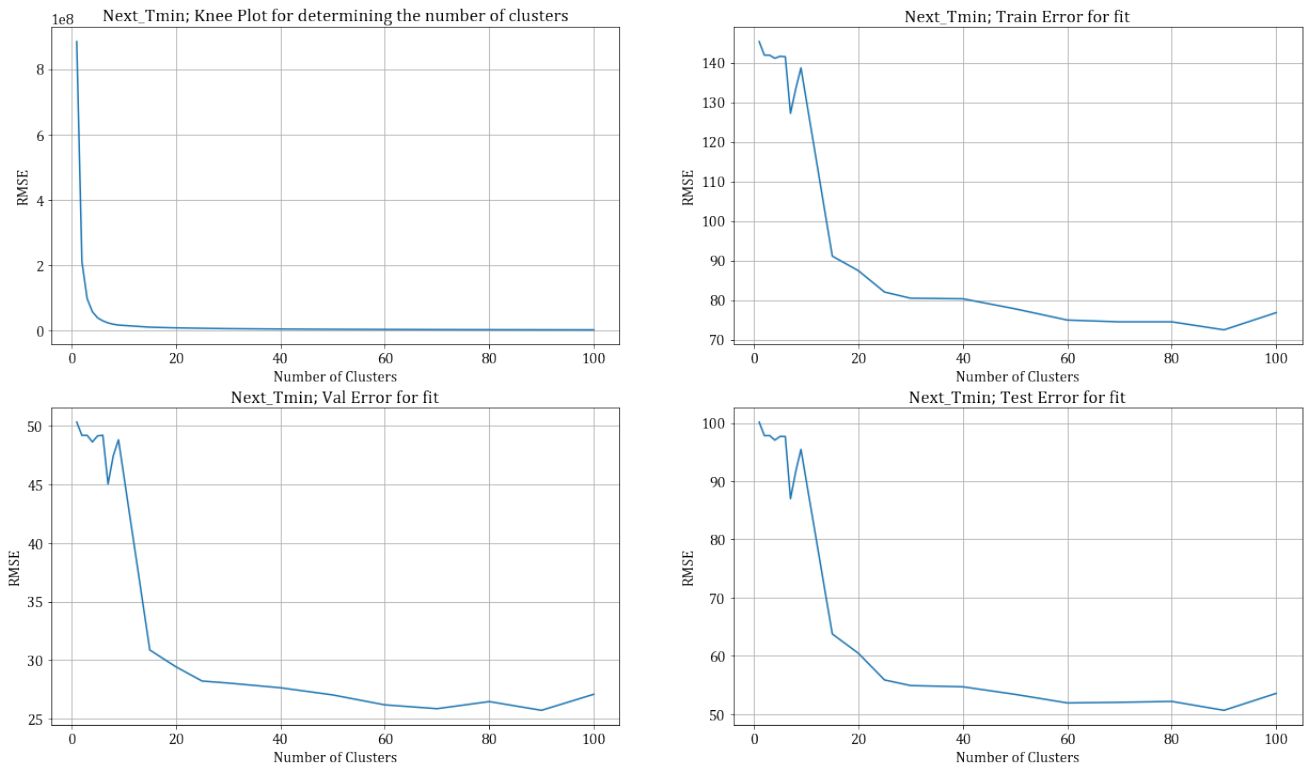


Figure 12: K-Means inertia, SSE on training and validation data from the left to right respectively. The errors obtained in tabular format is as follows:

# Clusters	Erms Train	Erms Validation	Erms Test
90	1.0480926961558428	1.1145328487370127	1.0612317092745545
70	1.077282613356503	1.1205646601791848	1.0900393186117472
60	1.0838258289557656	1.1347092563134056	1.0878633208966022
80	1.0773257656133501	1.1469280060128313	1.0933190935289967
50	1.124898166939697	1.171619621385478	1.1186915649161837

Table 6: Erms on the Training, Validation and Testing dataset, across different number of clusters, for 5 hyper parameters that result in the lowest Erms.

The the number of clusters that resulted in the lowest RMSE is 90. In addition to the scatter plot, histograms were plotted to understand the variance in the data.

The histogram and scatter plot of the target and the model output is as follows (train data):

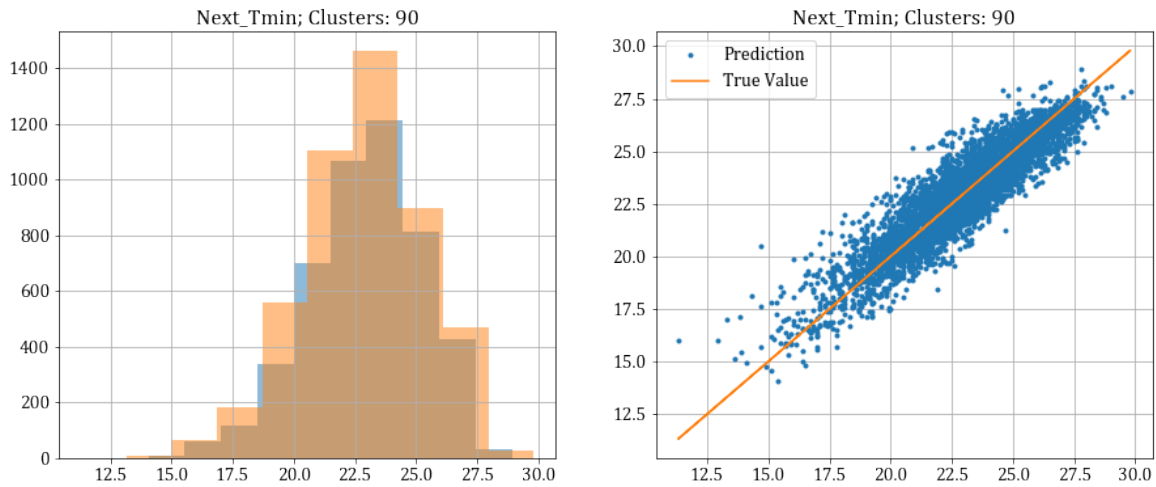


Figure 13: Histogram and Scatter plot of the target values against the model prediction for training dataset, using linear regression with gaussian basis and $\lambda : 0$

The histogram and scatter plot of the target and the model output is as follows (test data):

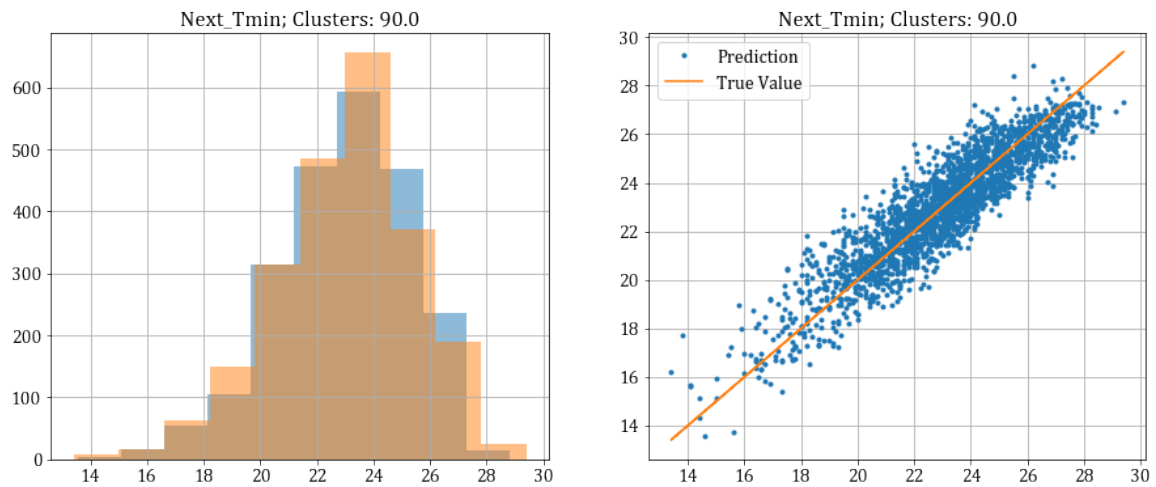


Figure 14: Histogram and Scatter plot of the target values against the model prediction for testing dataset, using linear regression with gaussian basis and $\lambda : 0$

3.2.1.2 Predicting: Next_Tmax

The Erms on the training and validation dataset and the RMSE distances of samples to their closest cluster center obtained across the number of clusters is as follows:

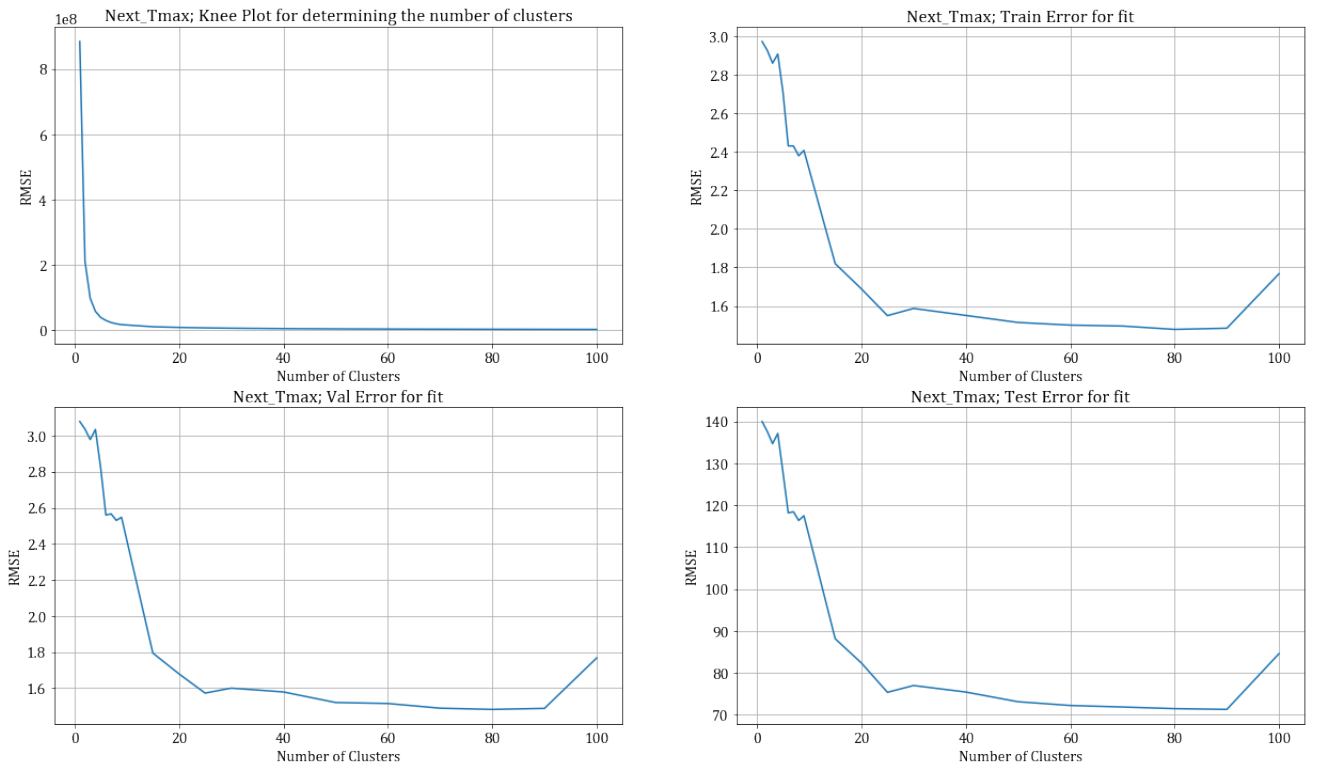


Figure 15: K-Means inertia, RMSE on training and validation data from the left to right respectively. The errors obtained in tabular format is as follows:

# Clusters	Erms Train	Erms Validation	Erms Test
80	1.4786466027685028	1.482350293596334	1.4982621391957776
90	1.484803258559306	1.4880444688982468	1.494427196289964
70	1.4960679385931273	1.4890949206178046	1.506337114473912
60	1.5009698930597348	1.5150336590549258	1.5139975307535112
50	1.5146941030926666	1.5205650411093423	1.5327334181249275

Table 7: Erms on the Training, Validation and Testing dataset, across different number of clusters, for 5 hyper parameters that result in the lowest Erms.

The the number of clusters that resulted in the lowest RMSE is 80. In addition to the scatter plot, histograms were plotted to understand the variance in the data.

The histogram and scatter plot of the target and the model output is as follows (train data):

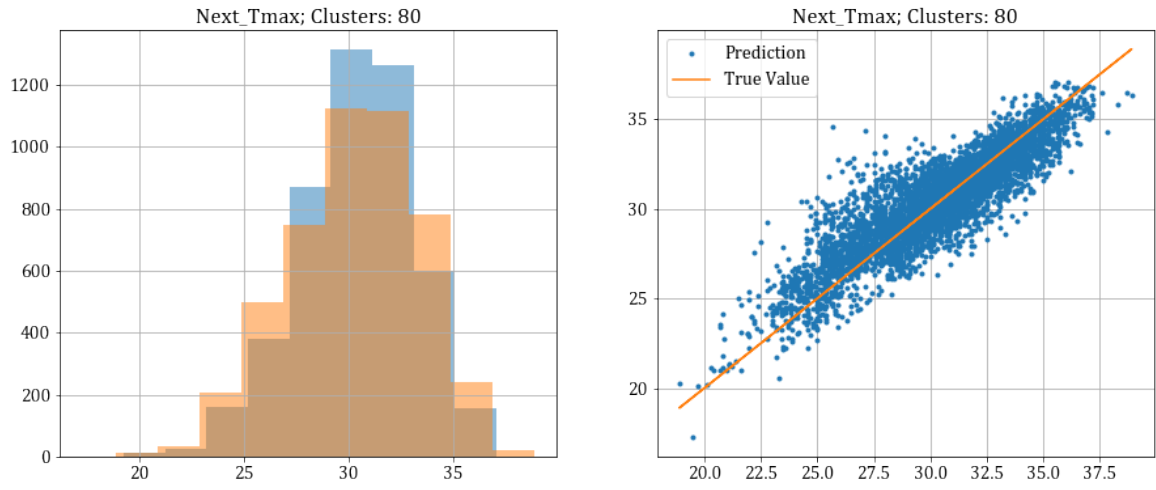


Figure 16: Histogram and Scatter plot of the target values against the model prediction for training dataset, using linear regression with gaussian basis and $\lambda : 0$

The histogram and scatter plot of the target and the model output is as follows (test data):

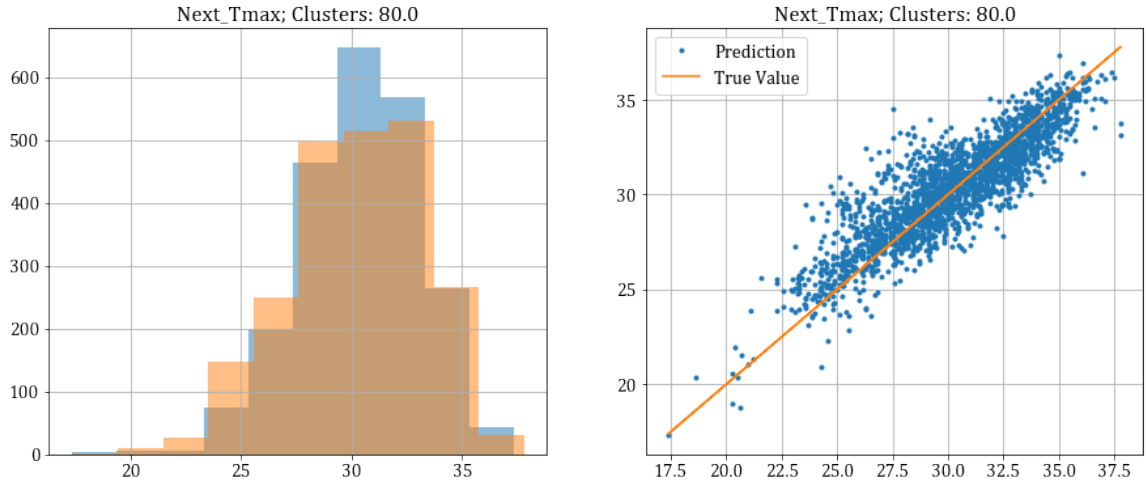


Figure 17: Histogram and Scatter plot of the target values against the model prediction for testing dataset, using linear regression with gaussian basis and $\lambda : 0$

3.2.2 Quadratic Regularization

Optimal parameters using quadratic regularization is given by $\vec{\omega}^* = (\Phi^T \Phi + \lambda I)^{-1} \Phi^T \vec{t}$;

λ is the regularization parameter. The RMSE on the cross-validation set was calculated for each value. The best performing model was selected as the one having least RMSE on CV data

The hyperparameter - number of clusters and λ were swept and the value that resulted in the lowest validation SSE was chosen. The following cluster numbers were swept for: [1, 2, 3, 4, 5, 6, 7, 8, 9, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100] and the following λ values were swept: [0.01, 0.1, 1.0, 5.0, 10.0].

3.2.2.1 Predicting: Next_Tmin

The Erms on the training and validation dataset and the SSE distances of samples to their closest cluster center obtained across the number of clusters is as follows:

# Clusters	λ	Erms Train	Erms Validation	Erms Test
200	0.01	1.9013040128753353	1.9965582216927813	1.9047855943641792
190	0.01	1.904933411245413	1.9990574601548905	1.908742610287438
180	0.01	1.906872845452907	1.9994072596187717	1.9109215864242062
170	0.01	1.916154510430869	2.007065870193715	1.9205837284324376
160	0.01	1.9265592590375111	2.0159961584465105	1.9311538203795762

Table 8: Erms on the Training, Validation and Testing dataset, across different number of clusters, for 5 hyper parameters that result in the lowest Erms.

The the number of clusters that resulted in the lowest RMSE is 200 and λ is 0.01. In addition to the scatter plot, histograms were plotted to understand the variance in the data.

The histogram and scatter plot of the target and the model output is as follows (train data):

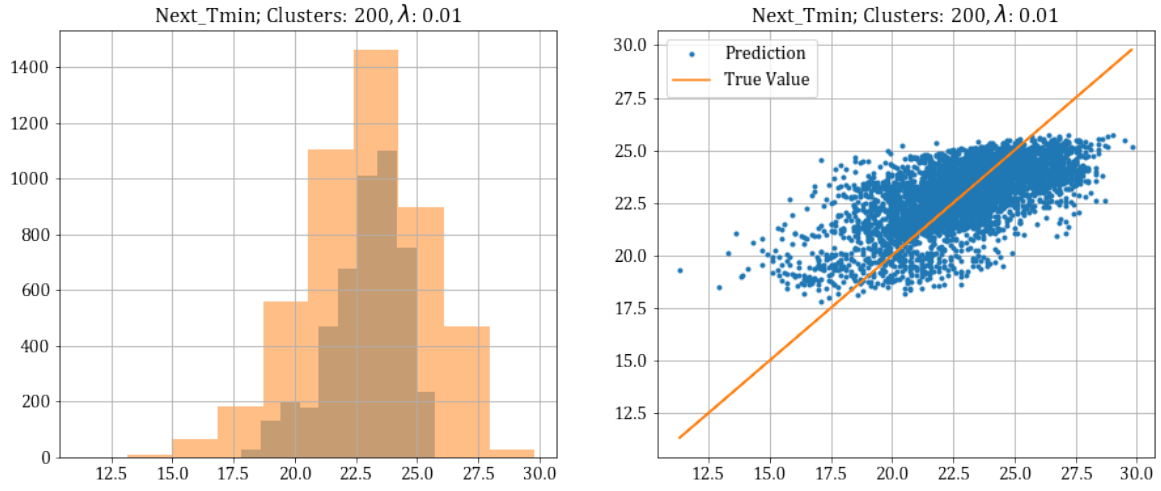


Figure 18: Histogram and Scatter plot of the target values against the model prediction for training dataset, using linear regression with gaussian basis and $\lambda : 0.01$

The histogram and scatter plot of the target and the model output is as follows (test data):

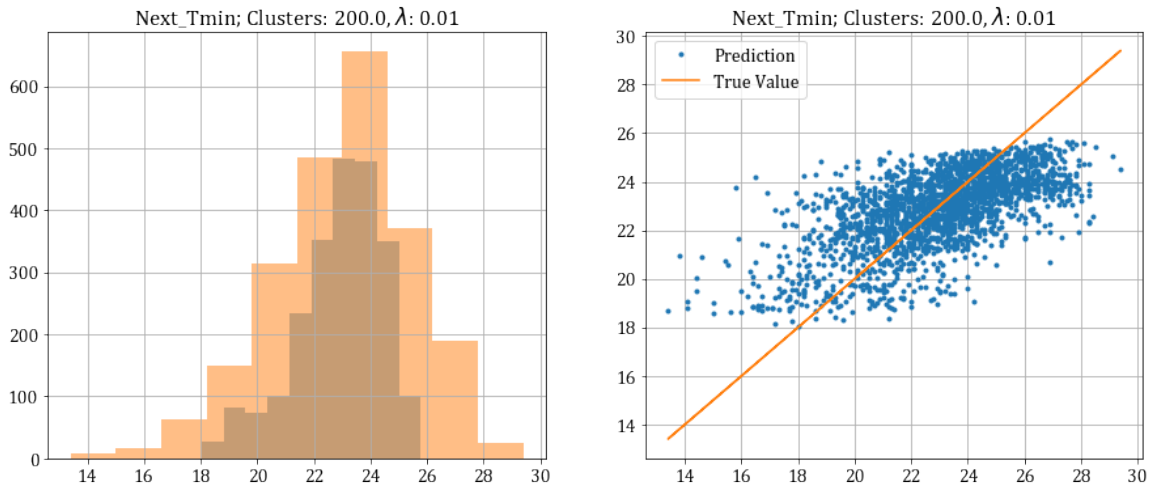


Figure 19: Histogram and Scatter plot of the target values against the model prediction for testing dataset, using linear regression with gaussian basis and $\lambda : 0.01$

3.2.2.2 Predicting: Next_Tmax

The Erms on the training and validation dataset and the RMSE distances of samples to their closest cluster center obtained across the number of clusters is as follows:

# Clusters	λ	Erms Train	Erms Validation	Erms Test
200	0.01	2.249936156869166	2.399288774682482	2.302560104383557
190	0.01	2.2523172411109824	2.4004581548123065	2.3045855076045143
180	0.01	2.2602647948690384	2.4079528711983964	2.313110392501987
170	0.01	2.2640439964624384	2.4103143785285273	2.3164194038569397
160	0.01	2.2690106265072445	2.414998730544044	2.32150961586746

Table 9: Erms on the Training, Validation and Testing dataset, across different number of clusters, for 5 hyper parameters that result in the lowest Erms.

The the number of clusters that resulted in the lowest RMSE is 200 and λ is 0.01. In addition to the scatter plot, histograms were plotted to understand the variance in the data.

The histogram and scatter plot of the target and the model output is as follows (train data):

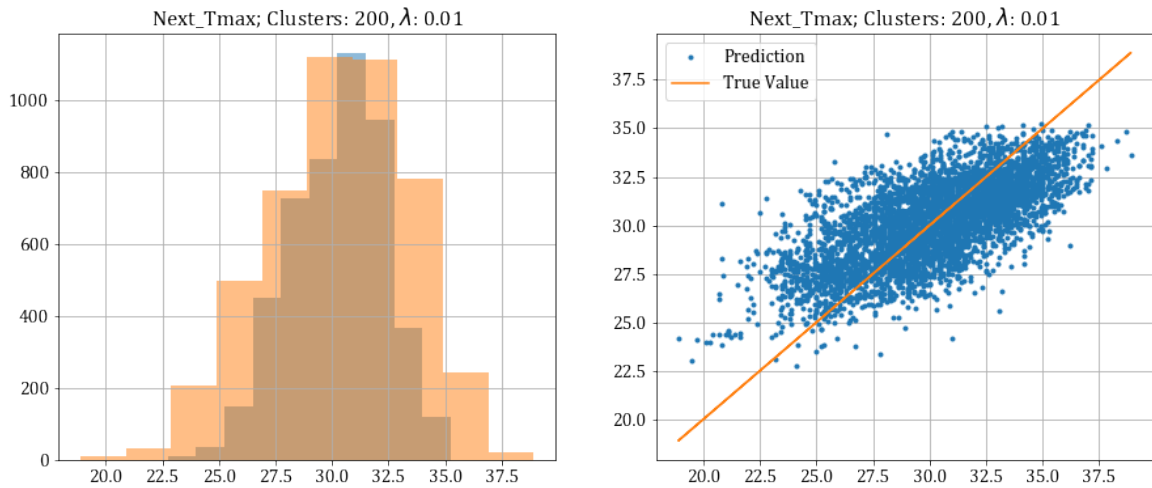


Figure 20: Histogram and Scatter plot of the target values against the model prediction for training dataset, using linear regression with gaussian basis and λ : 0.01

The histogram and scatter plot of the target and the model output is as follows (test data):

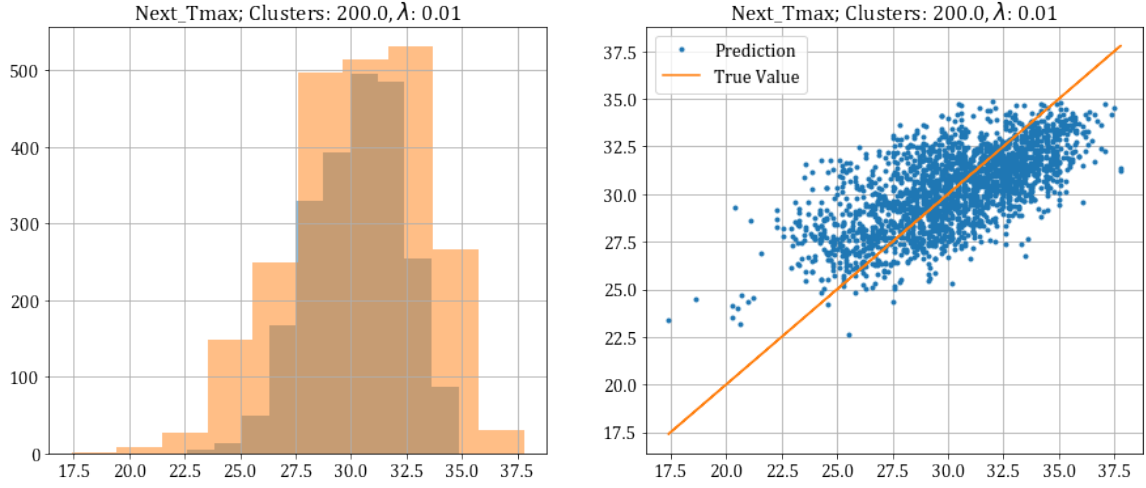


Figure 21: Histogram and Scatter plot of the target values against the model prediction for testing dataset, using linear regression with gaussian basis and $\lambda : 0.01$

3.2.3 Tikhonov Regularization

The Tikhonov regularization term is given by $\vec{\omega}^* = (\Phi * T\Phi + \lambda\tilde{\Phi})^{-1}\Phi^T\vec{t}$. The $\tilde{\Phi}$ term is defined as

$$\tilde{\Phi} = [\tilde{\phi}]_{i,j=1}^K \quad (13)$$

where K is the number of clusters and λ is the regularization parameter. The values 0.01,0.1, 1.0,5.0,10.0 were used to estimate the optimal parameters and the RMSE on the cross-validation set was calculated for each value. The best performing model was selected as the one having least RMSE on CV data

Applying Tikhonov regularization to the bivariate dataset, the optimal value of λ was estimated to be 0.01. The table for the RMSE values for the Training, CV and Test values corresponding to each λ value is

Lambda	RMSE Train	RMSE CV	RMSE test
0.01	78112040.25241715	80416219813.42682	43898825037.538
0.1	78629878.58895023	276304216179.1798	176596027875.55765
1.0	79471104.52781227	357583741029.9827	104372422450.83612
5.0	77593937.82583737	272444591755.6569	174802698267.85687
10.0	77693846.61754198	242869557997.72043	158196054705.92648

Table 10: Results obtained for Task 3

Scatter plots of the model prediction using the regularization parameter value 0.01:

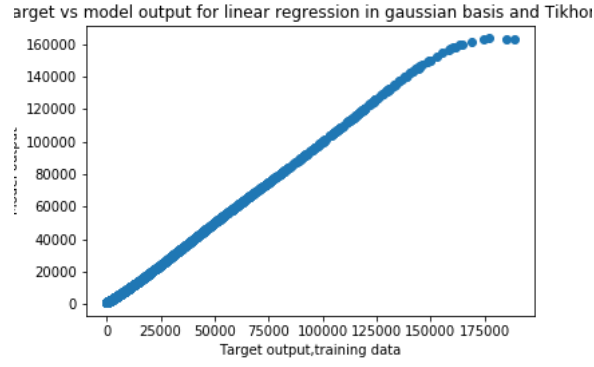


Figure 22: Scatter plot of the target values vs model prediction for Training set of Dataset 2, using linear regression with gaussian basis and Tikhonov Regularization, $\lambda = 0.01$

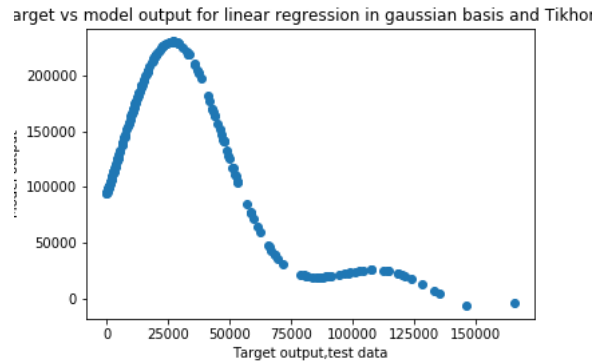


Figure 23: Scatter plot of the target values vs model prediction for Test set of Dataset 2, using linear regression with gaussian basis and Tikhonov Regularization, $\lambda = 0.01$

For Dataset 3, the table for the RMSE values for the Training, CV and Test values corresponding to each λ value corresponding to target variable "NTmin" is

Lambda	RMSE Train	RMSE CV	RMSE test
0.01	4929.01653053444	414848.3042013735	3312196.0992440097
0.1	4624.091536077471	1669.205290237633	36902.34473960538
1.0	4637.926167783597	2073.9375316355663	39568.04405922714
5.0	4652.374704231647	2257.2672544567195	40450.17809627787
10.0	4667.40003673528	2346.920490034092	40853.959722564214

Table 11: Results obtained for Task 3

the optimal value of λ was estimated to be 0.1 for the target output "NTmin". The scatter plots obtained are [Figure 24](#) and [Figure 25](#)

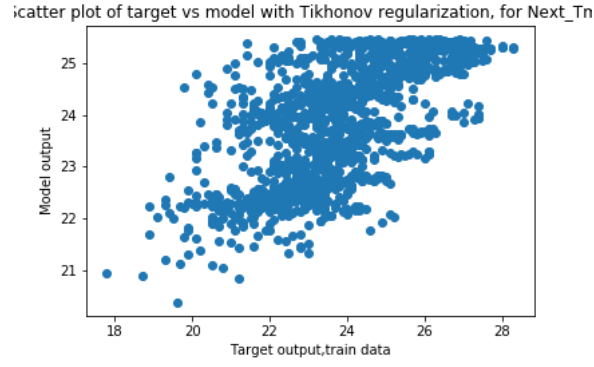


Figure 24: Scatter plot of the target values vs model prediction for Training set of Dataset 3, using linear regression with gaussian basis and Tikhonov Regularization, $\lambda = 0.1$

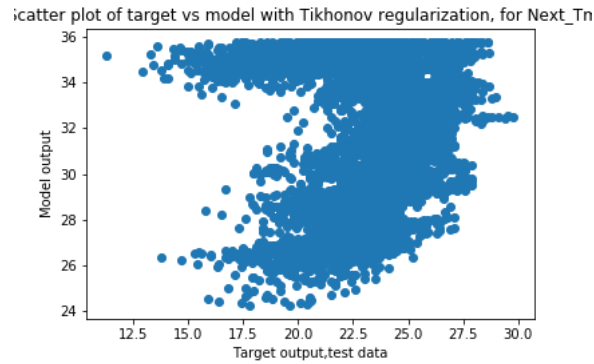


Figure 25: Scatter plot of the target values vs model prediction for Test set of Dataset 3, using linear regression with gaussian basis and Tikhonov Regularization, $\lambda = 0.01$

For the target output "NTmax" the following table of RMSE values for the training, test and CV data was obtained:

Lambda	RMSE Train	RMSE CV	RMSE test
0.01	4929.01653053444	414848.3042013735	3312196.0992440097
0.1	4624.091536077471	1669.205290237633	36902.34473960538
1.0	4637.926167783597	2073.9375316355663	39568.04405922714
5.0	4652.374704231647	2257.2672544567195	40450.17809627787
10.0	4667.40003673528	2346.920490034092	40853.959722564214

Table 12: Results obtained for Task 3

plots were obtained: [Figure 26](#) and [Figure 27](#).

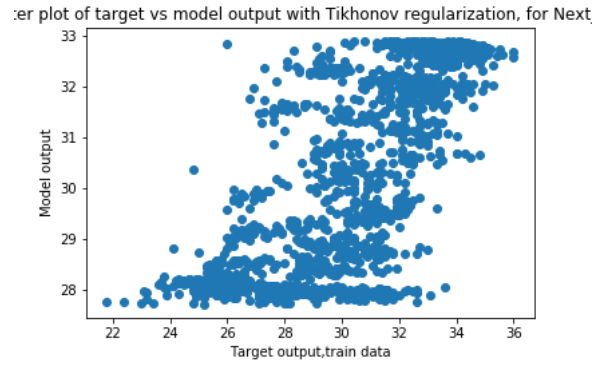


Figure 26: Scatter plot of the target values vs model prediction for Training set of Dataset 3, using linear regression with gaussian basis and Tikhonov Regularization, $\lambda = 0.1$

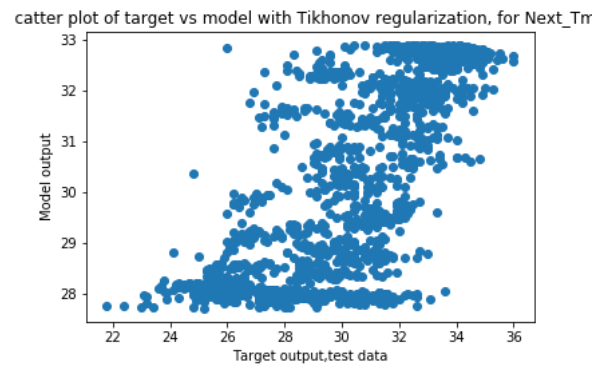


Figure 27: Scatter plot of the target values vs model prediction for Test set of Dataset 3, using linear regression with gaussian basis and Tikhonov Regularization, $\lambda = 0.1$

3.2.4 Inference

From the above plots we observe that:

-