

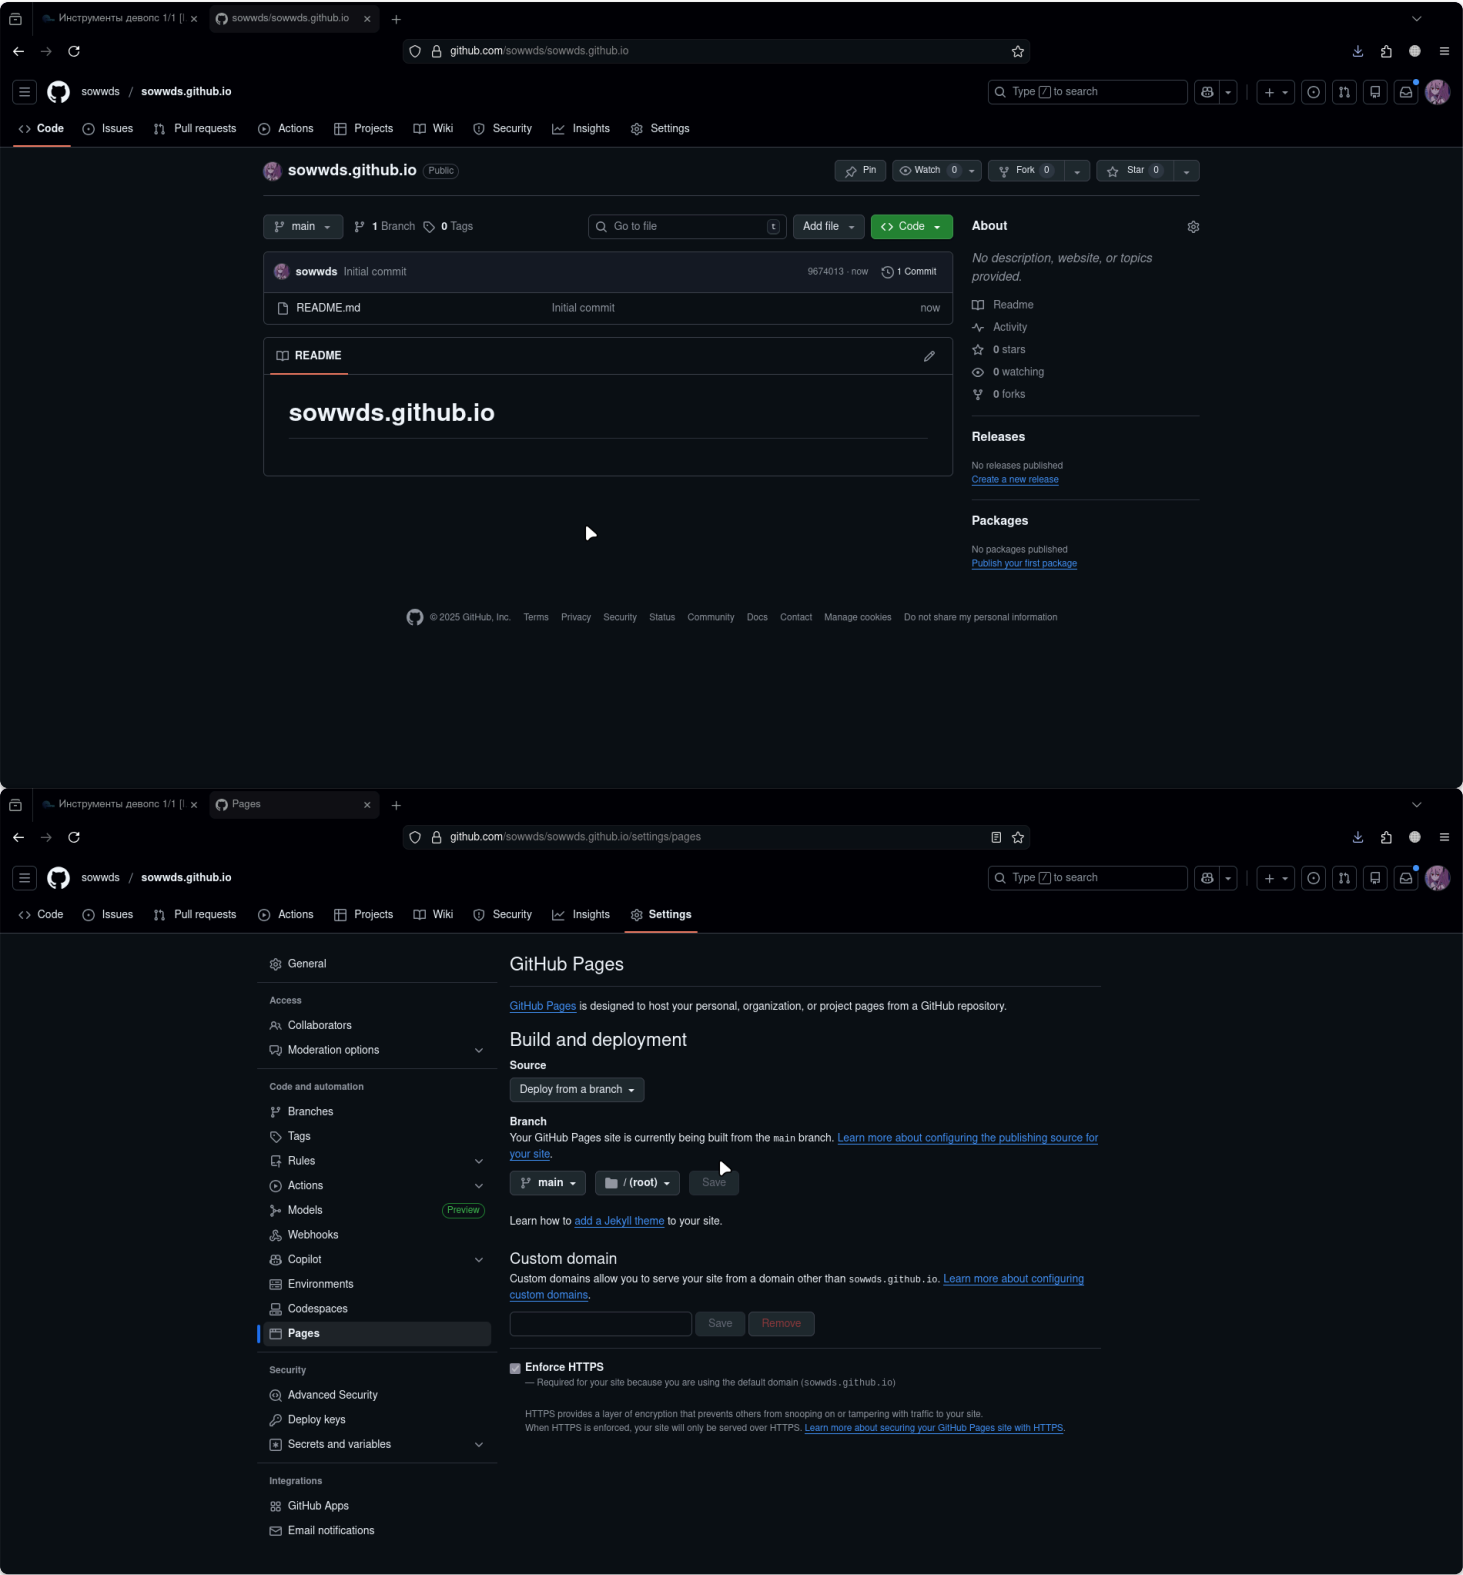


Практическая 5 Ефремов ЭФБО-10-23

Практика 5.1

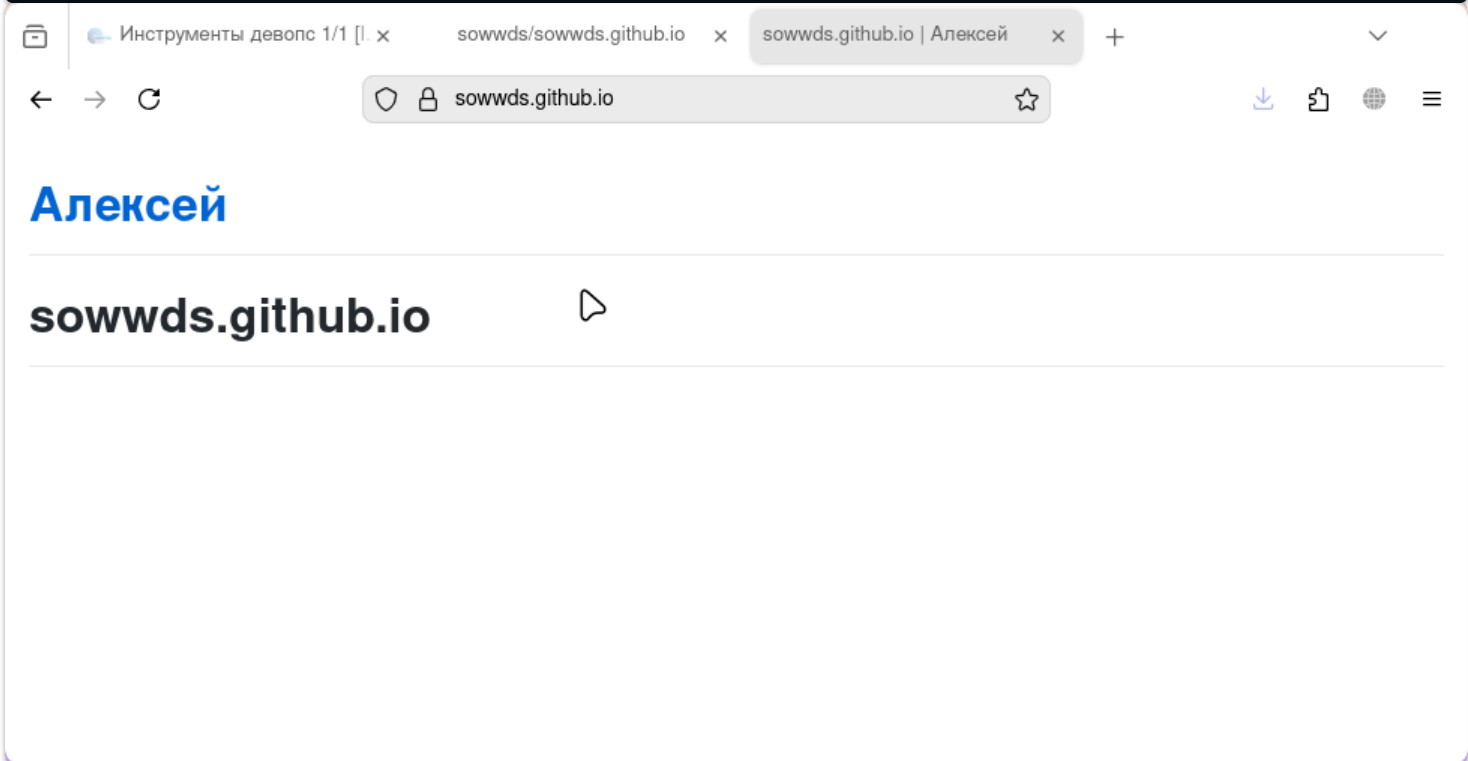

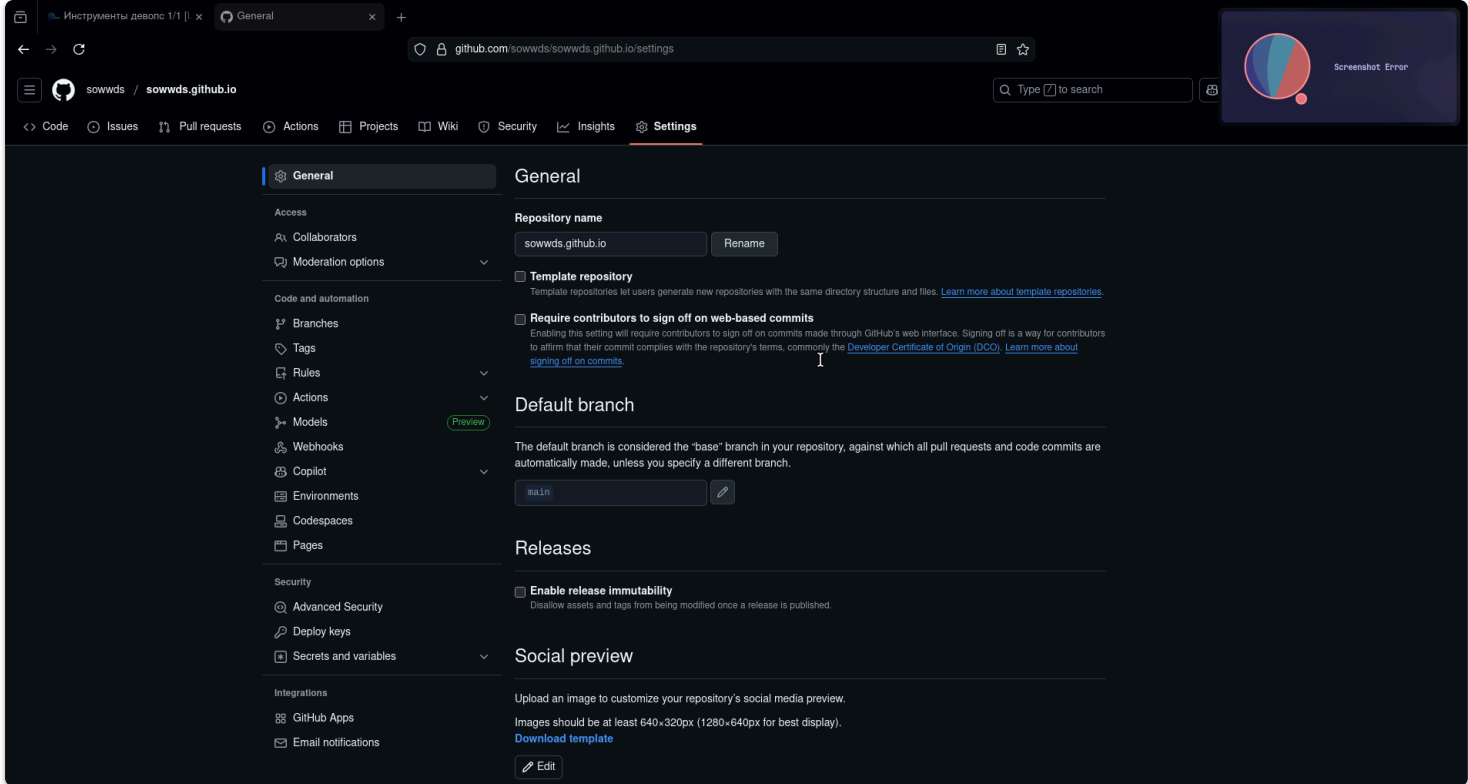

Инструменты разработки 1/1 | x

New File at / - sowwds.sowwds.io | Алексей

sowwds.github.io | Алексей

github.com/sowwds/sowwds.github.io/new/main?filename=github%2Fworkflows%2Fworkflow_template-c%2Fblob

сowwds / sowwds.github.io

Q Type [] to search

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

sowwds.github.io / .github / workflows / / deploy.yml in main

Cancel changes Commit changes...

Edit Preview

1 name: Deploy static content to Pages
2
3 on:
4 # Runs on pushes targeting the default branch
5 push:
6 branches: ['main']
7
8 # Allows you to run this workflow manually from the Actions tab
9 workflow_dispatch:
10
11 # Sets permissions of the GITHUB_TOKEN to allow deployment to GitHub Pages
12 permissions:
13 contents: read
14 pages: write
15 id-token: write
16
17 # Allow only one concurrent deployment, skipping runs queued between the run in-progress and latest queued.
18 # However, do NOT cancel in-progress runs as we want to allow these production deployments to complete.
19 concurrency:
20 group: 'pages'
21 cancel-in-progress: false
22
23 jobs:
24 # Single deploy job since we're just deploying
25 deploy:
26 environment:
27 name: github-pages
28 url: \${{ steps.deployment.outputs.page_url }}
29 runs-on: ubuntu-latest
30 steps:
31 - name: Checkout
32 uses: actions/checkout@v4
33 - name: Setup Pages
34
35 Use Control + Shift + A to toggle the tab key moving focus. Alternatively, use esc then tab to move to the next interactive element on the page.
36 Use Control + Space to trigger autocomplete in most situations.

Marketplace Documentation

Search Marketplace for Actions

Featured Actions

Cache

By actions

Cache artifacts like dependencies and build outputs to improve workflow execution time

5.2k

Setup Node.js environment

By actions

Setup a Node.js environment by adding problem matchers and optionally downloading and adding it to the PATH

4.6k

Setup Java JDK

By actions

Set up a specific version of the Java JDK and add the command-line tools to the PATH

1.8k

Setup .NET Core SDK

By actions

Used to build and publish .NET source. Set up a specific version of the .NET and authentication to private NuGet repository

1.1k

First Interaction

By actions

Greet new contributors when they create their first issue or open their first pull request

836

Featured categories

Code quality Monitoring

Инструменты разработки 1/1 | x

sowwds.github.io/index.html x

sowwds.github.io | Алексей

github.com/sowwds/sowwds.github.io/blob/main/index.html

сowwds / sowwds.github.io

Q Type [] to search

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

main sowwds.github.io / index.html

Go to file

sowwds Update index.html beta716 · now History

Code Blame 14 lines (11 loc) · 256 Bytes

1 <!DOCTYPE html>
2 <html lang="en">
3
4 <head>
5 <meta charset="UTF-8">
6 <meta name="viewport" content="width=device-width, initial-scale=1.0">
7 <title>GitHub Deployment Workflow</title>
8 </head>
9
10 <body>
11 <p>Hello, GitHub Actions!</p>
12 </body>
13
14 </html>

Deploy static content to Pages

Update index.html #3

Re-run all jobs

Summary

Jobs

- deploy

Run details

- Usage
- Workflow file

Triggered via push 1 minute ago

sowwds pushed → befa716 [main](#)

Status: **Success**

Total duration: **26s**

Artifacts: **1**

deploy.yml

on: push

deploy 10s <https://sowwds.github.io/>

Artifacts

Produced during runtime

Name	Size	Digest
github-pages	499 Bytes	sha256:84043f8ddda27525447d3b0978d1c5613f469383faa7fad877aedfb...

Hello, GitHub Actions!

Практика 5.2

```
sa@ubuntu-server:~$ sudo service ssh status
[sudo] password for sa:
* ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: inactive (dead)
TriggeredBy: ● ssh.socket
             Docs: man:sshd(8)
                  man:sshd_config(5)
sa@ubuntu-server:~$
sa@ubuntu-server:~$ _
```

```
sa@ubuntu-server:~$ sudo systemctl restart ssh
sa@ubuntu-server:~$ sudo service ssh status
* ssh.service - OpenBSD Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: enabled)
   Active: active (running) since Wed 2025-12-17 21:40:06 UTC; 9s ago
TriggeredBy: ● ssh.socket
             Docs: man:sshd(8)
                  man:sshd_config(5)
   Process: 1541 ExecStartPre=/usr/sbin/sshd -t (code=exited, status=0/SUCCESS)
  Main PID: 1544 (sshd)
    Tasks: 1 (limit: 3774)
   Memory: 2.1M (peak: 2.2M)
      CPU: 25ms
   CGroup: /system.slice/ssh.service
           └─1544 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"
```

```
Dec 17 21:40:06 ubuntu-server systemd[1]: Starting ssh.service - OpenBSD Secure Shell server...
Dec 17 21:40:06 ubuntu-server sshd[1544]: Server listening on 0.0.0.0 port 22.
Dec 17 21:40:06 ubuntu-server sshd[1544]: Server listening on :: port 22.
Dec 17 21:40:06 ubuntu-server systemd[1]: Started ssh.service - OpenBSD Secure Shell server.
sa@ubuntu-server:~$ _
```

```
sa@ubuntu-server:~$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:eb:22:c0 brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 metric 100 brd 10.0.2.255 scope global dynamic enp0s3
        valid_lft 86089sec preferred_lft 86089sec
    inet6 fd17:625c:f037:2:a00:27ff:feeb:22c0/64 scope global dynamic mngtmpaddr noprefixroute
        valid_lft 86092sec preferred_lft 14092sec
    inet6 fe80::a00:27ff:feeb:22c0/64 scope link
        valid_lft forever preferred_lft forever
3: docker0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc noqueue state DOWN group default
    link/ether 7e:14:d2:c2:63:89 brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
        valid_lft forever preferred_lft forever
sa@ubuntu-server:~$ _
```

Name	Protocol	Host IP	Host Port	Guest IP	Guest Port
ssh	TCP		2222	10.0.2.15	22

GNU nano 7.2

/etc/ssh/sshd_config

```
# This is the sshd server system-wide configuration file.  See
# sshd_config(5) for more information.

# This sshd was compiled with PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin:/usr/games

# The strategy used for options in the default sshd_config shipped with
# OpenSSH is to specify options with their default value where
# possible, but leave them commented.  Uncommented options override the
# default value.

Include /etc/ssh/sshd_config.d/*.conf

# When systemd socket activation is used (the default), the socket
# configuration must be re-generated after changing Port, AddressFamily, or
# ListenAddress.
#
# For changes to take effect, run:
#
#   systemctl daemon-reload
#   systemctl restart ssh.socket
#
#Port 22
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
PermitRootLogin yes
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10
```

Help	Write Out	Where Is	Cut	Execute	Location	Undo	Se
Exit	Read File	Replace	Paste	Justify	Go To Line	Redo	Co

Welcome to Ubuntu 24.04.3 LTS (GNU/Linux 6.8.0-86-generic x86_64)

- * Documentation: <https://help.ubuntu.com>
- * Management: <https://landscape.canonical.com>
- * Support: <https://ubuntu.com/pro>

System information as of Wed Dec 17 09:47:22 PM UTC 2025

System load: 0.06
Usage of /: 47.7% of 11.21GB
Memory usage: 8%
Swap usage: 0%
Processes: 129
Users logged in: 1
IPv4 address for enp0s3: 10.0.2.15
IPv6 address for enp0s3: fd17:625c:f037:2:a00:27ff:feeb:22c0

Expanded Security Maintenance for Applications is not enabled.

25 updates can be applied immediately.

To see these additional updates run: `apt list --upgradable`

Enable ESM Apps to receive additional future security updates.
See <https://ubuntu.com/esm> or run: `sudo pro status`

The list of available updates is more than a week old.

To check for new updates run: `sudo apt update`

sa@ubuntu-server:~\$ █