Actual execution tracks and the unconnected boundaries
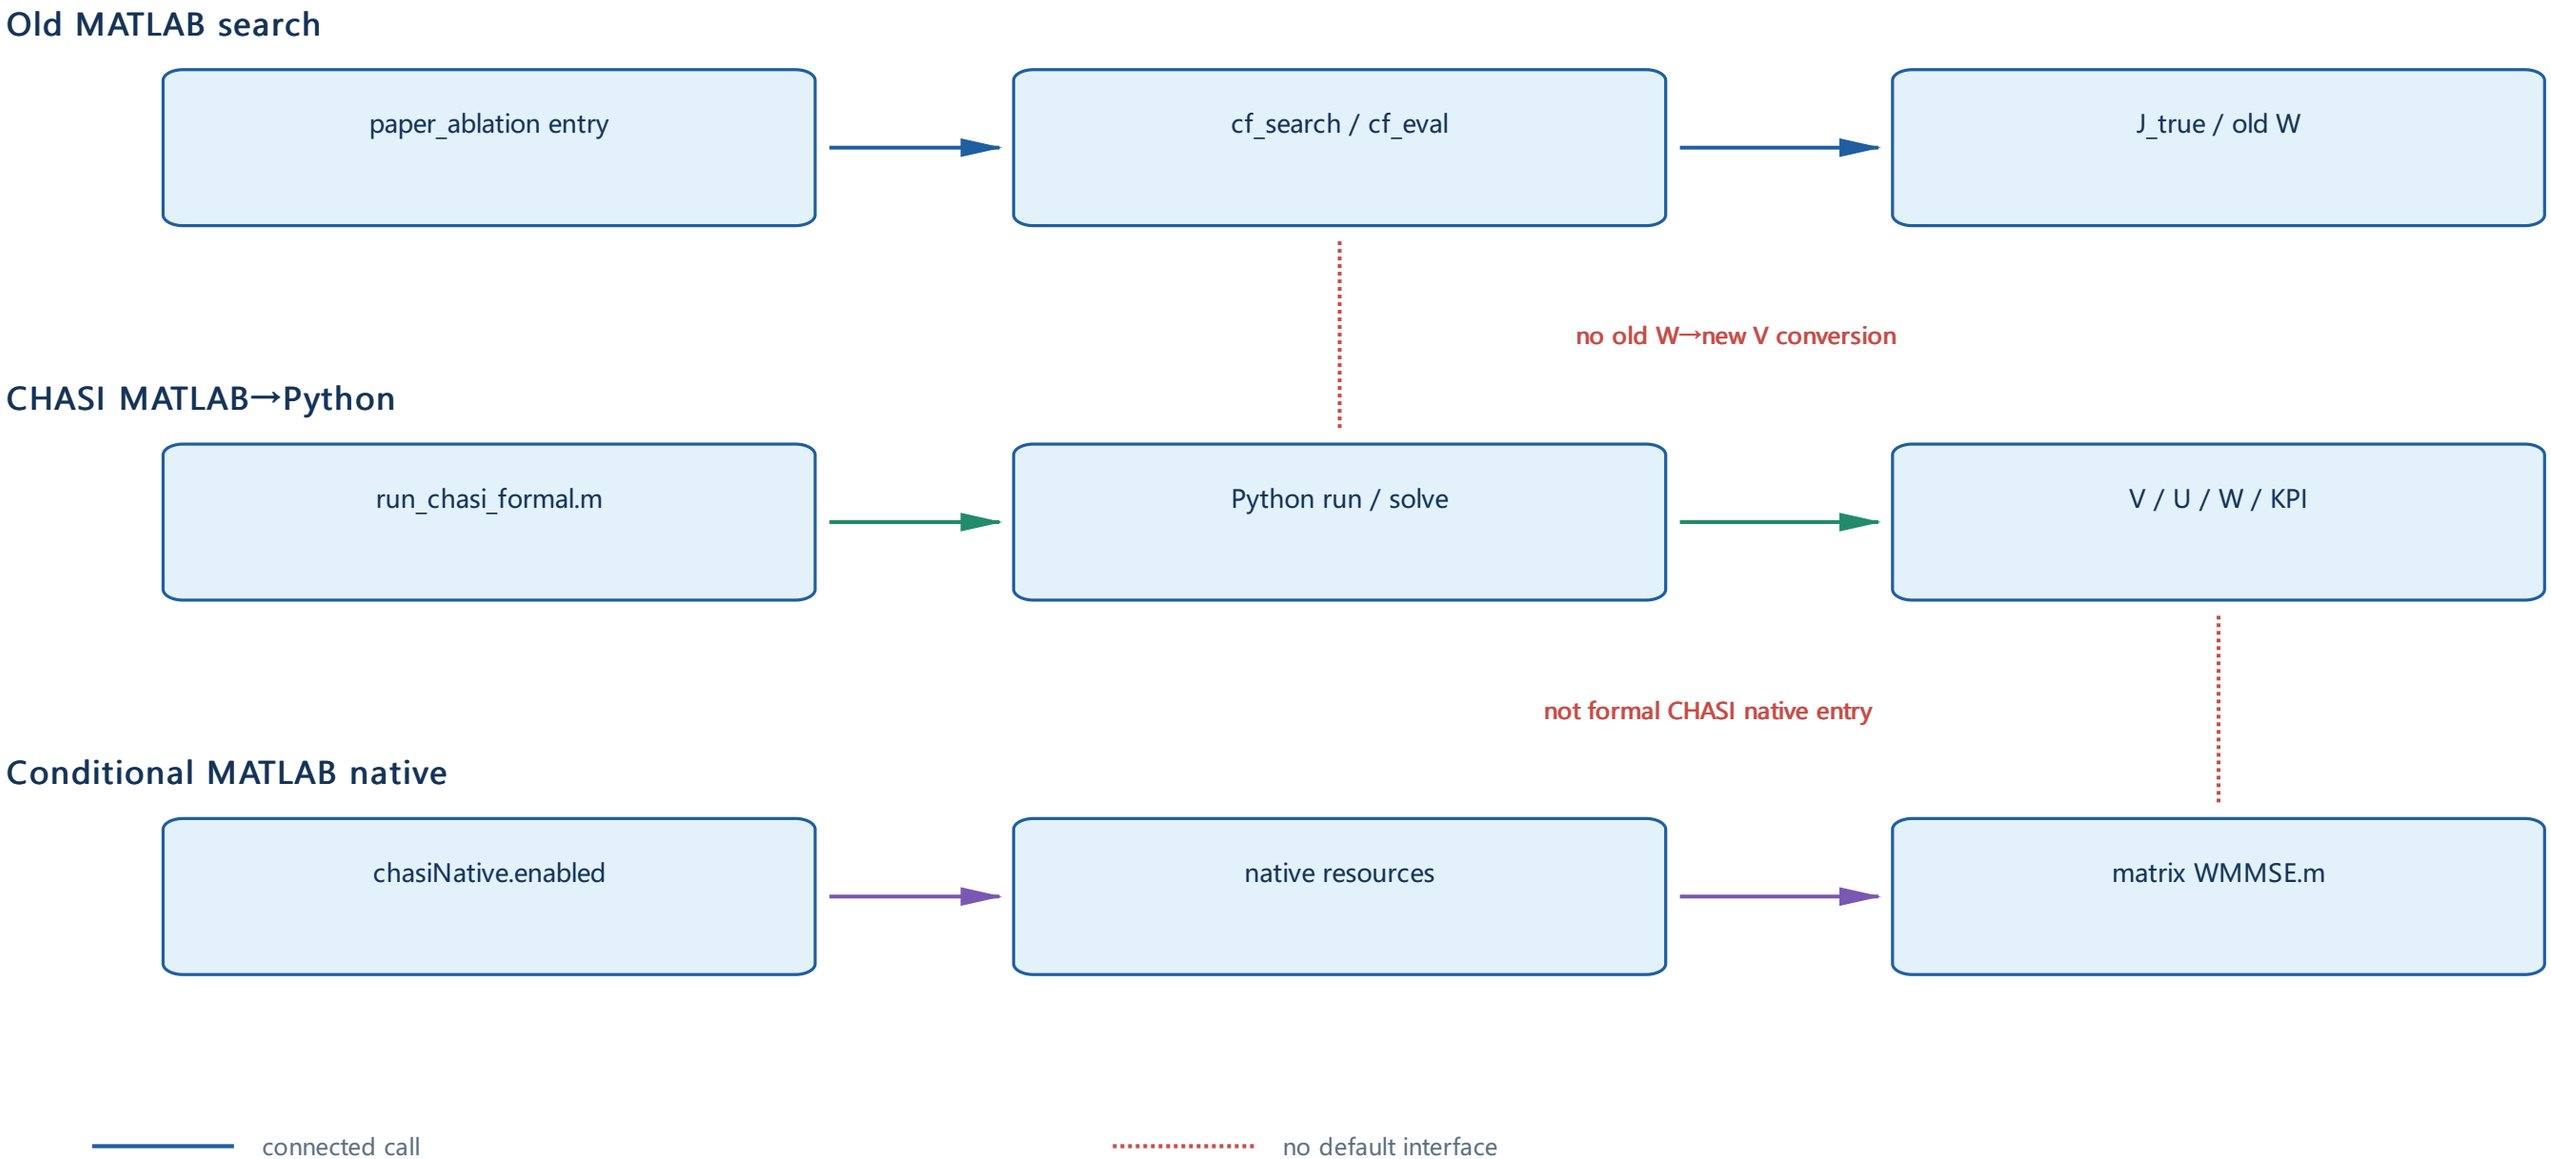
Three entry tracks coexist. MATLAB CHASI bridge passes scalar CLI settings, not old H/W arrays.