

# Train Once, Read Everywhere: Substrate Invariance of the Linearly Readable Structure in Frozen Language Models

James Burton Lancaster

July 25, 2026

## Abstract

We report the consolidated findings of the SRT (Semiotic-Reflexive Transformer) research program: a multi-year effort to treat frozen, production-scale language models not as black boxes to be fine-tuned but as *substrates* whose internal states carry structure that small, inspectable instruments can read. The program’s individual results include a ~12M-parameter adapter that exposes per-token semiotic signals from a frozen 7B backbone with zero cross-entropy degradation; an activation verbalizer that recovers text from single hidden states up to a calibrated paraphrase ceiling; read-out ports spanning architectures from dense 3B to 94-layer 235B-parameter mixture-of-experts models; and a 22MB linear head that gives a frozen multimodal chat model image-to-text retrieval at the level of fully-trained 2018 dual encoders on the standard COCO benchmark.

The headline finding, established in the program’s final arc, unifies these results: **the readable structure is a stable property of the model class, invariant along every axis a deployment can vary.** The cross-modal correspondence inside a frozen multimodal LLM is anisotropic-linear (a rotation cannot express it; a nonlinear model finds nothing beyond it at any data scale tested, and falls further behind as data grows). A head trained once on one host reads, with no retraining and at most a 42KB recalibration: a host ten times smaller (31B to 3B, no capability loss at matched data), the same host at 4-bit weight precision (a 0.011 loss in R@1 with unchanged head weights), and the same computation on entirely different silicon and kernels (CUDA/bf16 datacenter to Apple-Silicon/MLX-Q4, 97.0% head-space retrieval agreement over the full 5,000-caption pool against a 99.96% same-runtime reproducibility ceiling, and consumer-tier image-to-text retrieval within three R@1 points of the datacenter reference). Deployment tiers, from Raspberry-Pi-class edge devices to datacenter fleets, differ in latency and cost, never in capability. Train once, read everywhere.

We present the instrument stack, the measurement discipline that made the numbers trustworthy (anisotropy-corrected metrics, anchored reference frames, controls at every rung), the invariance evidence, and an honest ledger of the program’s negative results, several of which are load-bearing for the headline claim.

*Companion documents: the Stage-3 SRT-Adapter manuscript, the Stage-4 NLA manuscript, and the engineering guide, all in the program repository (<https://github.com/space-bacon/SRT>). Every number in this paper has a public artifact and a control behind it; the artifact index is Section 14.*

## 1. Introduction

### 1.1 The claim

A frozen language model computes more than its output distribution. At every layer, for every token, it produces intermediate states, and the SRT program’s founding bet was that these states

carry *readable* structure: signals about meaning, divergence, reflexive awareness, and discourse position that a small instrument can extract without touching a single backbone weight.

The program’s accumulated experiments support the bet, but the result that organizes all the others arrived last, and it is stronger than the bet itself. It is not merely that the structure is readable. It is that **what the instruments read does not depend on where or how the substrate runs**. The structure survives a ten-fold change in host scale. It survives quantization of the weights to four bits. It survives a change of hardware, numerical kernels, and quantization scheme simultaneously. And within a multimodal host it is shared across modalities, connected by a transformation so simple (a single linear map after per-modality centering) that its entire deployed form fits in 22 megabytes and can be audited by inspection.

We call this property **substrate invariance**, and we summarize it operationally: *train once, read everywhere*. An artifact calibrated against one instance of the model class reads every instance the deployment world produces, from an edge device performing a single prefill pass to a datacenter serving a fleet. The tiers differ in latency and cost. They do not differ in capability.

## 1.2 The program in six stages

1. **Stages 1–2 (theory and pretraining architecture)**. The semiotic framework: signs, interpretants, attractor basins of meaning, and a proposed architecture with these structures built into the embedding layer (Lancaster 2025, SSRN 5987495; Lancaster 2026a, SSRN 6349978).
2. **Stage 3 (the adapter)**. The realization that honest instrumentation beats reconstruction: freeze a strong existing model and bolt on ~12M trainable parameters that read what is already latent (arxiv/paper.md).
3. **Stage 4 (activation verbalization)**. Reading a single hidden state back as text, with the anisotropy-corrected, anchored measurement frame that the rest of the program inherited (paper\_nla.md).
4. **Stage 5 (scaling the read-out up)**. Ports of the read-only adapter to gpt-oss-20b and Qwen3-235B-A22B, establishing architecture- and scale-generality upward.
5. **Stage 6 (crossing modalities: SRT-Sunstone)**. The discovery that a text-trained read-out interprets images zero-shot on a frozen multimodal host, and the boundary studies that made the claim precise.
6. **The invariance arc (this paper’s contribution)**. The controlled ladder that identified the cross-modal gap as anisotropic-linear, benchmarked it, and then deliberately varied scale, precision, and hardware to establish that the readable structure is invariant.

## 1.3 How to read this paper

§2 describes the instruments. §3 describes the measurement discipline; we consider it a contribution in its own right, because nearly every number in this field is uninterpretable without it. §4 through §7 present the evidence, organized by invariance axis. §8 assembles the headline claim. §9 is the ledger of negative results. §10 gives the semiotic interpretation. §11–§13 situate, scope, and conclude.

## 2. The instrument stack

All instruments share one design rule: **the backbone is frozen, byte-identical, and runs natively**. Instruments read hidden states from forward passes the host is already performing; a deployment gains capabilities without any risk of regression to the host’s primary function.

### 2.1 The SRT-Adapter (Stage 3)

A ~12M-parameter module (about 0.17% of a 7B backbone) that taps the residual stream of frozen Qwen2.5-7B at three layers. Metapragmatic Attention Heads (MAH) read divergence; a GRU-based Reflexive Recurrent Module (RRM) integrates the divergence stream into a meta-state; a Bifurcation Estimation Network (BEN) emits per-token reflexivity  $\hat{r}$  and a regime label; a community head discovers discourse-trajectory structure without labels; and an optional FiLM correction ( $\mathbf{h} \leftarrow \mathbf{h} \cdot (1 + \gamma) + \beta$ ) is injected at two layers. Because the backbone’s embeddings and LM head are untouched, cross-entropy starts at pretrained quality; there is nothing to “recover.”

Two consumer artifacts ship from this stage: **srt-adapter-v1.0** (semantic embeddings; the re-search series behind it culminated in a model-soup checkpoint, mean MTEB-STS 0.3744) and **zooL4nD3r-v0.1** (961 discourse communities). A separate diagnostic established the substrate’s raw capacity for one downstream task: frozen-backbone features plus gradient boosting reach TruthfulQA-MC2 AUC  $0.8656 \pm 0.011$  on Qwen2.5-7B (0.8563 on Gemma-2-2B, 0.8475 on Llama-3.2-3B), at the top of the published hidden-state-detector band (SAPLMA  $\approx 0.72$ ; INSIDE  $\approx 0.78$ –0.85; EigenScore  $\approx 0.80$ –0.85).

### 2.2 The Activation Verbalizer (Stage 4)

A ~12.7M-parameter head trained so that, given a mid-layer hidden vector  $\mathbf{v}$  from the frozen backbone, it generates text whose own re-encoded activation matches  $\mathbf{v}$ . Stage 4’s lasting contributions are the measurement frame (§3) and the decoding result: with oracle best-of-K scoring (legitimate at deploy time, since  $\mathbf{v}$  is by construction available), the verbalizer saturates the paraphrase ceiling at K=64 on Qwen2.5-7B. Its honest limits are equally important and appear in §9.

### 2.3 The linear cross-modal head (the invariance arc)

The simplest instrument in the program and the one that carries the headline: two linear maps (5376→1024 each, ~22MB in bf16) trained with a symmetric InfoNCE objective on frozen-backbone states of paired images and captions, plus two per-modality centering vectors (~42KB). Nothing else. §6 and §7 show what it does and what it survives.

---

## 3. Measurement discipline

The program’s numbers are trustworthy because of four standing rules, each learned the hard way.

**Rule 1: always correct for anisotropy.** Transformer hidden states share a dominant direction; unrelated Qwen2.5-7B L20 states already have cosine  $\approx 0.24$  ( $\|\mu\| \approx 55$ ), and raw cosine metrics are therefore uninterpretable. Every similarity in this program is computed after subtracting the relevant pool mean, and the raw anisotropy is reported alongside. In the visual channel the same rule reappears with a refinement (§6.3): the anchor population must be drawn from the query’s own domain, and domain match beats population size.

**Rule 2: anchor every scale.** Stage 4 metrics are reported as  $\rho_{\text{norm}} \in [0,1]$ , normalized between a measured random-text floor (centered fve 0.510 on Qwen L20) and a measured same-source paraphrase ceiling (0.799), with replay (0.968) and nearest-neighbour retrieval (0.714) as reference points. A number without an anchored frame is not a result.

**Rule 3: every ladder carries controls.** Shuffled-pairs fits (capacity floors), train-size curves (memorization tests), held-out splits that are never touched by model selection, and leakage audits. The Karpathy benchmark run (§6.2) dropped 8,799 training pairs whose images belong to the Karpathy test and validation splits but had been moved into train2017 by COCO’s 2017 re-partition, and retrained the head before evaluating.

**Rule 4: respect encoding conventions.** BOS-sensitivity (a bare re-encode drops gemma-4 replay from 0.9986 to 0.615), EOS-inclusive scoring matched between evaluation and calibration, and per-modality centering are all mandatory and all documented in the released code.

---

#### 4. What the taps read on a single substrate

Before invariance can mean anything, the readings themselves must be established on one substrate. On frozen Qwen2.5-7B the program established, with full details in the companion manuscripts:

- **Semantic structure:** the adapter’s discourse/embedding vector supports competitive semantic similarity (the v1.0 product line and its research series).
  - **Reflexivity and regime:** per-token  $\hat{r}$  and a two-class regime signal, calibrated well enough that downstream ports report expected-calibration errors in the fourth decimal place (§5).
  - **Recoverability of the state itself:** a single L20 hidden state is recoverable as text up to the paraphrase ceiling of the backbone under best-of-64 oracle decoding ( $\rho_{\text{cen}} \approx 0.99$  against the anchored frame), with zero-training nearest-neighbour retrieval ( $\rho \approx 0.71$ ) as the deploy-time fallback that needs no generation at all.
  - **Cross-architecture replication of the substrate claim:** the Stage-3 read-off survives 1-NN probes on Qwen3-8B and Mistral-7B-v0.3, and the NLA pipeline replicated on Llama-3.2-3B and Gemma-2-2B.
- 

#### 5. Invariance axis one: architecture and scale, upward

The read-only adapter ports cleanly to radically different hosts, with only the ~16M side-channel heads trained and the backbone verified bit-exact against its reference forward pass in each case.

| host                | architecture             | regime ECE | regime AUROC | community NMI |
|---------------------|--------------------------|------------|--------------|---------------|
| Qwen3-235B-A22B-FP8 | 94-layer MoE, 22B active | 0.0005     | 0.986        | 0.62          |
| gpt-oss-20b (MXFP4) | sliding-window MoE       | 0.0009     | 0.974        | 0.42          |

The 235B port required sharding across eight GPUs and a sliding-window-mask implementation verified byte-identical to the reference; the signals survived unchanged. Reflexivity correlation on

gpt-oss-20b: Pearson 0.689. These ports established upward scale- and architecture-generalty well before the question of *downward* invariance (§7) was posed.

## 6. Invariance axis two: modality

### 6.1 The zero-shot discovery (SRT-Sunstone)

A 12.3M community read-out trained on **text only**, attached to frozen multimodal gemma-4-31B-it, interprets **images** with zero image training: CIFAR-10 image-to-word retrieval@1 of 0.93 against a chance rate of 0.10, and open-vocabulary retrieval of full sentences from a pool of ten thousand COCO captions it was never paired with. Cross-modal alignment peaks at roughly 80% of backbone depth and collapses at the final layer, replicating the late-is-surface signature seen on gpt-oss-20b.

The boundary study made the claim precise. On a random-dot autostereogram, whose figure exists only in binocular disparity, the read-out honestly reports texture; a simulated binocular-fusion front-end recovers the figure from the same pixels, and the read-out then names it, matching the true-silhouette profile. The capability gap was in the sensor, not the semiotics. A second boundary, the apparent inability to retrieve captions for synthetic graphics, was later shown to be substantially a *calibration artifact*: re-anchoring the image-side mean on a large natural-photo population moved the white-heart control’s exact caption from rank 352 to rank 5 out of roughly ten thousand (§6.3).

### 6.2 The modality gap is anisotropic-linear

The question the discovery begged: what transformation connects the image states and the text states? We answered it with a controlled ladder on COCO pairs (gemma-4-31B-it, layer 47; evaluation split of 1,000 held-out val2017 images against their 5,000 captions, untouched by any model selection; shuffled-pairs control at every rung).

| method                             | i2t R@1      | R@5          | R@10         | t2i R@1      |
|------------------------------------|--------------|--------------|--------------|--------------|
| centered                           | 0.288        | 0.523        | 0.648        | 0.173        |
| cosine (zero training)             |              |              |              |              |
| orthogonal                         | 0.247        | 0.506        | 0.656        | 0.164        |
| Procrustes (best variant)          |              |              |              |              |
| <b>trained</b>                     | <b>0.661</b> | <b>0.911</b> | <b>0.967</b> | <b>0.506</b> |
| <b>linear, 117k pairs, InfoNCE</b> |              |              |              |              |
| two-layer                          | 0.567        | 0.887        | 0.943        | 0.448        |
| MLP, 117k pairs                    |              |              |              |              |
| shuffled-pairs control             | 0.001        | 0.008        | 0.013        | 0.002        |

Three findings. First, **a rotation cannot express the gap**: every orthogonal-Procrustes variant scores below doing nothing beyond centering, because the two modality means are nearly parallel

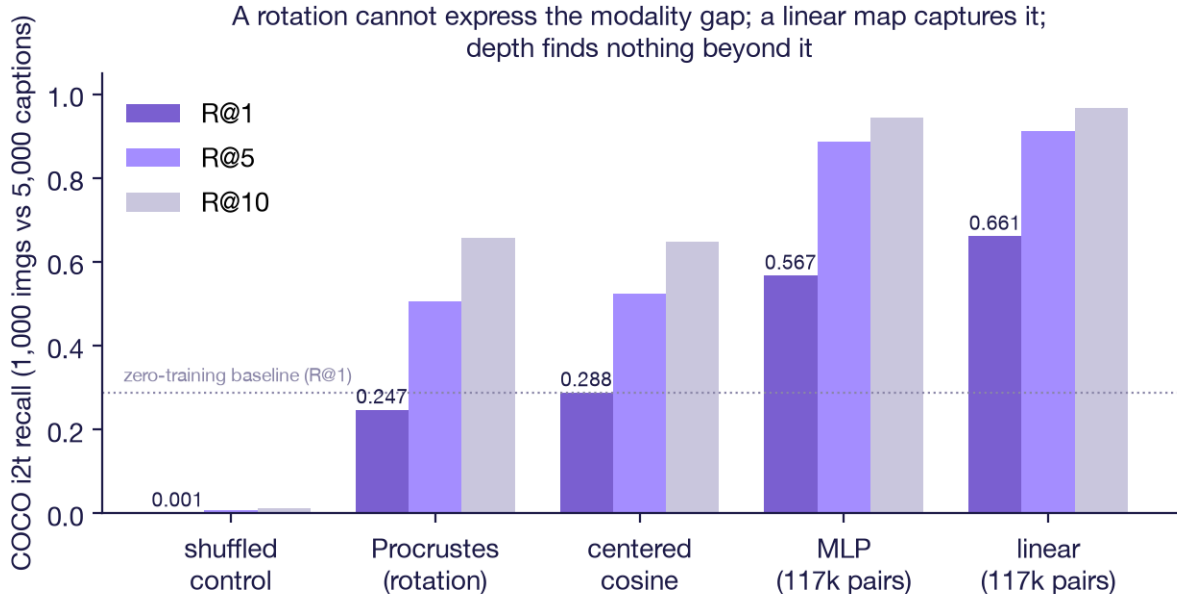


Figure 1: **Figure 1. The method ladder.** A rotation (orthogonal Procrustes) scores below doing nothing beyond per-modality centering; a single trained linear map captures the gap; a two-layer MLP with the same data never reaches it. Shuffled-pairs control at the floor.

( $\cos(\mu_{\text{img}}, \mu_{\text{txt}}) = 0.979$ ) and the residual difference is a scale-and-shear that a norm-preserving map cannot fix. Procrustes’ least-squares objective raises absolute paired similarity while destroying rank discrimination; the objective must optimize ranking. Second, **a single linear map captures the gap**, and its ceiling is still rising at the full COCO supervision (gains decelerate from roughly  $+0.10$  to  $+0.06$  R@1 per doubling; 0.661 is a lower bound). Third, **there is nothing beyond linear to find**: the MLP trails the linear map at every training size, and the gap *widens* with data (0.047 at 39k pairs to 0.094 at 117k). Thirty-three times more data gives the nonlinear model every chance to reveal structure a linear map cannot express; it instead falls further behind.

On the literature-standard **Karpathy 5k test**, leakage-controlled as described in §3, the head scores i2t R@1/R@5/R@10 = 0.416 / 0.710 / 0.818 (median rank 2) and t2i 0.292 / 0.567 / 0.685. This matches fully-trained 2018 dual encoders essentially digit for digit (VSE++: 0.413 / 0.711 / 0.812) from a linear map over a frozen chat model, using roughly three thousand times less pair data than CLIP-class systems. The claim is not “beats CLIP” (CLIP-class zero-shot sits near 0.58 at R@1); the claim is **no new model**: retrieval as a free rider on a host the deployment already runs.

### 6.3 The anchor rule, refined

The white-heart revision above generalizes Rule 1 to the visual channel with a twist a control forced on us: re-scoring the demo gallery’s CIFAR-style thumbnails with the 4,000-photo COCO mean *degraded* their retrievals, while the same mean rescued the synthetic probes queried against a COCO pool. The anchor population must match the query’s domain, and when domain and size conflict, domain wins: 150 in-domain images beat 4,000 out-of-domain ones. Practically this makes anchoring a calibration step, not a constant.

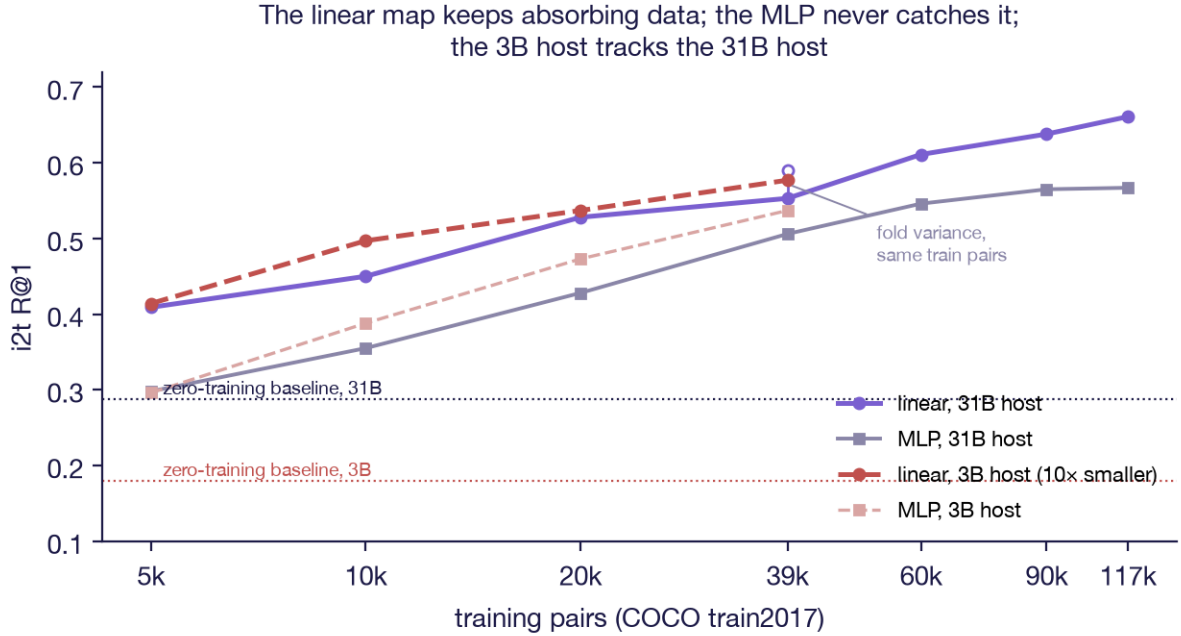


Figure 2: **Figure 2. Data scaling and the scale floor in one frame.** The linear map absorbs data faster than the MLP at every size on both hosts, and the 3B host’s curve tracks the 31B host’s: a ten-fold reduction in host scale costs nothing at matched training budget. The two 39k markers on the 31B linear curve show early-stopping fold variance on identical training pairs.

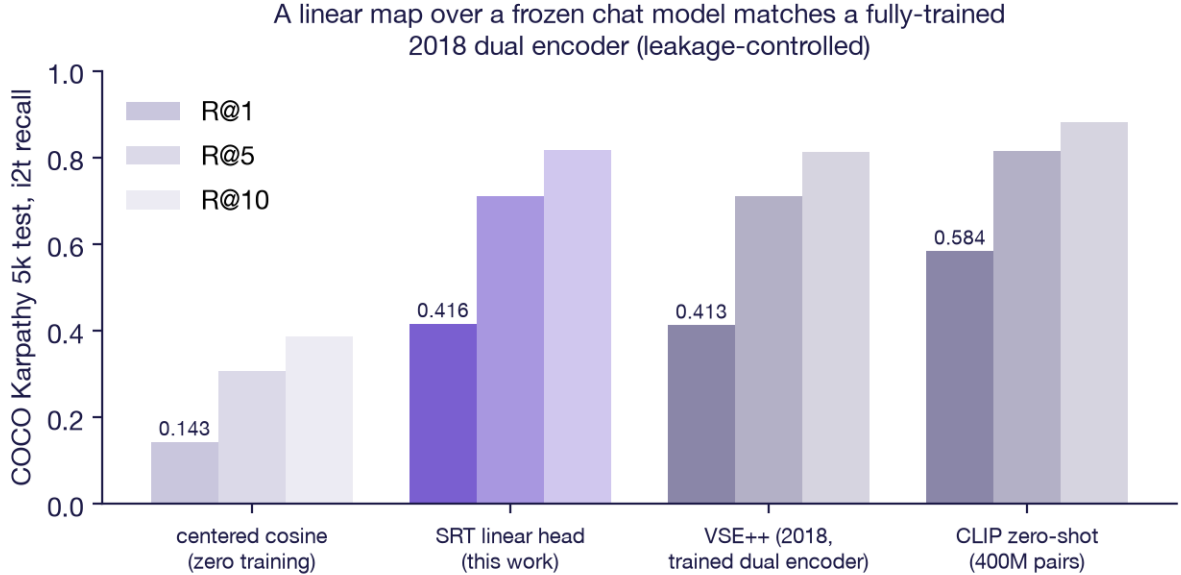


Figure 3: **Figure 3. Karpathy 5k placement (leakage-controlled).** The linear head over frozen gemma-4-31B-it matches VSE++, a fully-trained 2018 dual encoder, essentially digit for digit, and sits below CLIP-class zero-shot, which trained 400M parameters on 400M pairs.

## 6.4 What the head keeps is chosen by the objective, and capacity

is a budget

Compositionality benchmarks probe whether a retrieval system distinguishes “a horse eating grass” from “grass eating a horse.” CLIP-class dual encoders famously sit near chance on the word-order splits of SugarCrepe. The shipped head inherits the same failure (swap splits at 0.50 to 0.57), which is at first surprising, because a diagnostic on the raw layer-47 states shows the substrate separates word-order swaps *more* sharply than object replacements (mean positive-negative cosine 0.396 vs 0.582). The information survives to the tap; the head discards it, because InfoNCE with random in-batch negatives never charges for discarding syntax. The failure belongs to the objective, not the encoder.

Fixing the objective recovers most of it. Adding rule-based compositional perturbations of each training caption as explicit hard negatives (noun swaps, then vocabulary replaces, then spatial preposition replaces and dependency-parsed adjective transfers, up to  $K=4$  per caption, full-pool in the InfoNCE denominator) moves SugarCrepe macro accuracy from 0.631 to 0.705 across three retraining rounds, with each round’s gains landing on the trained axes (relation negatives moved `replace_rel` +4.7; attribute negatives moved `add_att` +5.1; untrained axes stayed flat). A weight sweep gives the trade a measured frontier: from retrieval-first (clean i2t 0.661, macro 0.642) to compositionality-first (clean 0.622, macro 0.705).

The arc ends at a wall that is itself a finding, twice over. The union of both negative families does not compose: per split it lands at approximately max of the parents, not the sum of their exclusive gains (macro 0.705 vs 0.703/0.685). The natural reading, that the 1,024 projection dimensions are a capacity budget, was then tested directly and refuted: retraining at `proj_dim` 2,048 and 4,096 with the same union negatives reproduces macro 0.705 exactly (0.698/0.705), so quadrupling the rank of the bilinear similarity buys nothing. The competition among trained properties (drift-nulling versus compositional margins versus clean retrieval) is a property of the objective and the data, not of width: a caption and its perturbation share one image-side target, and no projection of any rank can separate what the pooled image state does not distinguish. A 22 MB linear head on a frozen chat model closes 60% of the gap to CLIP ViT-B/32 on SugarCrepe by objective repair alone; the remainder now points at the image-side representation, since the text tower demonstrably distinguishes the perturbations and mean pooling may not (artifacts/nla/q4/sugarcrepe\_\*.json, artifacts/nla/q4/w05\_verdict\_20260806.json, artifacts/nla/q4/width\_null\_20260807.json).

---

## 7. Invariance axis three: scale downward, precision, and hardware

The final arc varied the three parameters a deployment actually controls and measured what the head noticed.

### 7.1 Host scale: 31B $\rightarrow$ 3B, no loss

The full ladder was re-run, identical code paths, on frozen Qwen2.5-VL-3B-Instruct (layer 29 of 36,  $d = 2048$ , the same 80%-depth heuristic). Every element of the fingerprint reproduced: the zero-training baseline works ( $R@1$  0.180,  $180\times$  chance); Procrustes hurts (0.147); the trained linear map dominates (0.577  $R@1$ , 0.870  $R@5$ , 0.955  $R@10$  at 39k pairs, median rank 1); the MLP trails at every size; the shuffled control sits at 0.000. The decisive comparison is at matched training



budget: the 3B host’s 0.577 against the 31B host’s 0.553–0.590 (the range reflecting early-stopping fold variance). Within noise, **a ten-fold reduction in host size costs nothing**. The linearly readable cross-modal correspondence is not an emergent luxury of scale; it is generic to the model class down to at least 3B, and because the retrieval read-out needs a single prefill pass rather than generation, 3B at 4-bit is Raspberry-Pi-class hardware.

## 7.2 Weight precision: bf16 → 4-bit, −0.011 R@1

The 3B head, trained on bf16 states, was applied **unchanged** to states from the same model loaded in 4-bit NF4:

| configuration                         | i2t R@1 | R@5   | R@10  |
|---------------------------------------|---------|-------|-------|
| head on bf16 states (reference)       | 0.577   | 0.870 | 0.955 |
| same head, unchanged, on 4-bit states | 0.566   | 0.857 | 0.941 |
| plus 42KB mean recalibration          | 0.569   | 0.868 | 0.948 |

The zero-training baselines are statistically identical across precisions (0.185 vs 0.180): four-bit quantization barely perturbs the representation geometry the head reads. A head retrained natively on quantized states lands on the same data-scaling curve as bf16 training, confirming that quantized states are fully usable substrate; but the cross-application result shows retraining is unnecessary. Data budget matters; precision does not.

## 7.3 Hardware and runtime: datacenter CUDA → consumer Apple Silicon

Finally, the original 31B head (trained on CUDA bf16 states in a datacenter) was tested against states produced by a different quantization of the same model (MLX 4-bit), running under different kernels on a consumer machine (Apple M2 Ultra). The protocol is cross-runtime self-retrieval over the full 5,000-caption calibration pool, both directions, six arms including two subspace controls, with the reference re-encoded fresh on CUDA to establish a reproducibility ceiling (`artifacts/nla/q4/head_space_validation_v2_20260805.json`).

The ceiling first: re-encoding the identical captions on the identical CUDA runtime reproduces the stored reference at 99.96% R@1, once duplicate captions are scored correctly (17 of the 5,000 rows are string-identical to another row, and returning an identical twin is not an error). Kernel nondeterminism alone therefore costs about 0.04%, and no cross-runtime number should be read against 100%. Across the runtime boundary, raw states retrieve their datacenter twins at 93.3% R@1 as-is. Mean-centering alone is inert (93.4%). **Through the head**, agreement rises to 96.8%, and to **97.0% with the 42KB per-runtime mean recalibration**.

Two control arms pin down where the text-side drift lives. Projecting both sides onto the top-1024 PCA basis of the reference, the high-variance subspace at the head’s own output dimension, lands at 92.2%, below raw. A random orthonormal 1024-dimensional projection lands at raw (93.2%). Keeping the top tenth of the variance keeps the damage; the head’s row space, which lives in the low-variance tail, is selectively clear of it. The drift is not a mean shift and not isotropic: it is concentrated in the high-variance subspace that the head’s 5,376-to-1,024 projection discards.

A correction is owed here. An earlier draft of this section reported 98.4%/100% and attributed them to head space; a reader’s code review established that the validation script never applied the head (it measured mean-centered raw states at a smaller pool, where the task saturates). The

numbers above are from the corrected protocol, with the head applied, duplicate-aware scoring, and the subspace controls the same reader’s null experiment called for.

The image side of the same boundary closes the remaining scope, and a further reader observation sharpened how to read it: the agreement metric transforms both sides identically, so a shared-mean frame error cancels there, while an end task scores queries against an external gallery frame and cannot hide it. The end tasks are therefore the instrument of record. The 1,000 evaluation images were encoded on both runtimes (mean of the layer-47 states over image-token positions). On image-to-text retrieval against the 5,000-caption gallery, the consumer runtime reaches **R@1 0.640 / R@5 0.903** against the datacenter reference’s 0.670 / 0.919, through the unchanged head plus the 42KB recalibration; with the shipped training mean instead of the local one, R@1 drops to 0.401, so the image-side mean correction is worth 24 points. In the reverse direction, text-to-image with the same external gallery frame, the consumer runtime reaches **R@1 0.444 / R@5 0.740** against the reference’s 0.503 / 0.808; the per-runtime mean buys +2.6 points there (and is neutral in a same-runtime control), with a roughly 6-point structured residual that no mean correction recovers, consistent with the subspace-control finding above. Both sides of the boundary carry a mean-frame component that the 42KB recalibration fixes; the text side additionally carries the high-variance structured drift, and pooled image states carry almost none. The claim’s “at most a 42KB recalibration” clause does real work on both sides, and the honest tier summary is end-task: i2t at 95% of the datacenter reference, t2i at 88% (`artifacts/nla/q4/{image_head_space_validation,t2i_external_frame}_20260805.json`).

A final refinement, again reader-supplied, fixes the units for all of this. A constant displacement competes with the query it is added to, so the meaningful knob is not its raw norm but rho, the displacement’s head-space gain divided by the median head-space query norm. In those units the two branches respond essentially identically to matched displacement, and the apparent image/text asymmetry in end-task damage is explained by the query-norm gap alone: the same cross-runtime mean delta (raw norms 22.7 and 21.5) lands at rho 1.33 on the image branch and 0.35 on the text branch. There is one displacement, arriving unequally, not two drift geometries. The same instrument also characterized a jitter-augmented retraining of the head: training against random-direction displacements bought 3.0x rho headroom against random directions but only 1.47x against the real, structured direction, which is measured evidence that augmentation priors for runtime drift should be drawn from measured drift families, not isotropic noise (`artifacts/nla/q4/round5_v2_direction_20260806.json`).

Acting on that evidence closes the loop. A head retrained with the measured drift family itself, each training sample perturbed by a real per-vector cross-runtime residual (3,000 measured MLX-minus-CUDA pairs, scaled  $U(0, 1.5)$ ), internalizes the drift outright. On held-out data whose residuals were never seen in training: image-to-text with **no calibration at all reaches R@1 0.636**, matching what the original head needed the recalibration to achieve (0.634); text-to-image reaches 0.469 against the original head’s 0.424 ceiling, the first crack in the structured residual after post-hoc affine correction and isotropic jitter both failed; the cross-runtime gap narrows to 0.2 R@1 points on image-to-text; and there is no measurable clean-performance tax (leakage-controlled same-runtime reference 0.660 vs the original head’s 0.668, inside noise at this sample size). The residual is learnable structure that generalizes across inputs. On the drift-trained head the 42KB recalibration adds +2.2 i2t and nothing on t2i, against +24.4 and +2.5 on the original head: the recalibration and drift-trained retraining are substitutes for the mean component, not steps of a ladder, and the choice between them is a data-availability question (200 unpaired states versus 3,000 paired encodes from the target runtime) (`artifacts/nla/q4/v3_drift_head_eval_20260806.json`;

`sunstone_linear_head_v3_drift.pt` is the shipped artifact and now serves the public demo).

An engineering note with strategic weight: on this consumer runtime the “state tap,” the one piece of edge engineering the program had scoped as remaining work, turned out to require no work at all (the runtime exposes intermediate states natively). The full stack, a 17GB quantized 31B host plus the 44MB head, runs on a home computer with no GPU server involved.

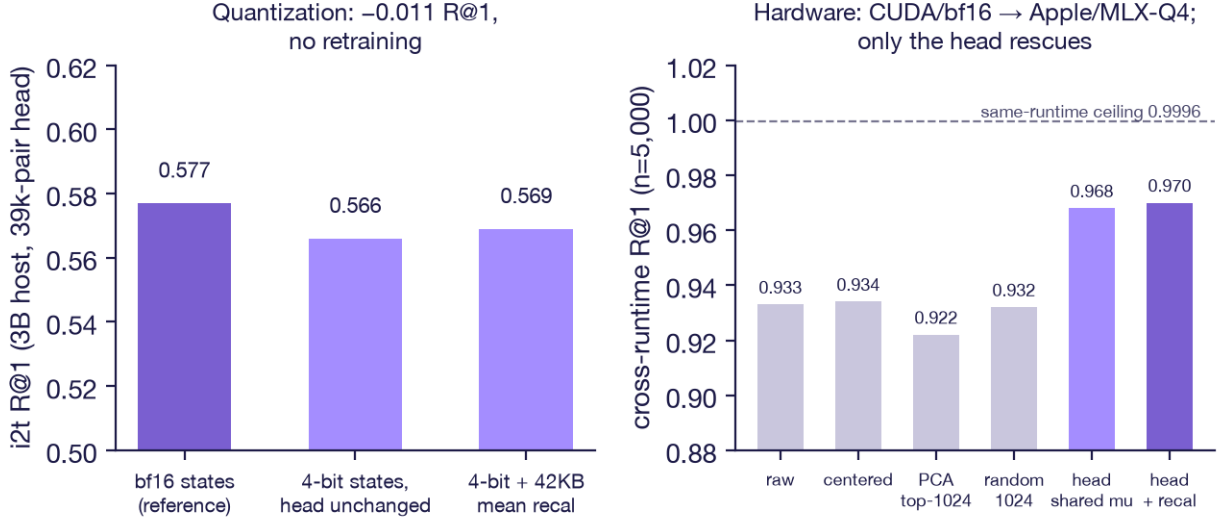


Figure 4: **Figure 4. Precision and hardware invariance.** Left: the bf16-trained head applied unchanged to 4-bit states loses 0.011 R@1; a 42KB mean recalibration recovers half. Right: across a simultaneous change of hardware, kernels, and quantizer, raw text states agree at 93.3% R@1 over the full 5,000 pool, centering and the subspace controls do not rescue, and the head lifts agreement to 97.0%, against a 99.96% same-runtime reproducibility ceiling.

## 8. The invariance claim, assembled

| axis              | variation                                                   | result                                                            |
|-------------------|-------------------------------------------------------------|-------------------------------------------------------------------|
| architecture      | dense 7B → sliding-window<br>MoE 20B → 94-layer MoE<br>235B | read-out signals survive;<br>calibration in the fourth<br>decimal |
| modality          | text → images, within one<br>frozen host                    | shared space; gap is one linear<br>map                            |
| host scale (down) | 31B → 3B                                                    | identical fingerprint; no loss at<br>matched data                 |
| weight precision  | bf16 → 4-bit NF4                                            | -0.011 R@1, head unchanged                                        |

| axis                           | variation                                       | result                                                                                                                                                                                                                                                    |
|--------------------------------|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| hardware / runtime / quantizer | CUDA + bnb $\rightarrow$ Apple Silicon<br>+ MLX | text: 97.0% head-space<br>agreement (n=5,000) vs a<br>99.96% ceiling, drift pinned to<br>the high-variance subspace the<br>head discards; end tasks<br>on-device: i2t R@1 0.640 vs<br>0.670, t2i 0.444 vs 0.503, 42KB<br>recal load-bearing on both sides |

The unification: what the SRT instruments read is not a property of a checkpoint, a precision, a device, or a scale. It is a property of the **model class**, stable enough that one small artifact, trained once, reads it everywhere the class is instantiated. The deployment consequences follow immediately. A single trained head serves an edge device batch-tagging photographs overnight, a laptop doing interactive local search, and a datacenter serving a fleet; every tier runs the *same artifact* against the *same structure*; and because the artifact is linear, it can be audited by inspection, and because the backbone is frozen, the host’s primary function carries zero regression risk. The tiers differ in latency and cost. They do not differ in capability.

We note the claim’s shape: it is an *invariance* claim, and its strongest evidence is a set of results that would individually be reported as negatives. Rotation fails. Depth finds nothing. Data does not rescue the nonlinear model. Quantization does not matter. Scale does not matter. Each null removes a way the structure could have been fragile.

## 9. The negative-results ledger

The program treats documented negatives as first-class findings; the headline could not be trusted without them.

1. **The greedy gap.** On every host, greedy decoding from the activation verbalizer collapses far below retrieval; on instruction-tuned hosts the best-of-K curve never reaches the retrieval baseline at any practical K (+0.017 per doubling on gpt-oss-20b and gemma-4-31B-it, against +0.10 on base Qwen). Retrieval, not generation, is the honest decode on tuned hosts.
2. **The base-versus-tuned conjecture, refuted by its own control.** An earlier draft conjectured that instruction tuning collapses the manifold sampling must traverse. A within-family control (identical pipeline on the gemma-4 base checkpoint) produced an indistinguishable K-curve (+0.013 vs +0.015 per doubling). Whatever sets verbalizability is in the pretrained substrate, not the alignment stage.
3. **Draft-conditioning, refuted with a mechanism.** Conditioning the verbalizer on the retrieval neighbour’s text adds 0.03 nats of predictive value for the gold text; cross-entropy training therefore has no gradient toward using it.
4. **Causal injection nulls.** Forcing community prototypes into the decode path produces near-zero causal movement on v8a (every diagonal effect within  $\pm 0.002$  nats; the pathway verified live by a 100 $\times$ -magnified probe moving CE by +2.27 nats), and the released adapters’ community-conditioning acts as a uniform style bias rather than a per-sign disambiguator. The diagnostic half of the program is robust; the causal-steering half is scoped out.

5. **The sensor boundary.** The autostereogram result: no read-out can report structure the encoder cannot compute. Supply the missing computation (simulated binocular fusion) and the boundary moves.
  6. **The anchor artifact.** A published boundary claim (synthetic graphics “outside the domain”) was substantially a calibration error, corrected and re-scoped in §6.3. We keep the original claim visible in the record because the correction is itself a finding about measurement discipline.
  7. **Negative families do not compose, and width does not rescue them.** The union of two hard-negative families that individually moved their own SugarCreme axes lands at approximately the per-split maximum of its parents, and compositional training erases a drift-trained head’s family-nulling. The obvious explanation, 1,024 dimensions as a capacity budget, was tested and refuted: projections of rank 2,048 and 4,096 reproduce macro 0.705 exactly. The competition among trained properties lives in the objective and the data, not the width (§6.4, §7.3).
- 

## 10. Semiotic interpretation

The program began in Peircean semiotics, and the invariance result gives the theory its sharpest empirical footing to date. The *interpretant*, the effect a sign produces in an interpreting system, was hypothesized in Stages 1–2 to be a real, structured object in representational space rather than a theoretical convenience. The evidence now reads: the interpretant-bearing structure (i) exists in frozen substrates that were never trained to expose it, (ii) is shared across the modality in which a sign arrives (word, photograph, or decoded depth map complete the same interpretant, and name the recovered figure identically to the real one), (iii) is *linearly* situated, so that reading it never requires reconstructing the system that produced it, and (iv) is invariant to the physical realization of the substrate, which is exactly what one would demand of a structural property of meaning as opposed to an artifact of a particular network.

The program’s law-like battery on contestedness (dissociation, coupling, causal forcing, and a diachronic test over 11,876 dated articles spanning 1770–1964, where contested political signs’ measured divergence drifts above concrete controls with a difference-in-differences of +0.048, permutation  $p = 0.007$ , crossing over in the early twentieth century) locates the semiotic load in the sign’s representation itself rather than in any injectable community signal, consistent with the causal nulls of §9.4.

---

## 11. Related work

The measurement frame descends from the anisotropy literature (Ethayarajh 2019). The cross-modal ladder engages the cross-lingual embedding alignment tradition (orthogonal maps between separately trained spaces) and finds its central tool inapplicable here, for a reason worth stating: separately trained embedding spaces differ by rotation-like transforms, but two modalities inside one jointly trained substrate differ by translation and anisotropic scale. The retrieval baselines are the standard COCO lineage (Karpathy & Fei-Fei 2015; VSE++, Faghri et al. 2018; CLIP, Radford et al. 2021). The hidden-state diagnostic band is SAPLMA (Azaria & Mitchell 2023), SAR (Duan et al. 2024), and INSIDE/EigenScore (Chen et al. 2024). The adapter’s contrastive components use supervised

contrastive learning (Khosla et al. 2020). The theoretical frame is Peirce, read through Kockelman’s semiotic stance and Silverstein’s metapragmatics (Lancaster 2025, 2026a).

## 12. Limitations

The invariance evidence spans 3B to 235B, three architectures, two quantization schemes, and two hardware stacks; it does not yet span model *families* trained by different organizations on the cross-modal axis (the linear-gap ladder is validated on gemma-4 and Qwen2.5-VL; the ceiling numbers are gemma-4’s). The linear ceiling at full COCO supervision is a lower bound, not a measured plateau. Sub-3B hosts are untested. The 4-bit hardware result uses NF4 and MLX-Q4; other quantizers should track but are unmeasured. Retrieval quality inherits pool coverage, and anchoring is a genuine calibration step (§6.3) that deployments must perform. Finally, the causal (injection/steering) half of the original program remains an open negative: these are reading instruments.

## 13. Conclusion

The SRT program set out to show that frozen language models are instrumentable substrates. It ends with something stronger: the structure the instruments read is invariant across the entire deployment envelope, scale, precision, and silicon, and cross-modally linear within a host. The practical corollary is a new class of artifact, small enough to ship as a configuration file, honest enough to audit by inspection, that grants a capability wherever its model class runs. The theoretical corollary is that meaning, as these substrates organize it, is a stable, linearly readable, realization-independent structure. Train once, read everywhere.

---

## 14. Artifact index

**Models (Hugging Face, RiverRider/):** `srt-adapter-v1.0`, `srt-adapter-v8a`, `zooL4nD3r-v0.1`, `srt-adapter-qwen3-235b`, `srt-adapter-gptoss20b`, `Gemma-4-31B-it-SRT-Sunstone`, `srt-sunstone-linear-head` (the 22MB head + anchors), `srt-nla-av-v1`, `srt-nla-av-gemma4`, `srt-nla-av-llama32-3b`.

**Data and results (RiverRider/srt-nla-gemma4-artifacts):** `procrustes/` (ladder results, fitted maps, 118k pair encodings, Karpathy eval), `scalefloor/` (3B replication + head), `q4/` (quantization-drift results + native-Q4 head), `overnight/` (run logs and summaries).

**Code (github.com/space-bacon/SRT):** the adapter and NLA packages (`srt/`, `srt_introspect/`), the experiment scripts (`scripts/gemma4_procrustes_xmodal.py`, `gemma4_encode_pairs.py`, `gemma4_mlp_align.py`, `gemma4_karpathy_eval.py`, `q4_drift_eval.py`, `local_sunstone.py`), and the engineering guide (`docs/CROSSMODAL_LINEAR_HEAD.md`).

**Demos:** `RiverRider/srt-sunstone`, `RiverRider/srt-showcase`, `RiverRider/srt-nla-gptoss20b-trace`, `srt-adapter-v1.0-demo`.

## Acknowledgments

The hardware-and-runtime section (7.3) owes its final form to Dipankar Sarkar, who reviewed the invariance evidence in public over five rounds: a code review that established the original validation never applied the head; an isotropic-noise null and subspace controls that turned “the head avoids the drift” from asserted into measured; the observation that same-transform agreement metrics

structurally cancel frame errors that end tasks expose, which also surfaced a mean-calibration bug in the deployed system; an analytic decomposition of the mean-swap arm; and the rho normalization that put both modality branches in common units. Every correction was accompanied by reproductions run from the published artifacts alone. The section’s remaining errors are ours.

## References

- Azaria, A., & Mitchell, T. (2023). The internal state of an LLM knows when it’s lying. *Findings of EMNLP*.
- Chen, C., et al. (2024). INSIDE: LLMs’ internal states retain the power of hallucination detection. *ICLR*. (Source of the INSIDE and EigenScore reference band.)
- Duan, J., et al. (2024). Shifting attention to relevance: Towards the predictive uncertainty quantification of free-form large language models. *ACL*. (SAR.)
- Ethayarajh, K. (2019). How contextual are contextualized word representations? Comparing the geometry of BERT, ELMo, and GPT-2 embeddings. *EMNLP-IJCNLP*.
- Faghri, F., Fleet, D. J., Kiros, J. R., & Fidler, S. (2018). VSE++: Improving visual-semantic embeddings with hard negatives. *BMVC*.
- Karpathy, A., & Fei-Fei, L. (2015). Deep visual-semantic alignments for generating image descriptions. *CVPR*.
- Khosla, P., Teterwak, P., Wang, C., Sarna, A., Tian, Y., Isola, P., Maschinot, A., Liu, C., & Krishnan, D. (2020). Supervised contrastive learning. *NeurIPS*.
- Kockelman, P. (2005). The semiotic stance. *Semiotica*, 157(1/4), 233–304.
- Lancaster, J. B. (2025). The treachery of signs: Semiotic mediation, pitchfork bifurcation, and political polarization in algorithmically curated societies. SSRN 5987495. <https://papers.ssrn.com/abstract=5987495>
- Lancaster, J. B. (2026a). The Semiotic-Reflexive Transformer: A neural architecture for detecting and modulating meaning divergence across interpretive communities. SSRN 6349978. <https://papers.ssrn.com/abstract=6349978>
- Lancaster, J. B. (2026b). The SRT-Adapter. Repository manuscript, [arxiv/paper.md](#).
- Lancaster, J. B. (2026c). Natural-Language Activations. Repository manuscript, [paper\\_nla.md](#).
- Peirce, C. S. (1931–1958). *Collected Papers of Charles Sanders Peirce* (C. Hartshorne, P. Weiss, & A. W. Burks, Eds.). Harvard University Press.
- Radford, A., Kim, J. W., Hallacy, C., et al. (2021). Learning transferable visual models from natural language supervision. *ICML*.
- Silverstein, M. (1976). Shifters, linguistic categories, and cultural description. In K. H. Basso & H. A. Selby (Eds.), *Meaning in Anthropology* (pp. 11–55). University of New Mexico Press.