

PH.D. RESEARCH PROPOSAL

SEQUENCE LEARNING USING DEEP NEURAL NETWORKS
WITH FLEXIBILITY & INTERPRETABILITY

Chang Li

Supervisor
Prof. Dacheng TAO

1 Aims & Objectives

1. Flexibility in modeling complex patterns with long-range dependencies
 - (a) Capturing complex non-linear correlations without prior knowledge and assumptions
 - (b) Encoding high dimensional input variables adaptively
 - (c) Discovering long term dependencies of encoded inputs
 - (d) Novel insights in feature extraction of complex inputs
2. Network architectures with better computational properties
3. Decoding/Encoding human interpretable representations from/into models
 - (a) Approximating deep neural networks' input-output relationships using human interpretable models
 - (b) Learning deep neural networks coupled with structured (potentially predefined) latent variable sequence

2 Synopsis

3 Background And Literature Review

One interesting task in machine learning is modeling complex sequences having long-term dependencies. Many applications such as machine translation, complex dynamical system analysis, activity recognition and behavioral phenotyping tools for neuro-science involved with capturing non-linear patterns in sequences. Sequence learning mainly have three difficulties: approximating non-linear relationship among sequences, feature selection and capturing long-term dependencies. Our primary aim of this proposal is mainly focused on demonstrating those three difficulties.

Despite substantial effort has been made for modeling sequences, many of those models are neither unable to approximate non-linear relationships nor have rigid assumptions due to the dependency on predefined form of prior function. For example, autoregressive moving average (ARMA) model [7] and many of its variants [3] have raised interests because of their effectiveness in many real world applications. However, those models cannot capturing non-linear relationships. Probabilistic Graphical Models [8, 9] (PGM) are very well studied for the past decades. With predefined prior distributions from domain knowledge, PGMs are capable to encode many sequence relationships such as Gaussian Processes [5], Hidden Markov Models [4] (HMM) and Linear Dynamic Systems [2] (LDS). However, capabilities of approximating non-linear patterns of PGMs are also severely suffered from rigid assumptions over priors.

Deep Neural Networks [6] (DNNs) are powerful and flexible models that have outperforming performance on various difficult learning tasks such as image classification, visual object recognition, machine translation and speech recognition. It can take high dimensional data with rich structure as input and scales over large data-set. DNNs are usually composed of hierarchical layers which contains large amount of latent variables. Non-linearity in the data is usually captured by non-linear interactions through those latent variables. Each of these latent variables normally connected to many other variables in adjacent layers. Results of those unique distributed representations are that DNNs are extremely flexible in fixing difficult problems in high dimensional space and have very generic learning algorithm (Stochastic Gradient Descent, SGD) for various problems. With sufficient training data, DNNs usually can get nice approximation of that information in a reasonable amount of time [6].

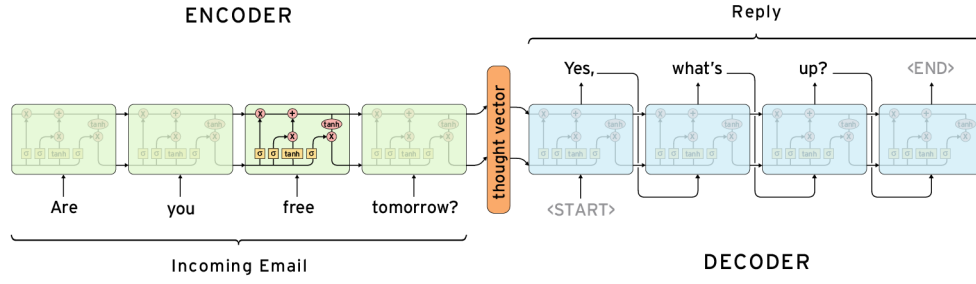


Figure 1: Encoder-Decoder Network

Despite the powerful capability of approximation, one significant limitation of DNNs is that they require fixed dimension of inputs and targets. Thus DNNs cannot be applied directly on areas without prior knowledge about variables' length or have various input length, such as speech recognition and machine translation. Sutskever et al. [10] in 2014 demonstrated this difficulty as sequence to sequence problems. They introduced an encoder-decoder framework based on two Recurrent Neural Networks (RNNs) and achieved a very successful result in machine translation. The key ideas (as shown in Figure 1) behind encoder-decoder networks and its variants are that they first encode the whole sentence of words into a single, fixed length variable using encoder network. Then a decoder network is used to decode that variable and generate translation. They enabled the network to take various length of inputs by encoding each of them into a single and fixed length variable. One major drawback is that "indeed the performance of a basic encoder-decoder deteriorates rapidly as the length of an input sentence increases [1]". Since for many sequence learning applications there exists many long-term dependencies relationships, the question of solving this drawback remains open.

Other than long-term dependencies difficulty, DNNs contain a very large number of latent variables which make the training results very hard for a human to interpret [6]. Since DNNs are capable of approximating a very large number of insignificant correlations between inputs and outputs of the training data, there is no way to distinguish the true relationships exist in data from suspicious correlations which are caused by sampling bias in data set [6]. Being able to explain the reasons behind such models plays a crucial role in tasks such as model comparison and deployment. It could also provide insights into the data set and model itself. Thus improving the interpretability of DNNs could also be a very interesting topic to investigate.

4 Expected Research Contribution

5 Proposed Methodology

6 Work Plan

References

- [1] D. Bahdanau, K. Cho, and Y. Bengio. Neural machine translation by jointly learning to align and translate. *arXiv preprint arXiv:1409.0473*, 2014.
- [2] Y. Bar-Shalom and X.-R. Li. Estimation and tracking- principles, techniques, and software. Norwood, MA: Artech House, Inc, 1993., 1993.

- [3] P. J. Brockwell and R. A. Davis. *Time series: theory and methods*. Springer Science & Business Media, 2013.
- [4] S. R. Eddy. Hidden markov models. *Current opinion in structural biology*, 6(3):361–365, 1996.
- [5] R. Frigola, Y. Chen, and C. E. Rasmussen. Variational gaussian process state-space models. In *Advances in neural information processing systems*, pages 3680–3688, 2014.
- [6] I. Goodfellow, Y. Bengio, and A. Courville. *Deep learning*. MIT press, 2016.
- [7] M. Hibon and S. Makridakis. *Arma models and the box-jenkins methodology*. 1997.
- [8] D. Koller and N. Friedman. *Probabilistic graphical models: principles and techniques*. MIT press, 2009.
- [9] K. P. Murphy. *Machine learning: a probabilistic perspective*. MIT press, 2012.
- [10] I. Sutskever, O. Vinyals, and Q. V. Le. Sequence to sequence learning with neural networks. In *Advances in neural information processing systems*, pages 3104–3112, 2014.